



EMC Technologies (NZ) Ltd
47 Mackelvie St, Grey Lynn
Auckland 1021
New Zealand
Phone 09 360 0862
Fax 09 360 0861
E-Mail Address: aucklab@emctech.co.nz
Web Site: www.emctech.co.nz

TEST REPORT

Windcave CHU200MP Handheld Payment Terminal

tested to the specification

47 Code of Federal Regulations

Part 15 - Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.225

Operation within the band 13.110 -14.010 MHz

for

Windcave Ltd

A handwritten signature in blue ink, appearing to read "Andrew Cutler", is placed over a light blue rectangular background.

This test report is issued with the authority of:

Andrew Cutler - General Manager



All tests reported
herein have been
performed in accordance
with the laboratory's
scope of accreditation

Table of Contents

1.	STATEMENT OF COMPLIANCE	3
2.	RESULTS SUMMARY	3
3.	INTRODUCTION	4
4.	CLIENT INFORMATION	4
5.	DESCRIPTION OF TEST SAMPLE	5
6.	SETUPS AND PROCEDURES	6
7.	TEST EQUIPMENT USED	15
8.	ACCREDITATIONS	15
9.	PHOTOGRAPHS	16

1. STATEMENT OF COMPLIANCE

The **Windcave CHU200MP Handheld Payment Terminal** complies with FCC Part 15 Subpart C Section 15.225 as an Intentional Radiator when the methods as described in ANSI C63.10 - 2013 are applied.

2. RESULTS SUMMARY

The results from testing carried out between August 24th and September 4th, 2020 are detailed in the following table:

Clause	Parameter	Result
15.201	Equipment authorisation requirement	Certification required.
15.203	Antenna requirement	Complies. Antenna internal to the device.
15.204	External PA and antenna modifications	Not applicable. No external devices.
15.205	Restricted bands of operation	Complies. Device transmits on a nominal frequency of 13.560 MHz.
15.207	Conducted limits	Complies.
15.209	Radiated emission limits - Emissions < 30 MHz	Complies.
15.209	Radiated emission limits – Emissions > 30 MHz	Complies.
15.225	Radiated emission limits - Fundamental	Complies.
15.225	Frequency stability	Complies.

3. INTRODUCTION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification.

The client selected the test sample.

This report relates only to the sample tested.

This report contains no corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

All compliance statements have been made with respect of the specification limit with no reference to the measurement uncertainty.

All testing was carried out as per the standard in the worst-case configuration with no deviations being applied.

4. CLIENT INFORMATION

Company Name	Windcave Ltd
Address	33 Wilkinson Rd, Ellerslie
State	Auckland 1060
Country	New Zealand
Contact	Oscar Zhao

5. DESCRIPTION OF TEST SAMPLE

Brand Name	Windcave
Product	Handheld Payment Terminal
Model Number	CHU200MP
Manufacturer	Windcave Limited
Country of Origin	New Zealand
Serial Number	2620290005
Firmware Version	V1.3.8.1X-t1
FCC ID	2AC2O-CHU200MP

The device tested is a Near Field Contactless Secure Card Reader (NFC Card Reader) that operates on 13.560 MHz.

The device also contains FCC certified modules for the following

- 2.4 GHz WiFi module. FCC ID: N7NBX31A
- 4G Cat M1 cellular modem. FCC ID: N7NHL78

Testing was carried out when the device under test was attached to a laptop computer using a USB to UART converter that was attached to the USB port on the laptop computer.

The UART convertor was attached to the device using a 1.2 metre length of Ethernet cable with the UART converter powering the device under test.

The client has declared the highest frequency in use in the device under test to be less than 108 MHz.

Testing was carried out using a laptop computer that used Windcave CHU200MP EMC Test software Version 1.00 to exercise the test sample using the Emissions and NFC options.

In Emissions mode the NFC transmitter was modulated and in NFC mode the NFC transmitter operated with an unmodulated carrier.

6. SETUPS AND PROCEDURES

Standard

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

Methods and Procedures

The measurement methods and procedures as described in ANSI C63.10 - 2013 were used.

Section 15.201: Equipment authorisation requirement

Certification as detailed in Subpart J of Part 2 is required for this device.

Section 15.203: Antenna requirement

The device has a permanently attached internal 13.560 MHz antenna.

Result: Complies.

Section 15.204: External radio frequency power amplifiers and antenna modifications

It is NOT possible to attach an external power amplifier to this transmitter.

Result: Complies.

Section 15.205: Restricted bands of operation

The device transmits on a nominal frequency of 13.560 MHz.

13.560 MHz transmissions would fall into the 13.110 – 14.010 MHz band that is covered by Section 15.225.

Result: Complies.

Section 15.207: Conducted emissions testing

Conducted Emissions testing was carried out over the frequency range of 150 kHz to 30 MHz which was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room

As it is possible for this device to be directly or indirectly connected to the Public AC mains supply testing was carried out using a representative AC power supply system that was powered at 120 Vac 60 Hz which powered the device under test via the USB to UART interface device.

The NFC Card Reader operates at 13.560 MHz.

Testing was carried out when the NFC Card Reader was operating normally with the internal antenna connected while continuously reading a card was that placed close to the reader.

The device was placed on top of the emissions table, which is 0.8 m x 0.8 m, 80 cm above the screened room floor which acts as the horizontal ground plane.

In addition the device was positioned 40 cm away from the screened room wall which acts as the vertical ground plane.

The artificial mains network was bonded to the screened room floor.

At all times the device was kept more than 80 cm from the artificial mains network.

The supplied plot is combined plot showing the worst case quasi peak and average results of both the phase and neutral lines to the representative AC power supply.

Quasi peak and average detectors have been used with resolution bandwidths of 9 kHz.

Measurement uncertainty with a confidence interval of 95% is:

- AC Mains port (0.15-30 MHz) ± 2.8 dB

Conducted Emissions – AC Input Power Port


Setup: Device tested when powered at 120 Vac 60 Hz via a UART to Serial Convertor with the NFC transmitter continuously interrogating a payment card.

Peak ---

Average --

Quasi Peak X

Average +

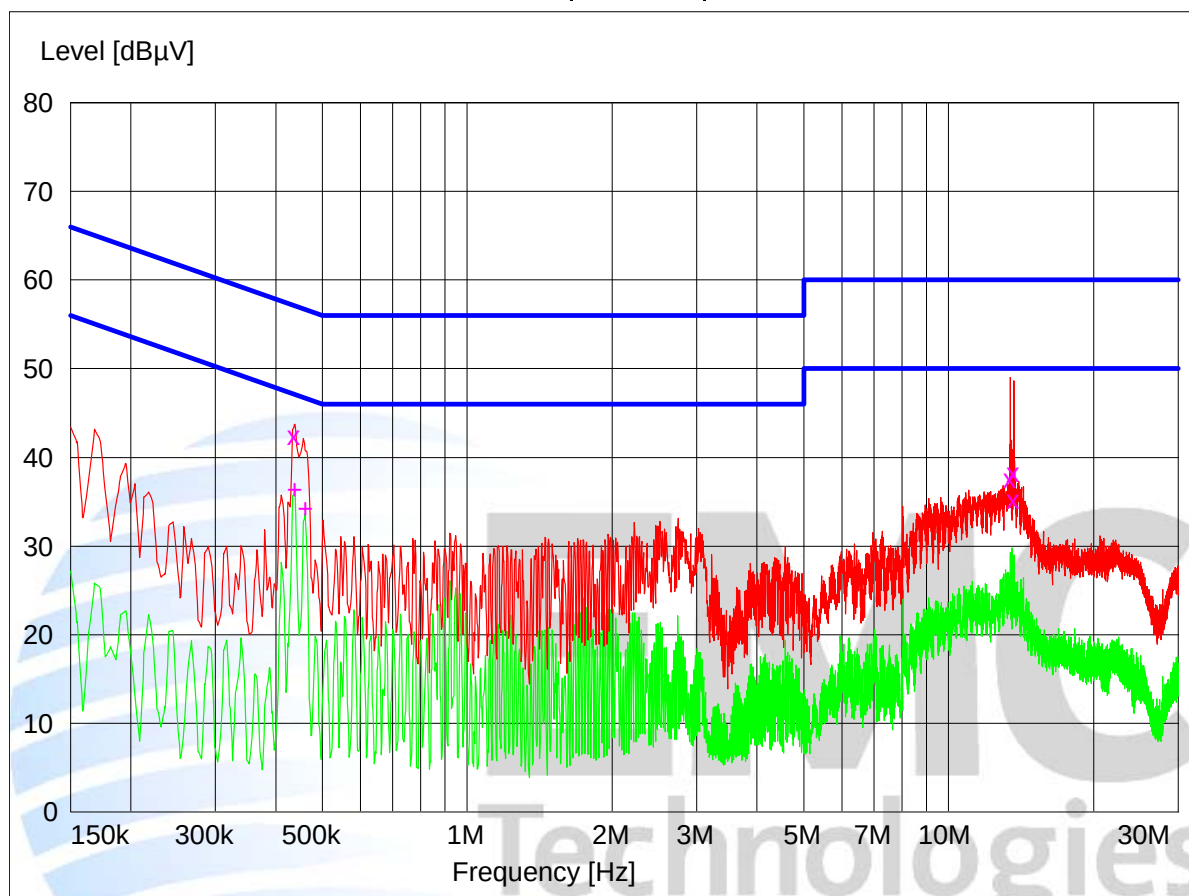

Final Quasi-Peak Measurements

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Phase	Rechecks (dBμV)
0.438000	42.50	57.1	14.6	L1	
13.445000	37.60	60.0	22.4	N	
13.655000	35.20	60.0	24.8	L1	
13.675000	38.30	60.0	21.7	N	

Final Average Measurements

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Phase	Rechecks (dBμV)
0.438000	36.40	47.1	10.7	L1	
0.460500	34.20	46.7	12.5	N	

Section 15.209: Radiated emission limits, general requirements

Radiated emission testing was carried out over the frequency range of 30 MHz to 2000 MHz as the device contains a 13.560 MHz NFC transceiver.

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand.

Testing was carried out when the device under test was attached to a laptop computer using a USB to UART converter that was attached to the USB port on the laptop computer.

The UART convertor was attached to the device using a 1.2 metre length of Ethernet cable with the UART converter powering the device under test.

The UART convertor was powered using a representative AC power supply that was powered at 120 Vac 60 Hz.

All interconnecting cables were bundled in 40 cm long bundles.

A custom programme was run on the computer which exercised all operational aspects of the device.

The device was transmitting continuously on 13.560 MHz with a NFC card being placed close to the card reader which was periodically read by the card reader.

Correct operations were indicated by an indication on the computer screen.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height, where appropriate, with an automated antenna tower.

Below 30 MHz a magnetic loop is used with the centre of the loop being 1 metre above the ground with measurements being made using a quasi peak detector at a distance of 10 metres.

Above 30 MHz the emission is measured in both vertical and horizontal antenna polarisations.

The emission level was determined in field strength by taking the following into consideration:

Level (dB μ V/m) = Receiver Reading (dB μ V) + Antenna Factor (dB/m) + Coax Loss (dB)

For example, if an emission of 30 dB μ V was observed at 30 MHz.

$$45.5 \text{ dB}\mu\text{V/m} = 30.0 \text{ dB}\mu\text{V} + 14 \text{ dB/m} + 1.5 \text{ dB}$$

Section 15.209: 13.560 MHz transmitter below 30 MHz spurious emission measurements

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
27.120	13.3	48.6	35.3	Pass

The device was transmitting continuously on 13.560 MHz with a NFC card being placed close to the card reader which was periodically read by the card reader.

Magnetic loop measurements were made at a distance of 10 metres.

A measurement receiver with a quasi peak detector with a 9 kHz bandwidth was used.

The 30 metre limit has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The limit at 27.120 MHz when measured at 30 metres is 30 uV/m or 29.54 dBuV/m.

Therefore the scaled limit at 10 metres will be 48.6 dBuV/m.

The spurious emission observed does not exceed the level of the fundamental emission.

No other low frequency spurious emissions were detected from the device when measurements were attempted from 10 kHz - 30.0 MHz

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (10 kHz – 30 MHz) $\pm$ 4.8 dB

Section 15.209: Spurious Emissions (above 30 MHz)

Measurements between 30 – 1000 MHz have been made at a distance of 3 metres.

A receiver with a quasi peak detector with a 120 kHz bandwidth was used between 30 – 2000 MHz.

Between 1000 – 2000 MHz a measuring receiver with using a peak detector and an average detector with a 1 MHz bandwidth was used.

The limits as described in Section 15.209 have been applied.

Frequency (MHz)	Vertical (dBµV/m)	Horizontal (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result	Antenna Polarisation
40.680		24.3	40.0	15.7	Pass	Horizontal
67.800	17.3	17.4	40.0	22.6	Pass	Horizontal
120.000	33.5	28.8	43.5	10.0	Pass	Vertical
176.280		31.6	43.5	11.9	Pass	Horizontal
203.400		25.1	43.5	18.4	Pass	Horizontal
230.520		23.5	46.0	22.5	Pass	Horizontal
403.000	29.6	33.8	46.0	12.2	Pass	Horizontal
345.000	27.1	27.5	46.0	18.5	Pass	Horizontal
517.7.2		29.9	46.0	16.1	Pass	Horizontal

No further emissions were detected within 15 dB of the limit when the measurements were made between 30 - 2000 MHz using both vertical and horizontal polarisations.

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 – 2000 MHz) ± 4.1 dB

Section 15.225: Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with a quasi peak detector using a 9 kHz bandwidth.

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit, as detailed in section 15.31 f (2).

The limit at 30 m at 13.560 MHz is 15,848 uV/m or 84.0 dBuV/m.


Applying the extrapolation factor of 40 dB/ per decade, the limit at 10 m is 103.1 dBuV/m.

Testing was also carried out to determine whether a variation in the DC supply voltage to the UART convertor would cause a significant change in field strength.

The 13.6 Vdc supply to the device was varied by +/- 15% between 11.6 Vdc and 15.6 Vdc.

Voltage (Vdc)	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11.6	13.560	47.3	103.1	55.8
13.6	13.560	47.3	103.1	55.8
15.6	13.560	47.3	103.1	55.8


Spectrum analyser plots show the carrier and modulation peaks within +/- 500 kHz.

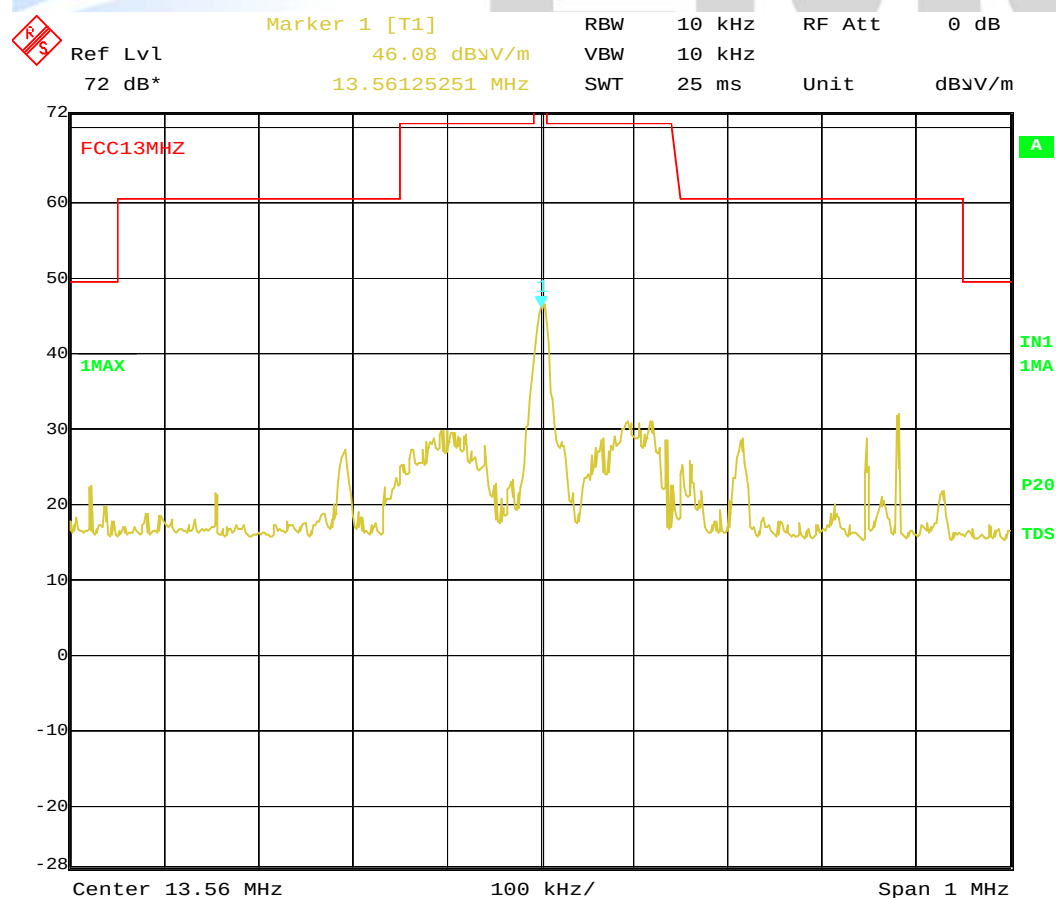

Date: 1. JAN. 1997 01:04:48

Section 15.225: Fundamental emission: cont.

Spectrum analyser plots show the carrier and modulation peaks within +/- 500 kHz.

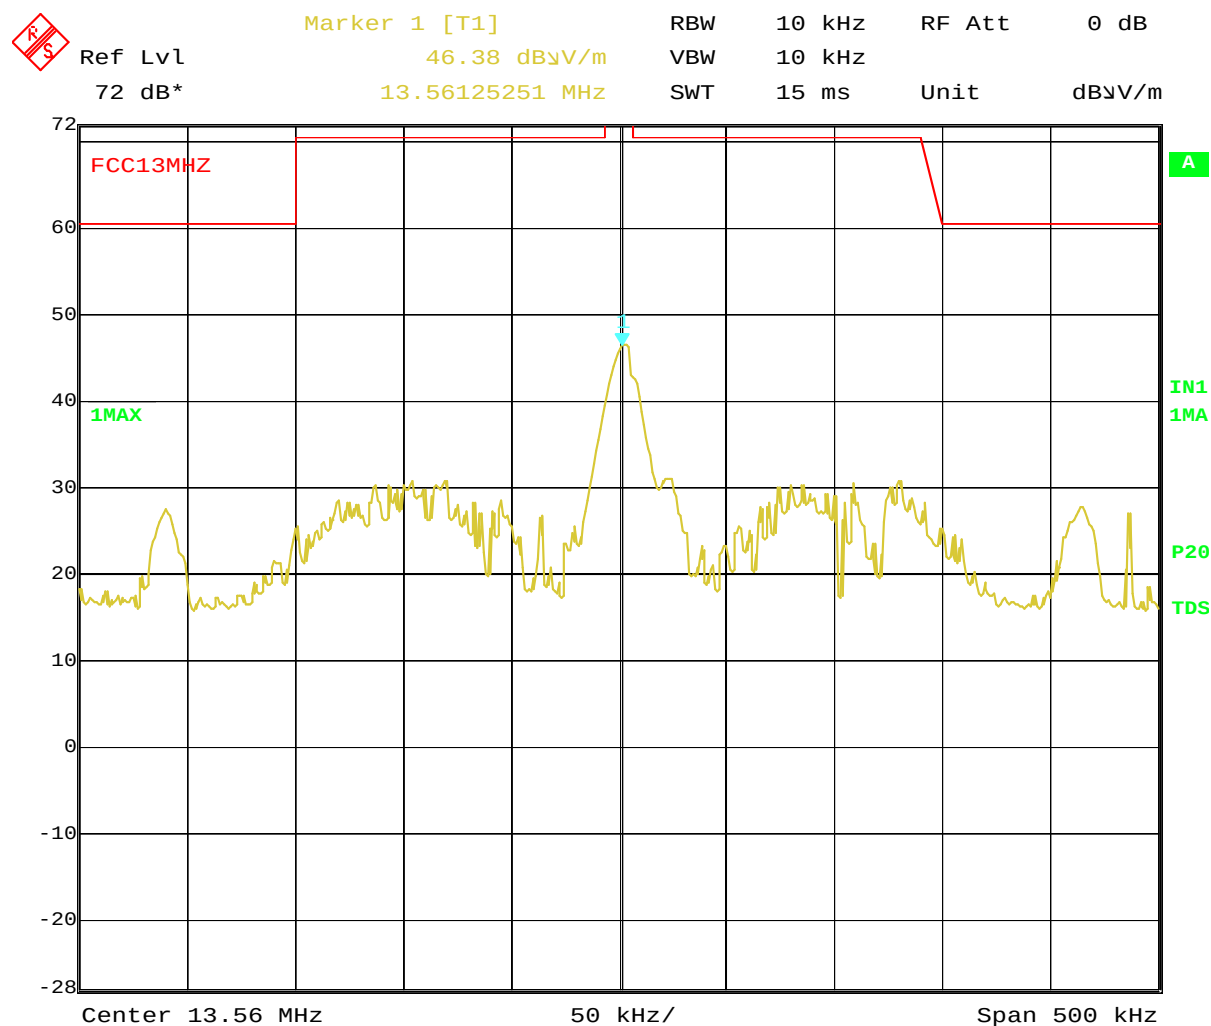

Date: 1. JAN. 1997 01:03:24

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz) ± 4.8 dB

Section 15.225: Frequency tolerance:

The frequency tolerance of the carrier is required to be +/- 0.01% of operating frequency when the temperature is varied between -20 degrees C and +50 degrees C.

The device operates nominally on 13.560 MHz which gives a frequency tolerance of +/- 1,356.0 Hz.

Temperature (°C)	Frequency (MHz)	Difference (Hz)
50.0	13.559 980	-20
40.0	13.560 010	+10
30.0	13.560 020	+20
20.0	13.560 040	+40
10.0	13.560 000	+0
0.0	13.560 000	+0
-10.0	13.560 060	+60
-20.0	13.560 100	+100

The 13.6 Vdc supply voltage was varied by +/- 15% at 20 degrees C (ambient).

Voltage (Vdc)	Frequency (MHz)	Difference (Hz)
11.6	13.560 040	+40
13.6	13.560 040	+40
15.6	13.560 040	+40

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:
Frequency tolerance $\pm$ 50 Hz

7. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial No	Asset Ref	Cal Due	Period
Aerial Controller	EMCO	1090	9112-1062	RFS 3710	Not applic	Not applic
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708	Not applic	Not applic
Biconical Antenna	Schwarzbeck	BBA 9106	-	3680	1 Jan 2021	3 years
Horn Antenna	EMCO	3115	9511-4629	E1526	1 Jan 2021	3 years
Log Periodic	Schwarzbeck	VUSLP 9111	9111-112	EMC4025	1 Jan 2021	3 years
Loop Antenna	EMCO	6502	9003-2485	3798	1 Jan 2021	3 years
Mains Network	R & S	ESH2-Z5	881362/034	3628	12 Oct 2020	2 years
Receiver	R & S	ESHS 10	828404/005	3728	27 Sept 2021	2 year
Receiver	R & S	ESIB 40	100295	INV0818	28 Aug 2021	2 year
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709	Not applic	Not applic
VHF Balun	Schwarzbeck	VHA 9103	9594	3696	1 Jan 2021	3 years
Power Supply	APT	7008	4170003	-	Not applic	Not applic

8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd designation as a FCC Accredited Laboratory by International Accreditation New Zealand, designation number: NZ0002 under the APEC TEL MRA.

All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.

International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with various accreditation bodies in a number of economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

9. PHOTOGRAPHS

External Views








Conducted emissions test set up



Conducted emissions test set up cont.



Radiated emissions test set up

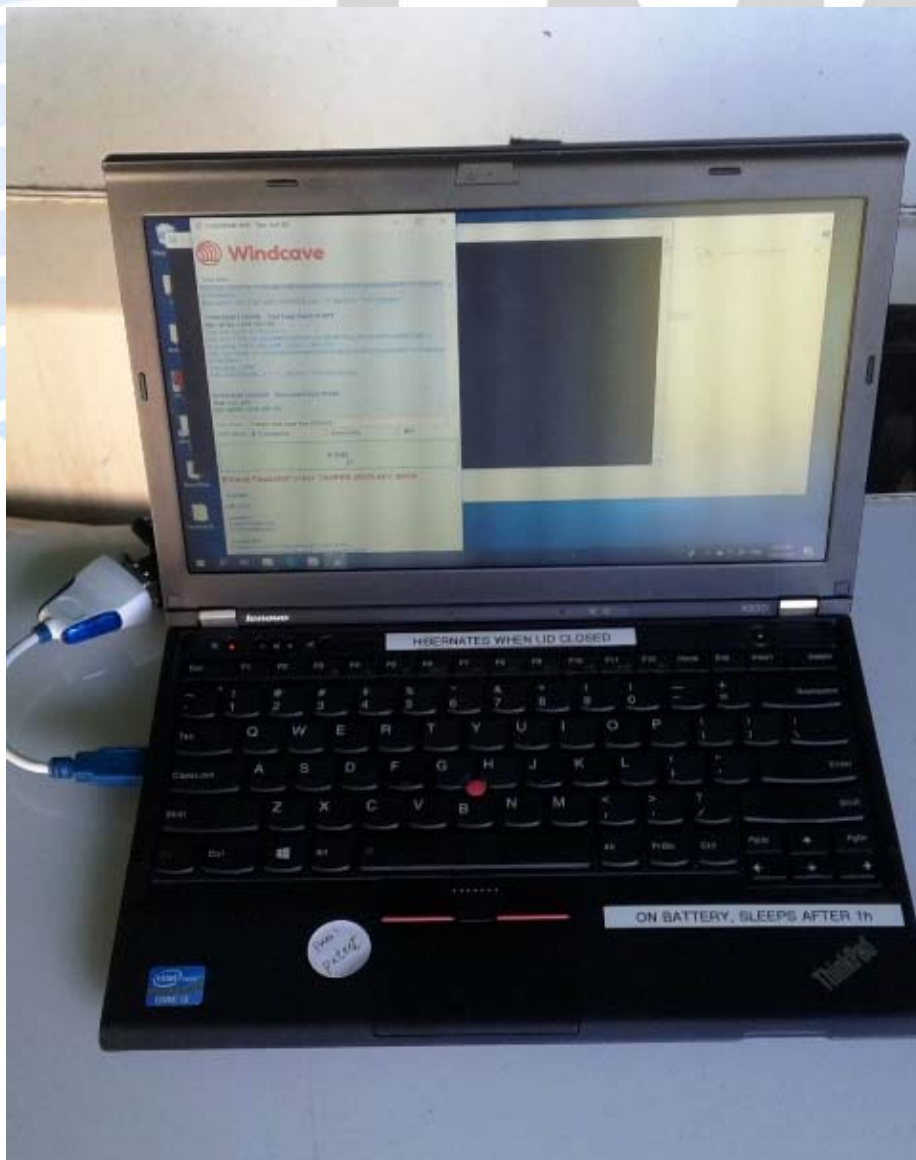

Radiated emissions test set up. Cont.



Radiated emissions test set up. Cont.

