

Vehicle Warning System V5.10


Transmitter Instruction



Installation Instruction

Install Transmitter and Antenna on the top of forklift.

The antenna and Transmitter have already been screwed on a metal base in factory. Please tie them up on top of the vehicle by cable ties (packed in the box) . And keep the antennas vertically. This will make the antennas work well and avoid influence by obstacles.

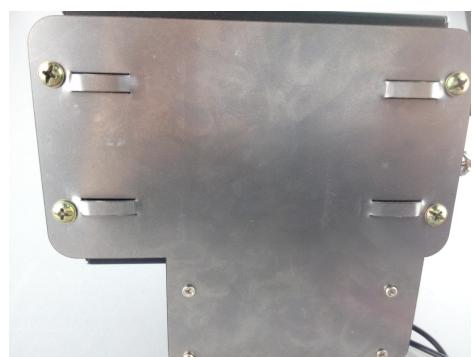

Overall Installation Example



Technical Data

Transmitter	
Electrical	Power supply:12-28V DC
Mechanical	Dimension:134×97×41(mm) Antenna length:120mm
Environmental	Work temperature:0-70 centigrade
Radio & Range	2400.0MHz~2483.5MHz Range:0-15meter

A photograph of the transmitter unit, which is a black rectangular device with a long antenna and several cables attached.

Operation

Connect with power

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.