NOTES:


- 1. INTERPRET DRAWING IAW ASME Y14.5-2009
- 2. LABEL MATERIAL: FANTASTOCK 2 OR EQUIVALENT. RIBBON MATERIAL: GREATRIBBON SDR-5 OR EQUIVALENT
- 3. FOR FULL DIMENSIONAL DEFINITION, REFER TO 53-00000029-00 REV01.DXF.
- 4. BACKGROUND COLOR TO BE WHITE. PRINTED TEXT AND IMAGES TO BE BLACK.
- 5. SERIAL NUMBER TO MATCH FOLLOWING CONVENTION (MMMSSSSSSSS):

 MMM = 3 CHARACTERS TO BE PROVIDED BY INHAND AT TIME OF MANUFACTURE.

 SSSSSSSS = 7 CHARACTERS. START AT 0000001 AND INCREASE SEQUENTIALLY.
- 6. ENCODE CAGE CODE/PART NUMBER (0J198 ASSY 165061-001), REVISION (INSERT CURRENT BOM REVISION), AND SERIAL NUMBER IN 2D QR CODE AND PRINT WHERE SHOWN.
- 7. PRINT BLACK AND WHITE INHAND LOGO (IHE_LOGO_BW.JPG).
- 8. INSERT APPLICABLE CURRENT BOM REV FOR PART NUMBER 165061-001.



SCALE 1:1 SHOWN WITH SAMPLE GRAPHICS FOR REFERENCE ONLY

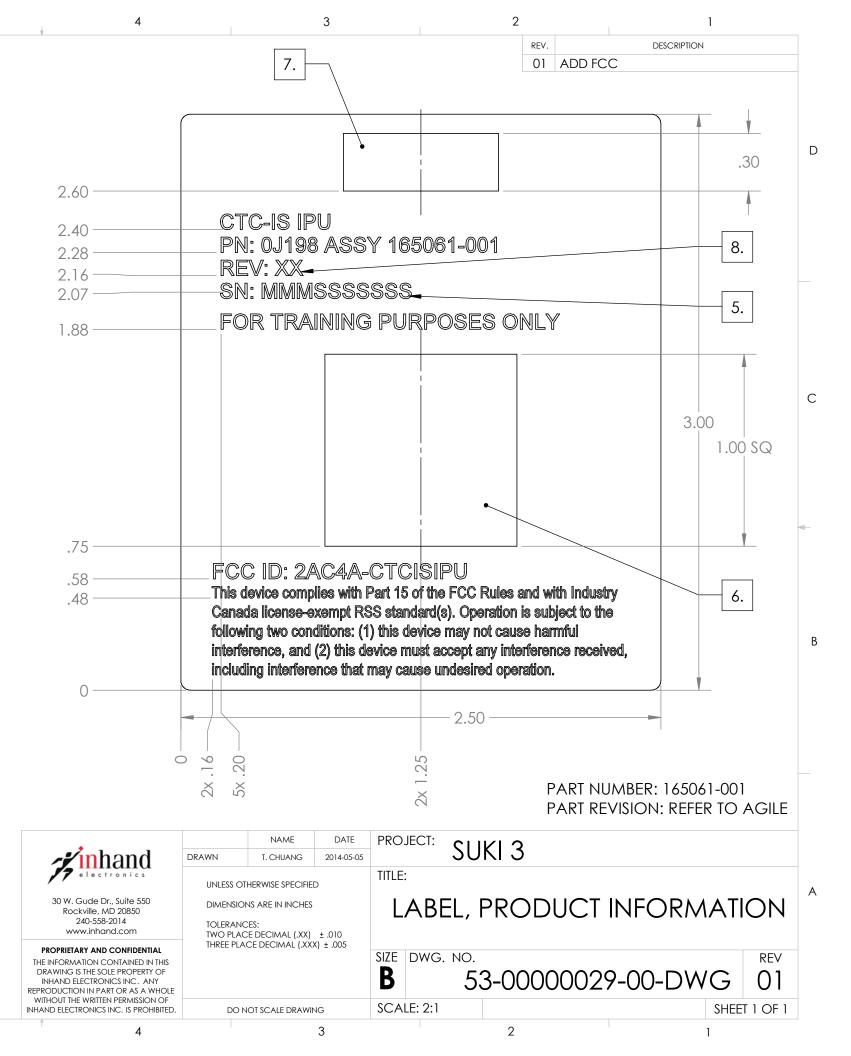

FCC Label Location Document

