



---

## FCC TEST REPORT

---

Report No: STS1502028F01

Issued for

V-MODA, LC

6464 Sunset Blvd, Suite 570 Hollywood, California 90028, United States

Product Name:	Bluetooth Stereo Headphone
Brand Name:	V-MODA
Model No.:	XFBT
FCC ID:	2AC58XFLPBT
Test Standard:	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test Sample.

Shenzhen STS Test Services Co., Ltd.

1/F, Building B, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





## TEST RESULT CERTIFICATION

**Applicant's name** ..... V-MODA, LC

Address ..... 6464 Sunset Blvd, Suite 570 Hollywood, California 90028, United States

**Manufacture's Name** ..... Cosonic Acoustic Technology Co., Ltd.

Room 502, 1st Building, Sohovark Industrial Incubation Park,

Address ..... No.6, South Industry Road, Songshan Lake National High-tech Industrial Development Zone, Dongguan City, Guangdong, China 523808

### Product description

Product name ..... Bluetooth Stereo Headphone

Band name ..... V-MODA

Model and/or type ..... XFBT  
reference .....

Ratings ..... DC 3.7V by Battery

**Standards** ..... FCC Part15.247

Test procedure ..... ANSI C63.4-2009

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

Date (s) of performance of tests.. Dec.1, 2014 to Dec.5, 2014

Date of Issue ..... Dec.6, 2014


Test Result ..... **Pass**

Testing Engineer : 

(Tony Liu)

Technical Manager : 

(Vita Li)

Authorized Signatory : 

(Bovey Yang)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1.1 TEST FACILITY</b>	6
<b>1.2 MEASUREMENT UNCERTAINTY</b>	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	7
<b>2.1 DESCRIPTION OF TEST MODES</b>	10
<b>2.2 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	10
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	11
<b>2.4 DESCRIPTION OF SUPPORT UNITS</b>	12
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	13
<b>3. EMC EMISSION TEST</b>	<b>14</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	14
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	14
<b>3.1.2 TEST PROCEDURE</b>	15
<b>3.1.3 TEST SETUP</b>	15
<b>3.1.4 EUT OPERATING CONDITIONS</b>	15
<b>3.1.5 TEST RESULTS</b>	16
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	18
<b>3.2.1 RADIATED EMISSION LIMITS</b>	18
<b>3.2.2 TEST PROCEDURE</b>	19
<b>3.2.3 DEVIATION FROM TEST STANDARD</b>	19
<b>3.2.4 TEST SETUP</b>	20
<b>3.2.5 EUT OPERATING CONDITIONS</b>	21
<b>3.2.6 TEST RESULTS (WORST CASE : GFSK)</b>	22
<b>4. CONDUCTED SPURIOUS EMISSIONS</b>	<b>39</b>
<b>4.1 REQUIREMENT</b>	39
<b>4.2 TEST PROCEDURE</b>	39
<b>4.3 TEST SETUP</b>	39
<b>4.4 EUT OPERATION CONDITIONS</b>	39
<b>4.5 TEST RESULTS</b>	40
<b>5. NUMBER OF HOPPING CHANNEL</b>	<b>47</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	47
<b>5.2 TEST PROCEDURE</b>	47
<b>5.3 TEST SETUP</b>	47
<b>5.4 EUT OPERATION CONDITIONS</b>	47



Table of Contents	Page
5.5TEST RESULTS	48
6. AVERAGE TIME OF OCCUPANCY	49
6.1 APPLIED PROCEDURES / LIMIT	49
6.2 TEST PROCEDURE	49
6.3 TEST SETUP	49
6.4 EUT OPERATION CONDITIONS	49
6.5TEST RESULTS	50
7. HOPPING CHANNEL SEPARATION MEASUREMENT	52
7.1 APPLIED PROCEDURES / LIMIT	52
7.2 TEST PROCEDURE	52
7.3 TEST SETUP	52
7.4 EUT OPERATION CONDITIONS	52
7.5TEST RESULTS	53
8. BANDWIDTH TEST	55
8.1APPLIED PROCEDURES / LIMIT	55
8.2 TEST PROCEDURE	55
8.3 TEST SETUP	55
8.4 EUT OPERATION CONDITIONS	55
8.5TEST RESULTS	56
9. OUTPUT POWER TEST	62
9.1 APPLIED PROCEDURES / LIMIT	62
9.2 TEST PROCEDURE	62
9.3 TEST SETUP	62
9.4 EUT OPERATION CONDITIONS	62
9.5TEST RESULTS	63
10. ANTENNA REQUIREMENT	69
10.1 STANDARD REQUIREMENT	69
10.2 EUT ANTENNA	69
APPENDIX-PHOTOS OF TEST SETUP	70



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.247) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(d)	Conducted Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	



## 1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China.

FCC Registration No.: 842334; IC Registration No.: 12108A-1

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  , where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.71\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Stereo Headphone
Trade Name	V-MODA
Model Name	XFBT
Channel List	Please refer to the Note 2.
Bluetooth	Frequency:2402 – 2480 MHz GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps),8-DPSK(3Mbps)
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V
Product SW/HW version	v1.0
Radio SW/HW version	v1.0
Test SW Version	CSR Bluesuite 2.5.0
RF power setting in TEST SW	255
Connecting I/O Port(s)	Please refer to the User's Manual



## Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Product have same HW/SW version as radio module.





2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	NA	0	BT Antenna

The EUT antenna is PCB Antenna. no antenna other than that furnished by the responsible party shall be used with the device.



## 2.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Low channel TX
Mode 2	Middle channel TX
Mode 3	High channel TX
Mode 4	Hopping on

For Conducted Emission	
Final Test Mode	Description
Mode 4	keeping TX

For Radiated Emission	
Final Test Mode	Description
Mode 1	Low channel TX
Mode 2	Middle channel TX
Mode 3	High channel TX
Mode 4	Hopping on

Note:

(1)The measurements are performed at the highest, middle, lowest available channels.

## 2.2 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Power package setting


Test Mode		PacketType	Packet Size
Basic	1M	1-DH1	3
		1-DH3	11
		1-DH5	15
ERD	2M	2-DH1	19
		2-DH3	26
		2-DH5	30
	3M	3-DH1	19
		3-DH3	27
		3-DH5	31

### 2.3BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

#### Radiated Spurious Emission Test

Configure 1: (Normal hopping)

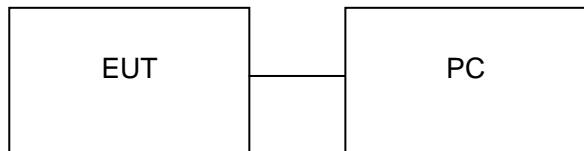

Configure 2: (Control continuous TX)

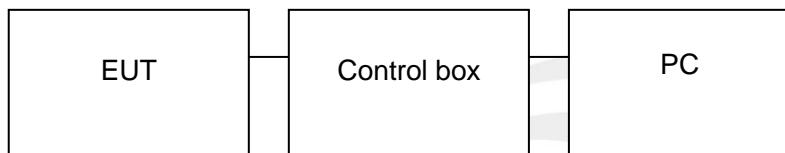

#### Conducted Emission Test





#### 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Bluetooth Stereo Headphone	V-MODA	XFBT	N/A	EUT
2	PC	Dell	N/A	N/A	FCC DOC approval
3	Control box	N/A	A1456	N/A	A.E

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".
- (4) N/A means not applicable.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2014.10.27	2015.10.26
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.06
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05
Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21
Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07
Power Meter	Anritsu	ML2495A	1204003	2014.10.25	2015.10.24
Power Sensor	Anritsu	MA2411B	100309	2014.10.25	2015.10.24

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	102086	102086	2014.10.25	2015.10.24
LISN	R&S	ENV216	101242	2014.10.25	2015.10.24
LISN	EMCO	3810/2NM	000-23625	2014.10.25	2015.10.24
50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.06
Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.06
Absorbing clamp	R&S	MDS-21	100668	2014.10.27	2015.10.26



### 3.EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.247&207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

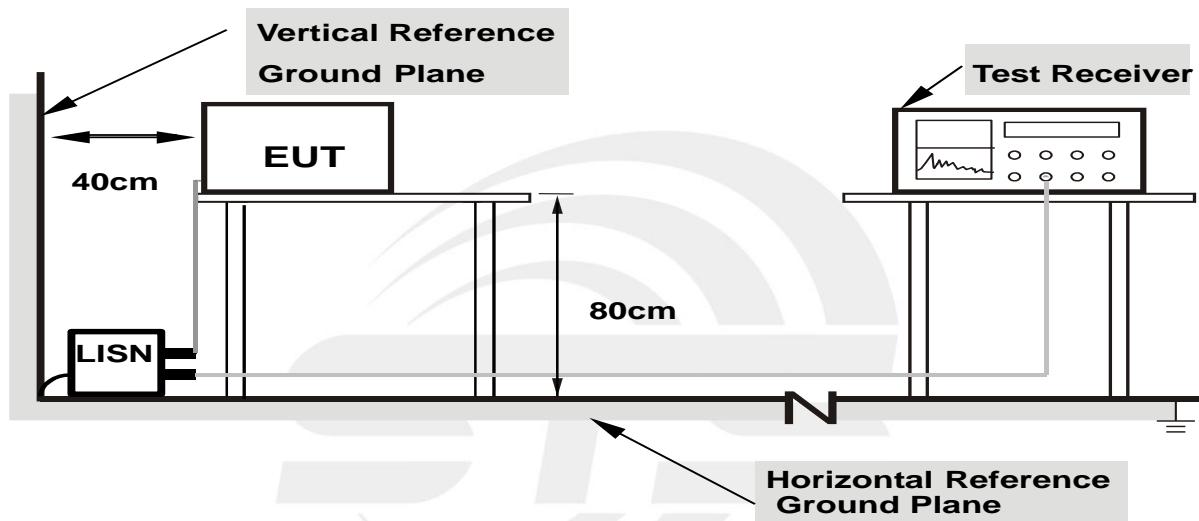


**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.5 TEST RESULTS

EUT :	Bluetooth Stereo Headphone	Model Name. :	XFBT
Temperature :	23°C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC3.7V	Test Mode :	keeping TX

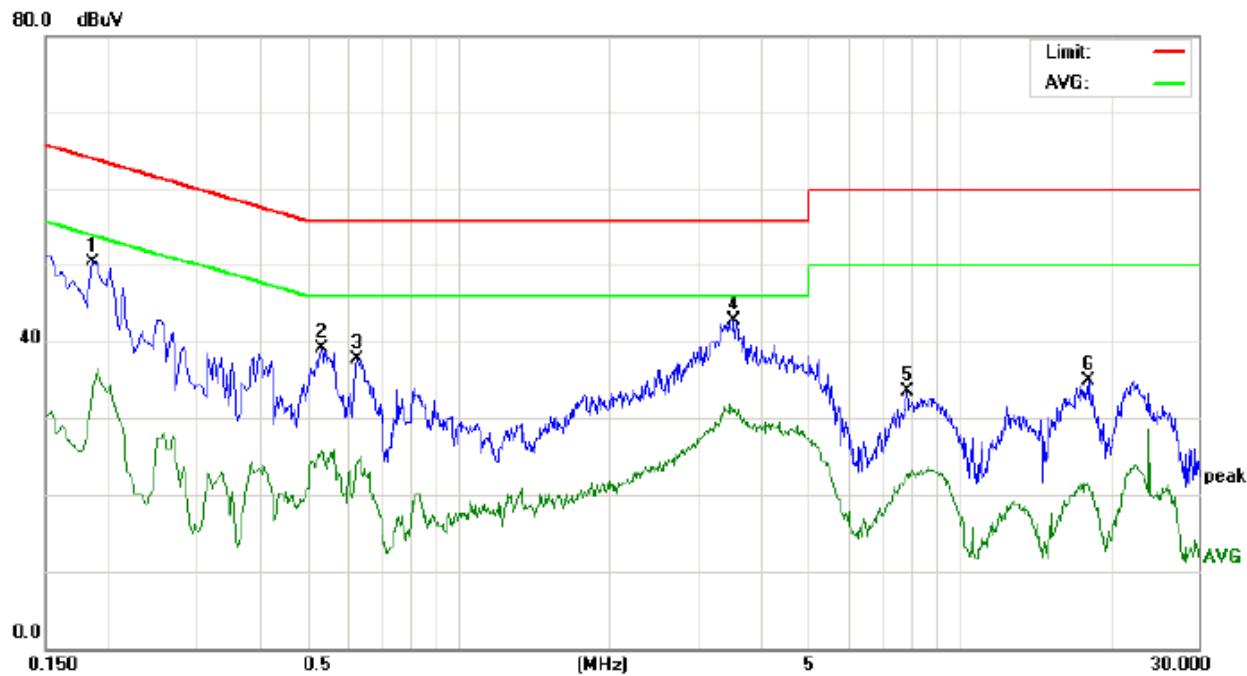

Site: Conduction  
 Limit: FCC Class B Conduction(QP)  
 EUT: Bluetooth Stereo Headphone  
 M/N: XFBT  
 Mode: keeping TX  
 Note:

Phase: **L1**


Temperature: 26

Power:

Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1859	40.35		23.56	10.20	50.55		33.76	64.21	54.21	-13.66	-20.45	P	
2	0.5340	28.67		15.32	10.37	39.04		25.69	56.00	46.00	-16.96	-20.31	P	
3	0.6300	27.29		14.11	10.32	37.61		24.43	56.00	46.00	-18.39	-21.57	P	
4	3.5579	32.12		20.32	10.50	42.62		30.82	56.00	46.00	-13.38	-15.18	P	
5	7.8779	23.11		12.28	10.34	33.45		22.62	60.00	50.00	-26.55	-27.38	P	
6	18.1738	24.75		10.71	10.12	34.87		20.83	60.00	50.00	-25.13	-29.17	P	

EUT :	Bluetooth Stereo Headphone	Model Name. :	XFBT
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC3.7V	Test Mode :	keeping TX

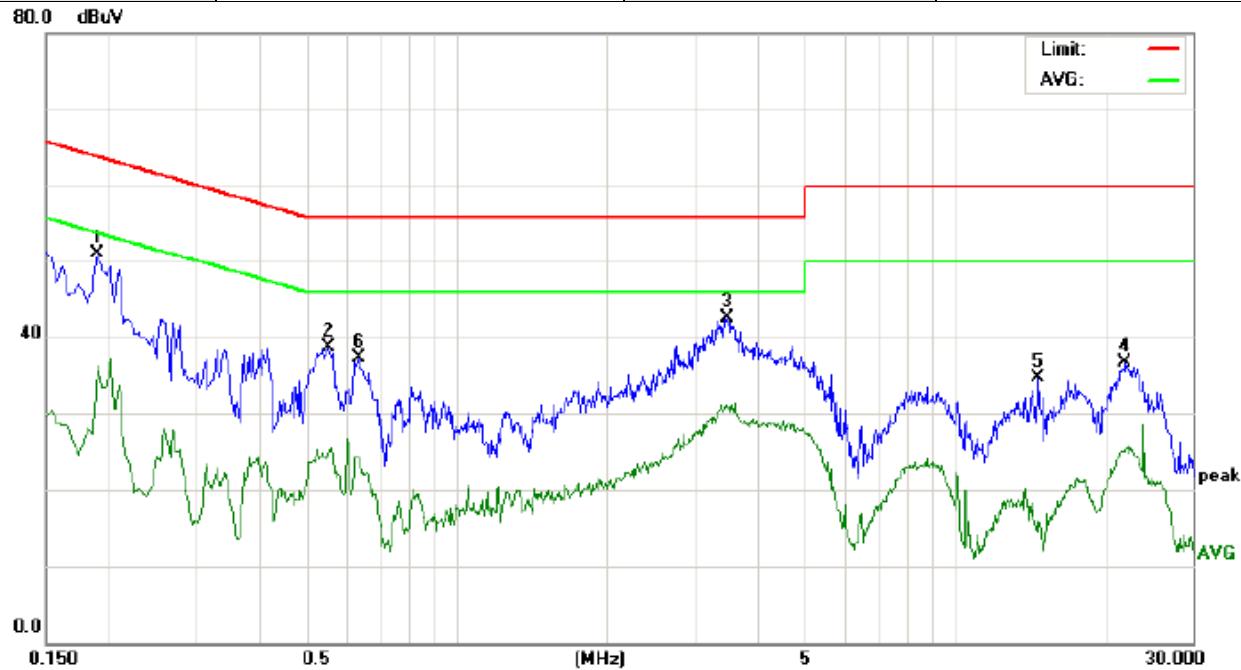

Site: Conduction Phase: **N** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %  
 EUT: Bluetooth Stereo Headphone  
 M/N: XFBT  
 Mode: keeping TX  
 Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	40.89		26.19	10.20	51.09		36.39	64.03	54.03	-12.94	-17.64	P	
2	0.5540	28.28		14.21	10.35	38.63		24.56	56.00	46.00	-17.37	-21.44	P	
3	3.4980	32.03		20.18	10.51	42.54		30.69	56.00	46.00	-13.46	-15.31	P	
4	22.0579	26.57		14.96	10.12	36.69		25.08	60.00	50.00	-23.31	-24.92	P	
5	14.7459	24.55		5.79	10.12	34.67		15.91	60.00	50.00	-25.33	-34.09	P	
6	0.6340	27.03		14.08	10.32	37.35		24.40	56.00	46.00	-18.65	-21.60	P	



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15247&205(a), then the Part 15 247&209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (30MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	RBW 1MHz / VBW 1MHz Peak detector for Pk value RBW 1MHz / VBW 10Hz Peak detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TESTSETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

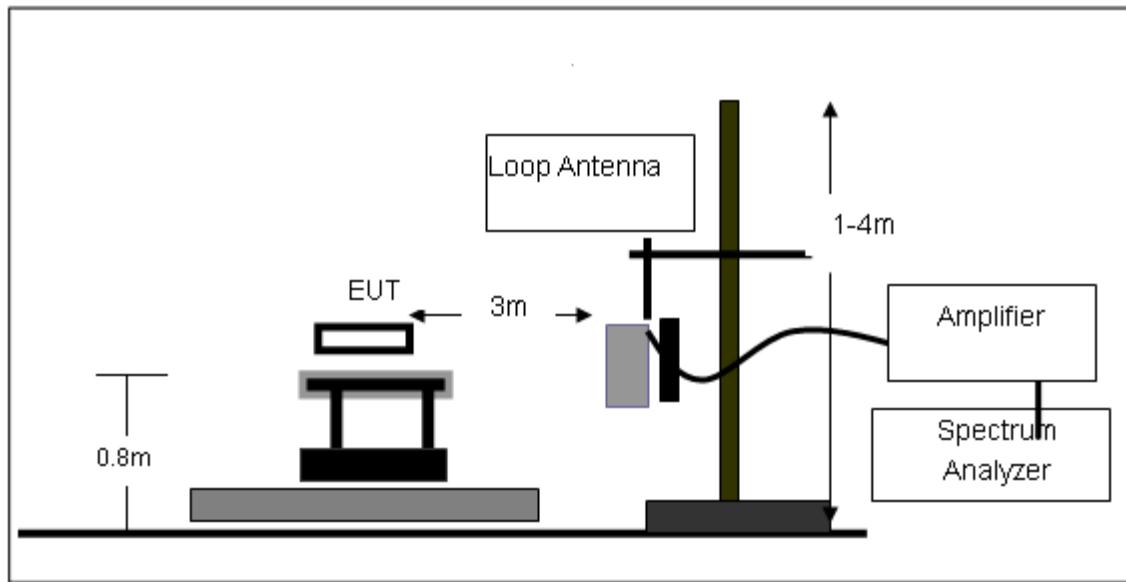

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

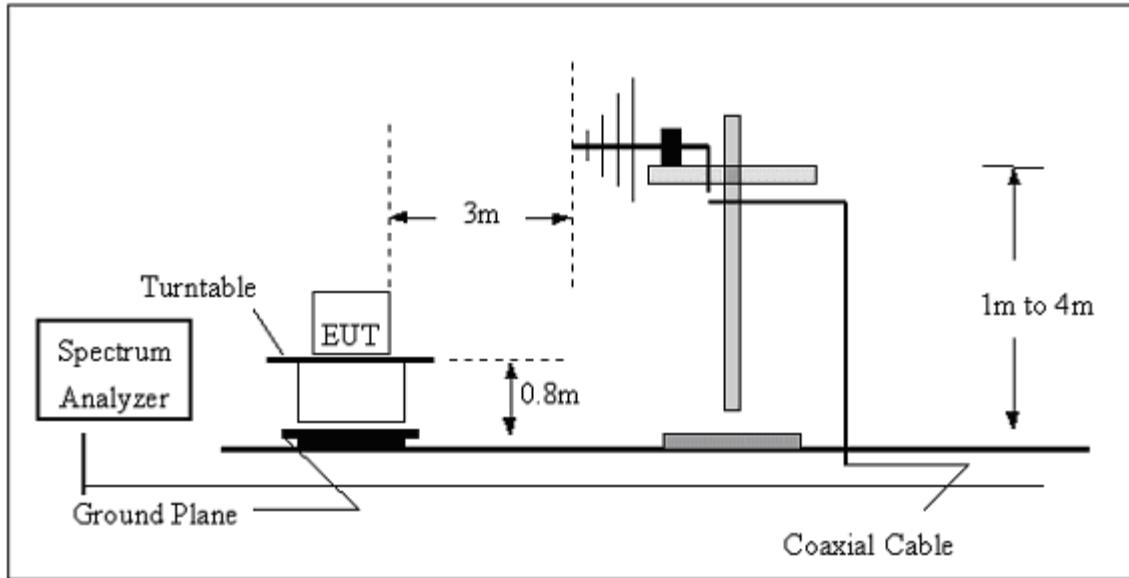

## (C) Radiated Emission Test-Up Frequency Above 1GHz

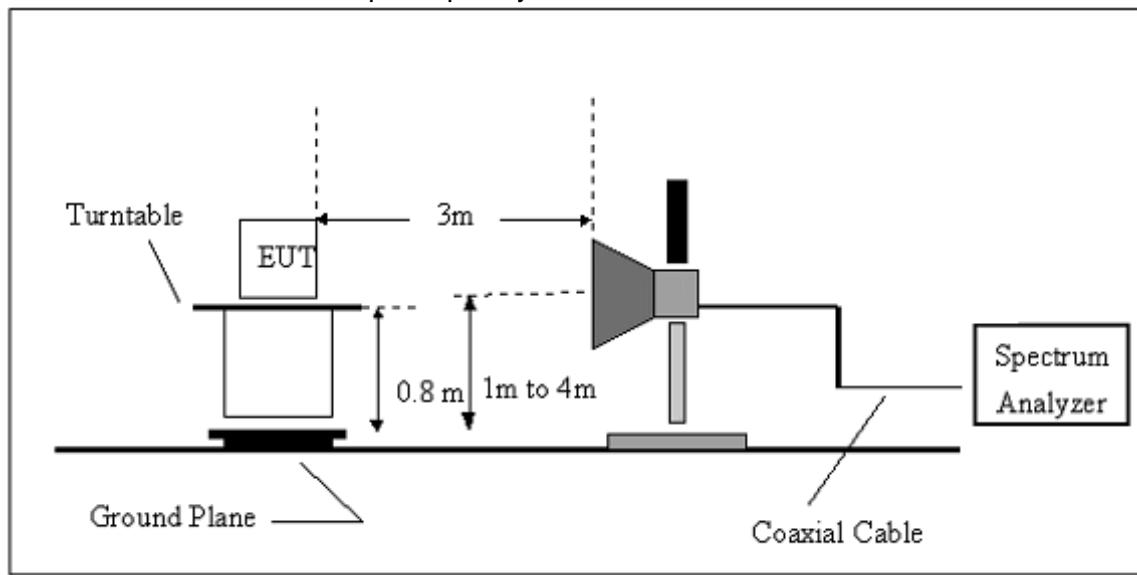

## 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**REMARK :** GFSK(1Mbps),  $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps) all have been tested , GFSK(1Mbps) is found as worst case and only reported



## 3.2.6 TEST RESULTS (WORST CASE : GFSK)

Below 30 MHz

EUT :	Bluetooth Stereo Headphone	Model Name. :	XFBT
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Polarization :	---
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);  
Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1000 MHz

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

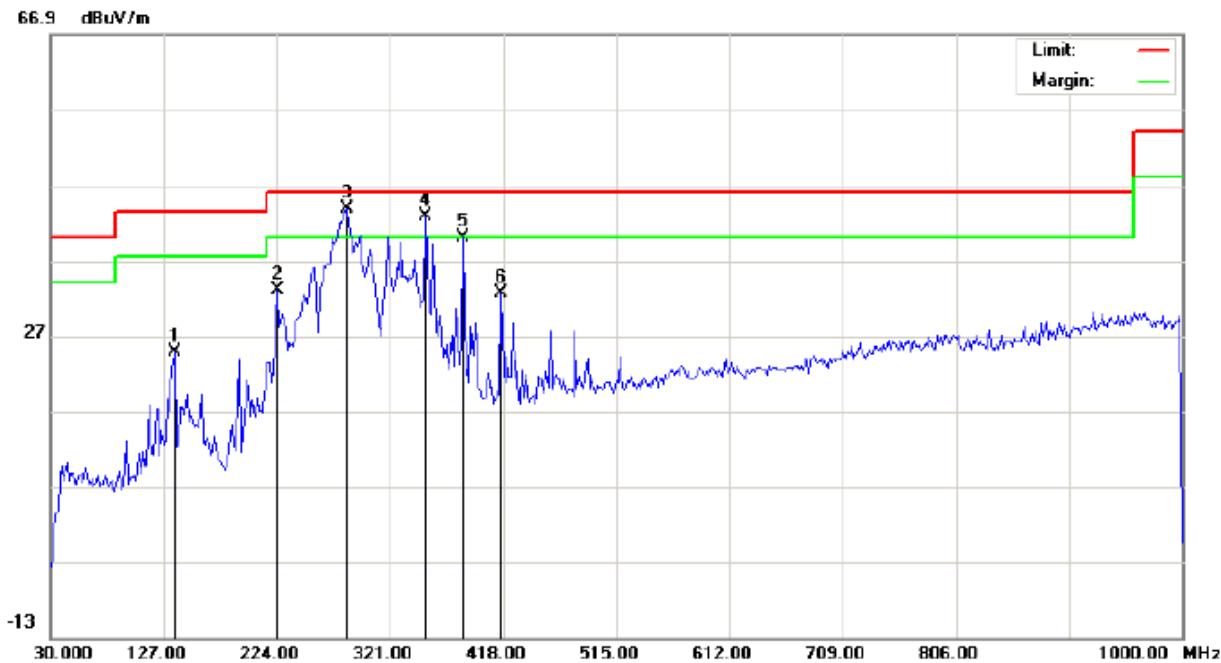

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo Headphone

Distance: 3m

M/N: XFBT


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	10.14	14.65	24.79	43.50	-18.71	peak			
2		224.0000	20.11	12.91	33.02	46.00	-12.98	peak			
3	*	283.8167	28.87	14.92	43.79	46.00	-2.21	peak			
4	!	351.7167	23.97	18.75	42.72	46.00	-3.28	peak			
5		384.0500	21.02	18.96	39.98	46.00	-6.02	peak			
6		416.3833	13.04	19.57	32.61	46.00	-13.39	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

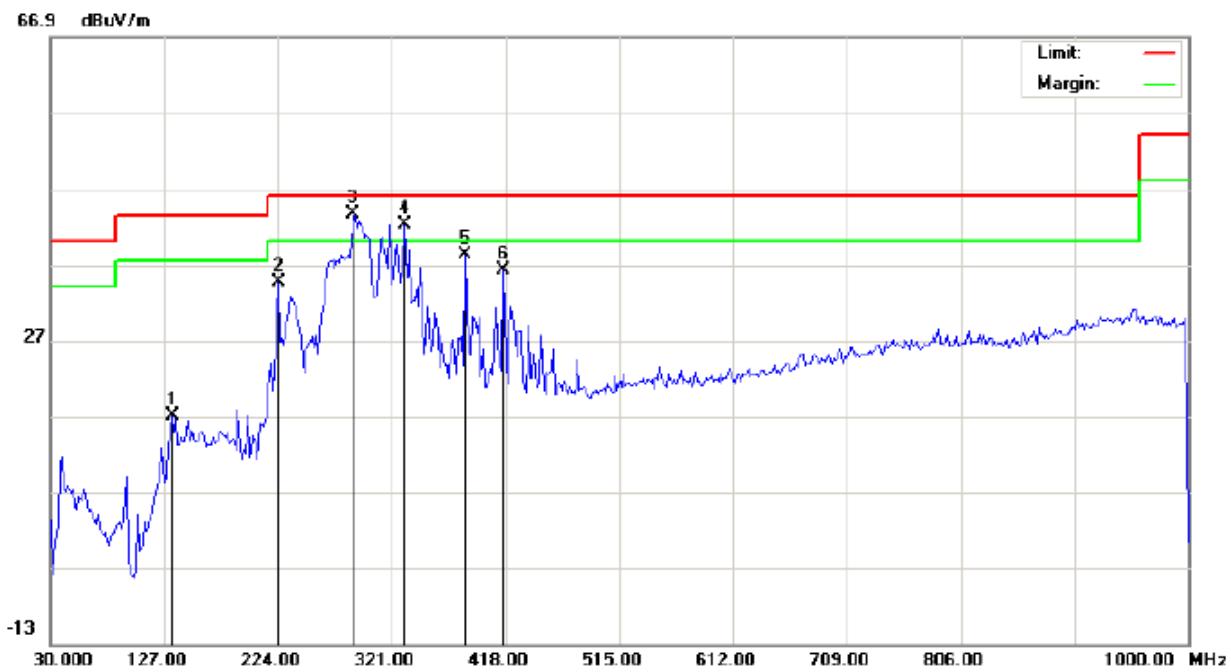

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo Headphone

Distance: 3m

M/N: XFBT

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		133.4667	4.52	12.48	17.00	43.50	-26.50	peak			
2		224.0000	23.25	11.35	34.60	46.00	-11.40	peak			
3	*	288.6666	28.56	15.07	43.63	46.00	-2.37	peak			
4	!	332.3167	24.58	17.56	42.14	46.00	-3.86	peak			
5		384.0500	19.24	18.96	38.20	46.00	-7.80	peak			
6		416.3833	16.56	19.57	36.13	46.00	-9.87	peak			

**RESULT: PASS**
**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

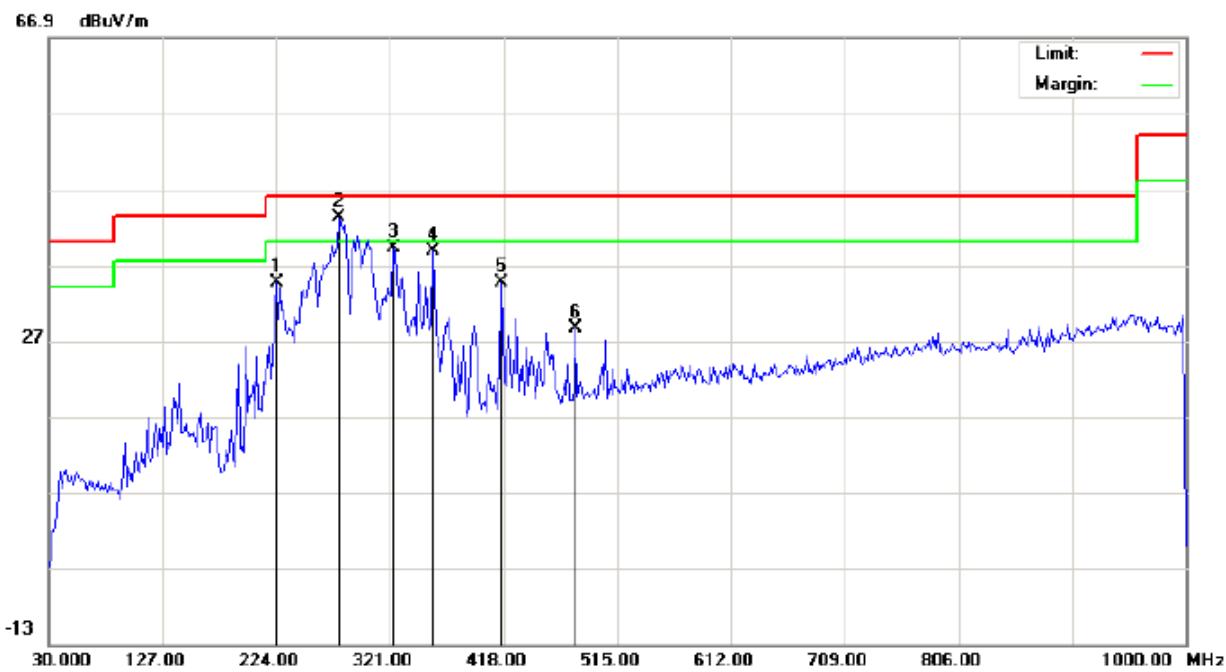

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo Headphone

Distance: 3m

M/N: XFBT


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		224.0000	21.62	12.91	34.53	46.00	-11.47	peak			
2	*	277.3500	28.50	14.73	43.23	46.00	-2.77	peak			
3		324.2333	22.20	17.02	39.22	46.00	-6.78	peak			
4		358.1833	20.10	18.79	38.89	46.00	-7.11	peak			
5		416.3833	15.01	19.57	34.58	46.00	-11.42	peak			
6		479.4333	7.64	20.91	28.55	46.00	-17.45	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

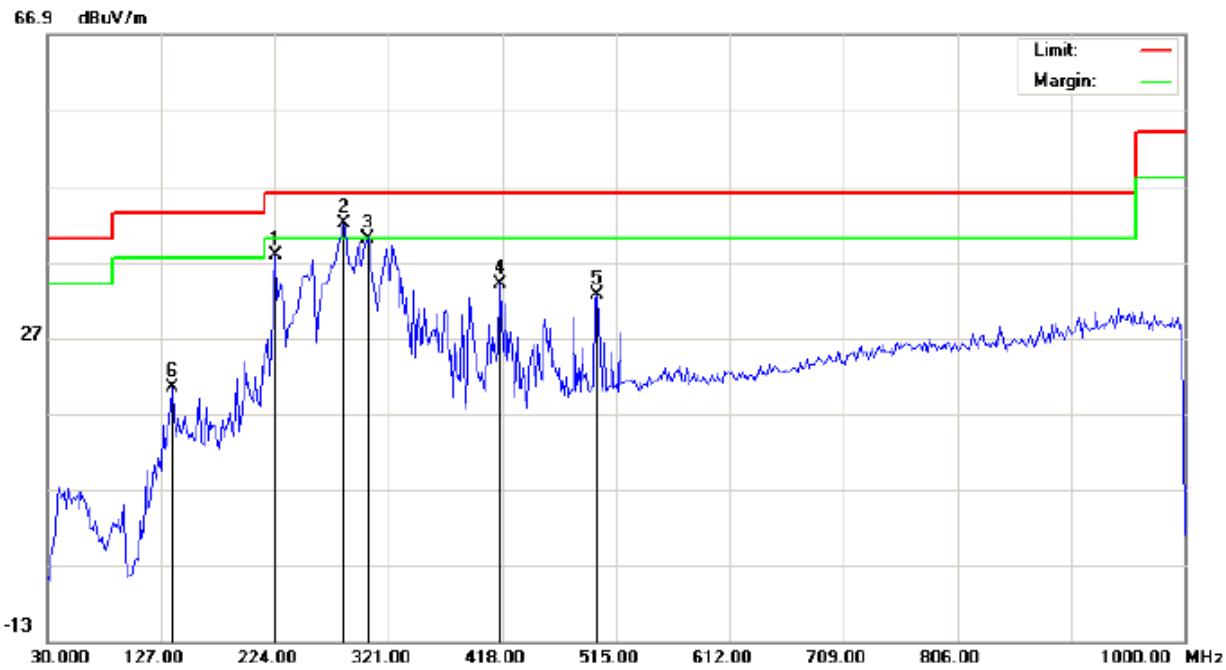

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo Headphone

Distance: 3m

M/N: XFBT

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		224.0000	26.38	11.35	37.73	46.00	-8.27	peak			
2	*	282.2000	27.13	14.87	42.00	46.00	-4.00	peak			
3	!	303.2167	24.41	15.62	40.03	46.00	-5.97	peak			
4		416.3833	14.48	19.57	34.05	46.00	-11.95	peak			
5		498.8333	11.45	21.12	32.57	46.00	-13.43	peak			
6		136.6999	6.49	13.82	20.31	43.50	-23.19	peak			


**RESULT: PASS**

Note: 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

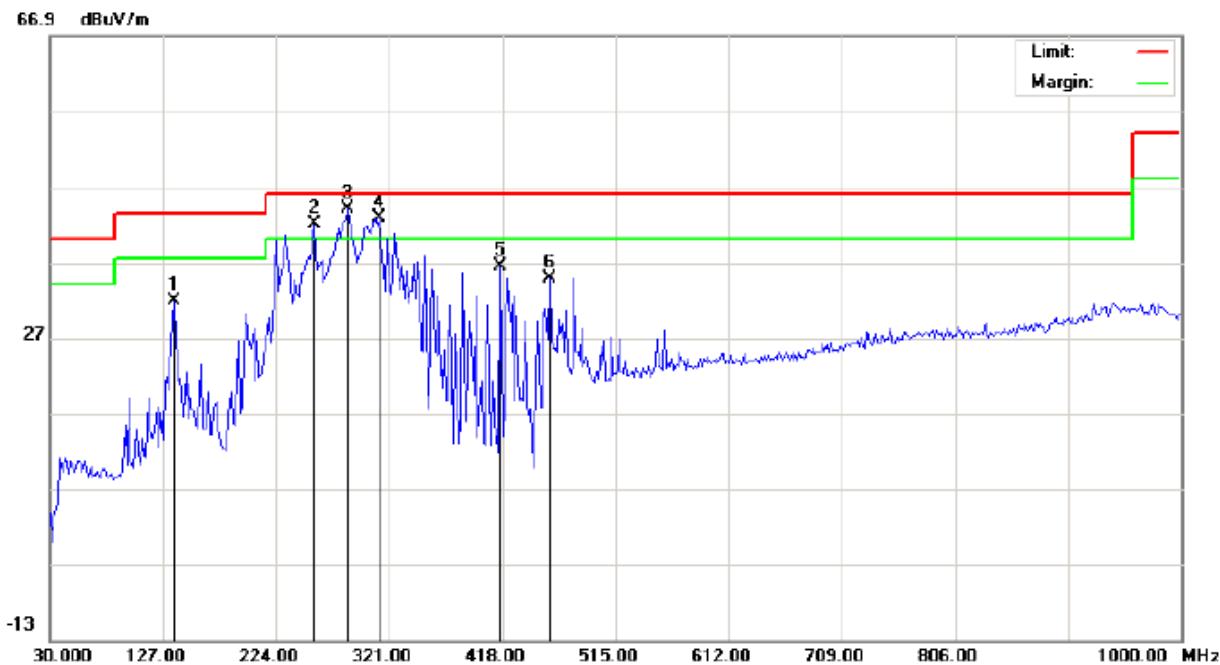

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Stereo Headphone

M/N: XFBT

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:

Temperature: 26

Humidity: 60 %


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		136.6999	17.07	14.65	31.72	43.50	-11.78	peak			
2	!	256.3333	27.83	14.09	41.92	46.00	-4.08	peak			
3	*	285.4331	28.95	14.97	43.92	46.00	-2.08	peak			
4	!	312.9166	26.57	16.27	42.84	46.00	-3.16	peak			
5		416.3833	16.76	19.57	36.33	46.00	-9.67	peak			
6		458.4166	14.04	20.68	34.72	46.00	-11.28	peak			

**RESULT: PASS**



## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

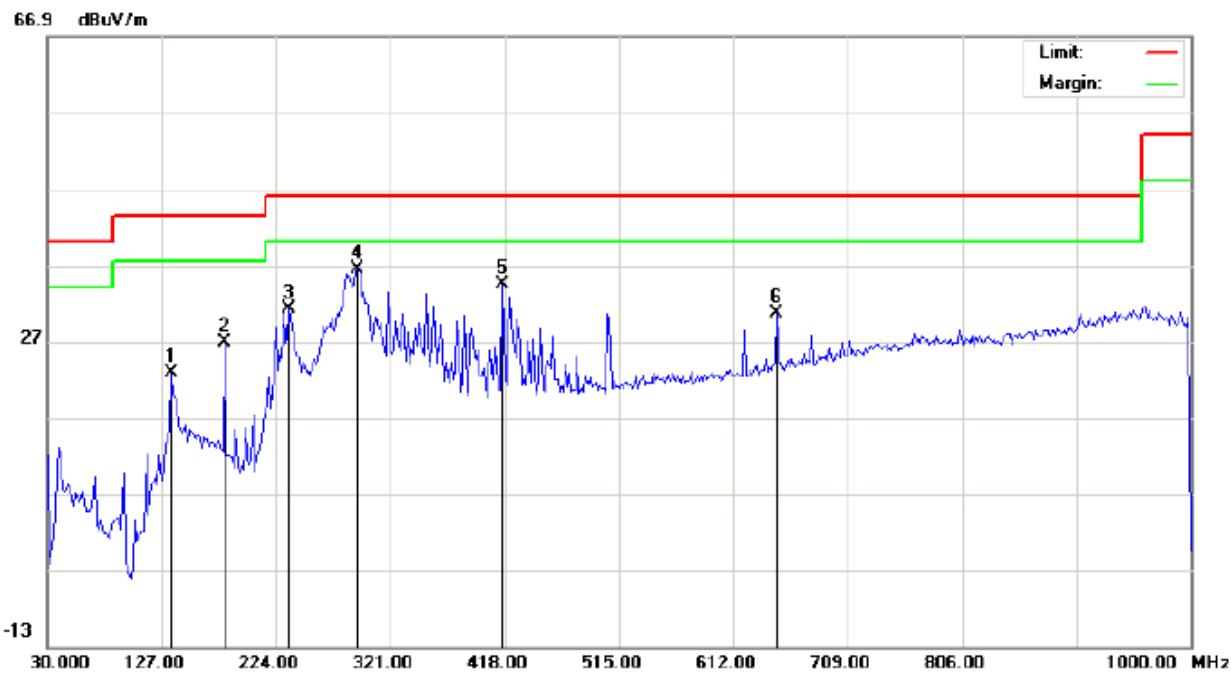

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Stereo Headphone

M/N: XFBT

Mode: High Channel TX

Note:-

Polarization: **Vertical**

Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		135.0833	9.67	13.15	22.82	43.50	-20.68	peak			
2		180.3500	12.74	13.98	26.72	43.50	-16.78	peak			
3		235.3167	18.80	12.46	31.26	46.00	-14.74	peak			
4	*	293.5167	21.10	15.21	36.31	46.00	-9.69	peak			
5		416.3833	14.84	19.57	34.41	46.00	-11.59	peak			
6		649.1833	6.68	23.83	30.51	46.00	-15.49	peak			

## RESULT: PASS


**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



Above 1000 MHz

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL-HORIZONTAL

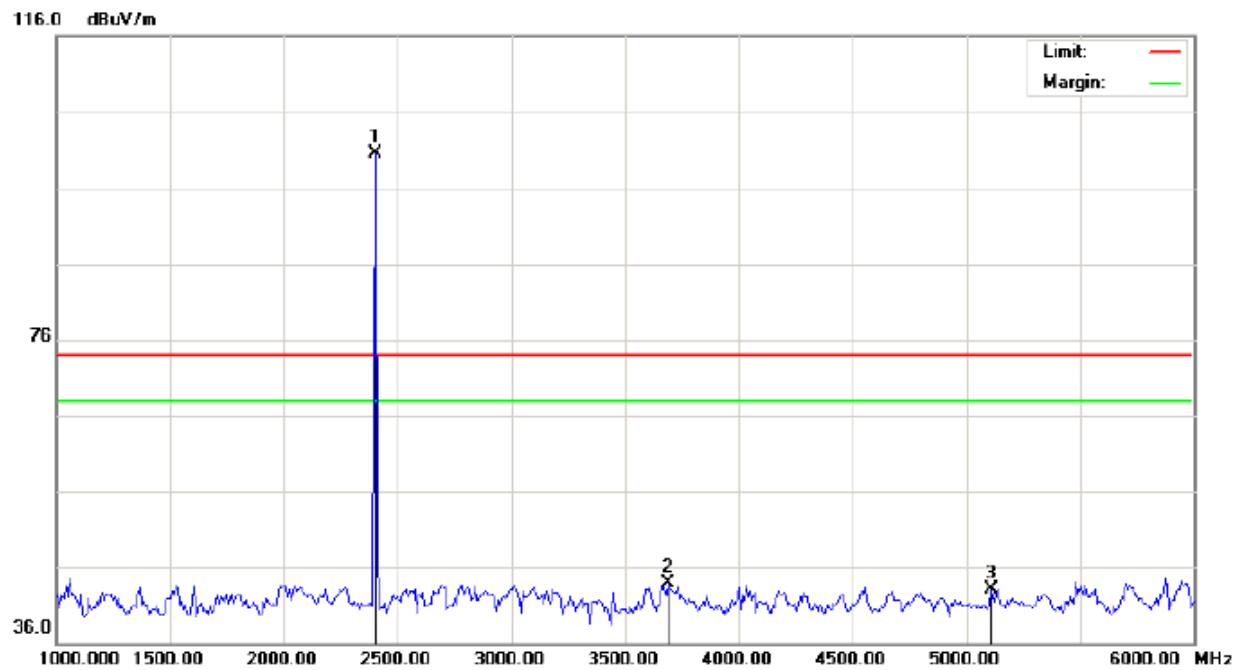


Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.11	10.32	100.43	74.00	26.43	peak			
2		3691.667	30.62	13.29	43.91	74.00	-30.09	peak			
3		5108.333	37.12	6.03	43.15	74.00	-30.85	peak			

**RESULT: PASS**



RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL –VERTICAL

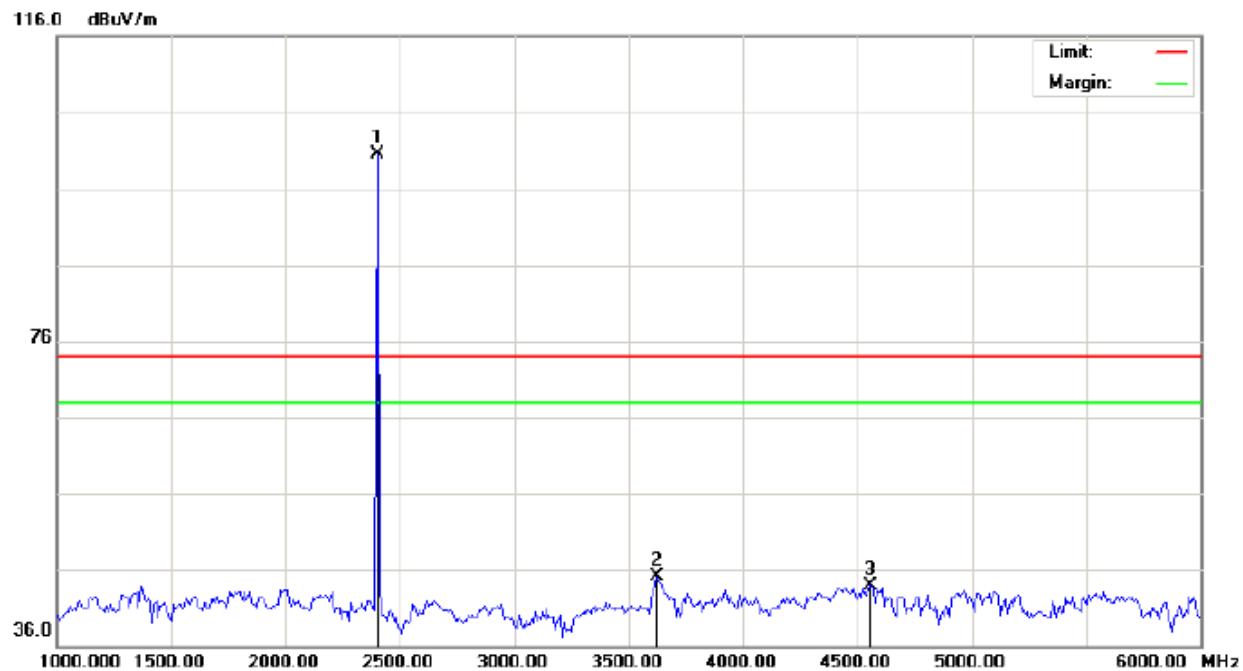


Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.17	10.32	100.49	74.00	26.49	peak			
2		3625.000	32.16	12.88	45.04	74.00	-28.96	peak			
3		4558.333	36.96	7.04	44.00	74.00	-30.00	peak			

## RESULT: PASS



## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-MIDDLE CHANNEL-HORIZONTAL

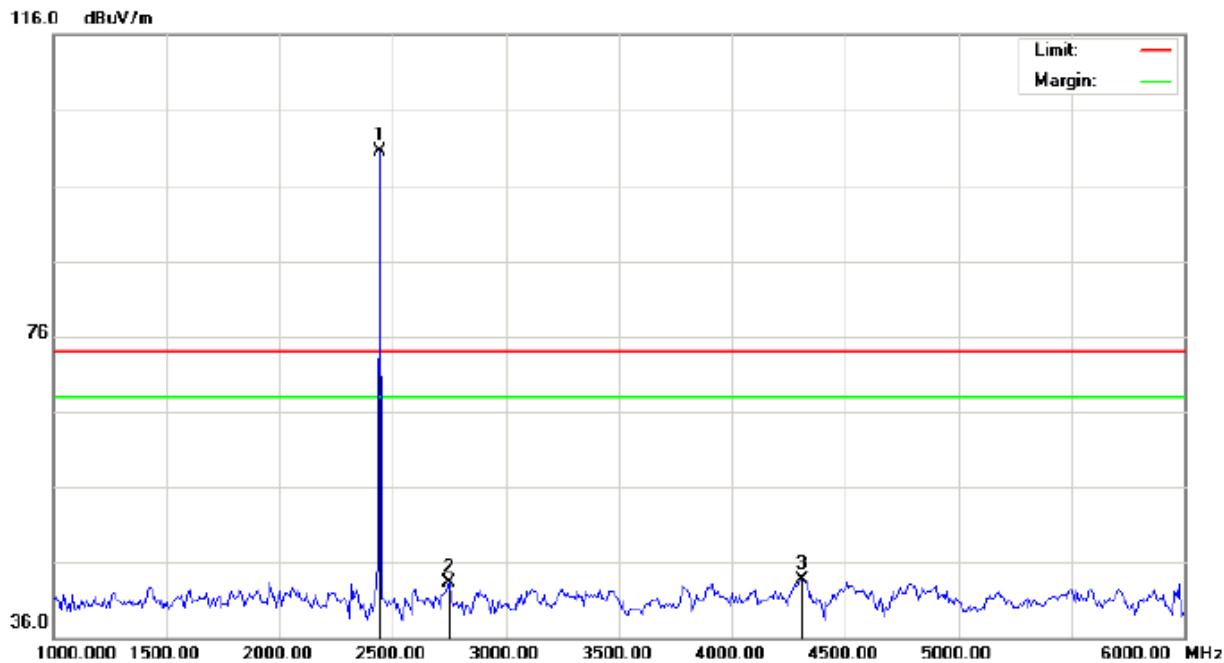


Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.22	10.37	100.59	74.00	26.59	peak			
2		2750.000	32.29	11.03	43.32	74.00	-30.68	peak			
3		4308.333	33.61	10.07	43.68	74.00	-30.32	peak			

## RESULT: PASS




## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)- MIDDLE CHANNEL –VERTICAL

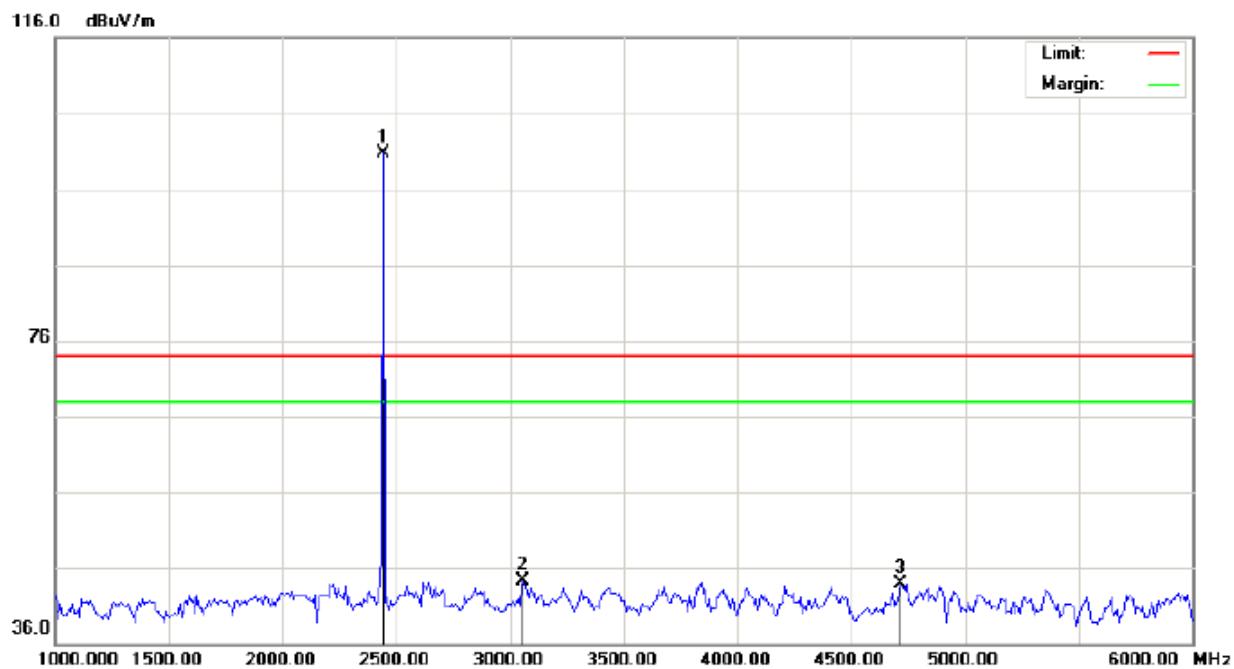

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.38	10.37	100.75	74.00	26.75	peak			
2		3058.333	32.65	11.69	44.34	74.00	-29.66	peak			
3		4716.667	36.42	7.46	43.88	74.00	-30.12	peak			

## RESULT: PASS

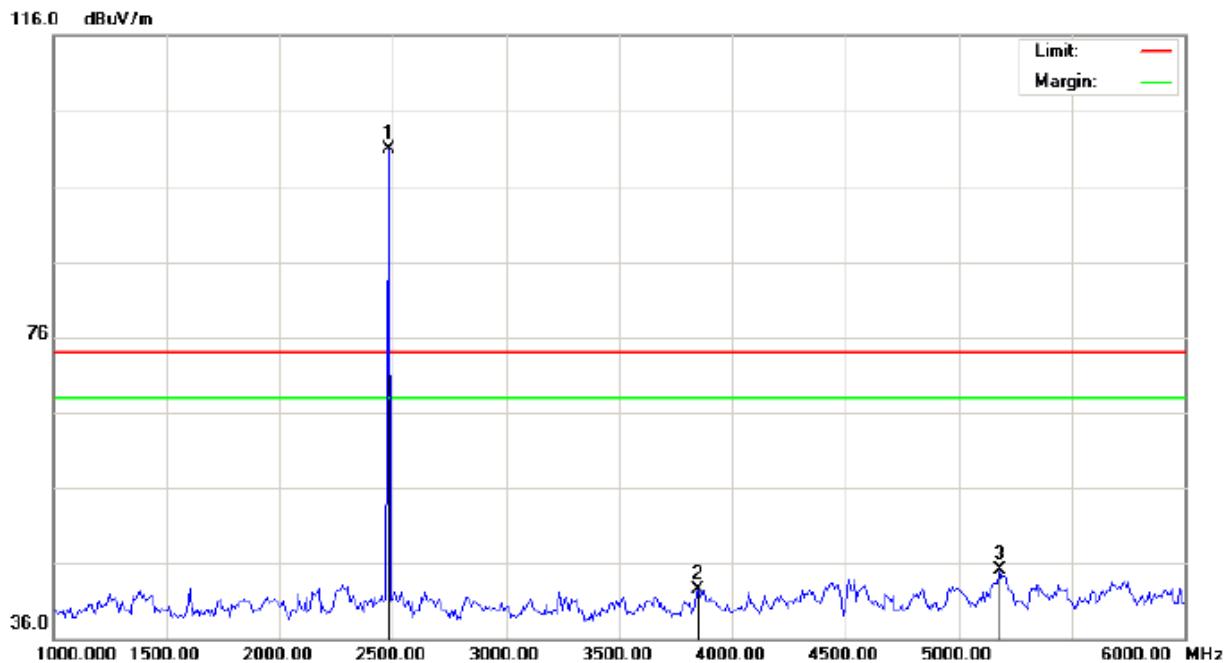RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL-HORIZONTAL

Site: site #1 Polarization: **Horizontal** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Stereo Headphone Distance:

M/N: XFBT

Mode: High Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	90.43	10.41	100.84	74.00	26.84	peak			
2		3850.000	28.28	14.27	42.55	74.00	-31.45	peak			
3		5183.333	40.53	4.53	45.06	74.00	-28.94	peak			

**RESULT: PASS**



#### RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL –VERTICAL

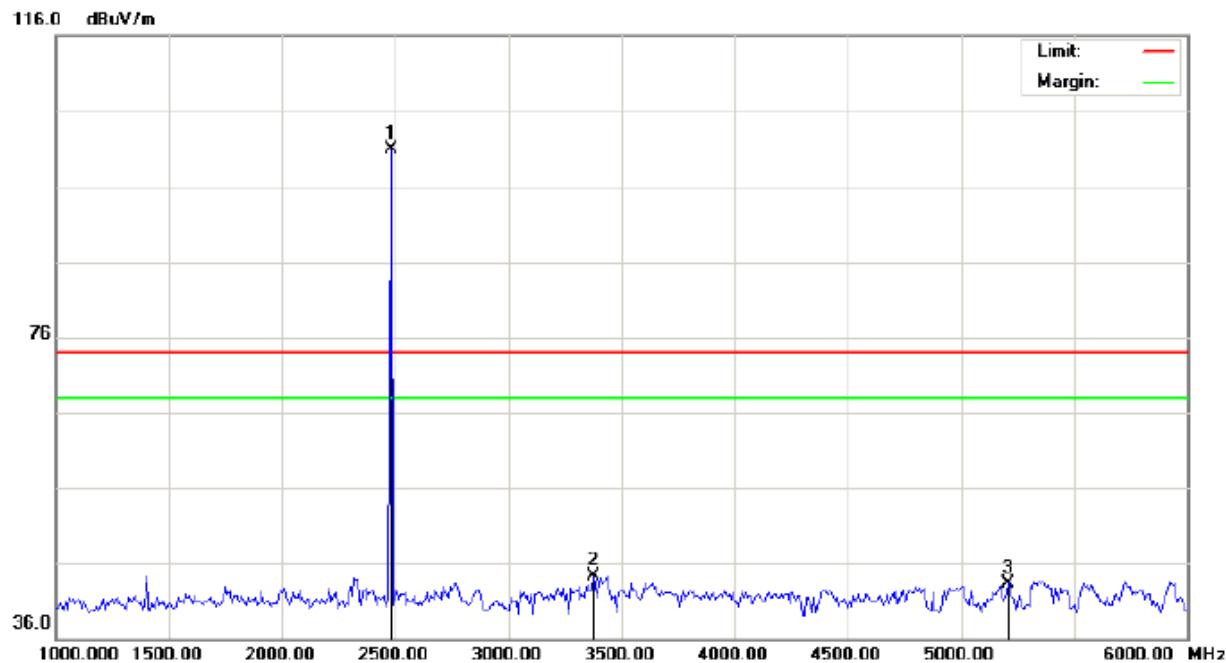

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.47	10.41	100.88	74.00	26.88	peak			
2		3375.000	32.29	11.99	44.28	74.00	-29.72	peak			
3		5208.333	39.30	4.03	43.33	74.00	-30.67	peak			

## RESULT: PASS

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.


Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.



## BAND EDGE TEST(Worst case:GFSK)

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

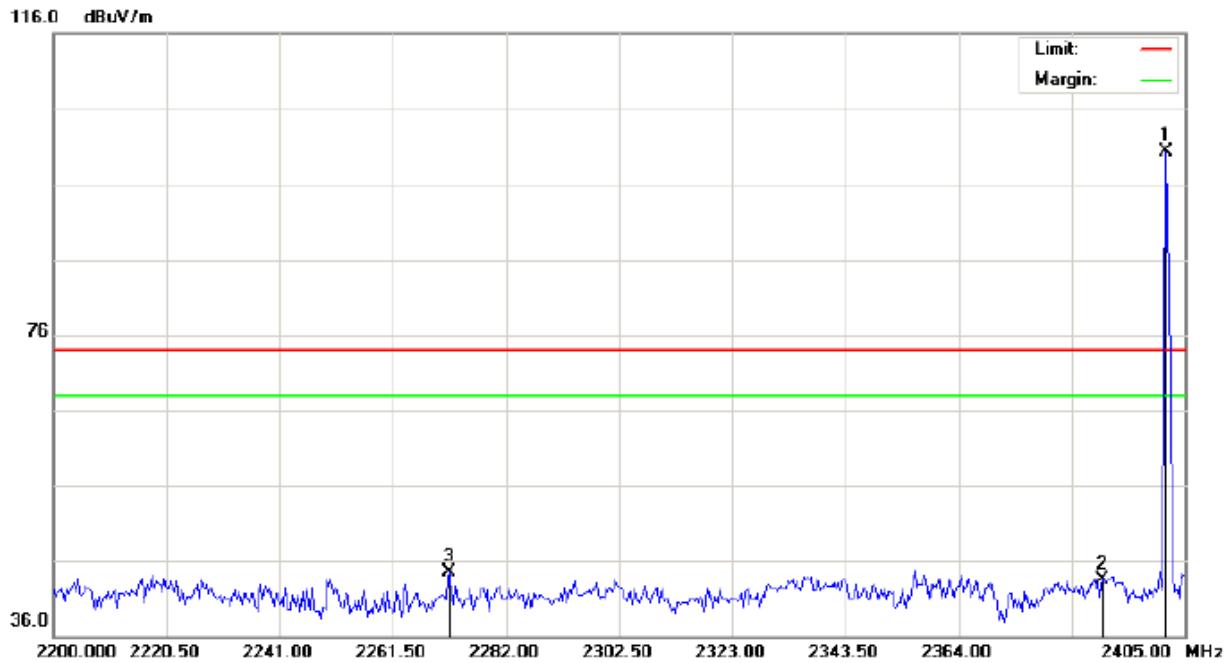

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth Stereo Headphone

Distance:

M/N: XFBT


Mode: Low Channel TX

**Note:**

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	89.99	10.32	100.31	74.00	26.31	peak			
2		2390.000	33.12	10.31	43.43	74.00	-30.57	peak			
3		2271.750	34.27	10.18	44.45	74.00	-29.55	peak			



## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

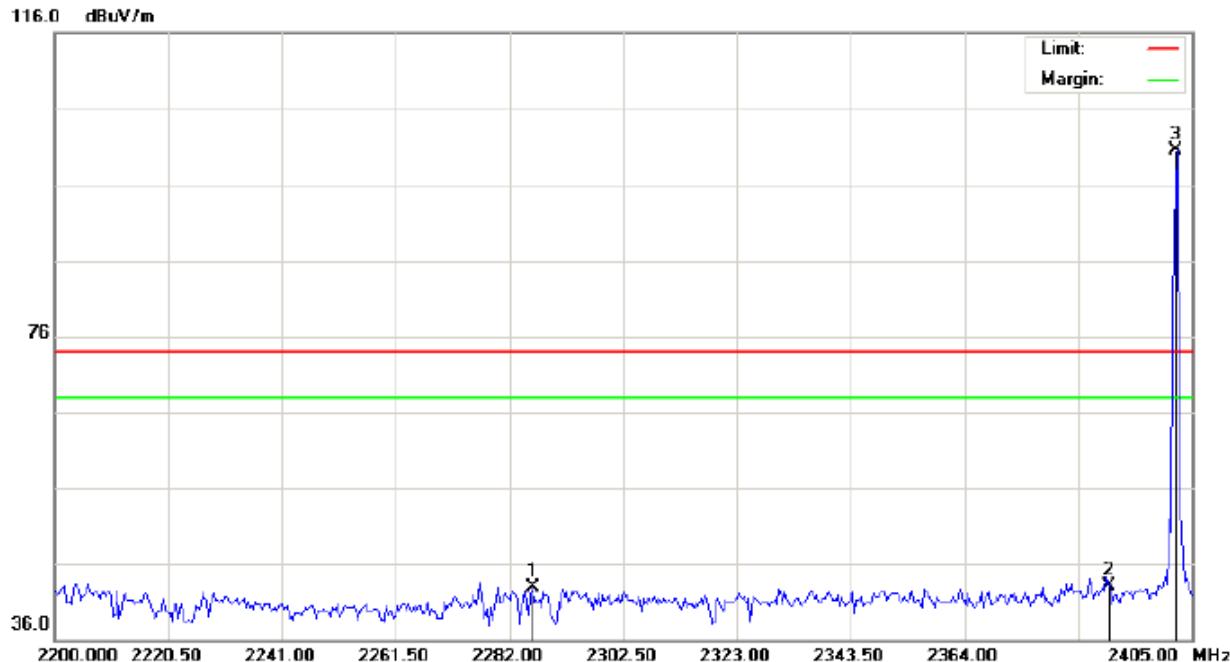


Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2286.100	32.73	10.19	42.92	74.00	-31.08	peak			
2		2390.000	32.85	10.31	43.16	74.00	-30.84	peak			
3	*	2402.000	90.26	10.32	100.58	74.00	26.58	peak			



## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

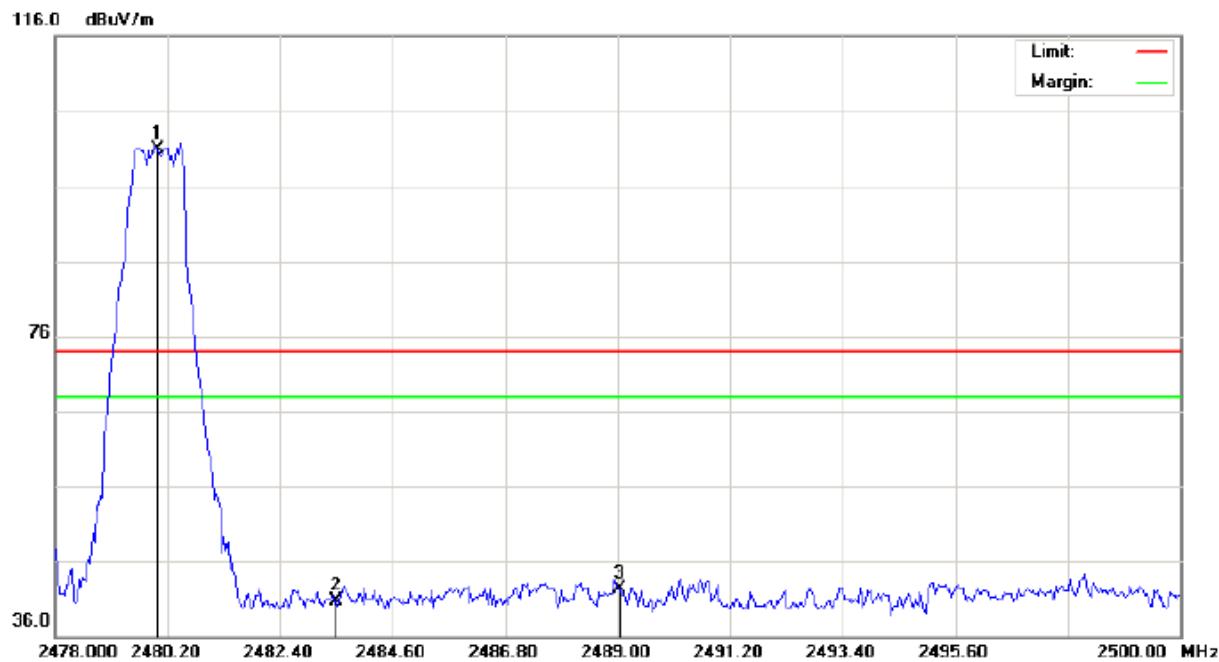


Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	90.46	10.41	100.87	74.00	26.87	peak			
2		2483.500	30.25	10.41	40.66	74.00	-33.34	peak			
3		2489.037	31.85	10.42	42.27	74.00	-31.73	peak			



## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

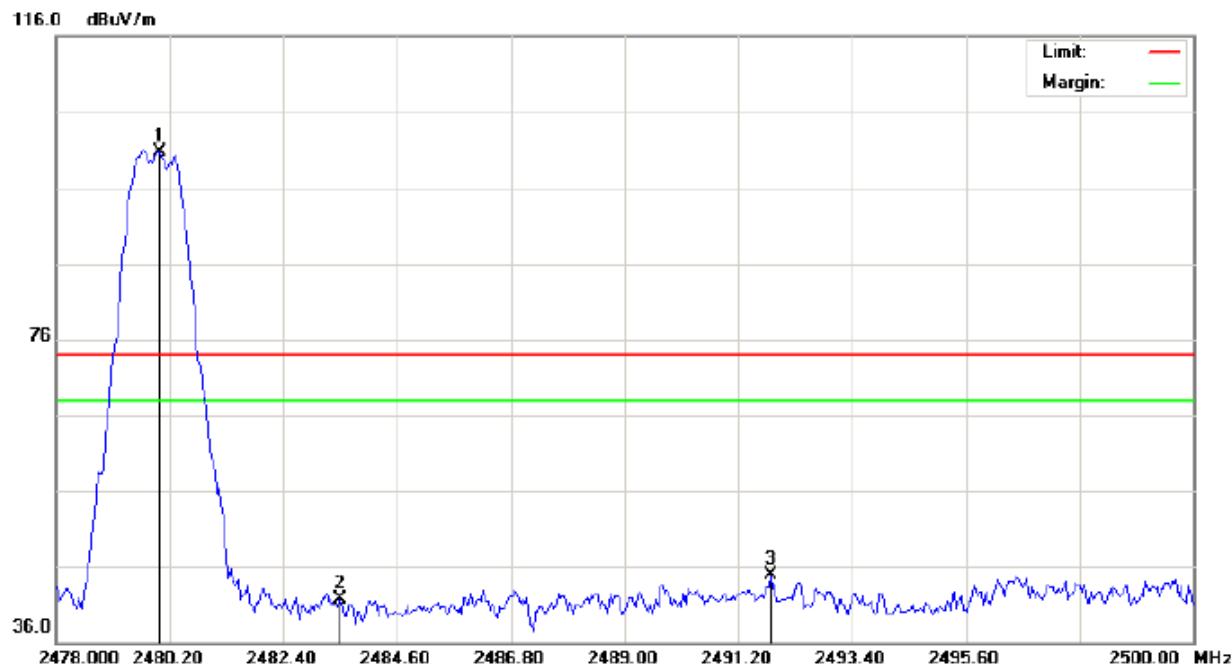

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Bluetooth Stereo Headphone Distance:  
M/N: XFBT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.35	10.41	100.76	74.00	26.76	peak			
2		2483.500	31.37	10.41	41.78	74.00	-32.22	peak			
3		2491.823	34.41	10.42	44.83	74.00	-29.17	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## 4. CONDUCTED SPURIOUS EMISSIONS

### 4.1 REQUIREMENT


According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/100 KHz
Trace-Mode:	Max hold

### 4.3 TEST SETUP

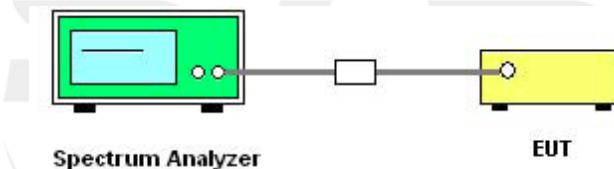

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.



### 4.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



**REMARK:** GFSK(1Mbps),  $\pi/4$ -DQPSK(2Mbps),8-DPSK(3Mbps) all have been tested , GFSK(1Mbps) is found as worst case and only reported

## 4.5 TEST RESULTS



EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	Low Channel(GFSK)		

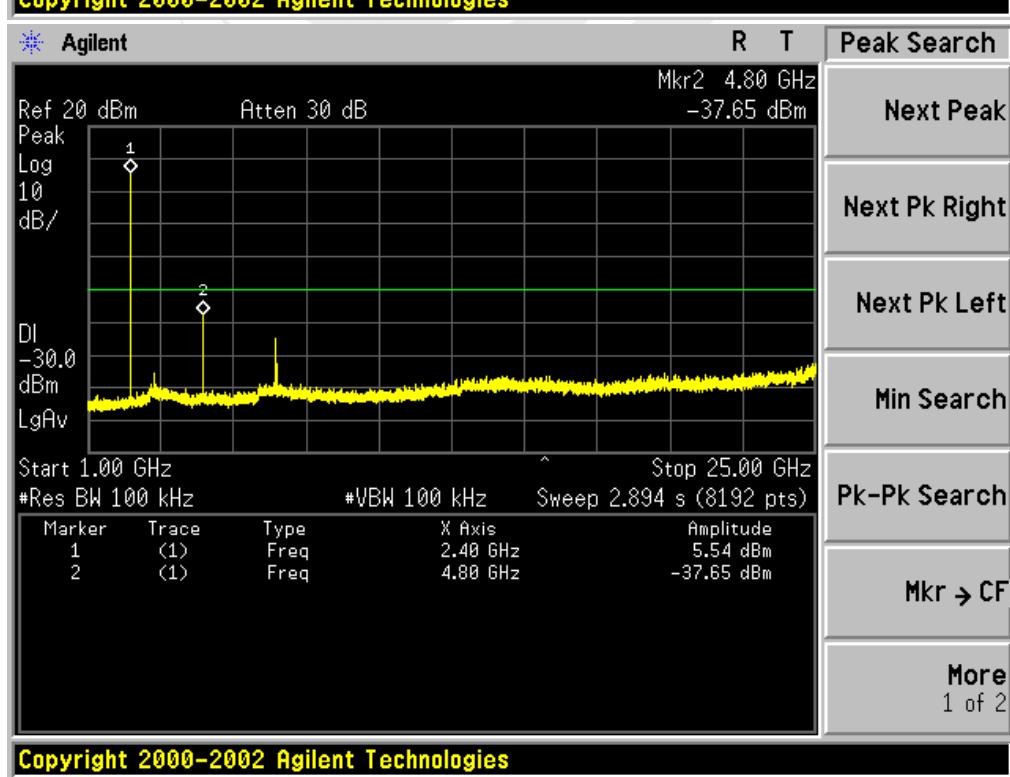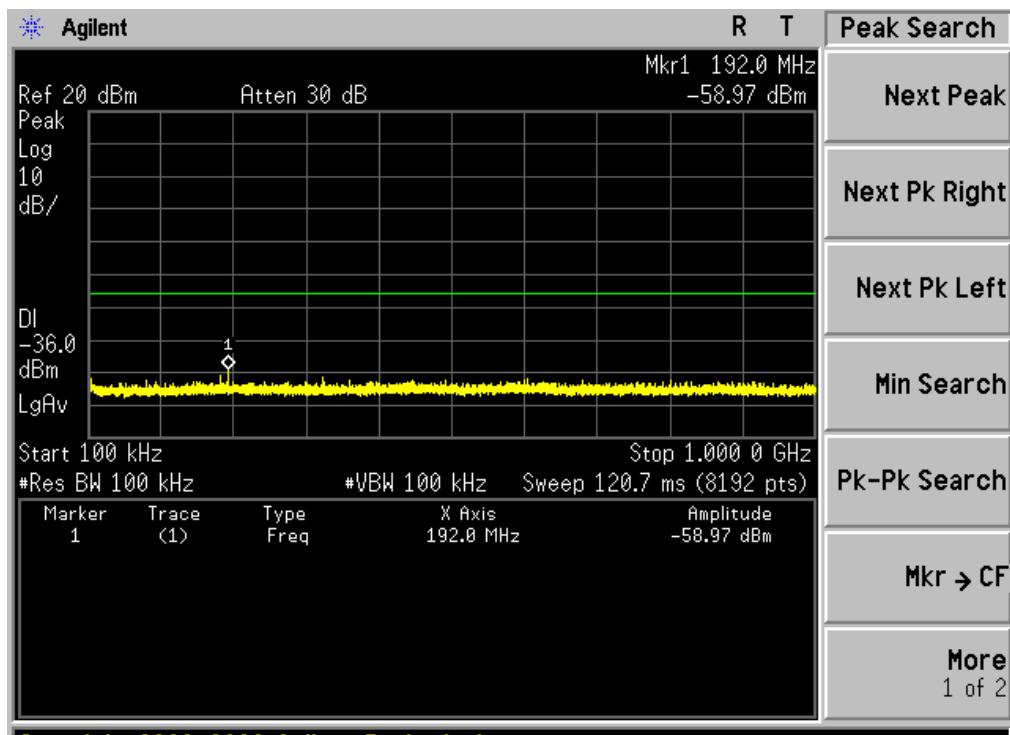

EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	Middle(GFSK)		

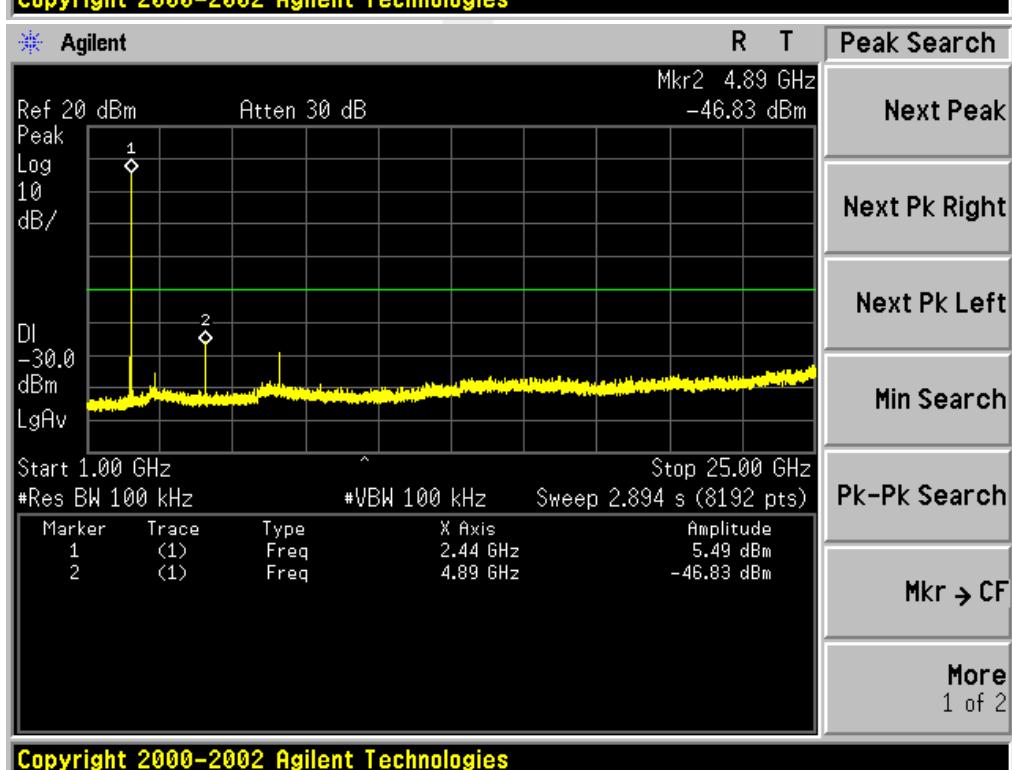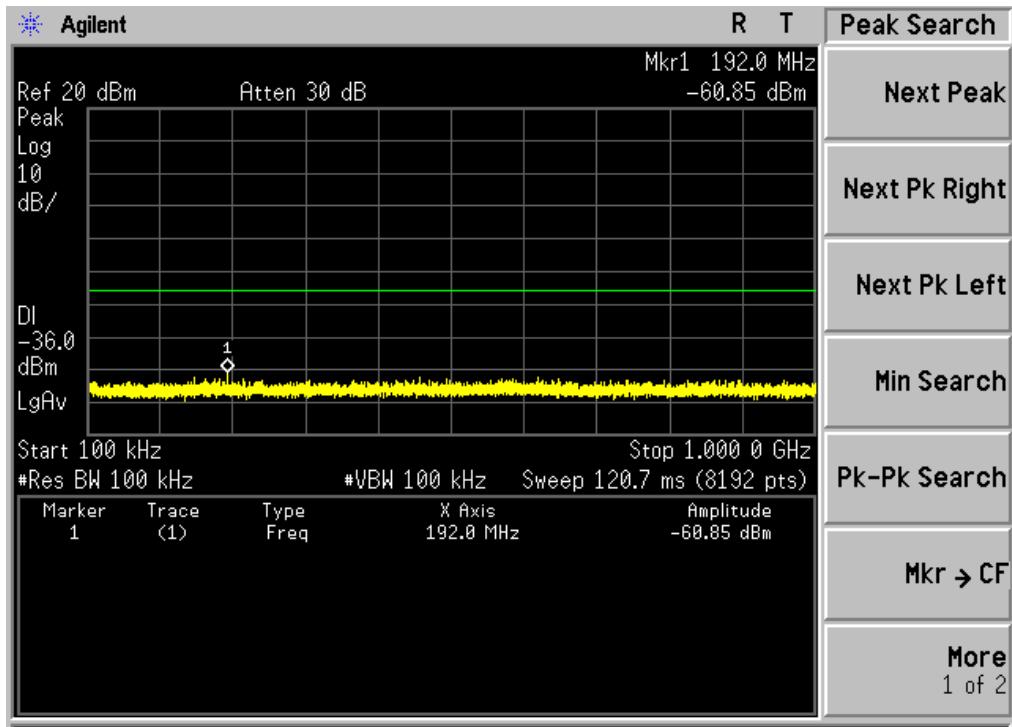

EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	High(GFSK)		

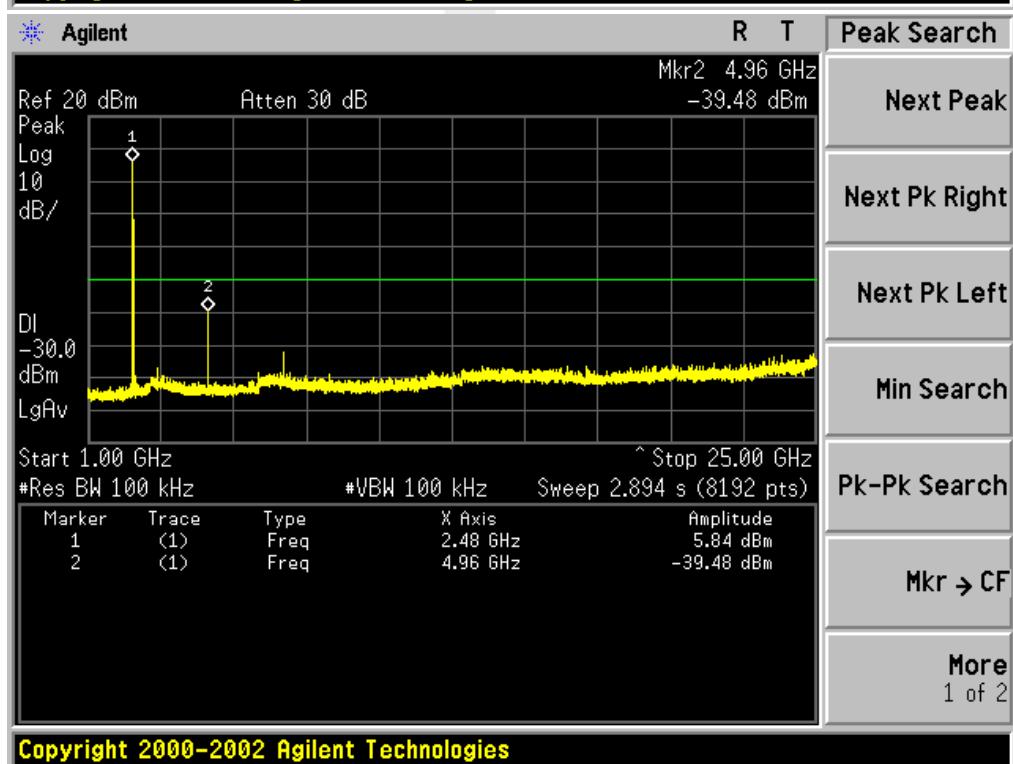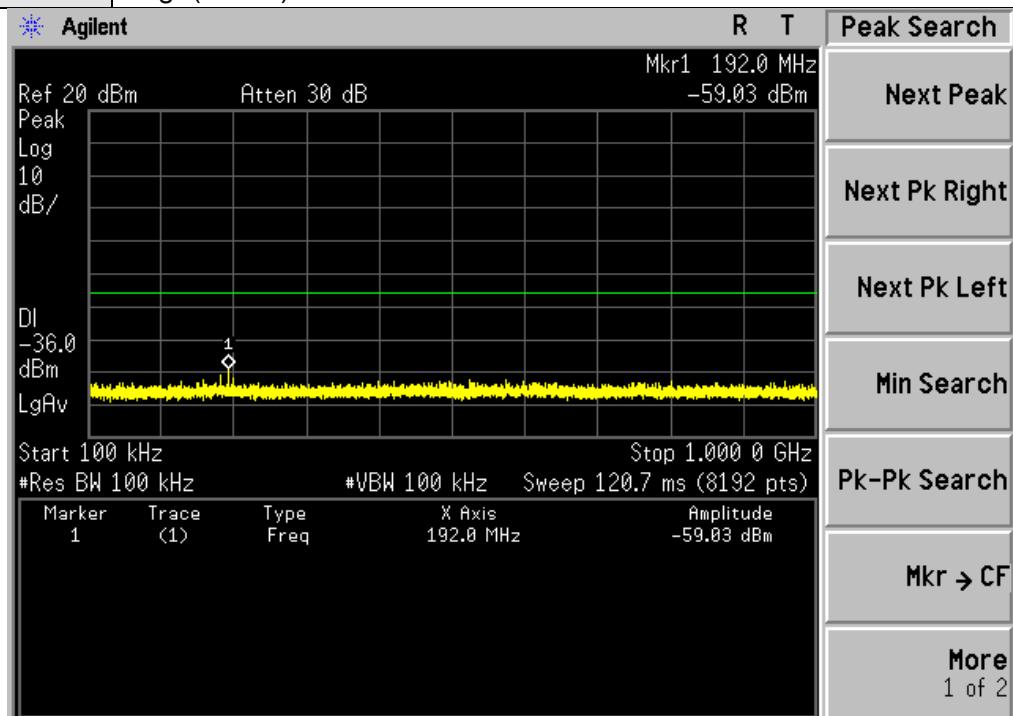



## CONDUCTED TEST RESULT FOR BANDEDGE


Mode	Channel	Carrier Frequency [MHz]	Frequency Hopping	Max Spurious Level [dBm]	Verdict
GFSK	LCH	2402	Off	-37.76	PASS
			On	-38.65	PASS
GFSK	HCH	2480	Off	-57.07	PASS
			On	-57.45	PASS
$\pi/4$ DQPSK	LCH	2402	Off	-39.99	PASS
			On	-41.96	PASS
$\pi/4$ DQPSK	HCH	2480	Off	-55.26	PASS
			On	-62.12	PASS
8DPSK	LCH	2402	Off	-37.49	PASS
			On	-42.53	PASS
8DPSK	HCH	2480	Off	-54.87	PASS
			On	-62.03	PASS

Note:All modes were tested,only the worst case record in the report.

## Test Graph

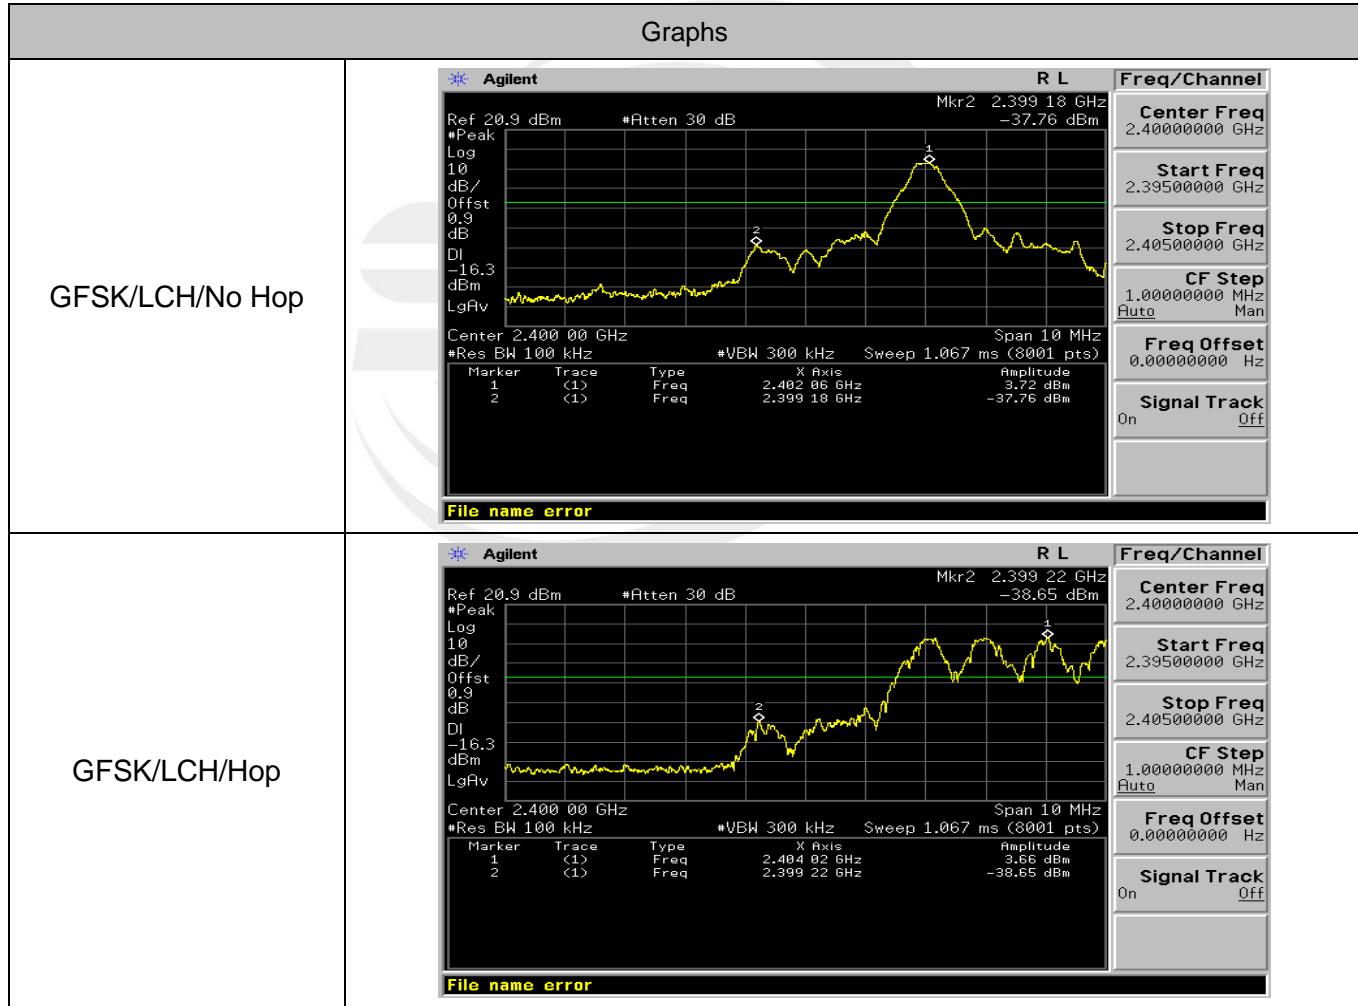


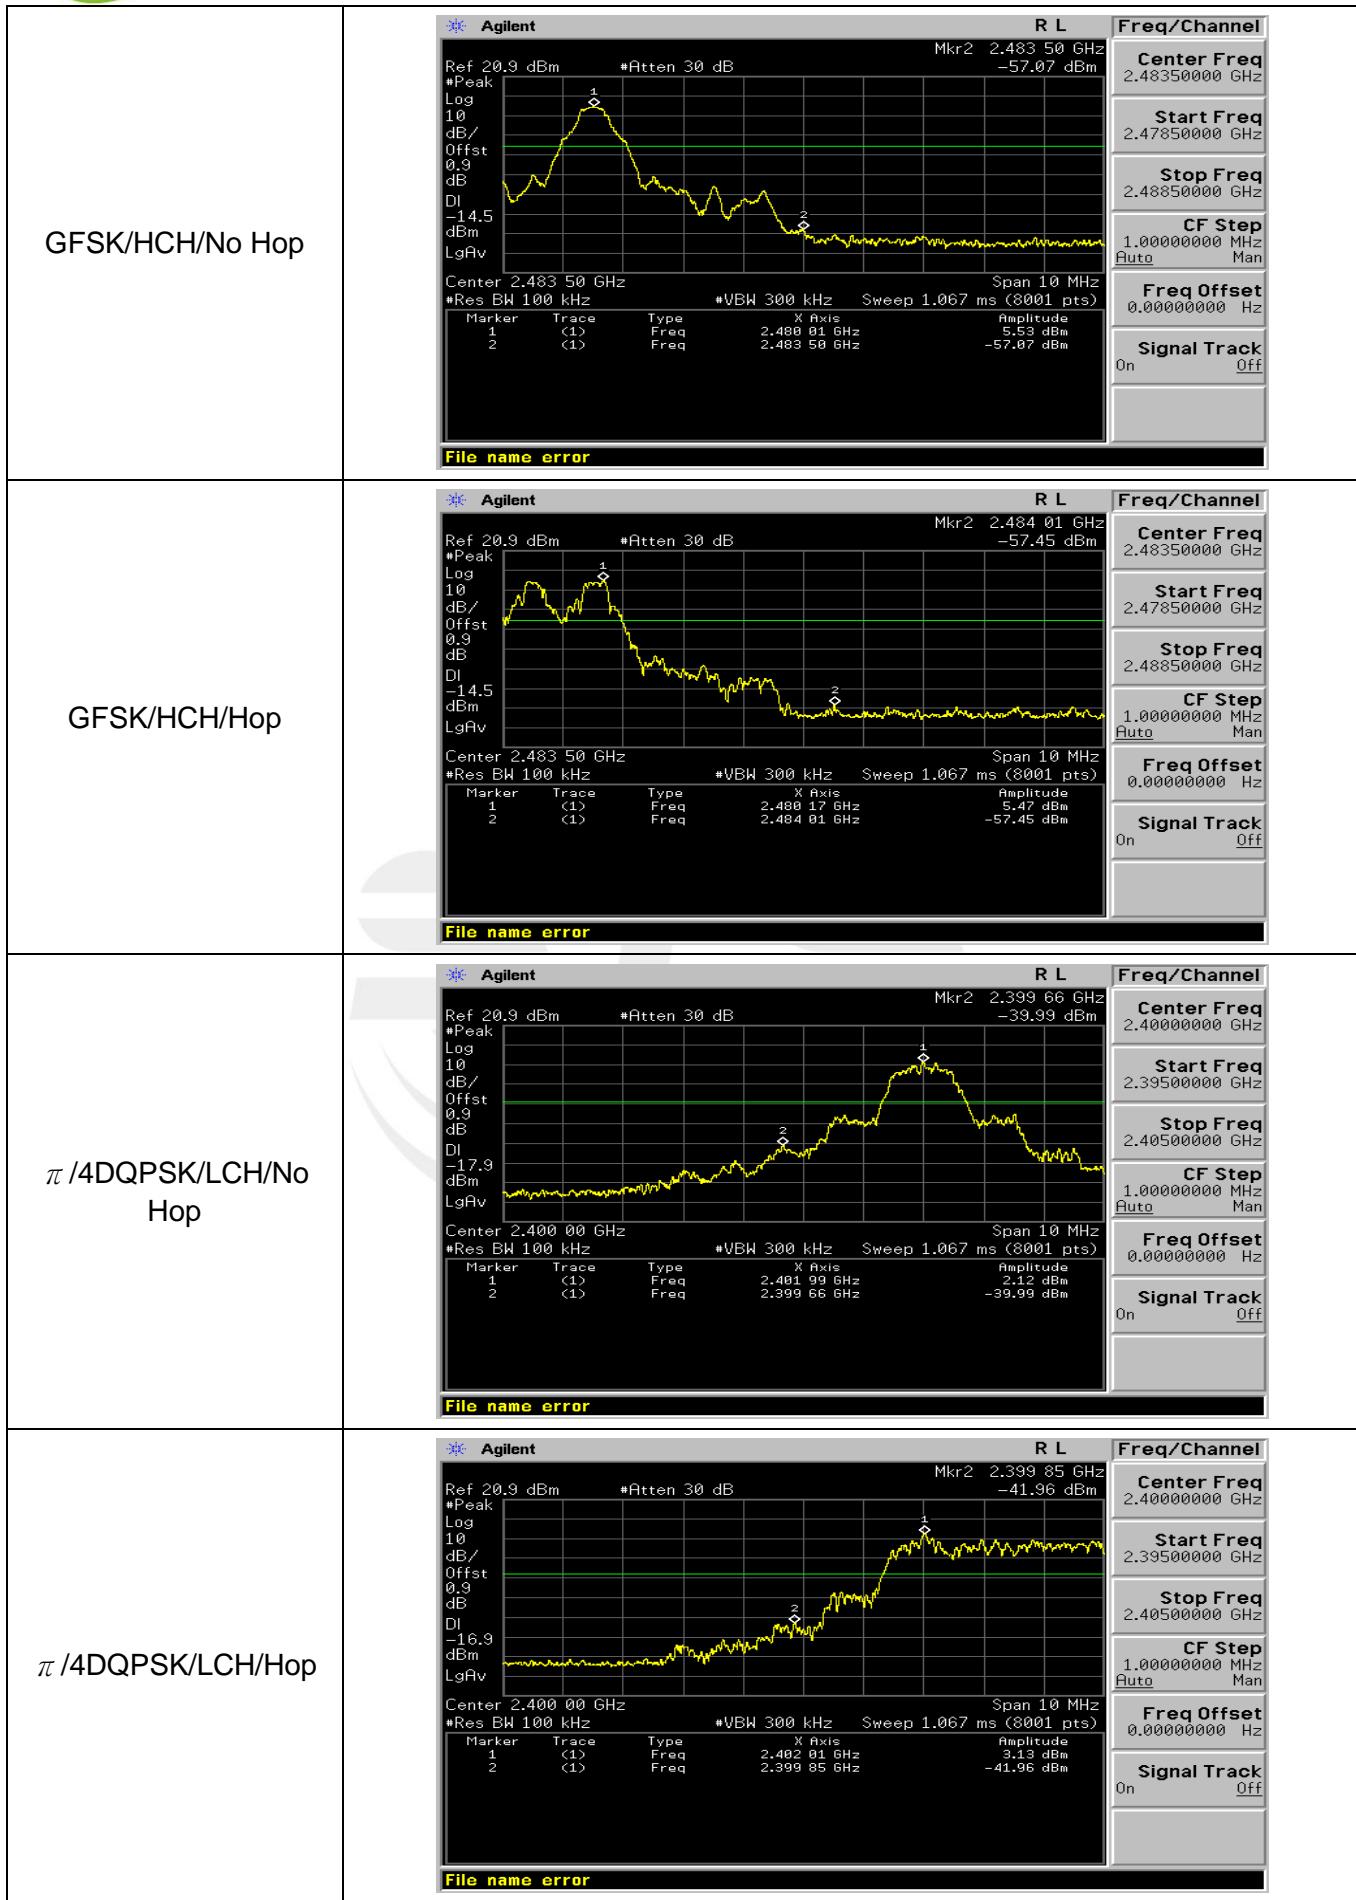

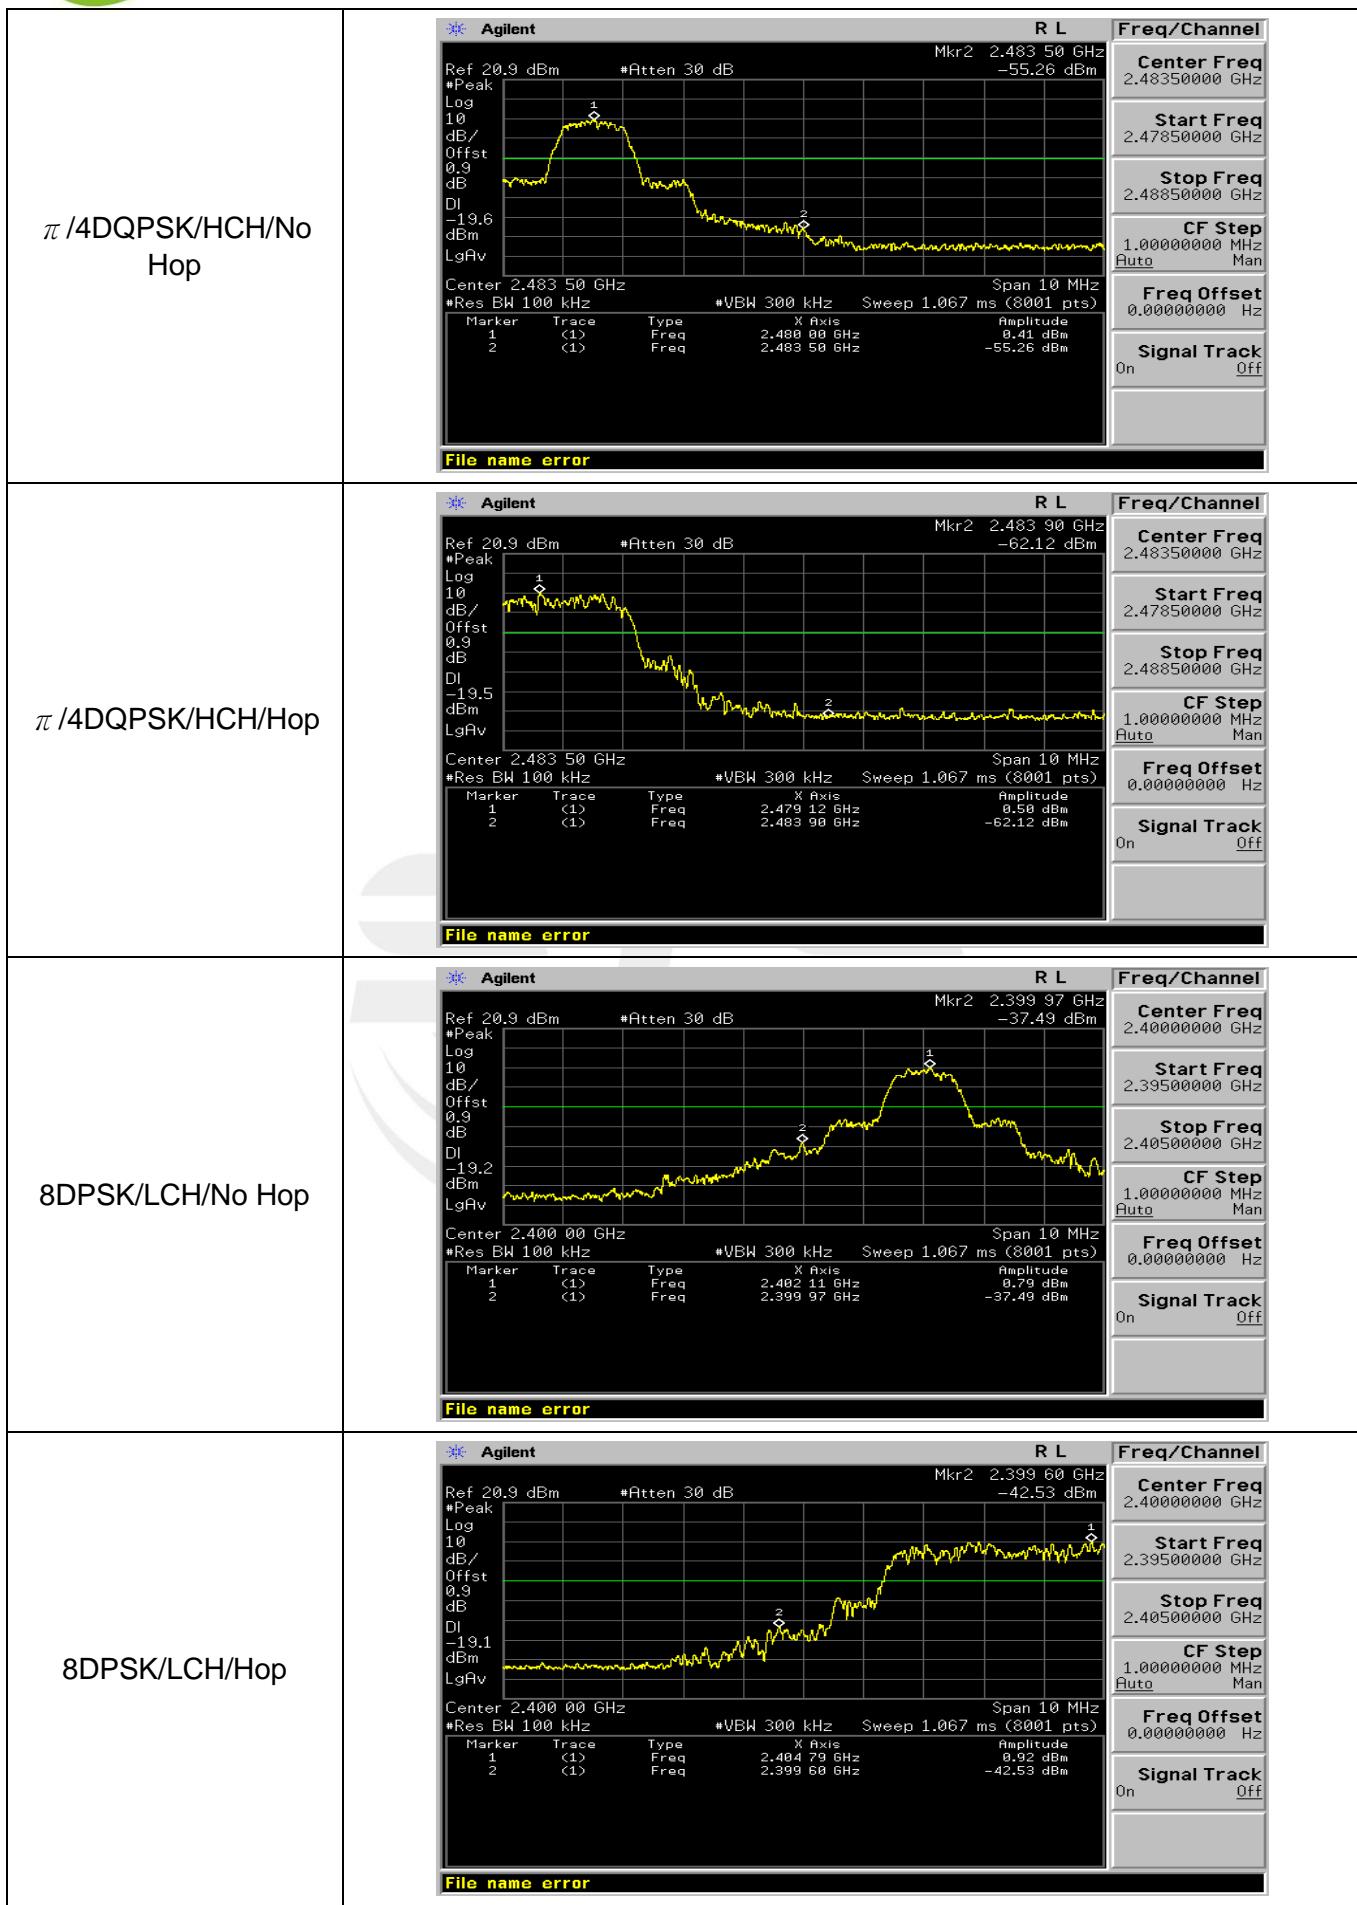




8DPSK/HCH/No Hop

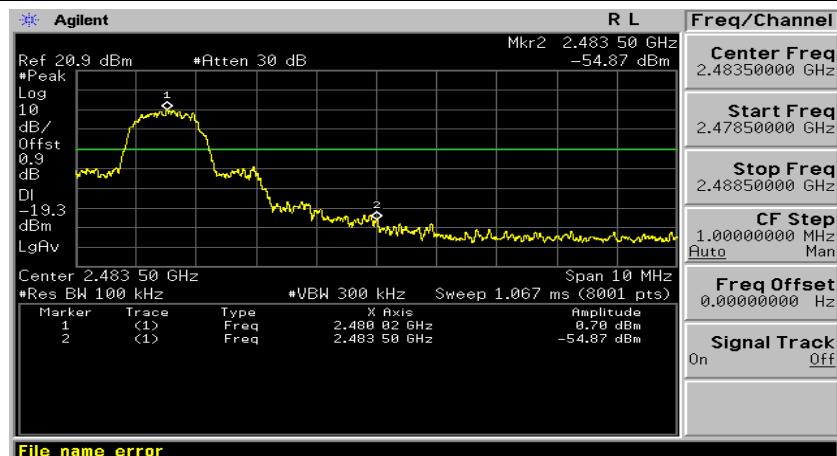

8DPSK/HCH/Hop

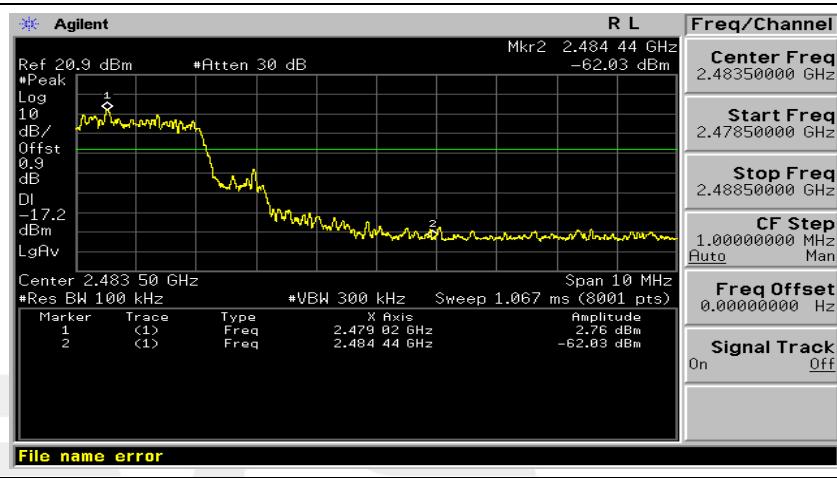



## 5. NUMBER OF HOPPING CHANNEL

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100K, VBW=300K, Sweep time = Auto.

### 5.3 TEST SETUP




### 5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.5TEST RESULTS

EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

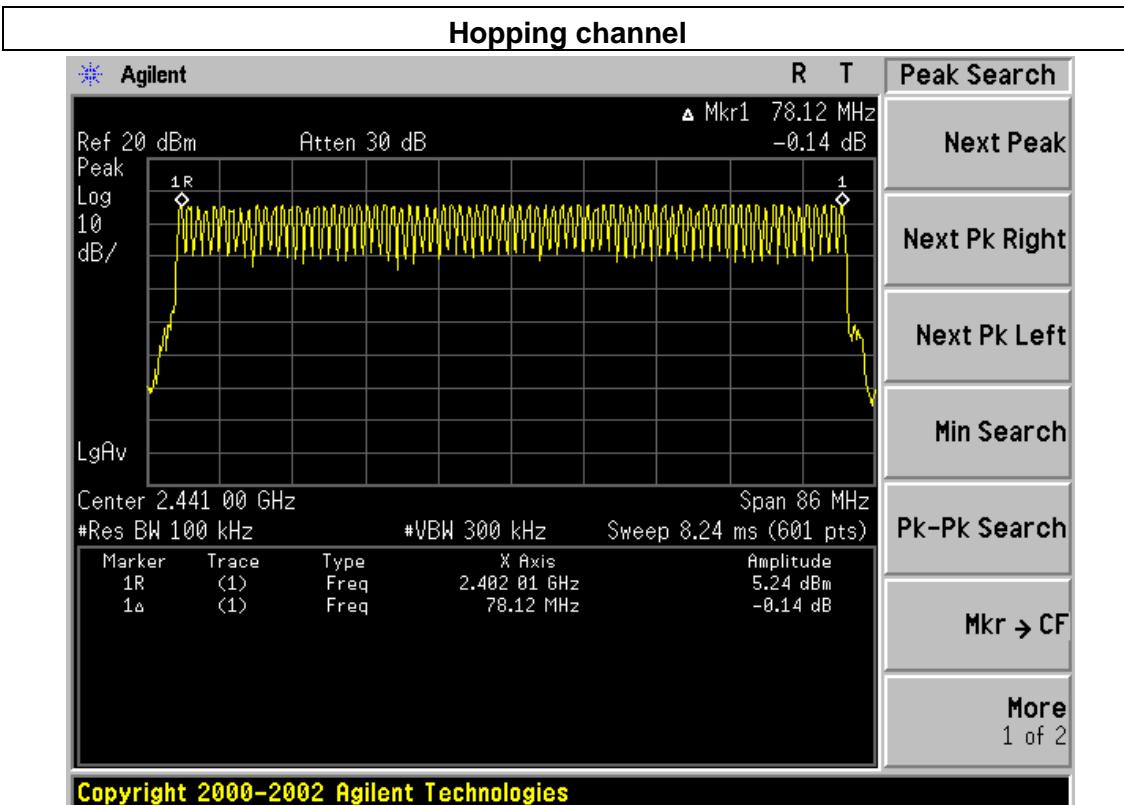

Note: All modes (GFSK, π/4DQPSK, 8DPSK) were tested, test result was passed.



## 6. AVERAGE TIME OF OCCUPANCY


### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.  
Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- e. Measure the maximum time duration of one single pulse.
- f. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- g. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

### 6.3 TEST SETUP

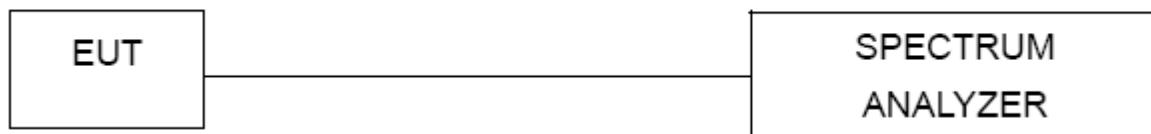

### 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 6.5 TEST RESULTS

EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	8DPSK(3Mbps)DH5 (Worst case)		

Note: All modes were tested, only the worst case record in the report.

**The Worst Case (3Mbps)**

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.92	31.6	311.47	400
Middle	2.92	31.6	311.47	400
High	2.92	31.6	311.47	400

Low Channel Time

$$2.92 * (1600/6) / 79 * 31.6 = 311.47 \text{ ms}$$


Middle Channel Time

$$2.92 * (1600/6) / 79 * 31.6 = 311.47 \text{ ms}$$


High Channel Time

$$2.92 * (1600/6) / 79 * 31.6 = 311.47 \text{ ms}$$


**TEST PLOT OF LOW CHANNEL**

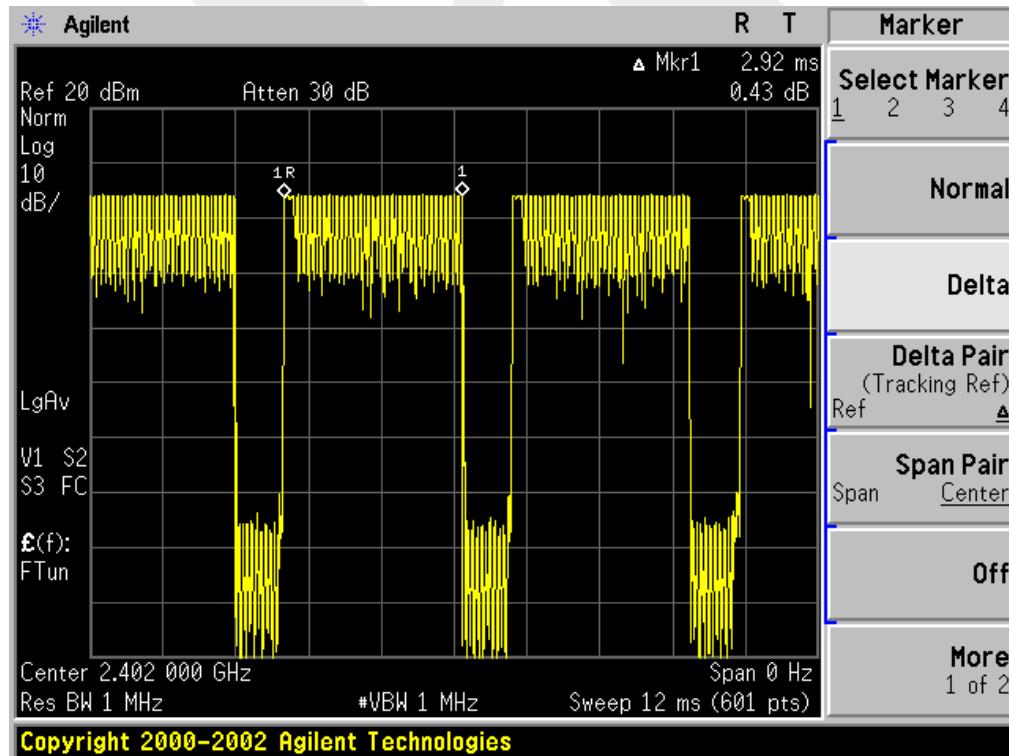

## TEST PLOT OF MIDDLE CHANNEL

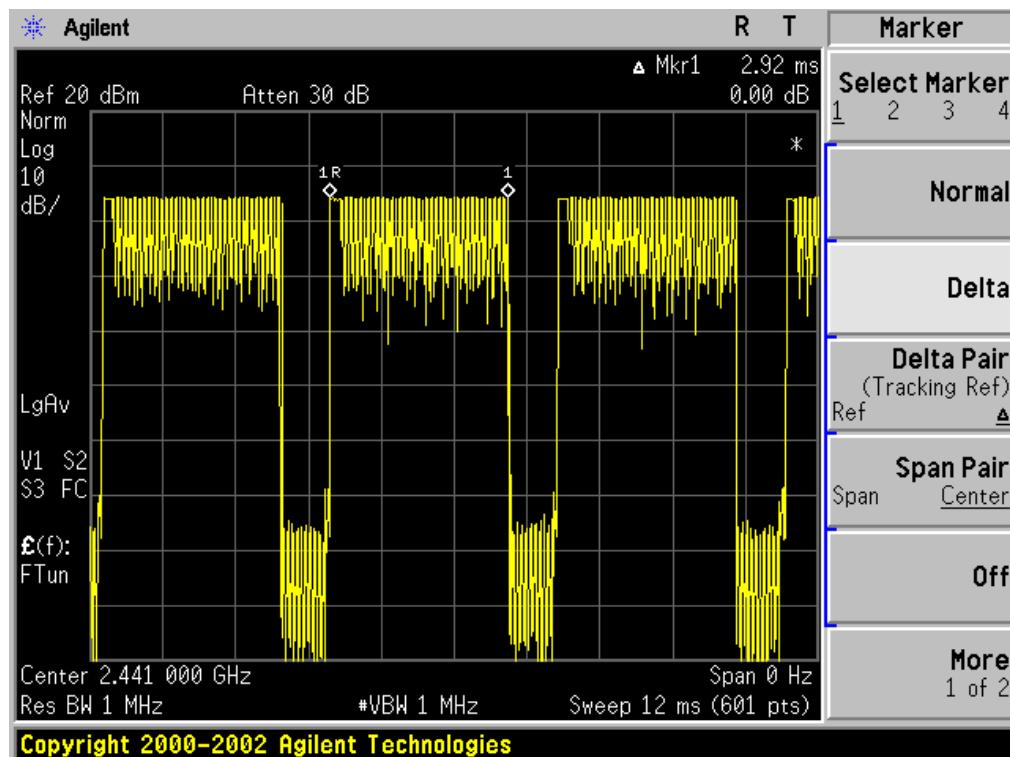

## TEST PLOT OF HIGH CHANNEL

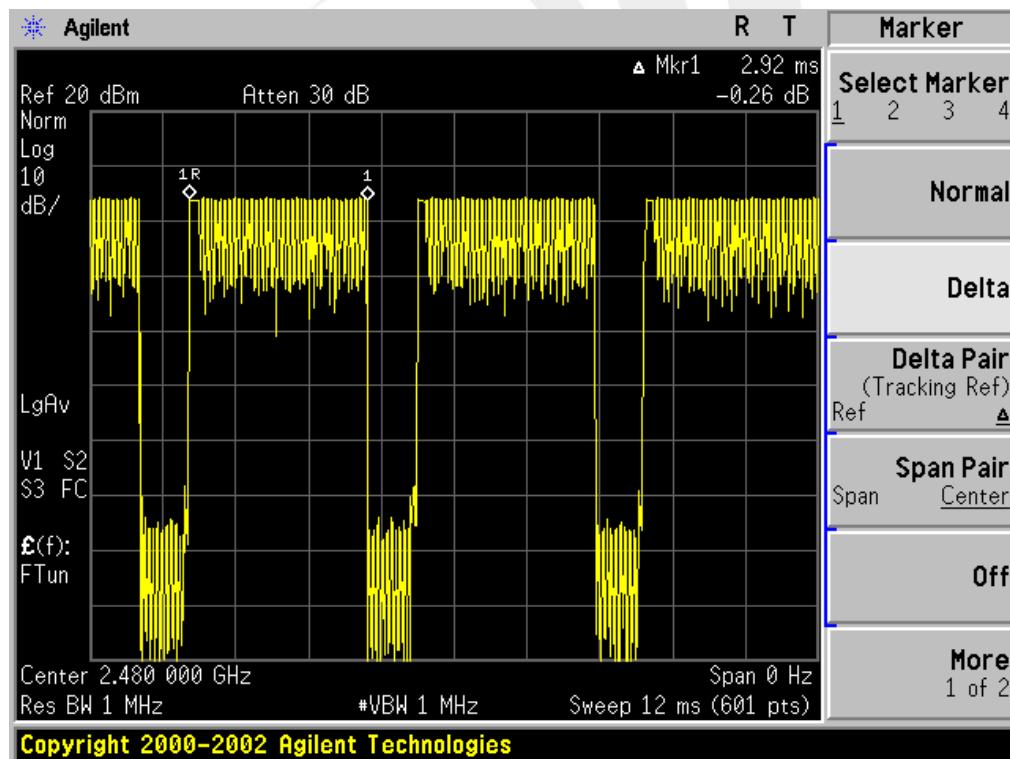

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 APPLIED PROCEDURES / LIMIT


Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 30 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 30 kHz were utilised for channel separation measurement.

### 7.3 TEST SETUP

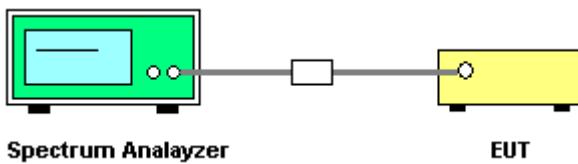

### 7.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

## 7.5 TEST RESULTS


EUT :	Bluetooth Stereo Headphone	Model Name :	XFBT
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00		

Mode	Channel.	Carrier Frequency Separation [MHz]	Limits[MHz]	Verdict
GFSK	Hop	1.000	0.778	PASS
$\pi$ /4DQPSK	Hop	1.000	0.918	PASS
8-DPSK	Hop	1.000	0.883	PASS


TEST PLOT FOR FREQUENCY SEPARATION (1Mbps)

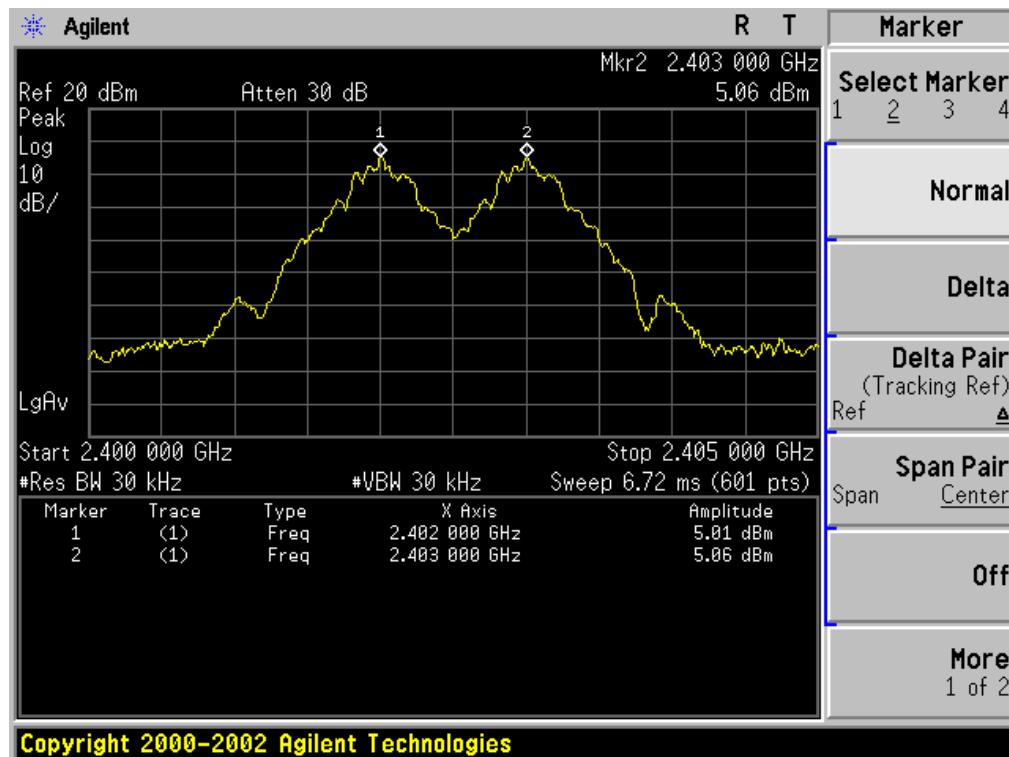

## TEST PLOT FOR FREQUENCY SEPARATION (2Mbps)

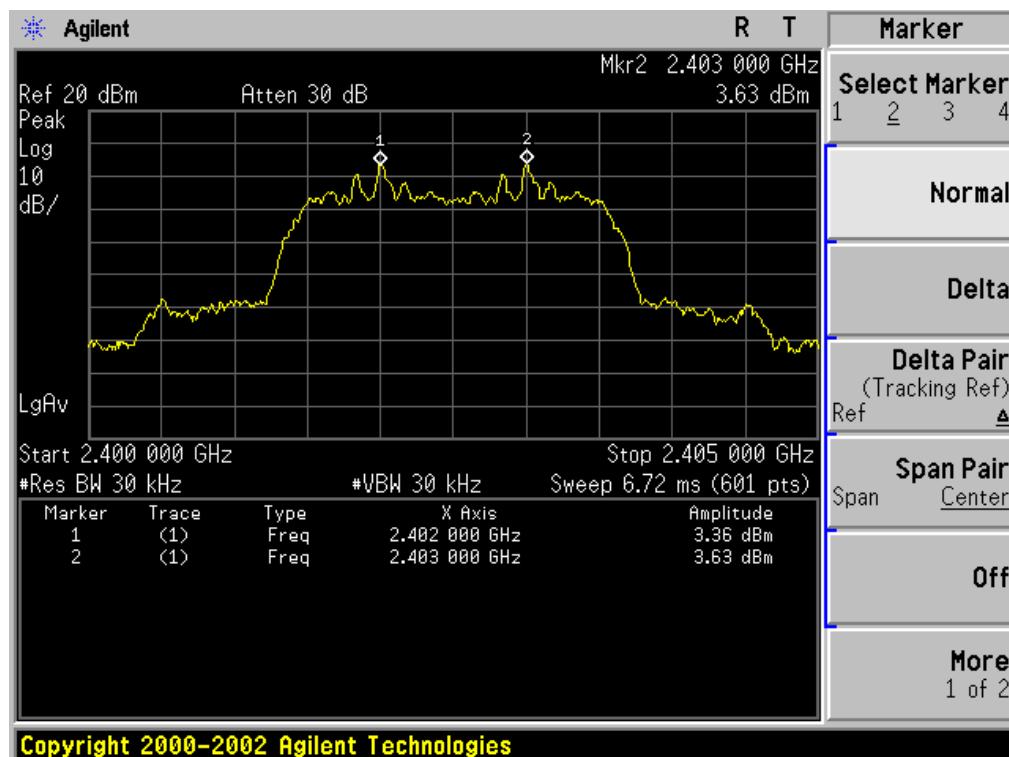

## TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

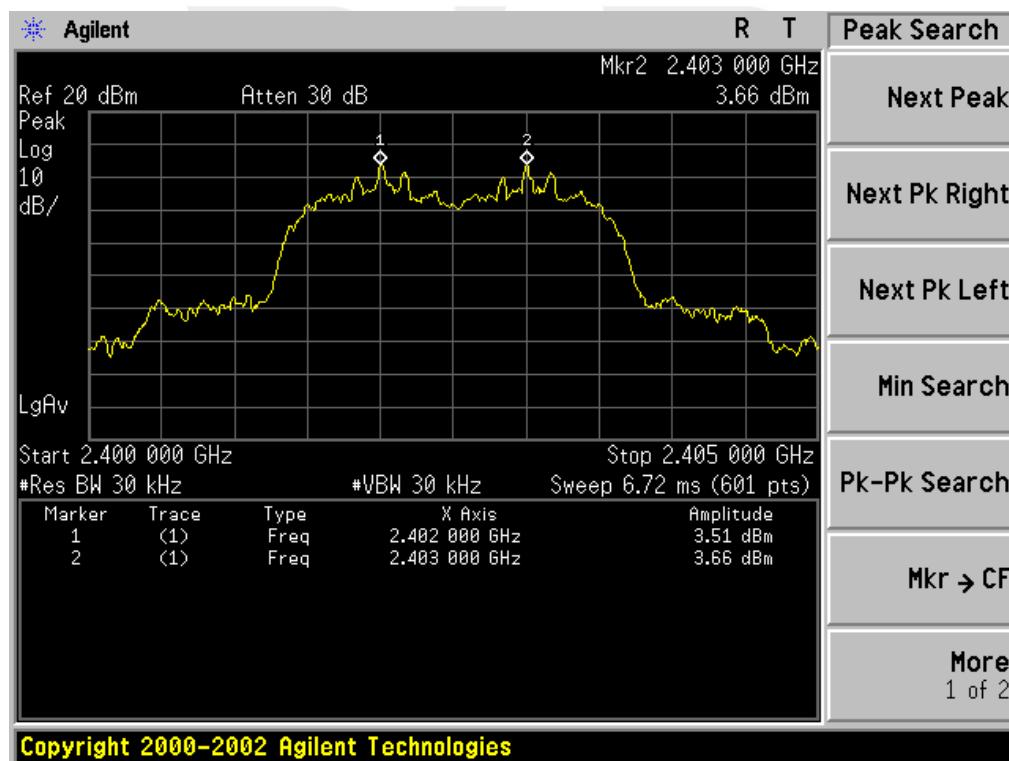
**NOTE:**

- Channel separation < 20dB bandwidth and 2/3 20dB bandwidth > 25Khz: Ch. separation Limit = two-thirds of the 20 dB bandwidth
- Channel separation >20dB bandwidth >25Khz: Channel separation Limit = 20dB bandwidth



## 8. BANDWIDTH TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C

Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW  $\geq$  RBW, Sweep time = Auto.

### 8.3 TEST SETUP




### 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 8.5 TEST RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.775	PASS
	Middle Channel	0.773	PASS
	High Channel	0.778	PASS

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

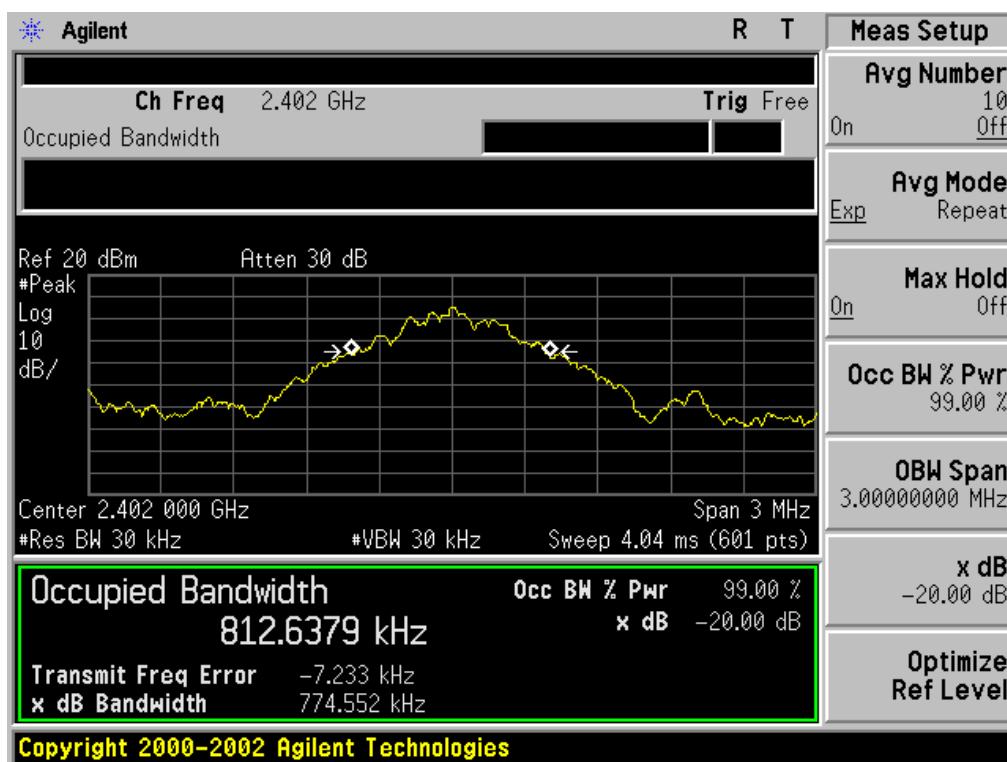




## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

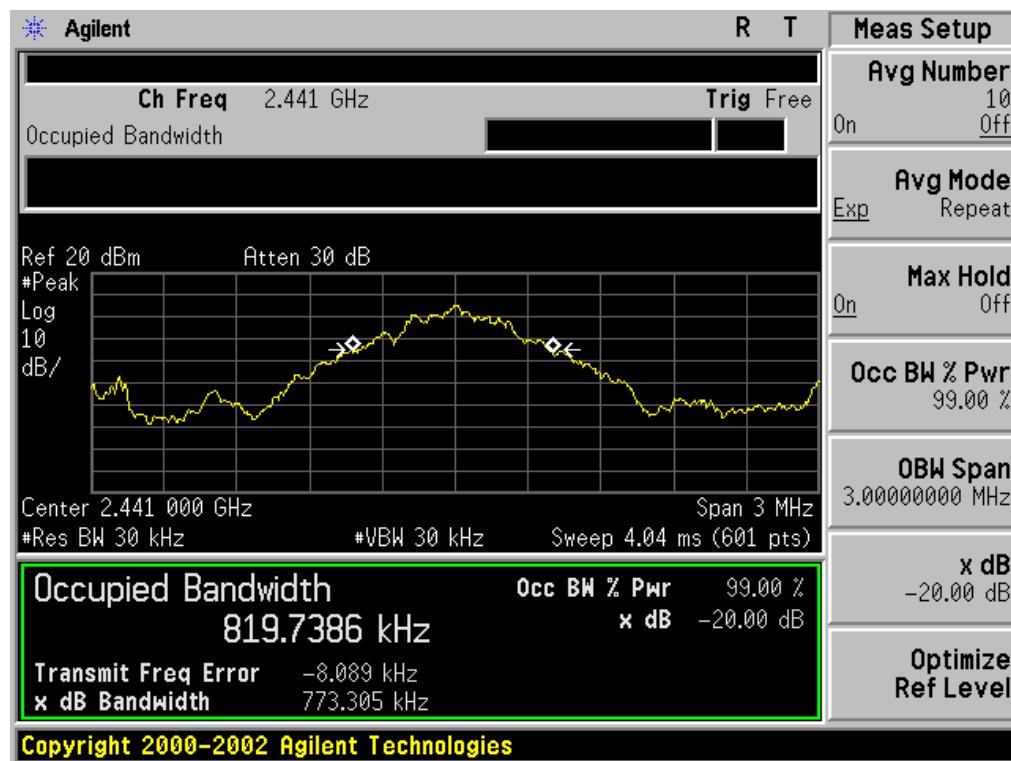


## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

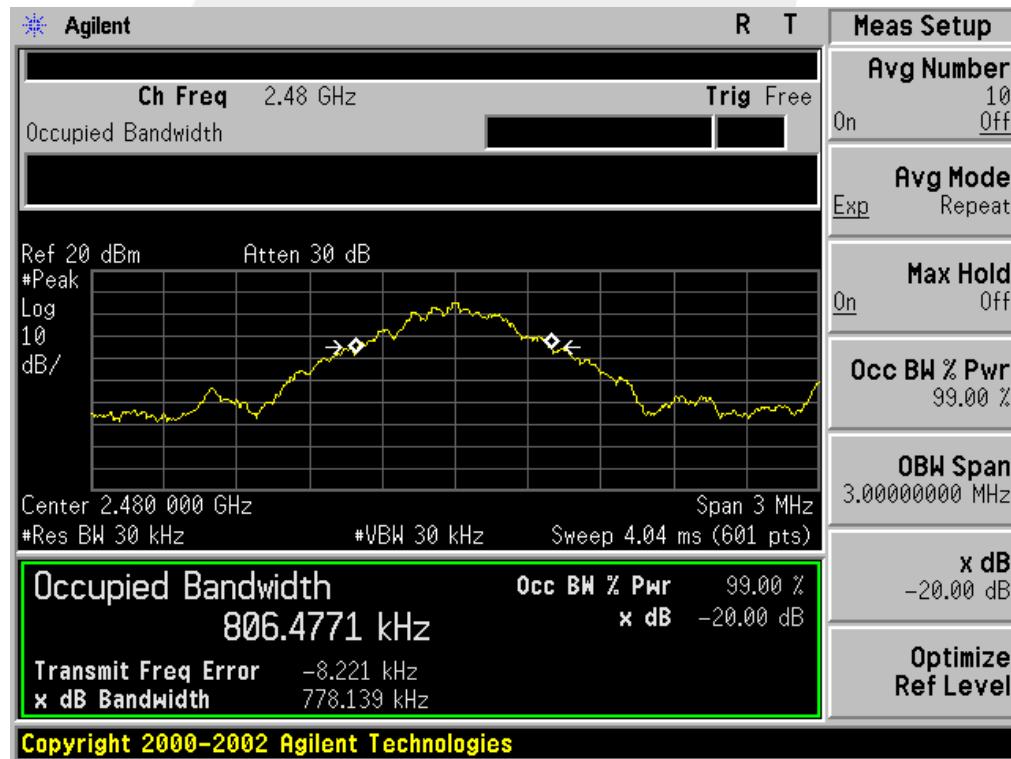

### BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT


Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.377	PASS
	Middle Channel	1.272	PASS
	High Channel	1.223	PASS

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

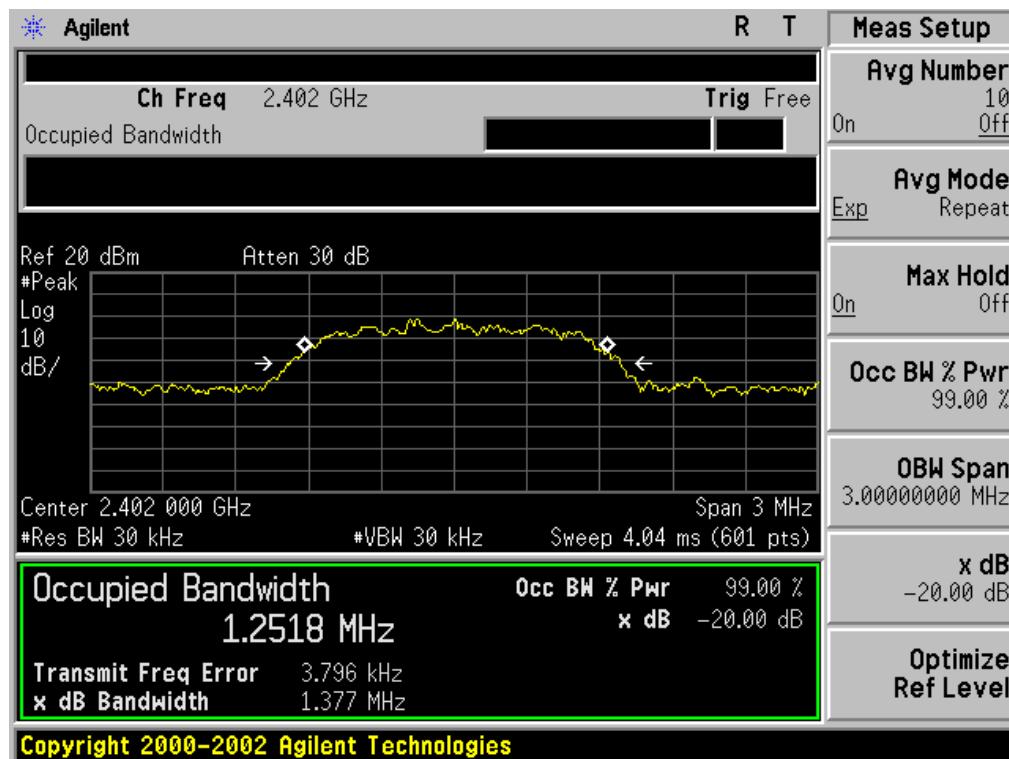




## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

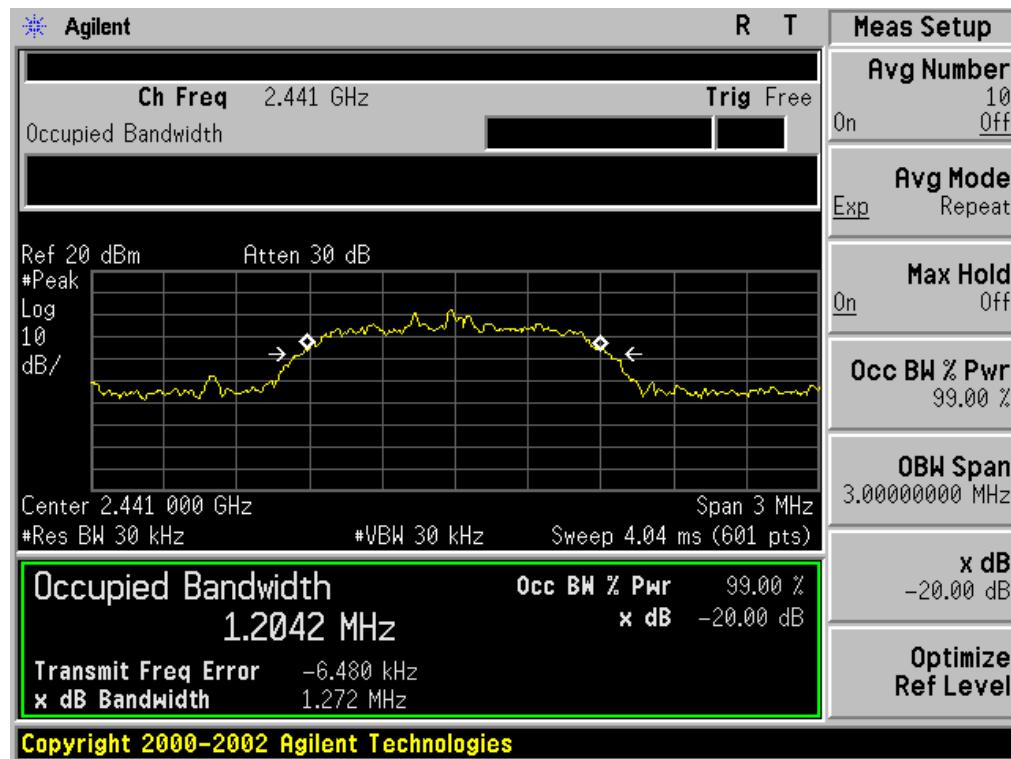


## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

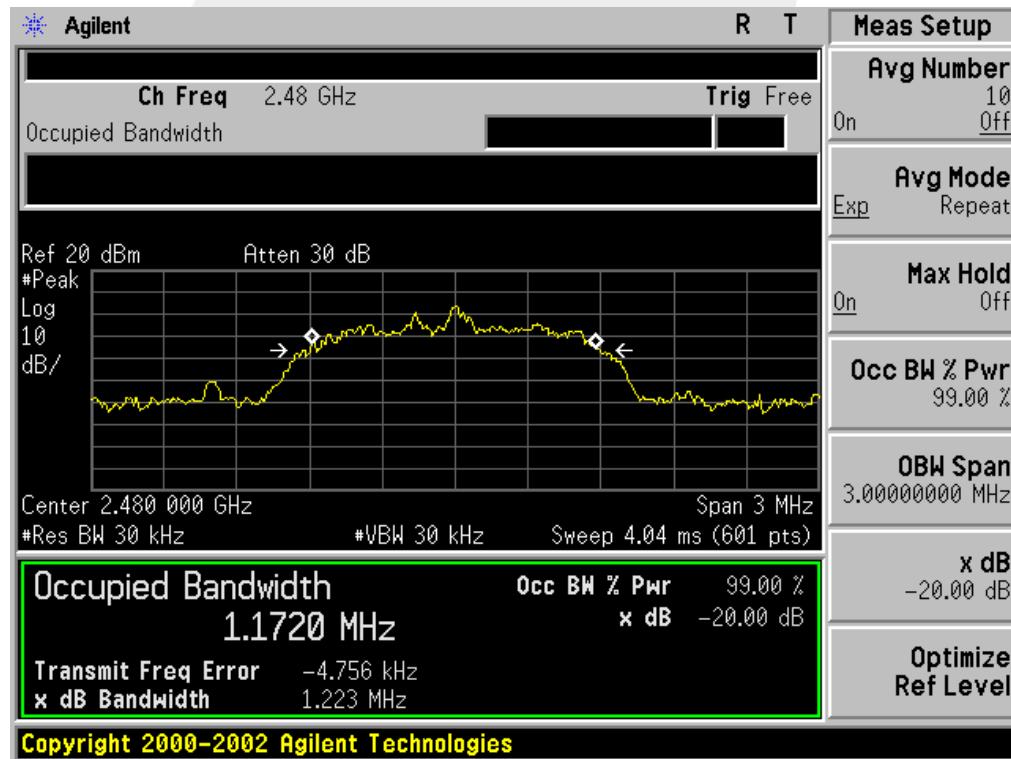

### BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT


Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.324	PASS
	Middle Channel	1.306	PASS
	High Channel	1.256	PASS

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

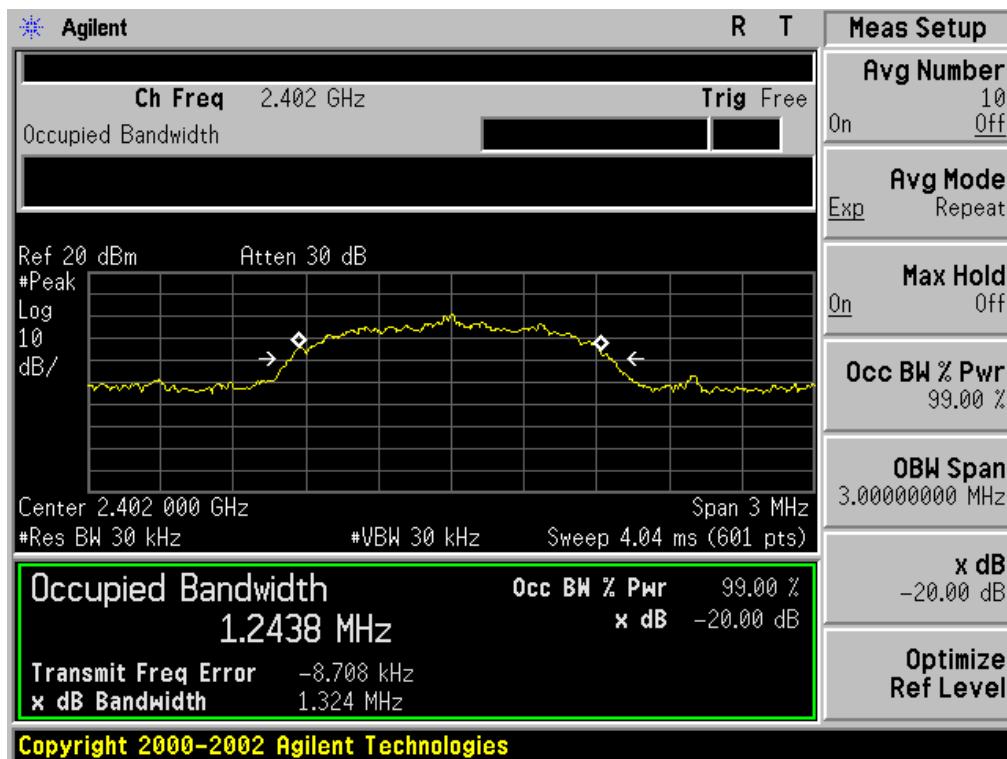




## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

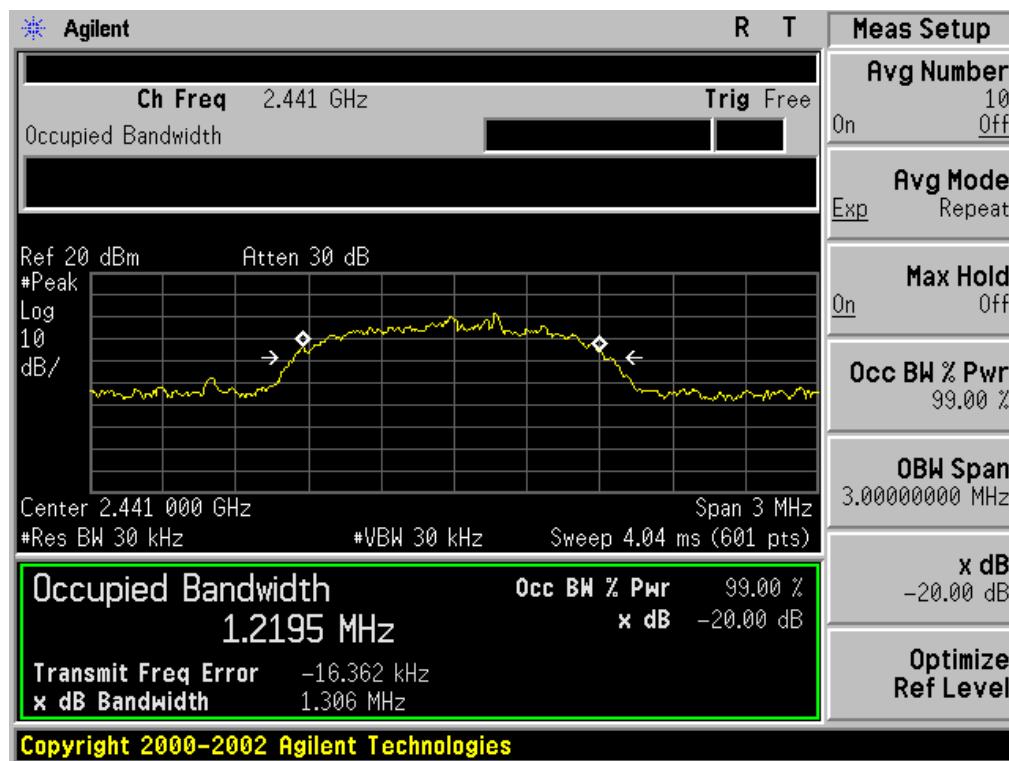

## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

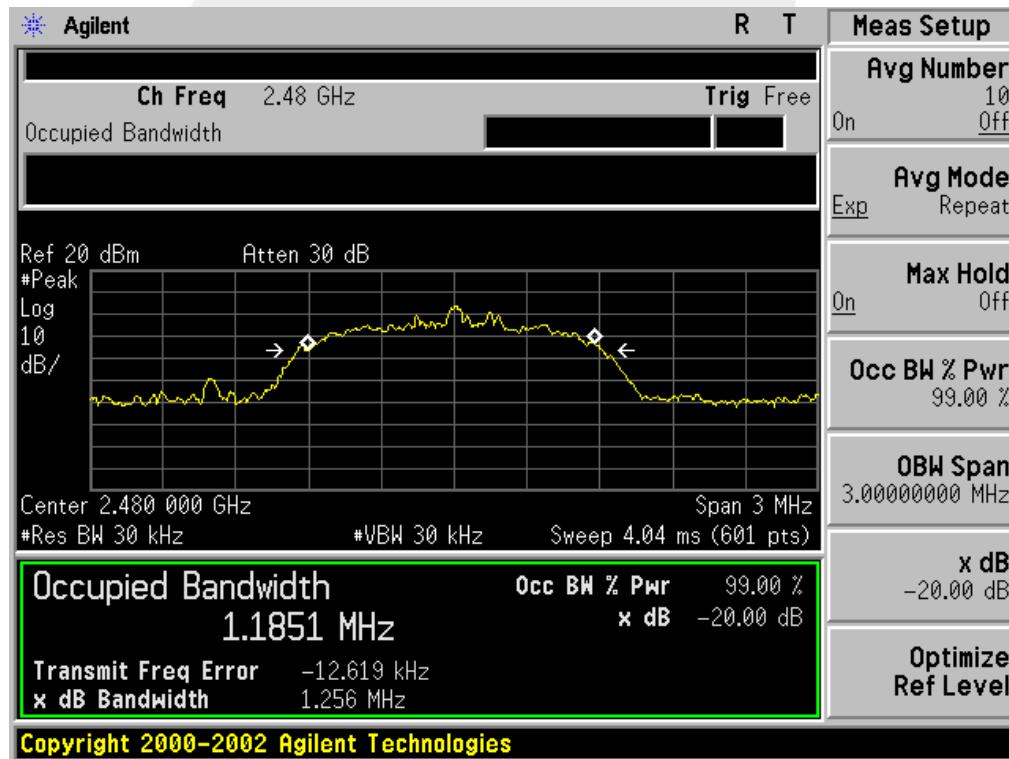



## 9. OUTPUT POWER TEST

### 9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (b)(i)	Peak Output Power	1 W or 0.125W Or if channel separation > 2/3 bandwidth provided the system is operate with an output power no greater than 125 mW(20.96dBm)	2400-2483.5	PASS

### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting :GFSK(1Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.
- Spectrum Setting : $\pi/4$ -DQPSK(2Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.
- Spectrum Setting :8-DPSK(3Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.

### 9.3 TEST SETUP



### 9.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



**PEAK OUTPUT POWER MEASUREMENT RESULT  
FOR GFSK MOUDULATION**


Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	5.16	30	Pass
2.441	5.45	30	Pass
2.480	5.61	30	Pass

Note : the channel separation > bandwidth

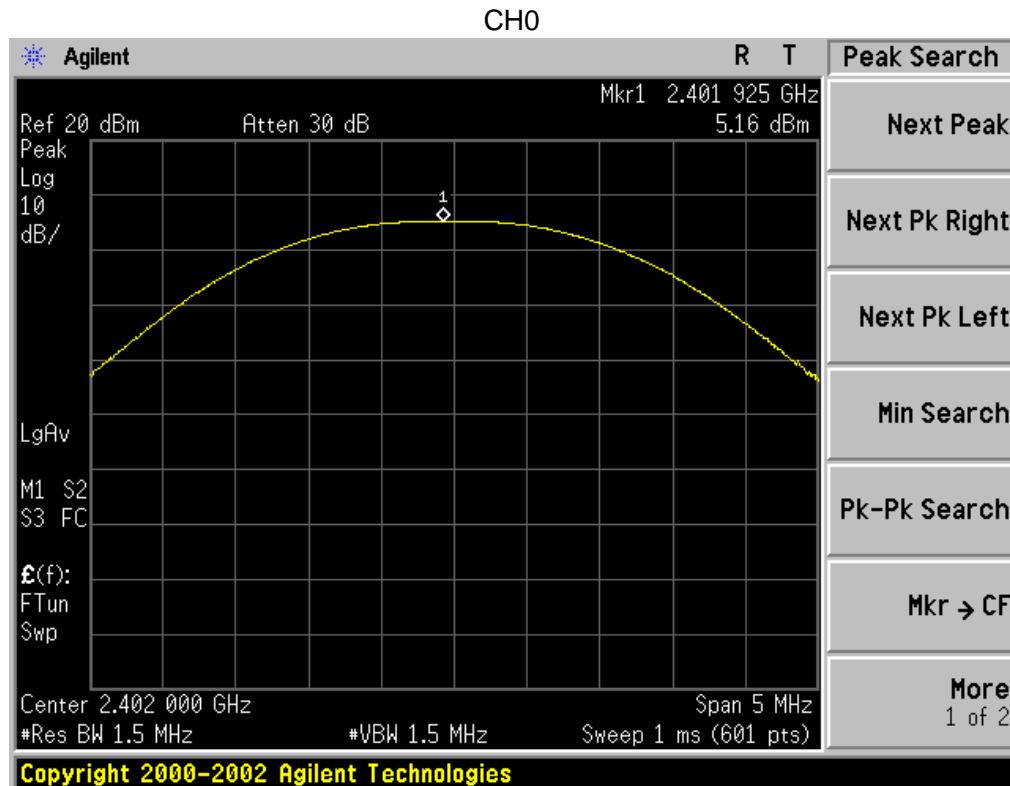




CH39

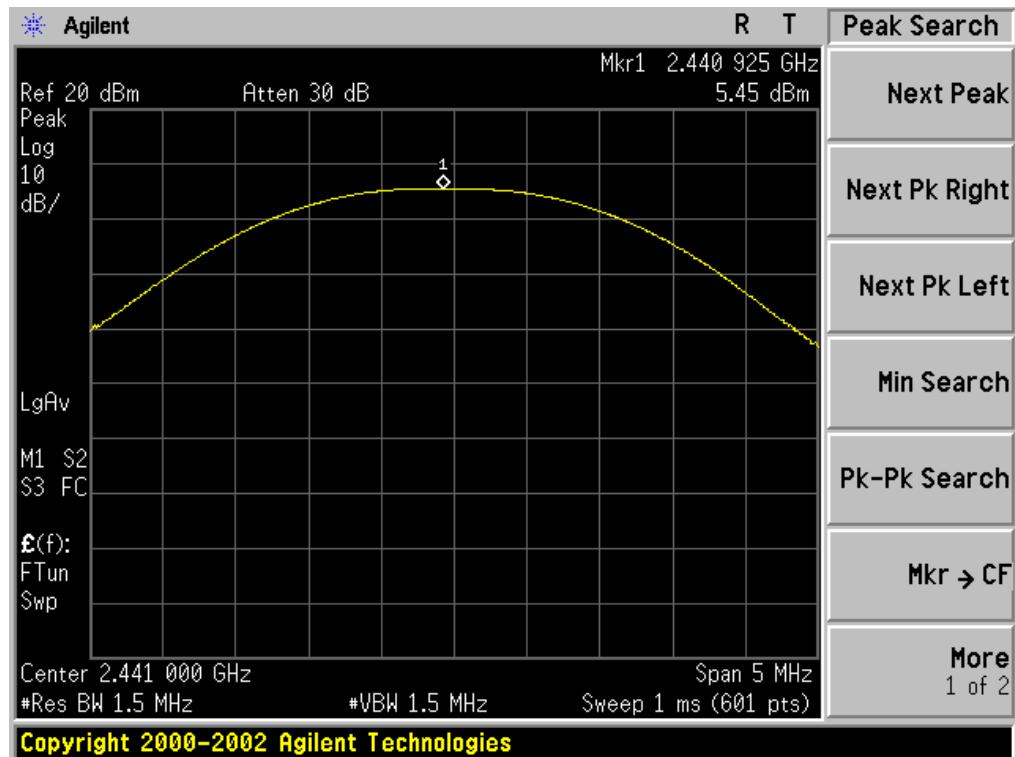


CH78

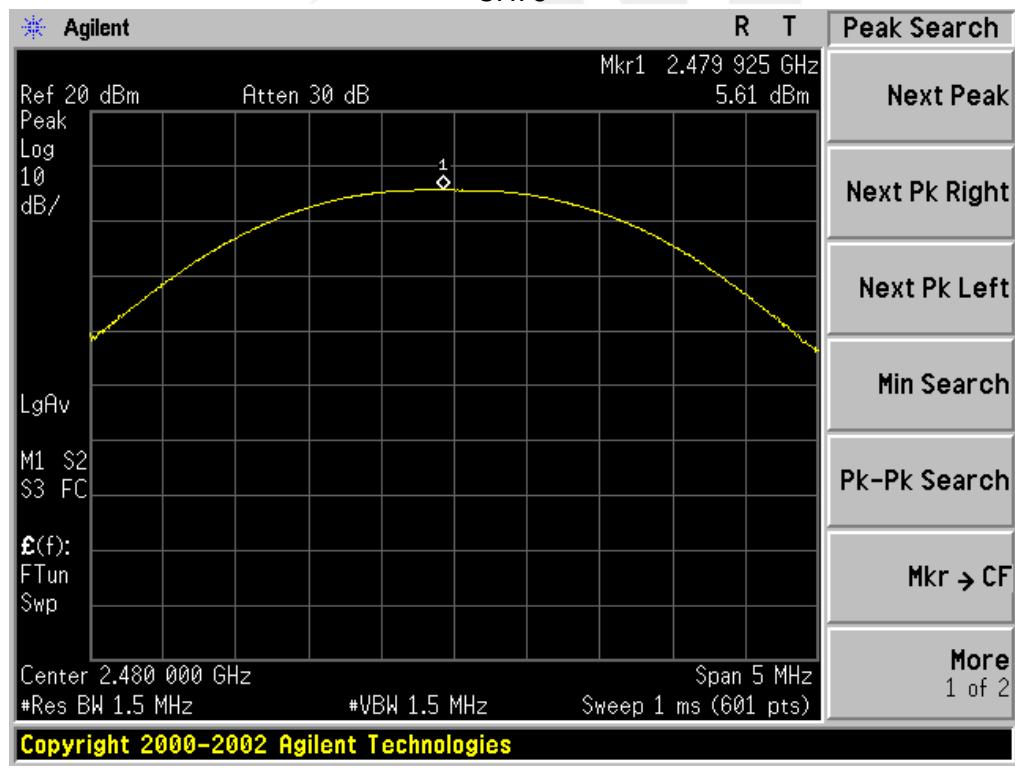


PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	4.41	21	Pass
2.441	4.56	21	Pass
2.480	4.51	21	Pass

Note : the channel separation >2/3 bandwidth

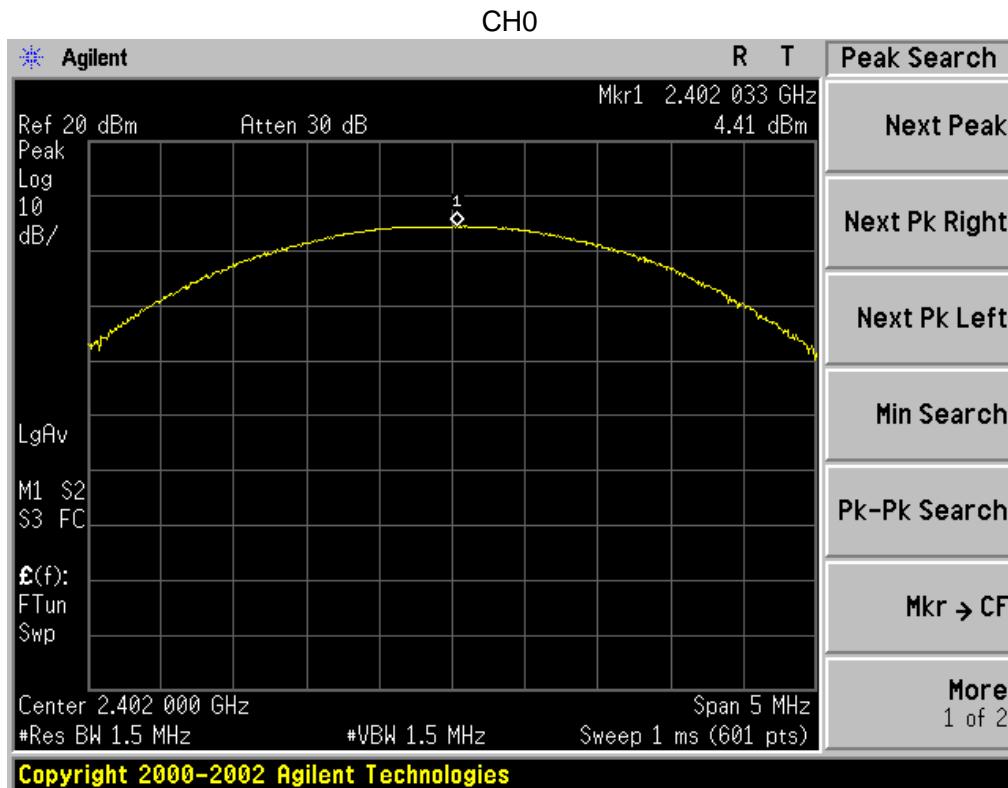




CH39

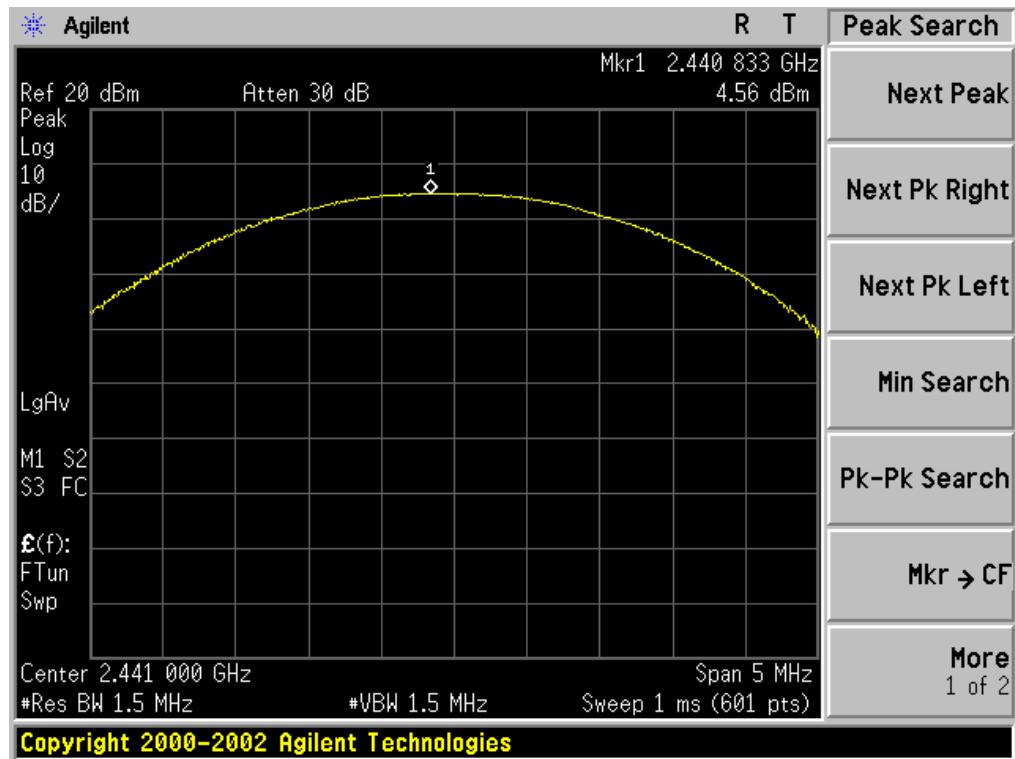


CH78

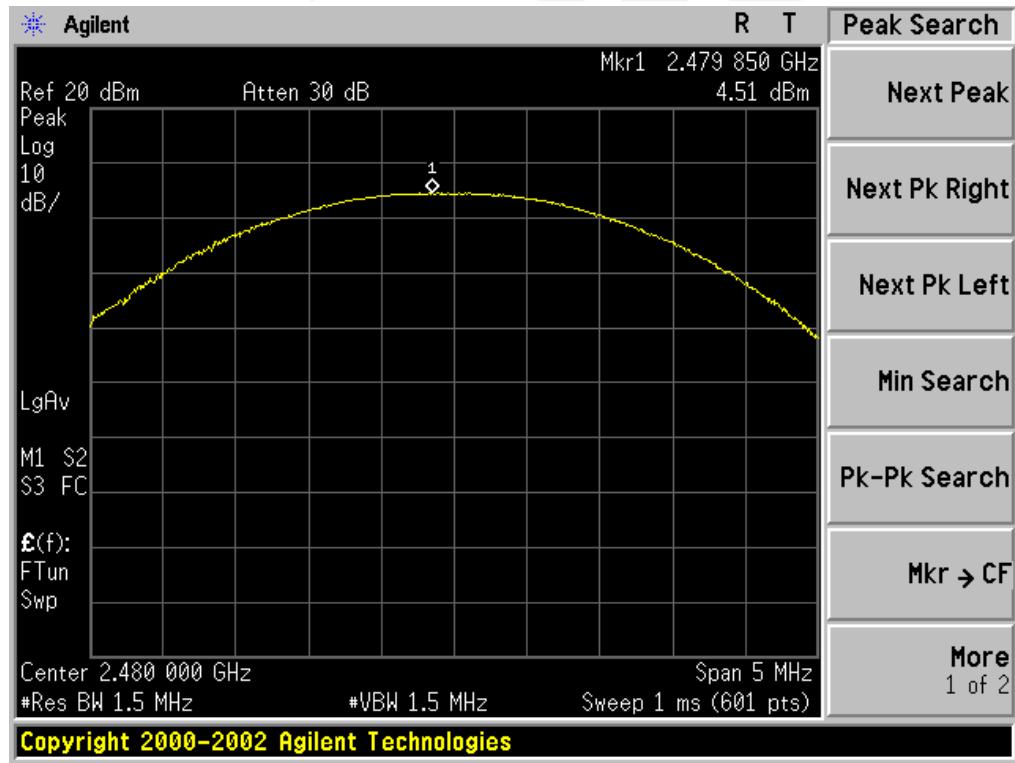


PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	4.57	21	Pass
2.441	4.67	21	Pass
2.480	4.68	21	Pass

Note : the channel separation >2/3 bandwidth

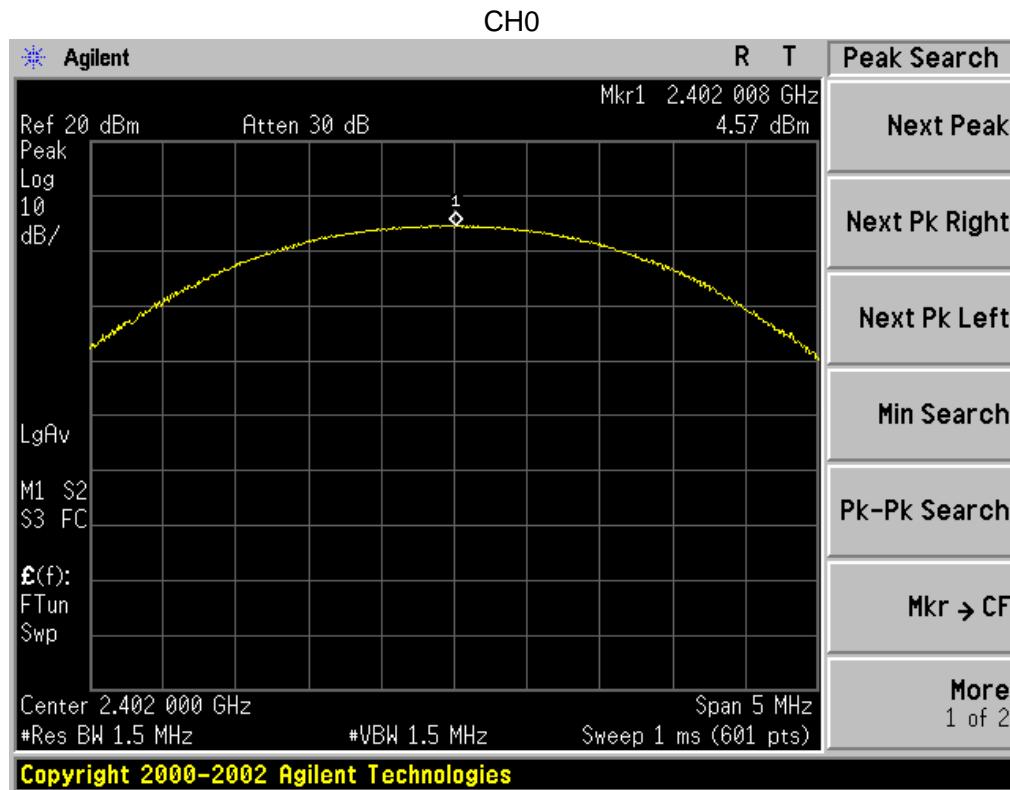




CH39

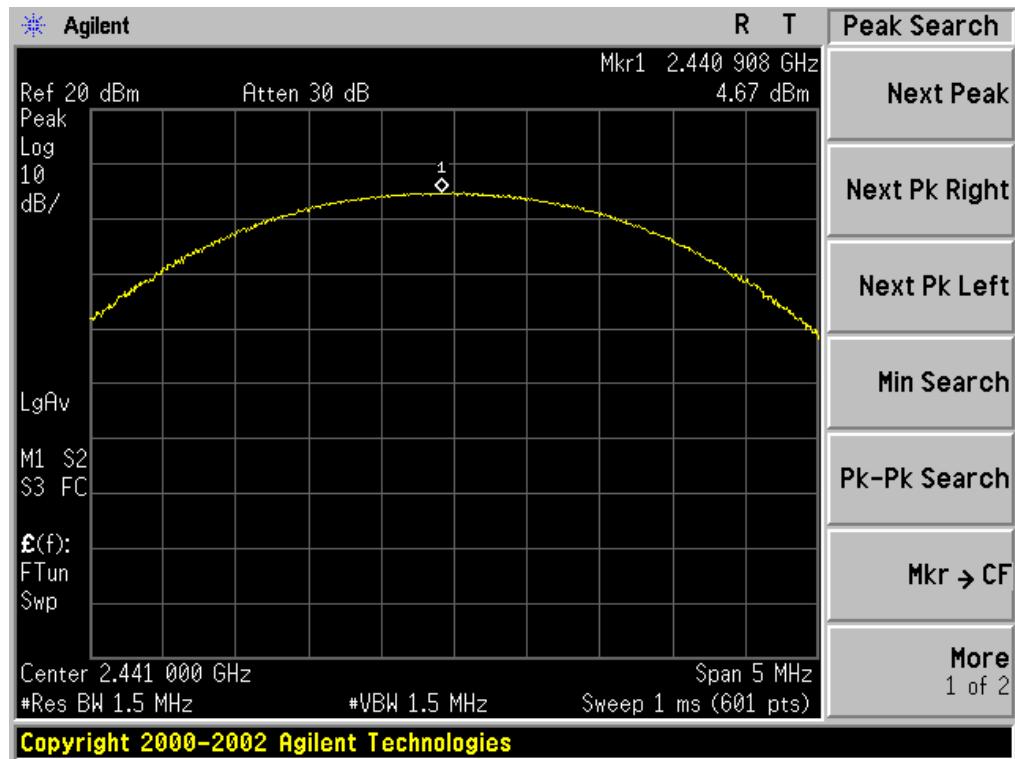

CH78

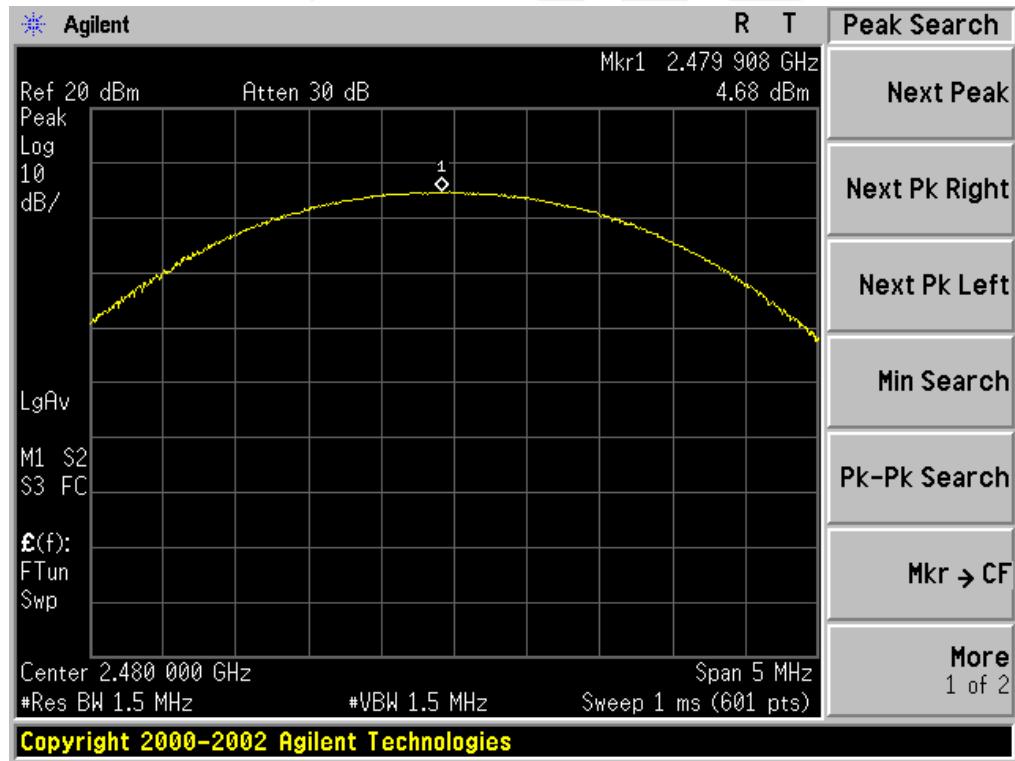



## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



### 10.2 EUT ANTENNA

The EUT antenna is permanent attached antenna. It comply with the standard requirement.



## APPENDIX-PHOTOS OF TEST SETUP

## Radiated Measurement Photos

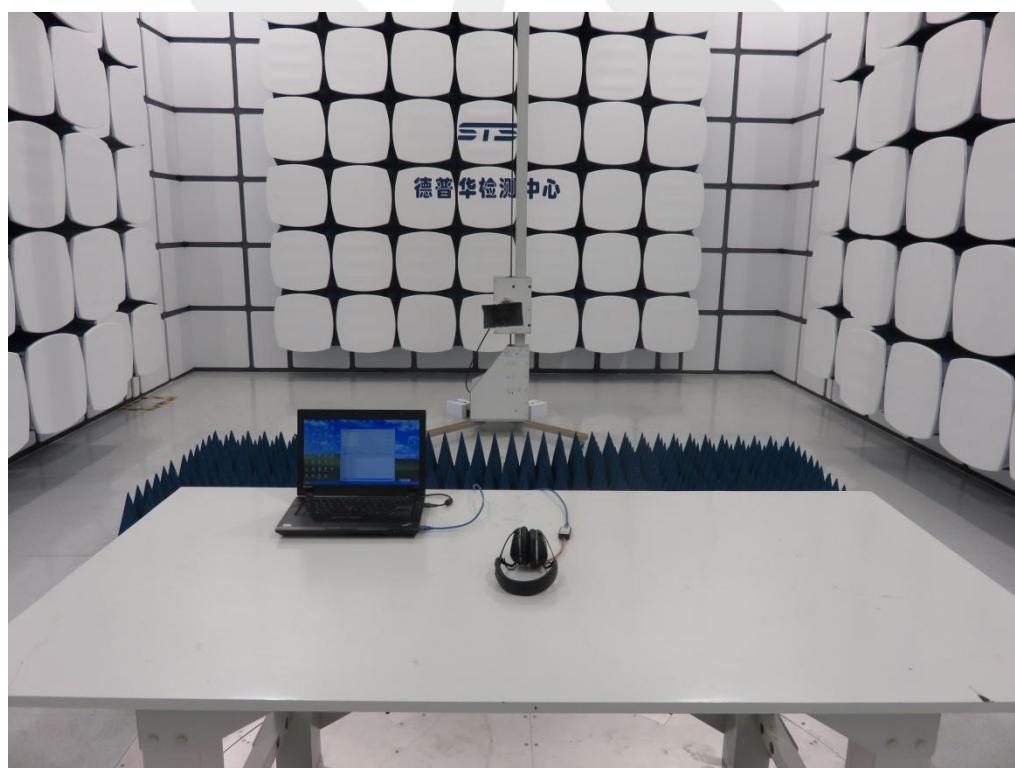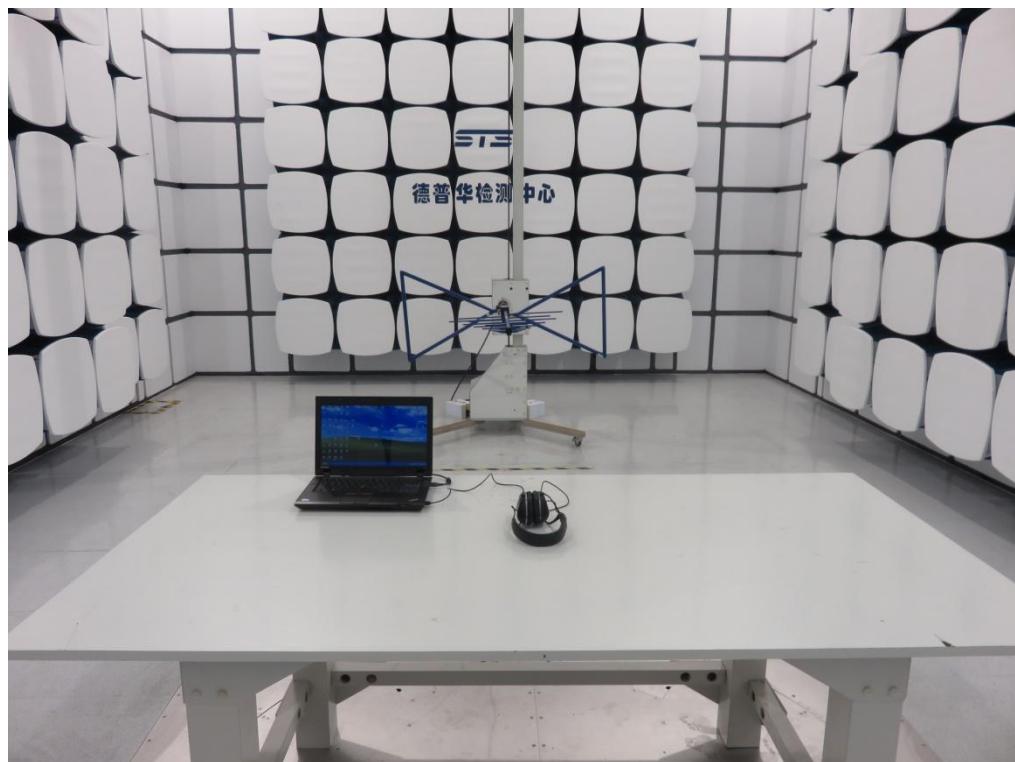

### Conducted Measurement Photos

