

TEST REPORT

Product Name LOFLICK 100 Triple Mode Connection

Mechanical Keyboard

Brand Mark : LOFREE Model No. : OE903

FCC ID : 2AC59-OE903

Report Number : BLA-EMC-202204-A5502

Date of Sample Receipt : 2022/4/19

Date of Test : 2022/4/19 to 2022/4/29

Date of Issue : 2022/4/29

Test Standard: 47 CFR Part 15, Subpart C 15.247

Test Result : Pass

Prepared for:

SHENZHEN LOFREE CULTURE CO.,LTD F8 Building, F518 IDEA LAND, Baoyuan Road, Xixiang, Baoan District, Shenzhen, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China

TEL: +86-755-23059481

Compiled by:

Approved by:

Review by:







Report No.: BLA-EMC-202204-A5502 Page 2 of 60

REPORT REVISE RECORD

| Version No. Date | | Description | |
|------------------|-----------|-------------|--|
| 00 | 2022/4/29 | Original | |





TABLE OF CONTENTS

| 1 | TE | EST SUMMARY | 5 |
|----|------|--|----|
| 2 | GE | ENERAL INFORMATION | 6 |
| 3 | GE | ENERAL DESCRIPTION OF E.U.T | 6 |
| 4 | TE | EST ENVIRONMENT | 7 |
| 5 | | EST MODE | |
| | | EASUREMENT UNCERTAINTY | |
| 6 | ME | ESCRIPTION OF SUPPORT UNIT | / |
| 7 | DE | ESCRIPTION OF SUPPORT UNIT | 8 |
| 8 | LA | ABORATORY LOCATION | 8 |
| 9 | TE | EST INSTRUMENTS LIST | 9 |
| 10 | CC | ONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) | 12 |
| | 10.1 | LIMITS | |
| | 10.2 | BLOCK DIAGRAM OF TEST SETUP | |
| | 10.3 | PROCEDURE | |
| | 10.4 | TEST DATA | 14 |
| 11 | CC | ONDUCTED BAND EDGES MEASUREMENT | 16 |
| | 11.1 | LIMITS | 16 |
| | 11.2 | BLOCK DIAGRAM OF TEST SETUP | |
| | 11.3 | TEST DATA | 17 |
| 12 | . AN | NTENNA REQUIREMENT | 18 |
| | 12.1 | CONCLUSION | 18 |
| | | | |
| 13 | RA | ADIATED SPURIOUS EMISSIONS | 19 |
| | 13.1 | LIMITS | |
| | 13.2 | BLOCK DIAGRAM OF TEST SETUP | |
| | 13.3 | PROCEDURE TEST DATA | |
| | 13.4 | | |
| 14 | ₽ RA | ADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS | 30 |
| | 14.1 | LIMITS | 30 |
| | 14.2 | BLOCK DIAGRAM OF TEST SETUP | |
| | 14.3 | PROCEDURE | |
| | 14.4 | TEST DATA | 33 |



| 37 | |
|----|--|

| 15 | СО | NDUCTED SPURIOUS EMISSIONS | 37 |
|----|------|----------------------------------|----|
| 1 | .5.1 | LIMITS | 37 |
| 1 | .5.2 | BLOCK DIAGRAM OF TEST SETUP | 37 |
| 1 | .5.3 | TEST DATA | 38 |
| 16 | РО | WER SPECTRUM DENSITY | 39 |
| 1 | 6.1 | LIMITS | 39 |
| 1 | .6.2 | BLOCK DIAGRAM OF TEST SETUP | 39 |
| 1 | .6.3 | TEST DATA | 39 |
| 17 | СО | NDUCTED PEAK OUTPUT POWER | 40 |
| 1 | 7.1 | LIMITS | 40 |
| 1 | .7.2 | BLOCK DIAGRAM OF TEST SETUP | |
| 1 | .7.3 | TEST DATA | 41 |
| 18 | MIM | NIMUM 6DB BANDWIDTH | |
| 1 | .8.1 | LIMITS | 42 |
| 1 | .8.2 | BLOCK DIAGRAM OF TEST SETUP | 42 |
| 1 | .8.3 | TEST DATA | 42 |
| 19 | | PENDIX | |
| ΑP | PEND | DIX A: PHOTOGRAPHS OF TEST SETUP | 58 |
| ΑP | PEND | DIX B: PHOTOGRAPHS OF EUT | 60 |



Page 5 of 60

1 TEST SUMMARY

| Test item | Test Requirement | Test Method | Class/Severity | Result |
|--|-------------------------------------|---|---|--------|
| Conducted Emissions at AC Power Line (150kHz-30MHz) | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2 | 47 CFR Part 15, Subpart C 15.207 | Pass |
| Conducted Band Edges Measurement | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2 | 47 CFR Part 15, Subpart C 15.247(d) | Pass |
| Antenna Requirement | 47 CFR Part 15, Subpart C 15.247 | N/A | 47 CFR Part 15, Subpart C 15.203 & 15.247(c) | Pass |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.209 & 15.247(d) | Pass |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5 | 47 CFR Part 15, Subpart C 15.209 & 15.247(d) | Pass |
| Conducted Spurious Emissions | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.6 & Section 11.11 | 47 CFR Part 15, Subpart C 15.247(d) | Pass |
| Power Spectrum Density | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.10.2 | 47 CFR Part 15, Subpart C 15.247(e) | Pass |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.5 | 47 CFR Part 15, Subpart C 15.247(b)(3) | Pass |
| Minimum 6dB Bandwidth | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.8.1 | 47 CFR Part 15, Subpart C 15.247a(2) | Pass |



Page 6 of 60

2 GENERAL INFORMATION

| Applicant | SHENZHEN LOFREE CULTURE CO.,LTD |
|----------------|---|
| Address | F8 Building,F518 IDEA LAND,Baoyuan Road,Xixiang,Baoan District, Shenzhen,China |
| Manufacturer | SHENZHEN LOFREE CULTURE CO.,LTD |
| Address | F8 Building,F518 IDEA LAND,Baoyuan Road,Xixiang,Baoan District,Shenzhen,China |
| Factory | ZHUHAI HENGCANG ELECTRONIC TECHNOLOGY CO., LTD. |
| Address | Floor3, Plant Building A, No.7 Pingxi Road III, Nanping Technology Industrial Park,Zhuhai City, Guangdong Province, China |
| Product Name | LOFLICK 100 Triple Mode Connection Mechanical Keyboard |
| Test Model No. | OE903 |

3 GENERAL DESCRIPTION OF E.U.T.

| Hardware Version | OE903_V2_210926 | |
|----------------------|------------------------------------|--|
| Software Version | F.Nor52832.LFSZBD022-100kH_v01.01 | |
| Battery Power supply | DC4.5V | |
| Operation Frequency: | 2402MHz-2480MHz | |
| Modulation Type: | GFSK | |
| Channel Spacing: | 2MHz | |
| Number of Channels: | 40 | |
| Antenna Type: | PCB Antenna | |
| Antenna Gain: | 1.87dBi(Provided by the applicant) | |



Page 7 of 60

4 TEST ENVIRONMENT

| Environment | Temperature | Voltage | |
|-------------|-------------|---------|--|
| Normal | 25°C | DC4.5V | |

5 TEST MODE

| TEST MODE | TEST MODE DESCRIPTION |
|-------------------|---|
| Transmitting mode | Keep the EUT in continuously transmitting mode with modulation. |
| Remark: new ba | attery is used during all test. |

6 MEASUREMENT UNCERTAINTY

| Parameter | Expanded Uncertainty (Confidence of 95%) | |
|---|--|--|
| Radiated Emission(9kHz-30MHz) | ±4.34dB | |
| Radiated Emission(30Mz-1000MHz) | ±4.24dB | |
| Radiated Emission(1GHz-18GHz) | ±4.68dB | |
| AC Power Line Conducted Emission(150kHz-30MHz) | ±3.45dB | |



Page 8 of 60

DESCRIPTION OF SUPPORT UNIT

| Device Type | Manufacturer | Model Name | Serial No. | Remark |
|-------------|--------------|------------|------------|--------|
| N/A | N/A | N/A | N/A | N/A |

LABORATORY LOCATION 8

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province,

China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.



Page 9 of 60

9 TEST INSTRUMENTS LIST

| Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz) | | | | | | |
|---|------|---------|---------------|------------|------------|--|
| Equipment Manufacturer Model S/N Cal.Date Cal.Due | | | | | | |
| Shield room | SKET | 833 | N/A | 25/11/2020 | 24/11/2023 | |
| Receiver | R&S | ESPI3 | 101082 | 24/9/2021 | 23/9/2022 | |
| LISN | R&S | ENV216 | 3560.6550.15 | 24/9/2021 | 23/9/2022 | |
| LISN | AT | AT166-2 | AKK1806000003 | 26/9/2021 | 25/9/2022 | |
| EMI software | EZ | EZ-EMC | N/A | N/A | N/A | |

| Test Equipment Of Conducted Band Edges Measurement | | | | | | |
|--|--------------|--------|------------|-----------|-----------|--|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due | |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 | |
| Spectrum | Agilent | N9020A | MY49100060 | 24/9/2021 | 23/9/2022 | |
| Signal Generator | Agilent | N5182A | MY49060650 | 24/9/2021 | 23/9/2022 | |
| Signal Generator | Agilent | E8257D | MY44320250 | 24/9/2021 | 23/9/2022 | |

| Test Equipment Of Antenna Requirement | | | | | |
|---------------------------------------|--------------|-------|-----|----------|---------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |

| Test Equipment Of Radiated Spurious Emissions | | | | | |
|---|--------------|-------|--------|------------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Chamber | SKET | 966 | N/A | 10/11/2020 | 9/11/2023 |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Receiver | R&S | ESR7 | 101199 | 24/9/2021 | 23/9/2022 |



Page 10 of 60

| broadband Antenna | Schwarzbeck | VULB9168 | 00836 P:00227 | 26/9/2020 | 25/9/2022 |
|----------------------|-------------|--------------|------------------|-----------|-----------|
| Horn Antenna | Schwarzbeck | 9120D | 01892 P:00331 | 26/9/2020 | 25/9/2022 |
| Amplifier | SKET | LNPA-0118-45 | N/A | 24/9/2021 | 23/9/2022 |
| EMI software | EZ | EZ-EMC | N/A | N/A | N/A |
| Loop antenna | SCHNARZBECK | FMZB1519B | 00102 | 26/9/2020 | 25/9/2022 |

| Test Equipment Of Radiated Emissions which fall in the restricted bands | | | | | |
|---|--------------|--------------|------------------|------------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Chamber | SKET | 966 | N/A | 10/11/2020 | 9/11/2023 |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Receiver | R&S | ESR7 | 101199 | 24/9/2021 | 23/9/2022 |
| broadband Antenna | Schwarzbeck | VULB9168 | 00836 P:00227 | 26/9/2020 | 25/9/2022 |
| Horn Antenna | Schwarzbeck | 9120D | 01892 P:00331 | 26/9/2020 | 25/9/2022 |
| Amplifier | SKET | LNPA-0118-45 | N/A | 24/9/2021 | 23/9/2022 |
| EMI software | EZ | EZ-EMC | N/A | N/A | N/A |
| Loop antenna | SCHNARZBECK | FMZB1519B | 00102 | 26/9/2020 | 25/9/2022 |

| Test Equipment Of Conducted Spurious Emissions | | | | | |
|--|--------------|--------|------------|-----------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Spectrum | Agilent | N9020A | MY49100060 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | N5182A | MY49060650 | 24/9/2021 | 23/9/2022 |



Page 11 of 60

| Signal Generator | Agilent | E8257D | MY44320250 | 24/9/2021 | 23/9/2022 |
|------------------|---------|--------|------------|-----------|-----------|
| | | | | | |

| Test Equipment Of Power Spectrum Density | | | | | |
|--|--------------|--------|------------|-----------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Spectrum | Agilent | N9020A | MY49100060 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | N5182A | MY49060650 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | E8257D | MY44320250 | 24/9/2021 | 23/9/2022 |

| Test Equipment Of Conducted Peak Output Power | | | | | |
|---|--------------|--------|------------|-----------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Spectrum | Agilent | N9020A | MY49100060 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | N5182A | MY49060650 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | E8257D | MY44320250 | 24/9/2021 | 23/9/2022 |

| Test Equipment Of Minimum 6dB Bandwidth | | | | | |
|---|--------------|--------|------------|-----------|-----------|
| Equipment | Manufacturer | Model | S/N | Cal.Date | Cal.Due |
| Spectrum | R&S | FSP40 | 100817 | 24/9/2021 | 23/9/2022 |
| Spectrum | Agilent | N9020A | MY49100060 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | N5182A | MY49060650 | 24/9/2021 | 23/9/2022 |
| Signal Generator | Agilent | E8257D | MY44320250 | 24/9/2021 | 23/9/2022 |




10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | |
|------------------------|----------------------------------|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 6.2 | | | |
| Test Mode (Pre-Scan) | TX | | | |
| Test Mode (Final Test) | TX | | | |
| Tester | Jozu | | | |
| Temperature | 25℃ | | | |
| Humidity | 60% | | | |

10.1 LIMITS

| Frequency of | Conducted limit(dBµV) | | | | |
|---|-----------------------|-----------|--|--|--|
| emission(MHz) | Quasi-peak | Average | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | |
| 0.5-5 | 56 | 46 | | | |
| 5-30 | 60 | 50 | | | |
| *Decreases with the logarithm of the frequency. | | | | | |

10.2 BLOCK DIAGRAM OF TEST SETUP

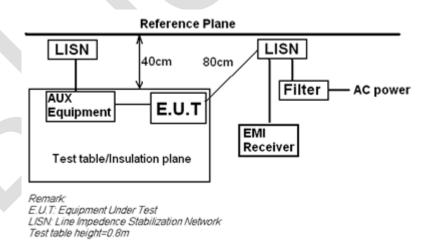

10.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.



Page 13 of 60

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.


5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



10.4 TEST DATA

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

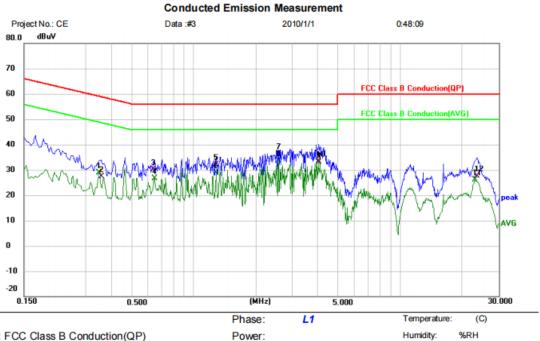

Limit: FCC Class B Conduction(QP) EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX mode

Note:


Site

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|---------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | 0.3460 | 19.02 | 9.85 | 28.87 | 49.06 | -20.19 | AVG | |
| 2 | 0.3540 | 17.46 | 9.85 | 27.31 | 58.87 | -31.56 | QP | |
| 3 | 0.6419 | 20.23 | 9.87 | 30.10 | 56.00 | -25.90 | QP | |
| 4 | 0.6460 | 16.67 | 9.87 | 26.54 | 46.00 | -19.46 | AVG | |
| 5 | 1.2820 | 22.22 | 9.93 | 32.15 | 56.00 | -23.85 | QP | |
| 6 | 1.2820 | 19.07 | 9.93 | 29.00 | 46.00 | -17.00 | AVG | |
| 7 | 2.5700 | 26.52 | 9.96 | 36.48 | 56.00 | -19.52 | QP | |
| 8 * | 2.5700 | 23.76 | 9.96 | 33.72 | 46.00 | -12.28 | AVG | |
| 9 | 4.0260 | 22.95 | 9.88 | 32.83 | 46.00 | -13.17 | AVG | |
| 10 | 4.0300 | 23.58 | 9.88 | 33.46 | 56.00 | -22.54 | QP | |
| 11 | 23.0820 | 15.57 | 10.48 | 26.05 | 50.00 | -23.95 | AVG | |
| 12 | 23.6180 | 17.27 | 10.48 | 27.75 | 60.00 | -32.25 | QP | |
| | | | | | | | | |

*:Maximum data x:Over limit !:over margin (Reference Only



[TestMode: TX]; [Line: Nutral] ;[Power:AC120V/60Hz]

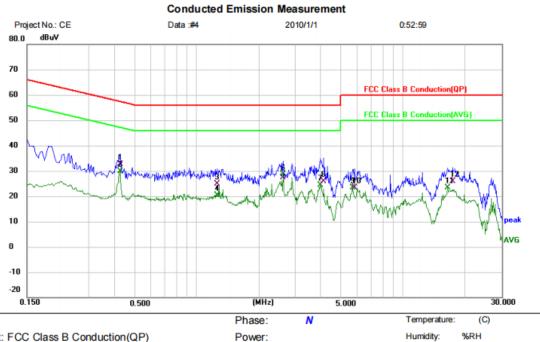

Limit: FCC Class B Conduction(QP)

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX mode

Note:

Site

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|---------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | | 0.4220 | 22.81 | 9.78 | 32.59 | 57.41 | -24.82 | QP | |
| 2 | | 0.4220 | 20.22 | 9.78 | 30.00 | 47.41 | -17.41 | AVG | |
| 3 | | 1.2500 | 15.03 | 9.84 | 24.87 | 56.00 | -31.13 | QP | |
| 4 | | 1.2579 | 10.52 | 9.85 | 20.37 | 46.00 | -25.63 | AVG | |
| 5 | | 2.6220 | 17.44 | 9.89 | 27.33 | 56.00 | -28.67 | QP | |
| 6 | * | 2.6220 | 18.75 | 9.89 | 28.64 | 46.00 | -17.36 | AVG | |
| 7 | | 3.9700 | 14.38 | 9.91 | 24.29 | 46.00 | -21.71 | AVG | |
| 8 | | 4.1140 | 15.88 | 9.91 | 25.79 | 56.00 | -30.21 | QP | |
| 9 | | 5.7020 | 13.44 | 9.98 | 23.42 | 50.00 | -26.58 | AVG | |
| 10 | | 5.8220 | 13.37 | 9.98 | 23.35 | 60.00 | -36.65 | QP | |
| 11 | | 16.4180 | 13.12 | 10.32 | 23.44 | 50.00 | -26.56 | AVG | |
| 12 | | 17.3620 | 15.62 | 10.36 | 25.98 | 60.00 | -34.02 | QP | |

*:Maximum data x:Over limit !:over margin (Reference Only



Page 16 of 60

11 CONDUCTED BAND EDGES MEASUREMENT


| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | | |
|------------------------|--|--|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2 | | | | | |
| Test Mode (Pre-Scan) | TX | | | | | |
| Test Mode (Final Test) | TX | | | | | |
| Tester | Jozu | | | | | |
| Temperature | 25℃ | | | | | |
| Humidity | 60% | | | | | |

11.1 LIMITS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 BLOCK DIAGRAM OF TEST SETUP





11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details





Page 18 of 60

12 ANTENNA REQUIREMENT

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | |
|---------------|----------------------------------|--|--|--|--|
| Test Method | N/A | | | | |


12.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.87dBi.

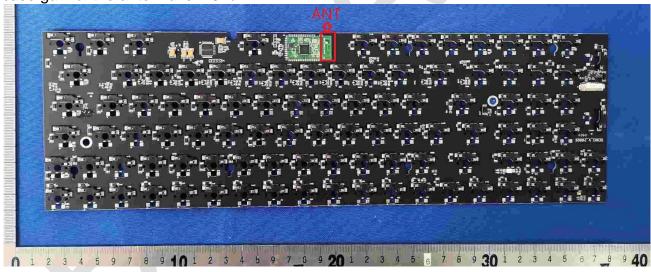



Page 19 of 60

13 RADIATED SPURIOUS EMISSIONS

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | | |
|------------------------|---|--|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | | | | | |
| Test Mode (Pre-Scan) | TX mode (SE) below 1G;TX mode (SE) Above 1G | | | | | |
| Test Mode (Final Test) | TX mode (SE) below 1G;TX mode (SE) Above 1G | | | | | |
| Tester | Jozu | | | | | |
| Temperature | 25℃ | | | | | |
| Humidity | 60% | | | | | |


13.1 LIMITS

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|---------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



13.2 BLOCK DIAGRAM OF TEST SETUP

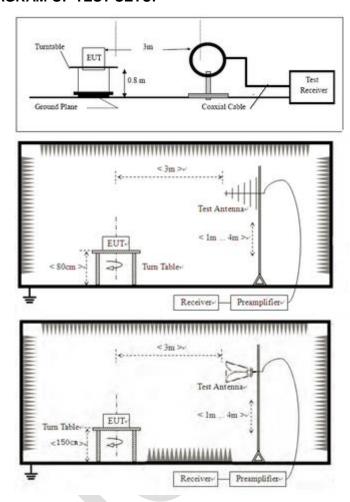

13.3 PROCEDURE

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



Page 21 of 60

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Humidity: %RH



13.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

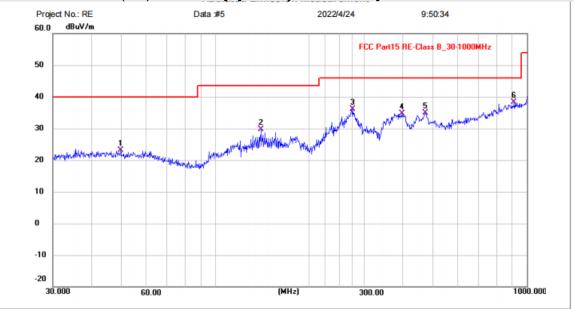

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX Note:

Power:

| Distance: | |
|-----------|--|
|-----------|--|


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|--------------------|----------------|------------------|-------------------|-------------------|----------------|----------|-----|--------|
| 1 | 49.5328 | -0.68 | 23.72 | 23.04 | 40.00 | -16.96 | QP | Р | |
| 2 | 139.8508 | 5.75 | 23.92 | 29.67 | 43.50 | -13.83 | QP | Р | |
| 3 | 275.1570 | 12.03 | 24.03 | 36.06 | 46.00 | -9.94 | QP | Р | |
| 4 | 396.2415 | 6.95 | 27.85 | 34.80 | 46.00 | -11.20 | QP | Р | |
| 5 | 472.1760 | 5.92 | 28.98 | 34.90 | 46.00 | -11.10 | QP | Р | |
| 6 * | 909.6667 | 1.43 | 36.96 | 38.39 | 46.00 | -7.61 | QP | Р | |

Humidity: %RH

(C)



[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

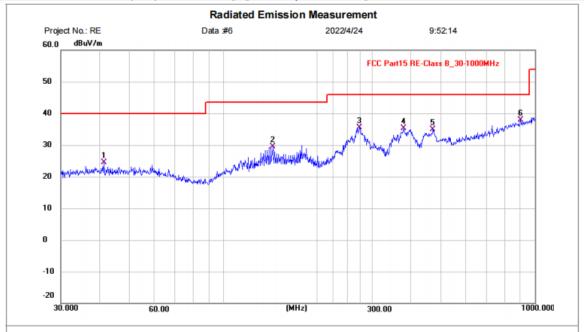

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX Note:

Site

Polarization: Vertical

Power:

Distance:

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|--------------------|----------------|------------------|-------------------|-------------------|----------------|----------|-----|--------|
| 1 | 41.2765 | 0.49 | 23.92 | 24.41 | 40.00 | -15.59 | QP | Р | |
| 2 | 143.8295 | 5.60 | 23.91 | 29.51 | 43.50 | -13.99 | QP | Р | |
| 3 | 273.2341 | 11.64 | 23.95 | 35.59 | 46.00 | -10.41 | QP | Р | |
| 4 | 378.5843 | 8.01 | 27.25 | 35.26 | 46.00 | -10.74 | QP | Р | |
| 5 | 470.5232 | 6.01 | 28.98 | 34.99 | 46.00 | -11.01 | QP | Р | |
| 6 * | 900.1474 | 1.17 | 36.76 | 37.93 | 46.00 | -8.07 | QP | Р | |

^{*:}Maximum data x:Over limit !:over margin

10400.00 11575.00 12750.00

(C)

%RH

Temperature:

Humidity:



[TestMode: TX low channel]; [Polarity: Horizontal]

(MHz)

Power:

8050.00

Polarization: Horizontal

9225.00

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode

1000.000 2175.00

3350.00

4525.00

5700.00

M/N: OE903 Mode: TX-L Note:

Site

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 3655.500 | 41.91 | 7.76 | 49.67 | 74.00 | -24.33 | peak | |
| 2 | | 5770.500 | 41.89 | 3.91 | 45.80 | 74.00 | -28.20 | peak | |
| 3 | | 7815.000 | 40.50 | 7.72 | 48.22 | 74.00 | -25.78 | peak | |
| 4 | | 10494.000 | 37.46 | 11.17 | 48.63 | 74.00 | -25.37 | peak | |
| 5 | * | 11293.000 | 39.04 | 11.91 | 50.95 | 74.00 | -23.05 | peak | |
| 6 | | 12350.500 | 38.86 | 11.67 | 50.53 | 74.00 | -23.47 | peak | |


*:Maximum data x:Over limit !:over margin (Reference Only

Humidity:

%RH



[TestMode: TX low channel]; [Polarity: Vertical]

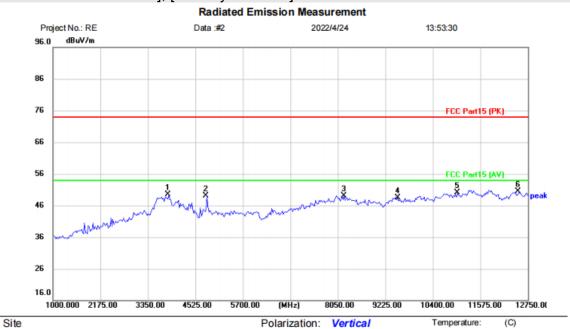

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode

M/N: OE903

Mode: TX-L Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 3872.745 | 42.66 | 6.76 | 49.42 | 74.00 | -24.58 | peak | |
| 2 | | 4814.629 | 45.48 | 3.66 | 49.14 | 74.00 | -24.86 | peak | |
| 3 | | 8205.411 | 40.99 | 8.21 | 49.20 | 74.00 | -24.80 | peak | |
| 4 | | 9524.048 | 39.43 | 9.11 | 48.54 | 74.00 | -25.46 | peak | |
| 5 | | 11007.515 | 38.18 | 11.99 | 50.17 | 74.00 | -23.83 | peak | |
| 6 | * | 12538.076 | 38.65 | 11.81 | 50.46 | 74.00 | -23.54 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only


Humidity:

(C)

%RH



[TestMode: TX mid channel]; [Polarity: Vertical]

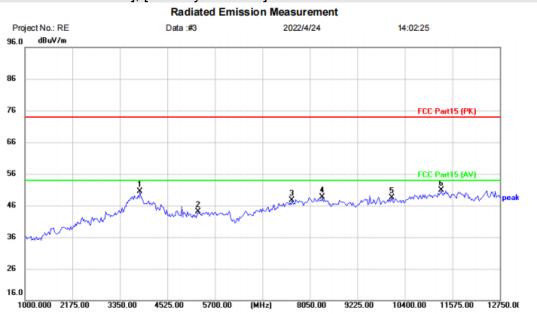

Polarization: Vertical

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX-M Note:

Site

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 3843.500 | 43.36 | 7.12 | 50.48 | 74.00 | -23.52 | peak | |
| 2 | | 5277.000 | 40.41 | 3.60 | 44.01 | 74.00 | -29.99 | peak | |
| 3 | | 7603.500 | 40.45 | 7.17 | 47.62 | 74.00 | -26.38 | peak | |
| 4 | | 8355.500 | 40.45 | 8.27 | 48.72 | 74.00 | -25.28 | peak | |
| 5 | | 10071.000 | 38.00 | 10.50 | 48.50 | 74.00 | -25.50 | peak | |
| 6 | * | 11293.000 | 39.01 | 11.91 | 50.92 | 74.00 | -23.08 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only

Humidity:

(C)

%RH



[TestMode: TX mid channel]; [Polarity: Horizontal]

Radiated Emission Measurement 2022/4/24 14:05:03 Project No.: RE Data:#4 dBuV/m 96.0 86 76 66 56 46 36 26 16.0 (MHz) 1000.000 2175.00 3350.00 4525.00 5700.00 10400.00 11575.00 12750.00 8050.00 9225.00

Polarization: Horizontal

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX-M Note:

Site

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 3655.500 | 41.62 | 7.76 | 49.38 | 74.00 | -24.62 | peak | |
| 2 | | 4877.500 | 42.20 | 3.37 | 45.57 | 74.00 | -28.43 | peak | |
| 3 | | 7439.000 | 40.75 | 6.86 | 47.61 | 74.00 | -26.39 | peak | |
| 4 | | 8261.500 | 40.46 | 8.23 | 48.69 | 74.00 | -25.31 | peak | |
| 5 | | 10658.500 | 38.41 | 11.32 | 49.73 | 74.00 | -24.27 | peak | |
| 6 | * | 12374.000 | 39.60 | 11.72 | 51.32 | 74.00 | -22.68 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only

Humidity:

(C)

%RH



[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement 2022/4/24 Project No.: RE Data:#5 14:11:33 dBuV/m 96.0 86 76 66 56 46 26 16.0 (MHz) 1000.000 2175.00 3350.00 9225.00 10400.00 11575.00 12750.00 4525.00 5700.00 8050.00

Polarization: Horizontal

Limit: FCC Part15 (PK)

M/N: OE903 Mode: TX-H Note:

Site

EUT: LOFLICK 100 Triple mode

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 2598.000 | 46.30 | -1.09 | 45.21 | 74.00 | -28.79 | peak | |
| 2 | | 3655.500 | 42.32 | 7.76 | 50.08 | 74.00 | -23.92 | peak | |
| 3 | | 6029.000 | 42.93 | 1.08 | 44.01 | 74.00 | -29.99 | peak | |
| 4 | | 8026.500 | 41.27 | 7.98 | 49.25 | 74.00 | -24.75 | peak | |
| 5 | | 9413.000 | 39.28 | 8.86 | 48.14 | 74.00 | -25.86 | peak | |
| 6 | * | 11763.000 | 39.55 | 11.63 | 51.18 | 74.00 | -22.82 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only

Humidity:

(C)

%RH



[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement 2022/4/24 Project No.: RE Data:#6 14:13:51 dBuV/m 96.0 86 76 66 56 46 26 16.0 (MHz) 1000.000 2175.00 3350.00 4525.00 9225.00 10400.00 11575.00 12750.00 5700.00 8050.00

Polarization: Vertical

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode

M/N: OE903 Mode: TX-H Note:

Site

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|-----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 3867.000 | 43.75 | 6.82 | 50.57 | 74.00 | -23.43 | peak | |
| 2 | | 5465.000 | 40.65 | 4.17 | 44.82 | 74.00 | -29.18 | peak | |
| 3 | | 8050.000 | 40.76 | 8.01 | 48.77 | 74.00 | -25.23 | peak | |
| 4 | | 10588.000 | 37.55 | 11.14 | 48.69 | 74.00 | -25.31 | peak | |
| 5 | * | 11316.500 | 38.78 | 11.88 | 50.66 | 74.00 | -23.34 | peak | |
| 6 | | 12374.000 | 38.80 | 11.72 | 50.52 | 74.00 | -23.48 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only



Page 30 of 60

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | | |
|--|----------------------------------|--|--|--|--|--|
| Test Method ANSI C63.10 (2013) Section 6.10.5 | | | | | | |
| Test Mode (Pre-Scan) | TX | | | | | |
| Test Mode (Final Test) | TX | | | | | |
| Tester | Jozu | | | | | |
| Temperature | 25 ℃ | | | | | |
| Humidity | 60% | | | | | |


14.1 LIMITS

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|---------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



14.2 BLOCK DIAGRAM OF TEST SETUP

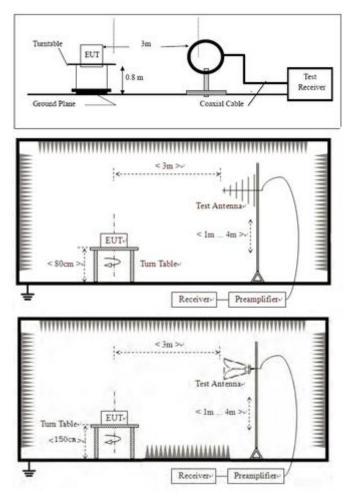

14.3 PROCEDURE

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



Page 32 of 60

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.








14.4 TEST DATA

[TestMode: TX high channel]; [Polarity: Horizontal]

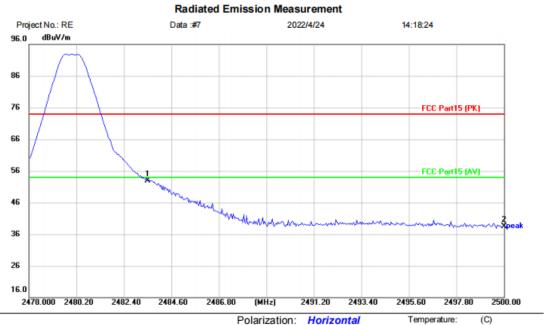

Site

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode


M/N: OE903 Mode: DB-H Note: Power:

Humidity:

%RH

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 2483.500 | 55.96 | -3.14 | 52.82 | 74.00 | -21.18 | peak | |
| 2 | 2500.000 | 41.57 | -3.08 | 38.49 | 74.00 | -35.51 | peak | |

*:Maximum data x:Over limit !:over margin (Reference Only



Humidity:

(C)

%RH



[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement Project No.: RE Data:#8 2022/4/24 14:21:08 dBuV/m 96.0 86 76 FCC Part15 (PK) 66 56 FCC Part15 (AV) 46 36 16.0 2478.000 2480.20 2482.40 2484.60 2486.80 2491.20 2493.40 2500.00 (MHz) 2495.60 2497.80

Polarization: Vertical

Limit: FCC Part15 (PK)

EUT: LOFLICK 100 Triple mode


M/N: OE903 Mode: DB-H Note:

Site

Power:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 2483.500 | 49.45 | -3.14 | 46.31 | 74.00 | -27.69 | peak | |
| 2 | | 2500.000 | 42.29 | -3.08 | 39.21 | 74.00 | -34.79 | peak | |

*:Maximum data x:Over limit !:over margin (Reference Only



2406.00

2396.40



[TestMode: TX low channel]; [Polarity: Horizontal]

Radiated Emission Measurement 2022/4/24 Project No.: RE Data:#9 14:27:44 dBuV/m 96.0 86 76 66 56 FCC Part15 (AV) 46 36 26

2367.60 2377.20

EUT: LOFLICK 100 Triple mode

2310.000 2319.60

2329.20

2338.80

M/N: OE903 Mode: DB-L Note:


16.0

Site Polarization: Horizontal Temperature: (C) Limit: FCC Part15 (PK) Humidity: %RH Power:

2348.40

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 2310.000 | 46.01 | -3.93 | 42.08 | 74.00 | -31.92 | peak | |
| 2 | | 2390.000 | 41.95 | -3.58 | 38.37 | 74.00 | -35.63 | peak | |

*:Maximum data x:Over limit !:over margin (Reference Only



Humidity:

(C)

%RH



[TestMode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement Project No.: RE Data :#10 2022/4/24 14:33:21 dBuV/m 96.0 86 76 66 56 FCC Part15 (AV) 46 36 26 16.0 2310.000 2319.60 2329.20 2338.80 2367.60 2377.20 2406.00 2348.40 (MHz)

Polarization: Vertical

Limit: FCC Part15 (PK)

M/N: OE903 Mode: DB-L Note:

Site

EUT: LOFLICK 100 Triple mode

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|----------|------------------|-------------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 2310.000 | 44.63 | -3.93 | 40.70 | 74.00 | -33.30 | peak | |
| 2 | | 2390.000 | 42.15 | -3.58 | 38.57 | 74.00 | -35.43 | peak | |

Power:

*:Maximum data x:Over limit !:over margin (Reference Only



Page 37 of 60

15 CONDUCTED SPURIOUS EMISSIONS


| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | |
|------------------------|--|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 7.8.6 & Section 11.11 | | | | |
| Test Mode (Pre-Scan) | TX | | | | |
| Test Mode (Final Test) | TX | | | | |
| Tester | Jozu | | | | |
| Temperature | 25℃ | | | | |
| Humidity | 60% | | | | |

15.1 LIMITS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in \$15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in \$15.205(a), must also comply with the radiated emission limits specified in \$15.209(a) (see \$15.205(c)).

15.2 BLOCK DIAGRAM OF TEST SETUP





15.3 TEST DATA





Page 39 of 60


16 POWER SPECTRUM DENSITY

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | |
|------------------------|------------------------------------|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 11.10.2 | | | | |
| Test Mode (Pre-Scan) | TX | | | | |
| Test Mode (Final Test) | TX | | | | |
| Tester | Jozu | | | | |
| Temperature | 25℃ | | | | |
| Humidity | 60% | | | | |


16.1 LIMITS

Limit: | ≤8dBm in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP



16.3 TEST DATA






17 CONDUCTED PEAK OUTPUT POWER

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | |
|------------------------|----------------------------------|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 7.8.5 | | | | |
| Test Mode (Pre-Scan) | TX | | | | |
| Test Mode (Final Test) | TX | | | | |
| Tester | Jozu | | | | |
| Temperature | 25 ℃ | | | | |
| Humidity | 60% | | | | |

17.1 LIMITS

| Frequency range(MHz) | Output power of the intentional radiator(watt) | |
|----------------------|--|--|
| | 1 for ≥50 hopping channels | |
| 902-928 | 0.25 for 25≤ hopping channels <50 | |
| | 1 for digital modulation | |
| | 1 for ≥75 non-overlapping hopping channels | |
| 2400-2483.5 | 0.125 for all other frequency hopping systems | |
| | 1 for digital modulation | |
| 5725 5050 | 1 for frequency hopping systems and digital | |
| 5725-5850 | modulation | |

17.2 BLOCK DIAGRAM OF TEST SETUP





17.3 TEST DATA





Page 42 of 60


18 MINIMUM 6DB BANDWIDTH

| Test Standard | 47 CFR Part 15, Subpart C 15.247 | | | | | |
|------------------------|-----------------------------------|--|--|--|--|--|
| Test Method | ANSI C63.10 (2013) Section 11.8.1 | | | | | |
| Test Mode (Pre-Scan) | TX | | | | | |
| Test Mode (Final Test) | TX | | | | | |
| Tester | Jozu | | | | | |
| Temperature | 25℃ | | | | | |
| Humidity | 60% | | | | | |

18.1 LIMITS

| Limit: | ≥500 kHz | |
|--------|----------|--|
| | _500 KHZ | |

18.2 BLOCK DIAGRAM OF TEST SETUP



18.3 TEST DATA




19 APPENDIX

Maximum Conducted Output Power


| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT | BLE | 2402 | Ant1 | -0.245 | 30 | Pass |
| NVNT | BLE | 2442 | Ant1 | -0.991 | 30 | Pass |
| NVNT | BLE | 2480 | Ant1 | -1.42 | 30 | Pass |

Power NVNT BLE 2402MHz Ant1

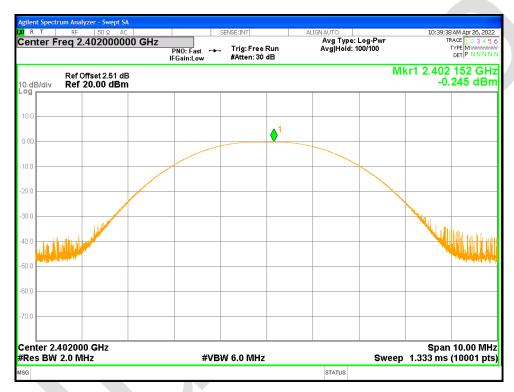



Power NVNT BLE 2442MHz Ant1



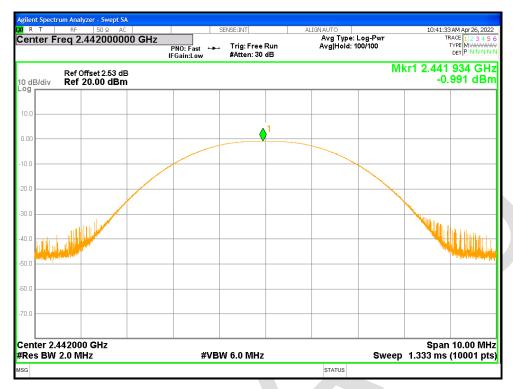

Power NVNT BLE 2480MHz Ant1

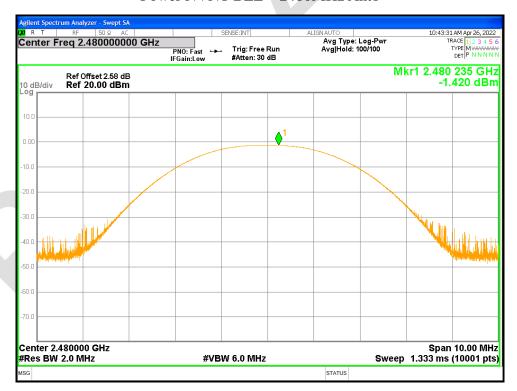





-6dB Bandwidth


| Condition | Mode | Frequency | Antenna | -6 dB Bandwidth | Limit -6 dB | Verdict |
|-----------|------|-----------|---------|-----------------|-----------------|---------|
| | | (MHz) | | (MHz) | Bandwidth (MHz) | |
| NVNT | BLE | 2402 | Ant1 | 0.677 | 0.5 | Pass |
| NVNT | BLE | 2442 | Ant1 | 0.681 | 0.5 | Pass |
| NVNT | BLE | 2480 | Ant1 | 0.678 | 0.5 | Pass |

-6dB Bandwidth NVNT BLE 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2442MHz Ant1



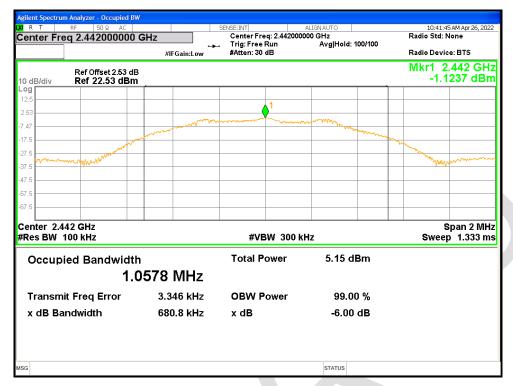

-6dB Bandwidth NVNT BLE 2480MHz Ant1





Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT | BLE | 2402 | Ant1 | 1.047887753 |
| NVNT | BLE | 2442 | Ant1 | 1.049985199 |
| NVNT | BLE | 2480 | Ant1 | 1.0497883 |

OBW NVNT BLE 2402MHz Ant1



OBW NVNT BLE 2442MHz Ant1





OBW NVNT BLE 2480MHz Ant1





Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------|-------------|---------|
| NVNT | BLE | 2402 | Ant1 | -9.857 | 8 | Pass |
| NVNT | BLE | 2442 | Ant1 | -10.659 | 8 | Pass |
| NVNT | BLE | 2480 | Ant1 | -11.279 | 8 | Pass |

PSD NVNT BLE 2402MHz Ant1



PSD NVNT BLE 2442MHz Ant1





PSD NVNT BLE 2480MHz Ant1





Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE | 2402 | Ant1 | -52.88 | -30 | Pass |
| NVNT | BLE | 2480 | Ant1 | -53.22 | -30 | Pass |

Band Edge NVNT BLE 2402MHz Ant1 Ref



Band Edge NVNT BLE 2402MHz Ant1 Emission






Band Edge NVNT BLE 2480MHz Ant1 Ref



Band Edge NVNT BLE 2480MHz Ant1 Emission



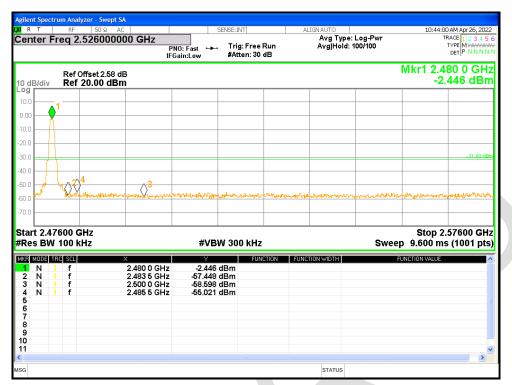



Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE | 2402 | Ant1 | -45.34 | -30 | Pass |
| NVNT | BLE | 2442 | Ant1 | -43.08 | -30 | Pass |
| NVNT | BLE | 2480 | Ant1 | -43.85 | -30 | Pass |

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref



Tx. Spurious NVNT BLE 2402MHz Ant1 Emission



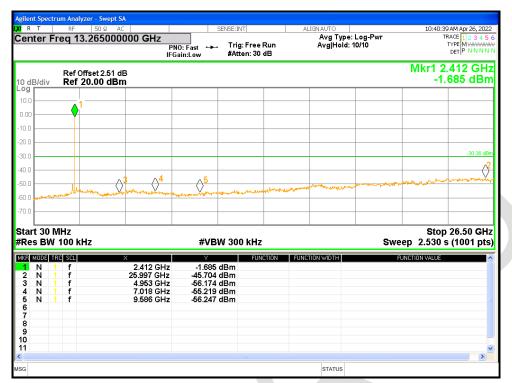


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref



Tx. Spurious NVNT BLE 2442MHz Ant1 Emission



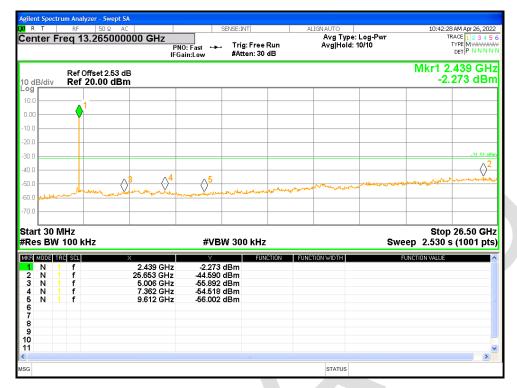

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 2480MHz Ant1 Emission









APPENDIX A: PHOTOGRAPHS OF TEST SETUP

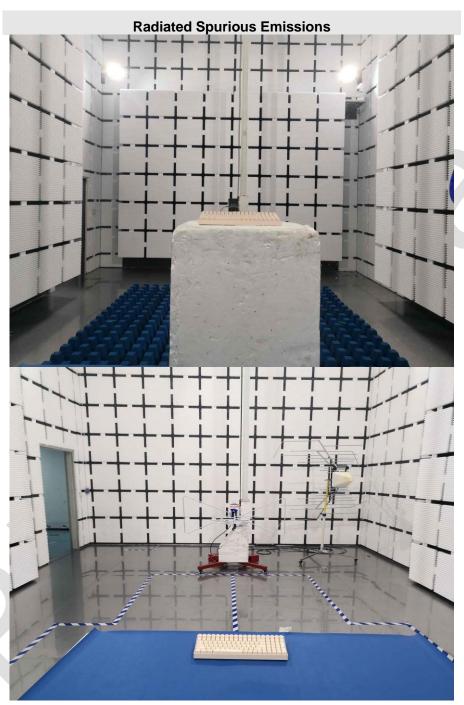





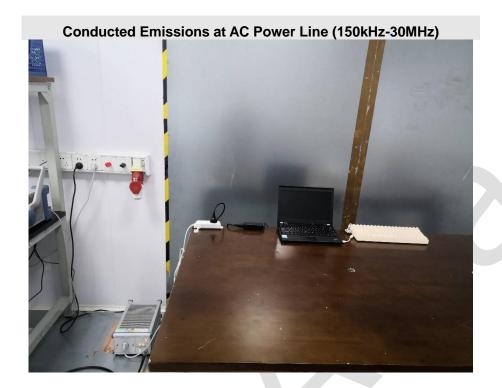



Page 60 of 60

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202204-A5501

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.