Test Report of FCC Part 15 C for FCC Certificate On Behalf of

JUSTDO (HK) LIMITED

FCC ID: 2AC66DUOX9

Product Description: 2.4GHz wireless keyboard

Model No.: ACHIEVER DUO X9

Prepared for: JUSTDO (HK) LIMITED

Jun Xing Industrial Park, Second Fuyuan Road, Fuyong, Baoan,

Shenzhen, P.R.China

Prepared by: Shenzhen QC Testing Laboratory Co., Ltd.

1stFloor, Building A, Huawan Industrial Park, Gushu, Xixiang Street,

Baoan,518126,Shenzhen,China

Tel: 0755-23008269 Fax: 0755-23726780

Report No.: QCT14IR010E

Issue Date: September 12, 2014

Test Date: September 08~11, 2014

Tested by: Reviewed by:

Kare Gao Carmi Du

Carmi

Approved by: Kendy Wes

Kendy Wang

TABLE OF CONTENTS 1.4 Test Facility......4 2. SYSTEM TEST CONFIGURATION......5 2.1 EUT Configuration5 2.3 General Test Procedures5 2.4 List of Measuring Equipments6 3. SUMMARY OF TEST RESULTS.......7 4. TEST OF CONDUCTED EMISSION 8 4.1 Applicable Standard......8 4.2 Test Setup Diagram......8 5. BAND EDGES MEASUREMENT......9 5.1 Limit of Band Edges Measurement9 5.2 Radiate EUT Setup......9 5.4 Test Result ______10 6. SPURIOUS EMISSIONS......12

1. GENERAL INFORMATION

1.1 Client Information

Applicant: JUSTDO (HK) LIMITED

Address of applicant: Jun Xing Industrial Park, Second Fuyuan Road, Fuyong,

Baoan, Shenzhen, P.R.China

Manufacturer: JUSTDO (HK) LIMITED

Address of manufacturer: Jun Xing Industrial Park, Second Fuyuan Road, Fuyong,

Baoan, Shenzhen, P.R.China

General Description of E.U.T

Items	Description
EUT Description:	2.4GHz wireless keyboard
Trade Name:	N/A
Model No.:	ACHIEVER DUO X9
Frequency Band:	2402MHz ~ 2480MHz
Number of Channels:	16
Channel Bandwidth:	1MHz
Antenna Type:	Built-in Antenna
Rated Voltage:	3. 0V DC from battery

Remark* The test data gathered are from the production sample provided by the manufacturer.

Supplementary models have the same circuit, but with different appearance

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2009.

The tests were performed in order to determine compliance with Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209,15.249 under the FCC Rules Part 15 Subpart C.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

Report No.: QCT14IR010E Page 3 of 25 FCC ID: 2AC66DUOX9

1.4 Test Facility

All measurement required was performed at Shenzhen CTL Testing Technology Co., Ltd.at Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055 The test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L5540

Shenzhen CTL Testing Technology Co., Ltd. To ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L5540, March, 2012.

Report No.: QCT14IR010E Page 4 of 25 FCC ID: 2AC66DUOX9

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2009 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous transmiting application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode. But the EUT is powed by DC 3.0V of battery, this test is not applicable.

Radiated Emissions The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

Report No.: QCT14IR010E Page 5 of 25 FCC ID: 2AC66DUOX9

2.4 List of Measuring Equipments

Test equipments list of Shenzhen CTL Testing Technology Co., Ltd.

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	Sunol Sciences Corp.	JB1 Antenna	A061713	2014.05.22
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	1166.5950.03	2014.03.19
3	Coaxial	1	/	/	2014.05.22
4	Controller	EM Electronics	Controller EM 1000	N/A	2014.05.22
5	Horn antenna	Sunol sciences corp	DRH-118	A062013	2014.07.22
6	Horn antenna	SCHWARZBECK	BBHA9710	1562	2014.07.22
7	Loop antenna	ZHINAN	ZN30900A	3548	2014.07.22
8	Amplifier	HP	8447D	1937A02492	2014.4.25
9	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2014.4.25
10	Spectrum Analyzer	R&S	FSP	100397	2014.05.22

3. SUMMARY OF TEST RESULTS

EUT Fundamental Frequency	FCC Rules	Description of Test	Result
	15.207	Disturbance Voltage at The Mains Terminals	N/A , without AC main
2.402~2.480	15.249	Band Edges Measurement	Pass
GHz	15.249	Spurious Emission	Pass
	15.203	Antenna Requirement	Pass


4. TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Fraguency Pango (MHz)	Limits	(dBuV)
Frequency Range (MHz)	Quasi-Peak	Average
0.150~0.500	66∼56	56∼46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

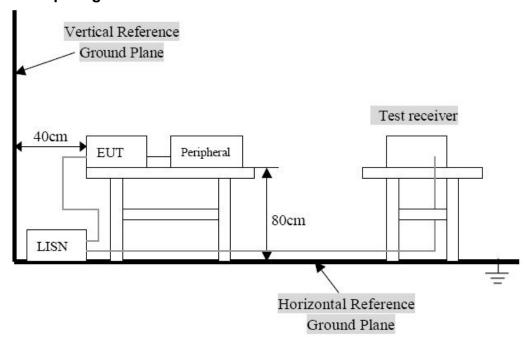

Remark: 1. The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC 15.207 limits.

2. The EUT was charged on the base,and the base was connected to a 120 VAC/ 60Hz power source.

Notes: The EUT is powered by DC 3.0V from battery without AC mains, this test is unapplicable.

5. BAND EDGES MEASUREMENT

5.1 Limit of Band Edges Measurement

- 1. In the above emission table, the tighter limit applies at the band edges.
- 2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dΒμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

5.2 Radiate EUT Setup

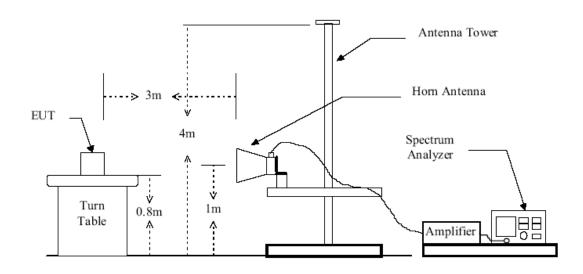


Figure 2: Frequencies measured above 1 GHz configuration

Report No.: QCT14IR010E Page 9 of 25 FCC ID: 2AC66DUOX9

5.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2009.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

5.4 Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz Wireless Keyboard
Humidity (%RH): 50~54	M/N: ACHIEVER DUO X9
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous transmitting


Radio test result

Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Limits (dBμV/m)
2389.15	Н	33.63	54
2483.67	Н	32.17	54


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBµV/m)	Limits (dBμV/m)
2389.15	V	31.18	54
2483.67	V	32.48	54

Report No.: QCT14IR010E Page 10 of 25 FCC ID: 2AC66DUOX9

Conducted test result CH Low

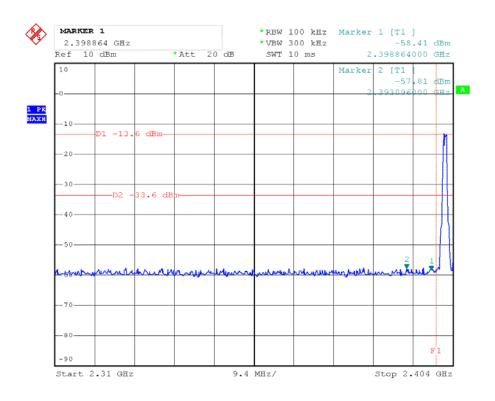

CH High

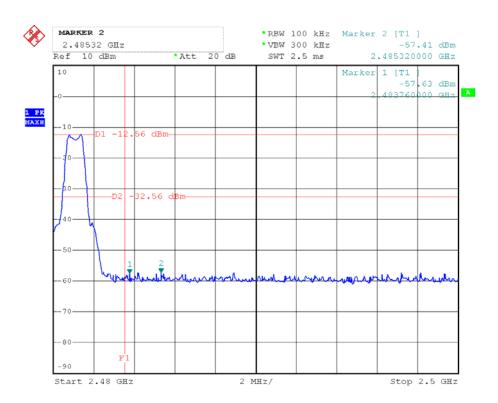

6. SPURIOUS EMISSIONS

6.1 Limit of Spurious Emissions

- 1. In the section 15.249(a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:
- 2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µmV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Report No.: QCT14IR010E Page 12 of 25 FCC ID: 2AC66DUOX9

6.2 EUT Setup

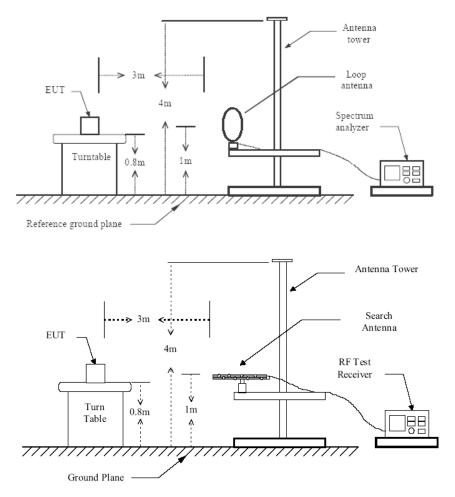


Figure 1: Frequencies measured below 1 GHz configuration

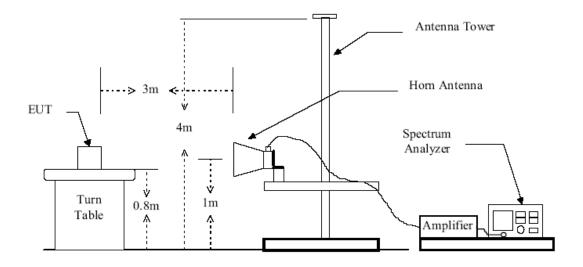


Figure 2: Frequencies measured above 1 GHz configuration

6.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2009.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

6.4 Spurious Emissions Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz Wireless Keyboard
Humidity (%RH): 50~54	M/N: ACHIEVER DUO X9
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous transmitting

ACHIEVER DUO X9

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

- 1. EUT was lie vertically, and then its Antenna oriented upward
- 2. EUT was lie vertically, and then its Antenna oriented downward
- 3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Normal operating Mode:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBµV)	(dB/M)	(dB)	(dBµV/M)	(dB μ V/M)	(dB)	PK/QP
0.45	22.38	8.25	1.01	29.62	67	-37.38	QP
17.38	21.75	7.57	1.2	28.12	49.5	-21.38	QP
22.43	23.24	8.64	1.05	30.83	49.5	-18.67	QP
25.71	23.63	7.22	1.69	29.16	49.5	-20.34	QP

Report No.: QCT14IR010E Page 15 of 25 FCC ID: 2AC66DUOX9

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4GHz Wireless Keyboard

ACHIEVER DUO X9 M/N: **Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER

Operator: Chen Test Specification: DC 3.0V


Comment: Polarization: Horizontal Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)" Short Description: Fig. Field Strength

Stop Detector Meas. Start IF Transducer

Frequency Frequency Bandw. Time

30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

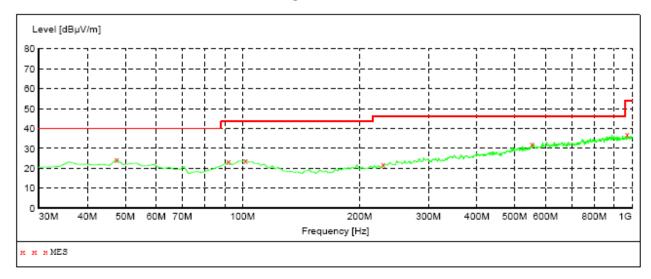

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.50	15.8	40.0	15.5	QP	100.0	0.00	HORIZONTAL
92.080000	23.30	16.5	43.5	20.2	QP	100.0	0.00	HORIZONTAL
101.780000	24.10	17.3	43.5	19.4	QΡ	100.0	0.00	HORIZONTAL
229.820000	22.00	16.1	46.0	24.0	QΡ	100.0	0.00	HORIZONTAL
553.800000	32.00	25.1	46.0	14.0	ÕΡ	100.0	0.00	HORIZONTAL
972.840000	36.90	29.7	54.0	17.1	OP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4GHz Wireless Keyboard

M/N: **ACHIEVER DUO X9 Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER

Operator: Chen Test Specification: DC 3.0V


Comment: Polarization: Vertical Tem:25℃ Hum:50%

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength

Detector Meas. IF Stop Start Transducer

Bandw. Frequency Frequency Time

30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

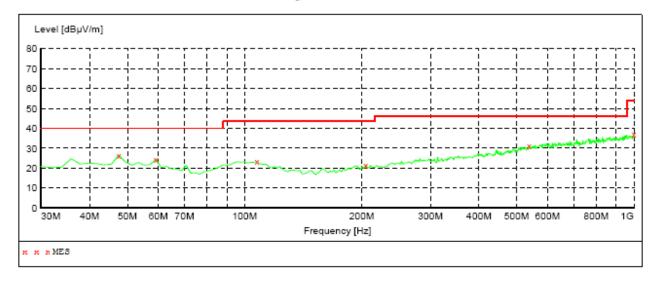

Frequency MHz	Level dBµV/m		Limit dBµV/m	-	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.60	15.8	40.0	13.4	QP	100.0	0.00	VERTICAL
59.100000	24.50	14.6	40.0	15.5	QP	100.0	0.00	VERTICAL
107.600000	23.30	16.8	43.5	20.2	QP	100.0	0.00	VERTICAL
204.600000	21.60	15.0	43.5	21.9	QP	100.0	0.00	VERTICAL
538.280000	31.40	24.7	46.0	14.6	QP	100.0	0.00	VERTICAL
1000.000000	36.90	30.0	54.0	17.1	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4GHz Wireless Keyboard

M/N: **ACHIEVER DUO X9 Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER


Operator: Chen Test Specification: DC 3.0V

Comment: Polarization: Horizontal Tem:25℃ Hum:50%

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength

Start Stop Detector Meas. IF Transducer Time Bandw.

Frequency Frequency 30.0 MHz Coupled 100 kHz 1.0 GHz MaxPeak VULB9163 NEW

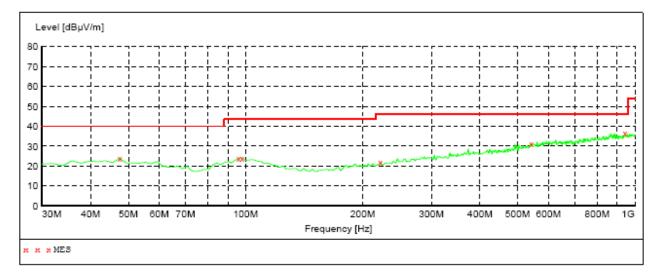

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000 95.960000 97.900000 222.060000 542.160000 943.740000	23.90 23.90 24.10 21.80 31.30 36.60	15.8 17.2 17.4 15.5 24.8 29.5	40.0 43.5 43.5 46.0 46.0 54.0	16.1 19.6 19.4 24.2 14.7 16.4	QP QP QP QP QP QP	100.0 100.0 100.0 100.0 100.0	0.00 0.00 0.00 0.00 0.00	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4GHz Wireless Keyboard

ACHIEVER DUO X9 M/N: **Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER


Operator: Chen Test Specification: DC 3.0V

Comment: Polarization: Vertical Tem:25℃ Hum:50%

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength

Start Stop Detector Meas. IF Transducer Bandw. Time

Frequency Frequency 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

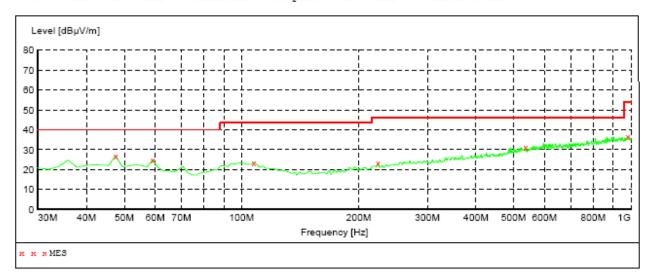

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	27.00	15.8	40.0	13.0	QP	100.0	0.00	VERTICAL
59.100000	24.90	14.6	40.0	15.1	QP	100.0	0.00	VERTICAL
107.600000	23.60	16.8	43.5	19.9	OP	100.0	0.00	VERTICAL
224.000000	23.30	15.6	46.0	22.7	QP	100.0	0.00	VERTICAL
536.340000	31.30	24.7	46.0	14.7	QP	100.0		VERTICAL
982.540000	36.60	29.8	54.0	17.4	QP	100.0		VERTICAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4GHz Wireless Keyboard

M/N: **ACHIEVER DUO X9 Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER


Operator: Chen Test Specification: DC 3.0V

Comment: Polarization: Horizontal Tem:25℃ Hum:50%

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength

Start Stop Detector Meas. IF Transducer Bandw. Time

Frequency Frequency 30.0 MHz 1.0 GHz Coupled 100 kHz VULB9163 NEW MaxPeak

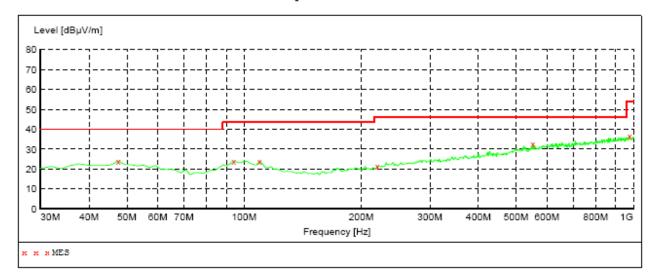

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.10	15.8	40.0	15.9	QP	100.0	0.00	HORIZONTAL
94.020000	24.00	16.9	43.5	19.5	ÕΡ	100.0	0.00	HORIZONTAL
109.540000	24.00	16.6	43.5	19.5	ÕΡ	100.0	0.00	HORIZONTAL
220.120000	21.60	15.3	46.0	18.4	QΡ	100.0	0.00	HORIZONTAL
551.860000	32.70	25.0	46.0	13.3	ÕΡ	100.0	0.00	HORIZONTAL
978.660000	36.60	29.8	54.0	17.4	OP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4GHz Wireless Keyboard

ACHIEVER DUO X9 M/N: **Operating Condition:** Continuous transmitting

Test Site: 3m CHAMBER


Operator: Chen Test Specification: DC 3.0V

Comment: Polarization: Vertical Tem:25℃ Hum:50%

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength

Start Detector Meas. IF Stop Transducer Time Bandw.

Frequency Frequency 30.0 MHz 1.0 GHz 100 kHz VULB9163 NEW MaxPeak Coupled

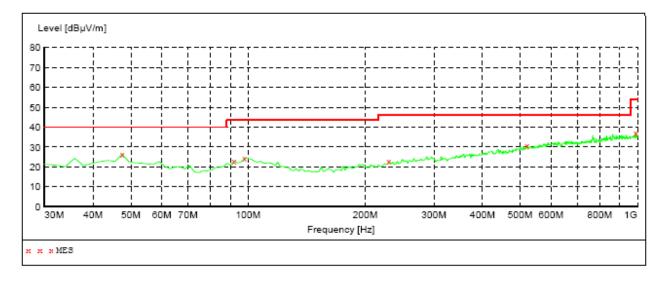

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000 92.080000 97.900000	26.50 22.80 24.30	15.8 16.5 17.4	40.0 43.5 43.5	13.5 20.7 19.2	QΡ	100.0 100.0 100.0	0.00 0.00 0.00	VERTICAL VERTICAL VERTICAL
229.820000 520.820000 990.300000	22.70 30.90 37.20	16.1 24.3 29.9	46.0 46.0 54.0	23.3 15.1 16.8	QP QP	100.0 100.0 100.0	0.00 0.00 0.00	VERTICAL VERTICAL VERTICAL

The worst Spurious Emission Data above 1GHz Channel Low

	Channel Low (2402MHz)										
Maximum Frequency		Pola	rity and Lev	rel		Limit	Margin	Mark			
(MHz)	Polarity	Height (m)	Reading dB _µ V	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)			
2402	Н	1	75.73	-7.15	68.58	114	-45.42	Р			
2402	П	11 1	67.35	-7.15	60.2	94	-33.8	Α			
2402	V	1	77.52	-7.15	70.37	114	-43.63	Р			
2402	V 1	68.35	-7.15	61.2	94	-32.8	Α				
4804	ш	4	42.54	1.07	43.61	74	-30.39	Р			
4004	H 1	I	32.35	1.07	33.42	54	-20.58	Α			
4804	V	V 1	43.75	1.07	44.82	74	-29.18	Р			
4004	V		32.84	1.07	33.91	54	-20.09	Α			
7206	Н	1	41.52	7.38	48.9	74	-25.1	Р			
7200	П	I	32.33	7.38	39.71	54	-14.29	Α			
7206	V	1	43.36	7.38	50.74	74	-23.26	Р			
7200	V	I	32.53	7.38	39.91	54	-14.09	Α			
9608	Н	1						Р			
9000	11	I						Α			
9608	V	1						Р			
9000	V	I						Α			
12021.67	Н	4						Р			
12021.07	П	1						Α			
12021.67	V	1						Р			
12021.07	V	I						Α			
25380.37											

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

- 2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
 - 4. The test limit distance is 3m limit

The worst Spurious Emission Data above 1GHz Channel Middle

THE WOISE	Channel Low (2441MHz)											
Maximum Frequency		Pola	Limit	Margin	Mark							
(MHz)	Polarity	Height (m)	Reading dB _µ V	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)				
2441	Н	1	74.35	-6.37	67.98	114	-46.02	Р				
2441	'' '	66.35	-6.37	59.98	94	-34.02	Α					
2441	V	V 1	77.51	-6.37	71.14	114	-42.86	Р				
2441	V	ı	68.35	-6.37	61.98	94	-32.02	Α				
4882	ш	Ц 4	42.35	1.07	43.42	74	-30.58	Р				
4002	H 1	ı	32.34	1.07	33.41	54	-20.59	Α				
4882		2 V	1	43.25	1.07	44.32	74	-29.68	Р			
4002	V	'	32.75	1.07	33.82	54	-20.18	Α				
7323	7323 H	1	42.35	7.49	49.84	74	-24.16	Р				
1323	П	I	33.06	7.49	40.55	54	-13.45	Α				
7323	V	1	43.87	7.49	51.36	74	-22.64	Р				
1323	V	ı	33.56	7.49	41.05	54	-12.95	Α				
9755	Н	1						Р				
9755	П	I						Α				
9755	V	1						Р				
9755	V	ı						Α				
12191.67	Н	1						Р				
12191.07	П	ı						Α				
12191.67	V	1						Р				
12191.07	V	I						Α				
25380.37												

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

- 2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
 - 4. The test limit distance is 3m limit

The worst Spurious Emission Data above 1GHz Channel High

	Channel Low (2481MHz)											
Maximum Frequency		Pola	rity and Lev	rel		Limit	Margin	Mark				
(MHz)	Polarity	Height (m)	Reading dB _µ V	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)				
2480	Н	1	75.38	-6.05	69.33	114	-44.67	Р				
2400	'	66.54	-6.05	60.49	94	-33.51	Α					
2480	V	1	78.36	-6.05	72.31	114	-41.69	Р				
2400	V		68.95	-6.05	62.9	94	-31.1	Α				
4960	Н	1 1	43.06	1.07	44.13	74	-29.87	Р				
4900		32.85	1.07	33.92	54	-20.08	Α					
4960	V 1	1	44.35	1.07	45.42	74	-28.58	Р				
4900	V	'	33.36	1.07	34.43	54	-19.57	Α				
7440	Н	1	41.58	7.61	49.19	74	-24.81	Р				
7440	11	I	32.85	7.61	40.46	54	-13.54	Α				
7440	V	1	43.36	7.61	50.97	74	-23.03	Р				
7440	V	ı	32.58	7.61	40.19	54	-13.81	Α				
9924	Н	1						Р				
9924	11	I						Α				
9924	V	1						Р				
3324	V	ı						Α				
12361.67	Н	1						Р				
12301.07	11	I						Α				
12361.67	V	1						Р				
12301.07	V	ı						Α				
25380.37												

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

Report No.: QCT14IR010E Page 25 of 25 FCC ID: 2AC66DUOX9