

TEST REPORT

Applicant: Xiamen VBeT Electronics Co., Ltd.

Address: N403, Weiye Building, Xiamen Pioneering Park for Overseas
Chinese Scholars, PRC, Xiamen, China

Product Name: DECT Link


FCC ID: 2AC67-DECT300U

FCC PART 15D
Standard(s): ANSI C63.17-2013
ANSI C63.4-2014

Report Number: 2402X97571E-RF-00A

Report Date: 2024/12/23

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Pedro Yun

Title: Project Engineer



Approved By: Gavin Xu

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 EUT OPERATION CONDITION	7
3.2 EUT EXERCISE SOFTWARE	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP	8
3.6 TEST FACILITY	9
3.7 MEASUREMENT UNCERTAINTY	9
4. REQUIREMENTS AND TEST PROCEDURES	10
4.1 CONDUCTED EMISSIONS	10
4.1.1 Applicable Standard	10
4.1.2 EUT Setup	10
4.1.3 EMI Test Receiver Setup	10
4.1.4 Test Procedure	11
4.1.5 Corrected Amplitude & Margin Calculation	11
4.1.6 Test Result	11
4.2 RADIATED SPURIOUS EMISSIONS	12
4.2.1 Applicable Standard	12
4.2.2 EUT Setup	12
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	13
4.2.4 Test Procedure	13
4.2.5 Corrected Result & Margin Calculation	13
4.2.6 Test Result	14
4.3 EMISSION BANDWIDTH	15
4.3.1 Applicable Standard	15
4.3.2 EUT Setup	15
4.3.3 Test Procedure	15
4.3.4 Test Result	15
4.4 PEAK TRANSMIT POWER	16
4.4.1 Applicable Standard	16
4.4.2 EUT Setup	16
4.4.3 Test Procedure	16
4.4.4 Test Result	16
4.5 POWER SPECTRAL DENSITY	17
4.5.1 Applicable Standard	17

4.5.2 EUT Setup	17
4.5.3 Test Procedure	17
4.5.4 Test Result	18
4.6 EMISSION INSIDE AND OUTSIDE THE SUB-BAND	19
4.6.1 Applicable Standard	19
4.6.2 EUT Setup	19
4.6.3 Test Procedure	19
4.6.4 Test Result	20
4.7 FREQUENCY STABILITY	21
4.7.1 Applicable Standard	21
4.7.2 EUT Setup	21
4.7.3 Test Procedure	21
4.7.4 Test Result	22
4.8 SPECIFIC REQUIREMENTS FOR UPCS DEVICE	23
4.8.1 Applicable Standard	23
4.8.2 EUT Setup	25
4.8.3 Test Procedure	25
4.8.4 Test Result	26
5. TEST DATA AND RESULTS	27
5.1 AC LINE CONDUCTED EMISSIONS	27
5.2 RADIATED SPURIOUS EMISSIONS	30
5.3 EMISSION BANDWIDTH	46
5.4 PEAK TRANSMIT POWER	48
5.5 POWER SPECTRAL DENSITY	50
5.6 EMISSION INSIDE AND OUTSIDE THE SUB-BAND	52
5.7 FREQUENCY STABILITY	57
5.8 SPECIFIC REQUIREMENTS FOR UPCS DEVICE	58
EXHIBIT A - EUT PHOTOGRAPHS	63
EXHIBIT B - TEST SETUP PHOTOGRAPHS	64

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402X97571E-RF-00A	Original Report	2024/12/23

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	DECT Link
EUT Model:	DECT 300U
Multiple Models:	VT DECT 300U
Operation Frequency:	1921.536-1928.448 MHz
Maximum Peak Output Power (Conducted):	19.57 dBm
Modulation Type:	GFSK
Rated Input Voltage:	5.0Vdc from USB
Serial Number:	For RF Conducted Test: 2SFP-5 For AC line conducted emissions and Radiated Spurious Emissions Below 1G Tests: 2SFP-2 For Radiated Spurious Emissions Above 1G Test:2SFP-1
EUT Received Date:	2024/10/9
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
DSP Group	PCB	50	1920-1930MHz	0dBi
The design of compliance with §15.203:				
☒ Unit uses a permanently attached antenna.				
☐ Unit uses a unique coupling to the intentional radiator.				
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC § 15.315, § 15.207	Conducted Emission	Compliant
FCC § 15.205, § 15.209, § 15.319(g)	Radiated Spurious Emissions	Compliant
FCC § 15.323 (a)	Emission Bandwidth	Compliant
FCC § 15.319 (c)	Peak Transmit Power	Compliant
FCC § 15.319 (d)	Power Spectral Density	Compliant
FCC § 15.323 (d)	Emission Inside and Outside the sub-band	Compliant
FCC § 15.323 (f)	Frequency Stability	Compliant
FCC § 15.323 (c)(e) & § 15.319 (f)	Specific Requirements for UPCS	Compliant
FCC § 15.317, § 15.203	Antenna Requirement	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The system was configured to testing Mode, which was provided by the manufacturer.

3.2 EUT Exercise Software

The EUT configuration as below:

EUT Exercise Software:	SSCOM V 5.13.1.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
GFSK	default	default	default

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Adapter	92P1109	11S92P1109Z1ZBTZ93A6YG
Lenovo	Laptop	E480	PF-1QQYYP 19/06
PHILIPS	Keyboard	SPK6234	K234210510743
PHILIPS	Mouse	SPK7214	M214BQ210411115
R&S	Digital Radio Communication Tester	CMD 60M	846956/010

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	no	no	1.2	Adapter	Laptop
USB Cable	no	no	1.0	Laptop	Keyboard
USB Cable	no	no	1.0	Laptop	Mouse

3.5 Block Diagram of Test Setup

AC line conducted emissions:

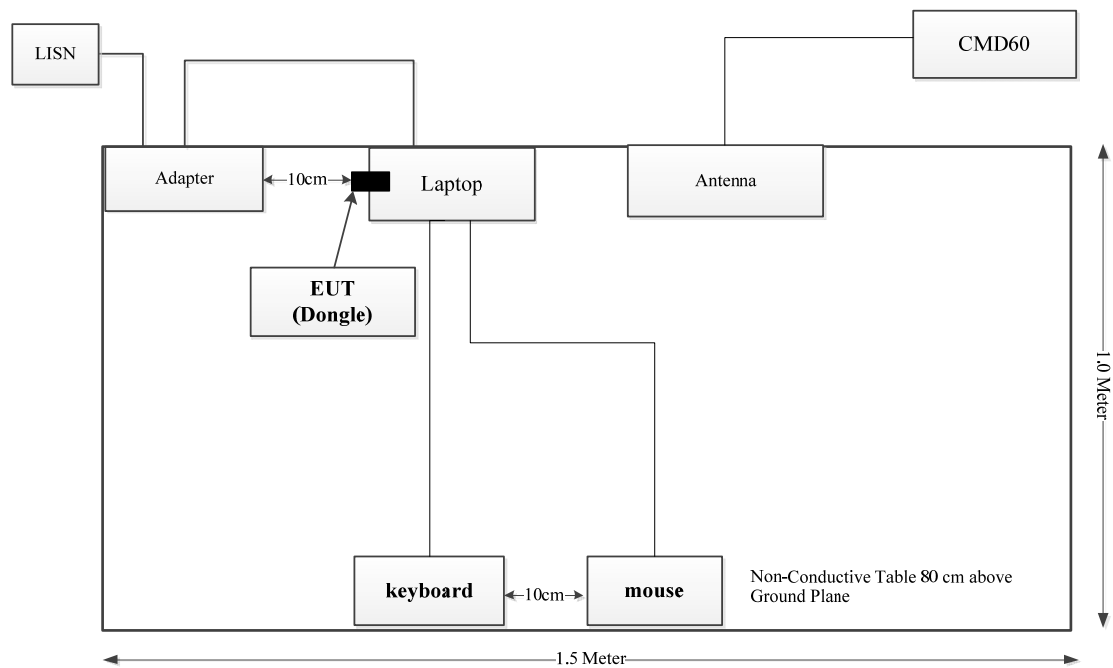

Spurious emissions:

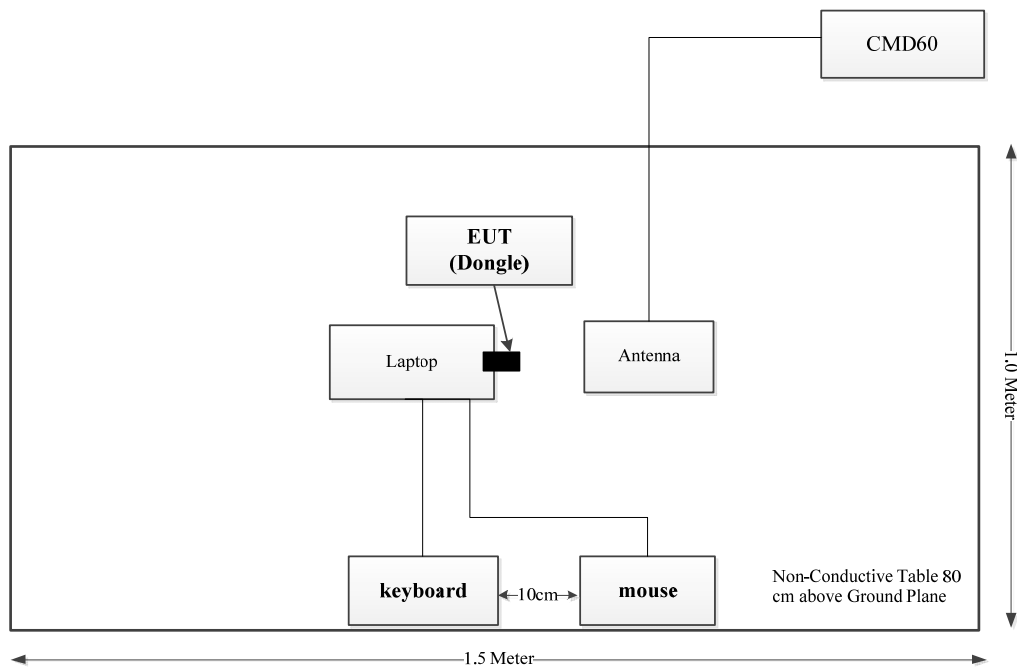

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB, 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G-140G: 5.46dB, 140G-220G: 6.00dB, 220G-325G: 7.35dB
EIRP	4.94dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES


4.1 Conducted Emissions

4.1.1 Applicable Standard

FCC§15.315

An unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.

4.1.2 EUT Setup

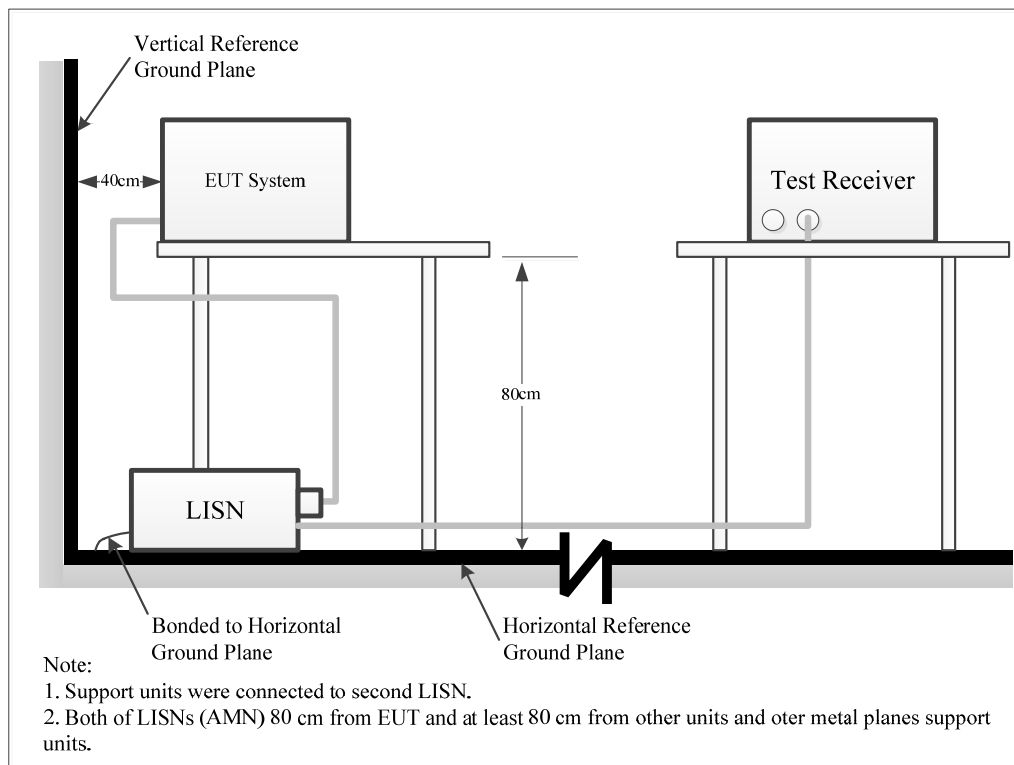

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.


4.2 Radiated Spurious Emissions

4.2.1 Applicable Standard


FCC §15.319(g) ; §15.205; §15.209

4.2.2 EUT Setup

30MHz~1GHz:

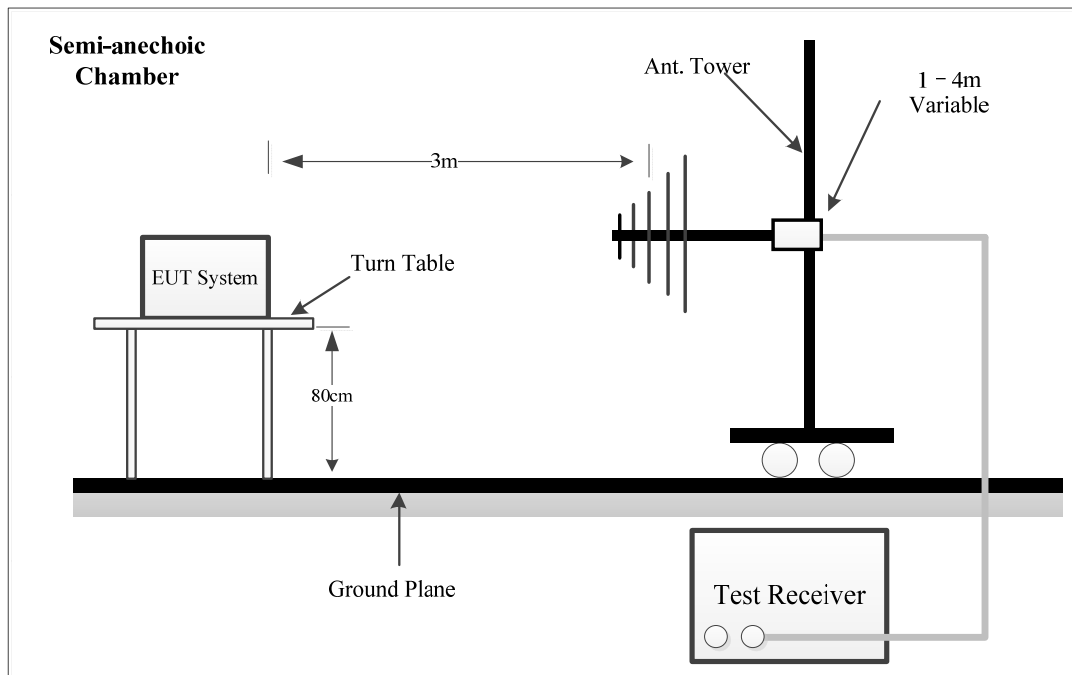

Above 1GHz:

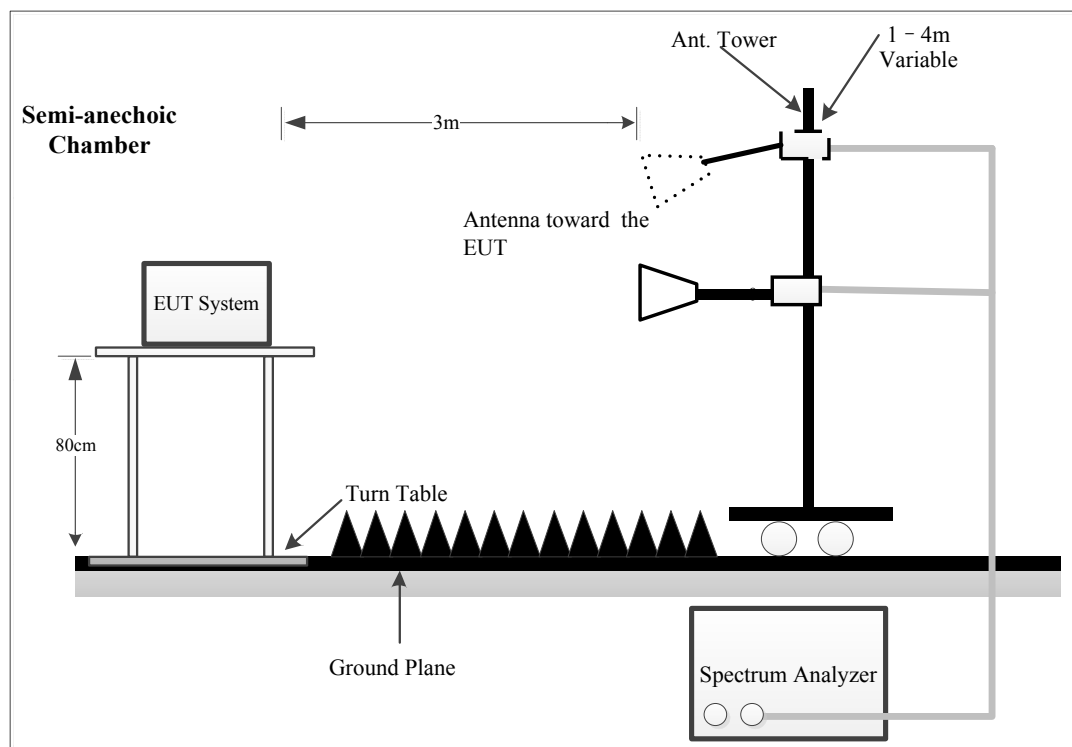

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC 15.209 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP

Above 1G:

Pre-scan:

Frequency Range	Measurement	Detector	Duty cycle	RBW	Video B/W
Above 1G	PK	Peak	Any	1MHz	3 MHz
	Ave.	Peak	>98%	1MHz	5kHz
			<98%	1MHz	1/T, not less than 5kHz

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	Detector	Duty cycle	RBW	Video B/W
Above 1G	PK	Peak	Any	1MHz	3 MHz
	Ave.	Peak	>98%	1MHz	10 Hz
			<98%	1MHz	1/T

Note: T is minimum transmission duration

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average measurement, peak and Average measurement for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.


4.3 Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.323 (a)

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

4.3.2 EUT Setup

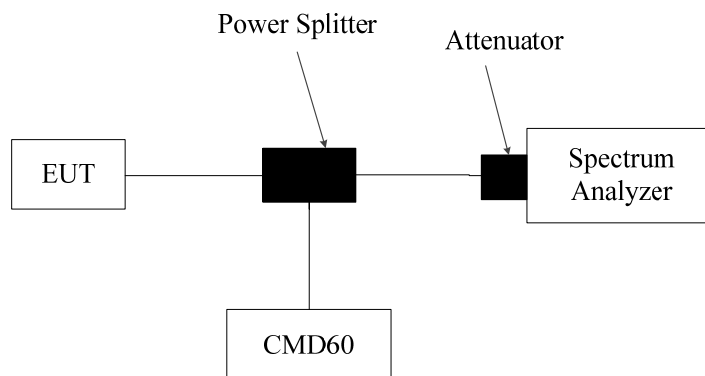

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.3.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.3

Table 3—Spectrum analyzer settings for measurement of emissions bandwidth *B*

RBW	Approximately 1% of the emission bandwidth (a rough estimate may be obtained from peak power level measurement, or use manufacturer's declared value)
Video bandwidth	$\geq 3 \times$ the RBW
Center frequency	Nominal center frequency of channel
Span	$\geq 2 \times$ the expected emission bandwidth
Sweep time	Coupled to frequency span and RBW
Amplitude scale	Log
Detection	Peak detection with maximum hold enabled

Record the maximum level of the modulated carrier. Find the two furthest frequencies above and below the frequency of the maximum level of the modulated carrier where the signal level is 26 dB below the peak level of the carrier. The difference in frequency between these two frequencies is the emission bandwidth.

If after measuring the emission bandwidth, it is found that the RBW used was not approximately 1% of the emission bandwidth, then adjust the RBW and repeat the procedure until the correct RBW is used. If the spectrum analyzer has fixed values of RBW, the one that is the nearest to 1% of the emission bandwidth is acceptable, provided it is no less than 0.5% of the emission bandwidth and no greater than 2% of the emission bandwidth.

4.3.4 Test Result

Please refer to section 5.3.


4.4 Peak Transmit Power

4.4.1 Applicable Standard

FCC §15.319 (c)

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

4.4.2 EUT Setup

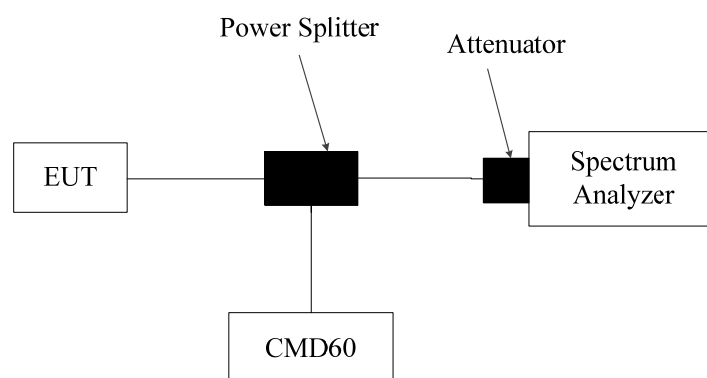

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.4.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.2

The resolution bandwidth (RBW) setting for this test must be adjusted by repeating this test and using increasing values of the RBW until there are negligible changes (within ± 0.5 dB) in the measured values of the maximum power.

Table 2—Spectrum analyzer settings for determining the peak power

RBW	$\geq$ Emission bandwidth
Video bandwidth	$\geq$ RBW
Span	Zero
Center frequency	Nominal center frequency of transmit carrier
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

4.4.4 Test Result

Please refer to section 5.4.


4.5 Power Spectral Density

4.5.1 Applicable Standard

FCC §15.319 (d)

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

4.5.2 EUT Setup

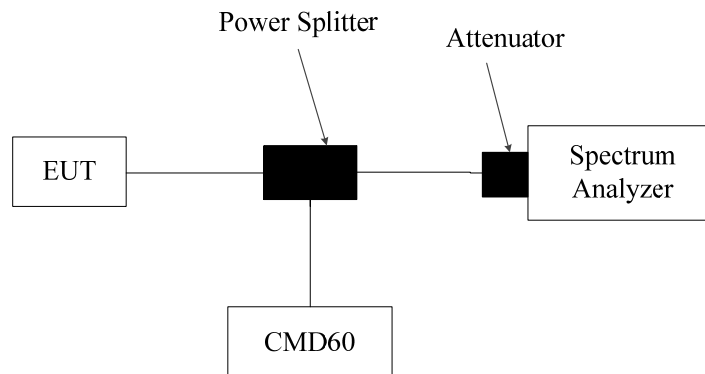

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.5.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.5

The EUT transmit data sequence and mode of operation shall be representative of that encountered in normal operation, so that transient effects associated with transmission bursts or data content are captured by the PSD measurement.

Table 4—Spectrum analyzer settings for finding of the maximum of PSD_{EUT}

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

For burst-type signals, arrange to measure the wideband burst duration of each burst analyzed and compute the mean duration.

Determine the level that is 20 dB below the first peak. Record the power-averaged waveform between the 20 dB threshold levels around the first peak with at least 30 000 samples per second as shown in Figure 4.

Multiple wideband bursts may produce the waveform between -20 dB peaks; these must be included in the determination of the average burst length. If there is no level that is 20 dB below the peak, then analyze the complete sweep and include all of the wideband waveform that occurs during the sweep time in the computation of average burst length.

Sum the values of the sample points (in linear units of power) and divide by the sample frequency to obtain the total pulse energy in the 3 kHz bandwidth, then divide by the average duration of the wideband input pulse to obtain the average pulse power.

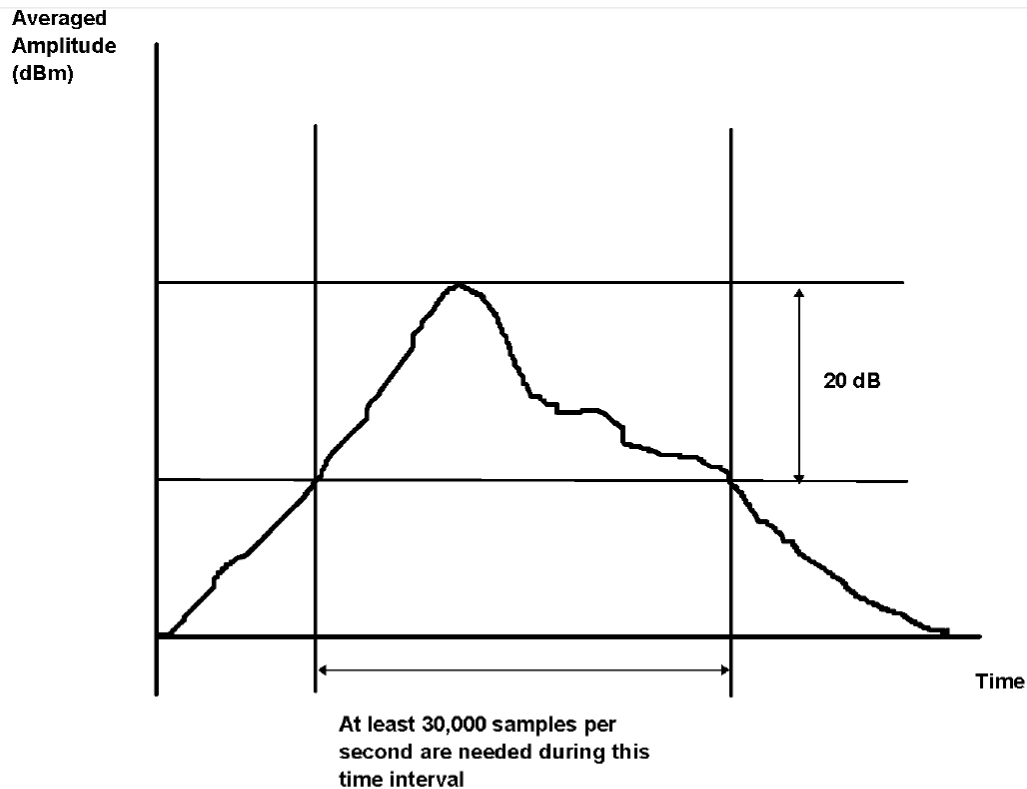


Figure 4—Computed average transient method: Sampling of the averaged power waveform measured with 3 kHz RBW

4.5.4 Test Result

Please refer to section 5.5.


4.6 Emission Inside and Outside the Sub-band

4.6.1 Applicable Standard

FCC §15.323 (d)

Emissions outside the band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band. Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. B” is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

4.6.2 EUT Setup

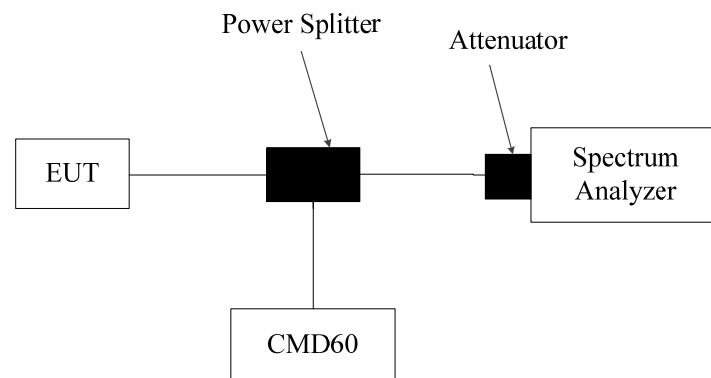

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.6.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.6

In-band emission:

In the region between 1B and 2B from the center of the RF carrier, the measured emission level (measured with 1% of emission bandwidth) shall not exceed 30 dB below the permitted peak power for the EUT.

In the region between 2B and 3B from the center of the RF carrier, the measured emission level shall not exceed 50 dB below the permitted peak power for the EUT.

Table 5—Spectrum analyzer settings for measuring in-band emissions

RBW	Approximately 1% of the emission bandwidth (<i>B</i>)
Video bandwidth	$3 \times \text{RBW}$
Sweep time	The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts.
Number of sweeps	Sufficient to stabilize the trace
Amplitude scale	Log
Detection	Peak detection and max hold enabled
Span	Approximately equal to $3.5 B$

In the region between $3B$ and the UPCS band edge, as measured from the center of the RF carrier, the measured emission level shall not exceed 60 dB below the permitted peak power for the EUT.

Out-band emission:

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and either item c) or item d), as follows:

- a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -9.5 dBm.
- b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -29.5 dBm.
- c) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed -39.5 dBm.
- d) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.

UPCS devices, in general, include digital circuitry not directly associated with the radio transmitter and are subject to the requirements for unintentional radiators as described in 47CFR15.109, for both in-band and out-of-band emissions. These emissions shall be measured with the EUT operating in receive and transmit modes. For the transmit mode, do not measure within 3.75 MHz or $3B$, whichever is the largest, of the edges of the band. Emissions that are directly caused by digital circuits in the transmit path do not have to meet 47CFR15.109 limits, but shall meet those limits as mentioned in the preceding list.

4.6.4 Test Result

Please refer to section 5.6.


4.7 Frequency Stability

4.7.1 Applicable Standard

FCC §15.323(f)

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to $+50^{\circ}\text{C}$ at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

4.7.2 EUT Setup

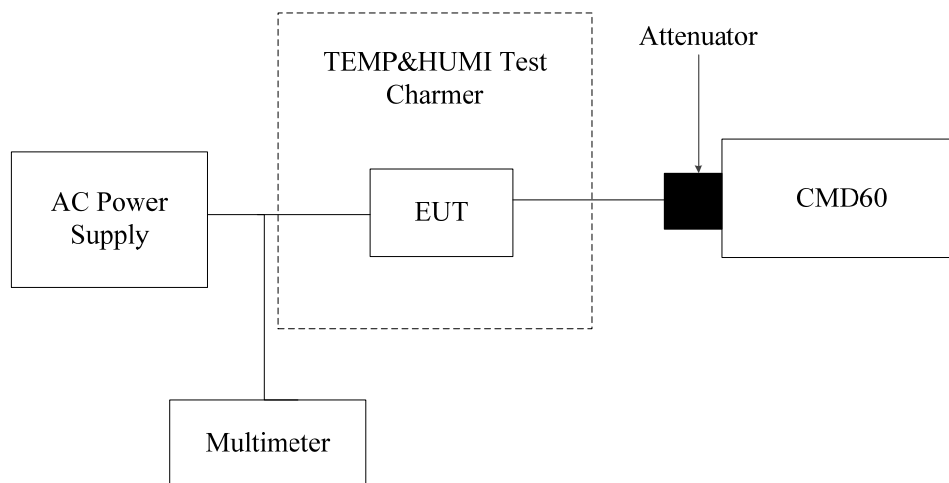

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.7.3 Test Procedure

According to ANSI C63.17-2013 Section 6.2.1.2

This test does not apply to an EUT that is capable only of operating from a battery. For a mains-powered EUT, the mean value of the carrier frequency shall be measured at the power supply voltage extremes of row 1 of Table 7.

Table 7—Test parameters for carrier-frequency stability testing

Temperature	Supply voltage
$20^{\circ}\text{C} \pm 2^{\circ}\text{C}$	85% to 115% of declared nominal voltage
$-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$	All declared nominal(s)
$+50^{\circ}\text{C} \pm 2^{\circ}\text{C}$	All declared nominal(s)

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

4.7.4 Test Result

Please refer to section 5.7.

4.8 Specific Requirements For UPCS Device

4.8.1 Applicable Standard

FCC §15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

FCC §15.323(c)

Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

- (1) Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.
- (2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.
- (3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.
- (4) Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.
- (5) If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.
- (6) If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.
- (7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable

threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

(8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

(9) Devices that have a power output lower than the maximum permitted under this subpart may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

(11) An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.


(12) The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

ANSI C63.17 2013 §6.2 Frequency and time stability and §7. Monitoring tests and §8. Time and spectrum window access procedure.

FCC §15.323(e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

4.8.2 EUT Setup

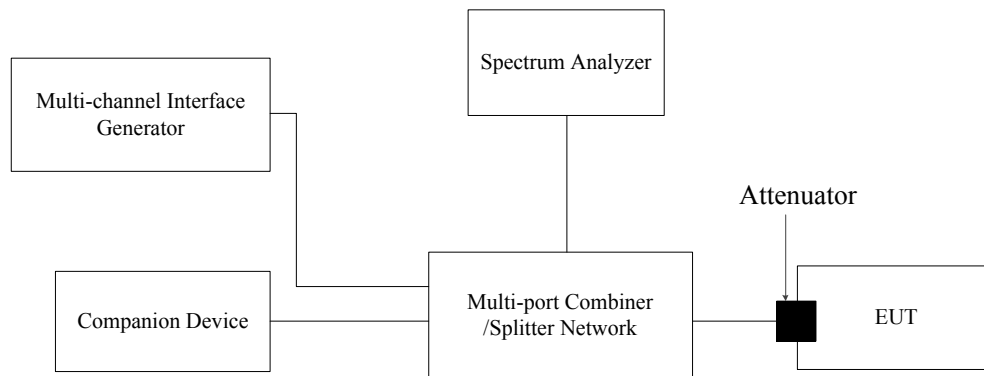

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.8.3 Test Procedure

1) Monitoring Time

According to ANSI C63.17- 2013 Section 7.3.3

2) Lower Monitoring Threshold

According to ANSI C63.17- 2013 Section 7.3.1

3) Maximum Transmit Period

According to ANSI C63.17- 2013 Section 8.2.2

4) System Acknowledgement

According to ANSI C63.17- 2013 Section 8.1, 8.2

5) Least Interfered Channel (LIC)

According to ANSI C63.17- 2013 Section 7.3.2, 7.3.3

6) Random waiting

According to ANSI C63.17- 2013 Section 8.1.2 or 8.1.3

7) Monitoring Bandwidth and Reaction Time

According to ANSI C63.17- 2013 Section 7.4, 7.5

8) Monitoring Antenna

According to ANSI C63.17- 2013 Section 4

9) Monitoring threshold relaxation

According to ANSI C63.17- 2013 Section 4

10) Duplex Connections

According to ANSI C63.17- 2013 Section 8.3

11) Alternative monitoring interval

According to ANSI C63.17- 2013 Section 8.4

12) Frame Repetition Stability Frame Period and Jitter

According to ANSI C63.17- 2013 Section 6.2.2, 6.2.3

4.8.4 Test Result

Please refer to section 5.8.

5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2SFP-2	Test Date:	2024/10/28
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A


* *Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Note: The maximum output power channel: Highest Channel was tested.

Project No.: 2402X97571E-RF
Port: Line
Test Mode: Transmitting
Note:

Serial No.: 2SFP-2
Tester: Yukin Qiu

Date: 2024-10-28

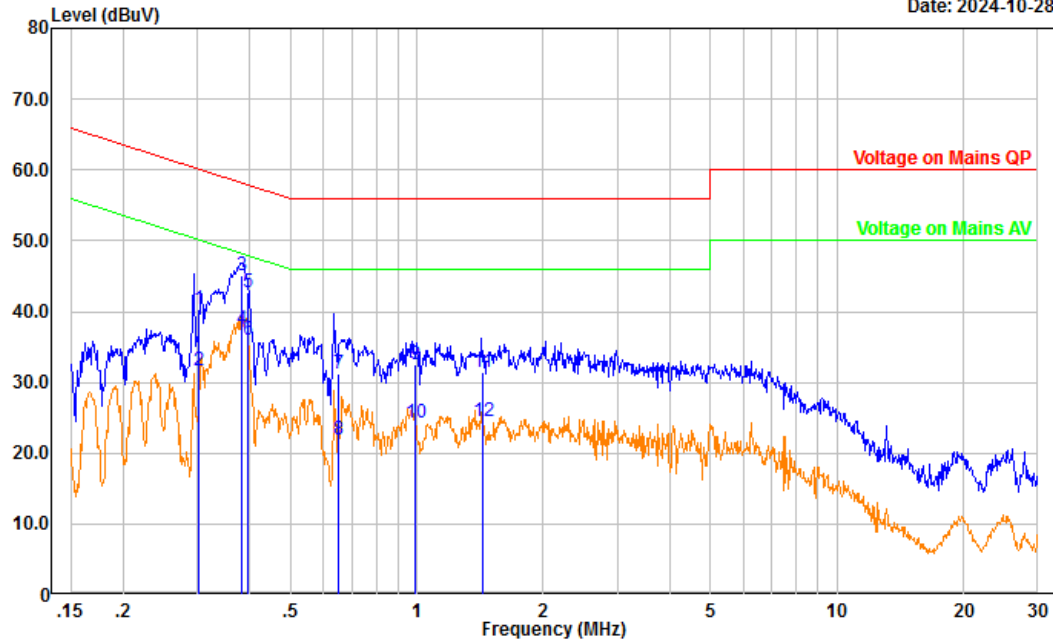


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.303	29.60	10.82	40.42	60.17	19.75	QP
2	0.303	20.82	10.82	31.64	50.17	18.53	Average
3	0.384	34.34	10.84	45.18	58.19	13.01	QP
4	0.384	26.59	10.84	37.43	48.19	10.76	Average
5	0.396	31.86	10.84	42.70	57.93	15.23	QP
6	0.396	25.20	10.84	36.04	47.93	11.89	Average
7	0.651	20.39	10.84	31.23	56.00	24.77	QP
8	0.651	11.16	10.84	22.00	46.00	24.00	Average
9	0.993	21.68	10.85	32.53	56.00	23.47	QP
10	0.993	13.42	10.85	24.27	46.00	21.73	Average
11	1.430	20.50	10.84	31.34	56.00	24.66	QP
12	1.430	13.58	10.84	24.42	46.00	21.58	Average

Project No.: 2402X97571E-RF
Port: neutral
Test Mode: Transmitting
Note:

Serial No.: 2SFP-2
Tester: Yukin Qiu

Date: 2024-10-28

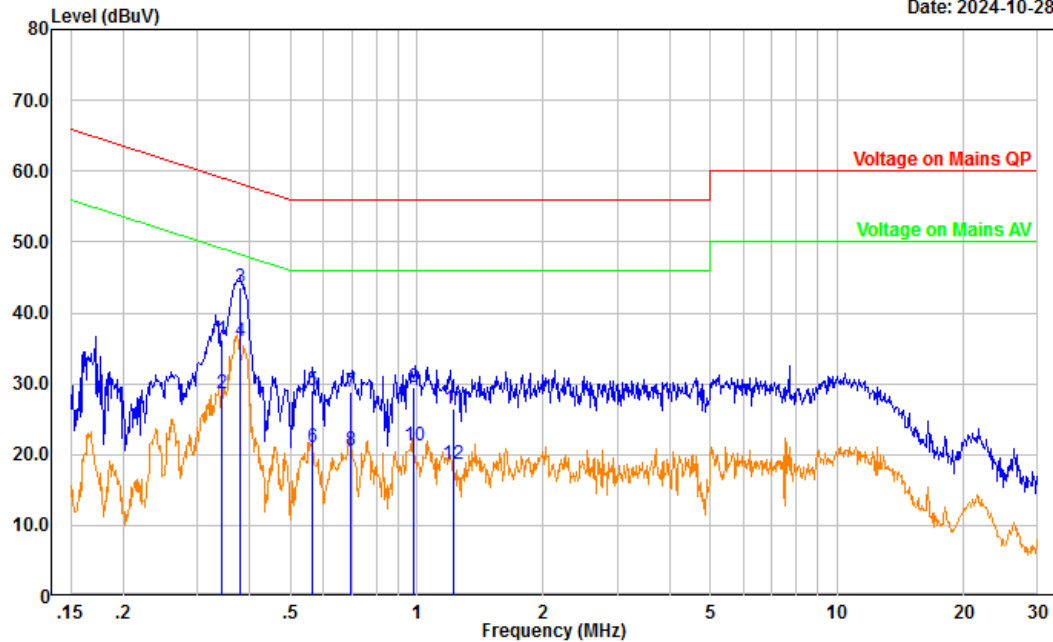

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.343	25.42	10.78	36.20	59.13	22.93	QP
2	0.343	17.84	10.78	28.62	49.13	20.51	Average
3	0.379	32.85	10.78	43.63	58.30	14.67	QP
4	0.379	25.23	10.78	36.01	48.30	12.29	Average
5	0.564	18.22	10.73	28.95	56.00	27.05	QP
6	0.564	10.25	10.73	20.98	46.00	25.02	Average
7	0.697	18.13	10.76	28.89	56.00	27.11	QP
8	0.697	9.82	10.76	20.58	46.00	25.42	Average
9	0.981	18.57	10.84	29.41	56.00	26.59	QP
10	0.981	10.47	10.84	21.31	46.00	24.69	Average
11	1.218	15.50	10.86	26.36	56.00	29.64	QP
12	1.218	7.68	10.86	18.54	46.00	27.46	Average

5.2 Radiated Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	2SFP-2	Test Date:	2024/10/28
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Zoo Zou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.4	Relative Humidity: (%)	45	ATM Pressure: (kPa)	101.2
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

Note: The maximum output power channel: Highest Channel was tested.

9kHz~30MHz


Three antenna orientations (parallel, perpendicular, and ground-parallel) were measured, the worst orientations were below:

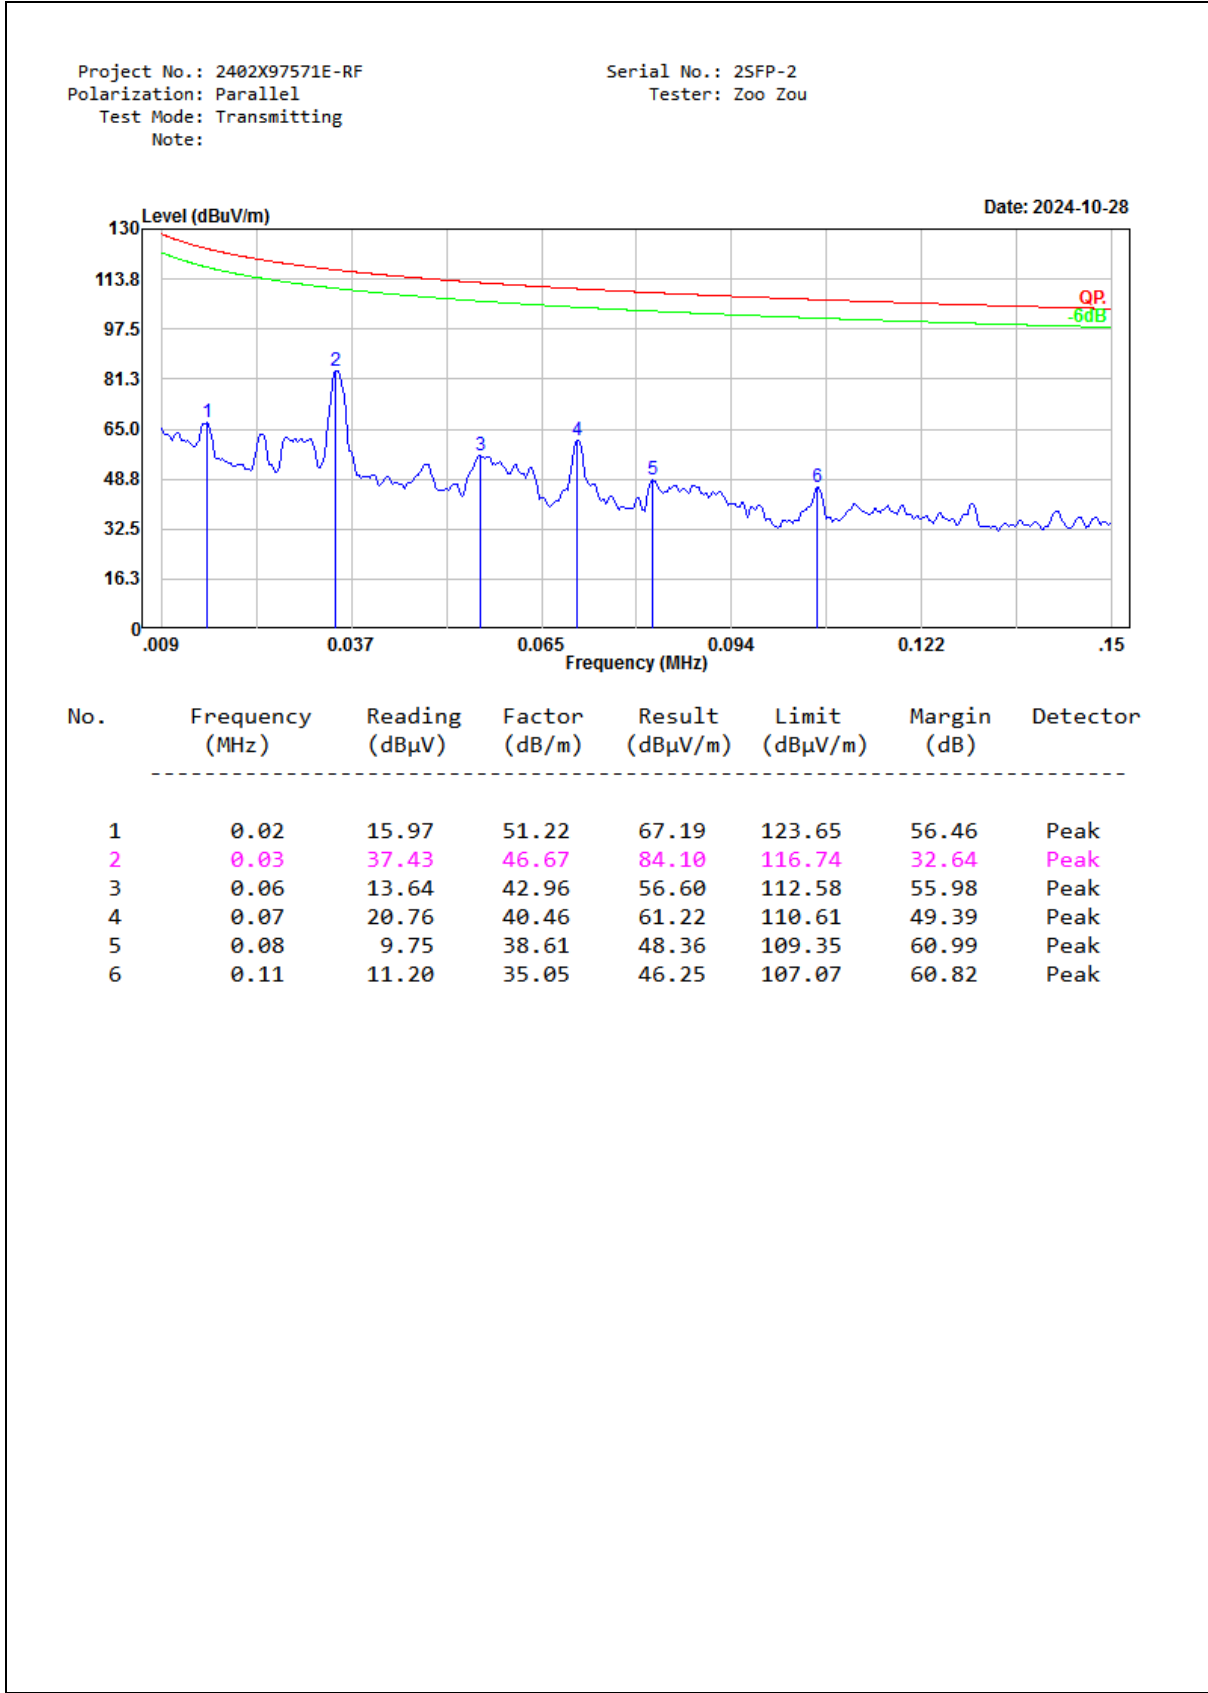

Project No.: 2402X97571E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:


Serial No.: 2SFP-2
Tester: Zoo Zou

Date: 2024-10-28

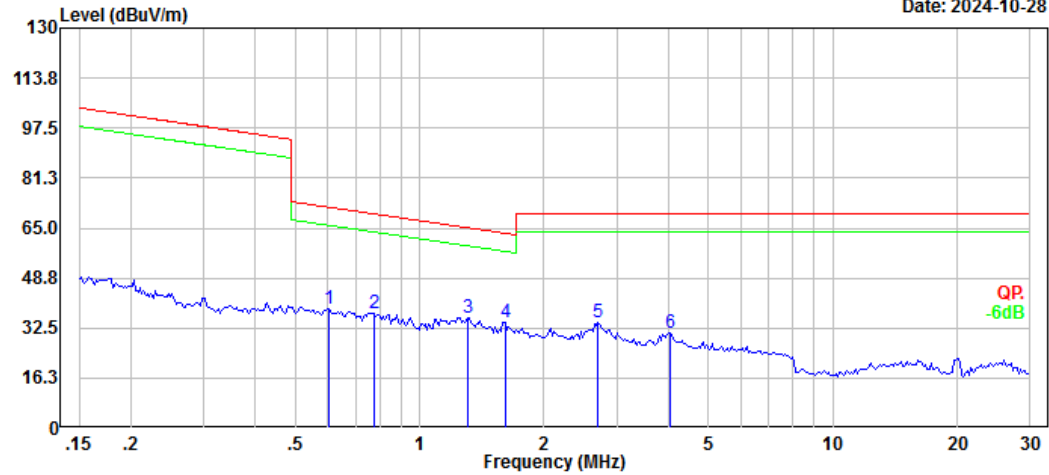


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.60	16.50	22.45	38.95	71.99	33.04	Peak
2	0.78	16.29	20.78	37.07	69.73	32.66	Peak
3	1.30	20.75	15.22	35.97	65.13	29.16	Peak
4	1.61	20.56	13.85	34.41	63.25	28.84	Peak
5	2.71	23.95	10.50	34.45	69.54	35.09	Peak
6	4.05	23.48	7.63	31.11	69.54	38.43	Peak

30MHz-1GHz

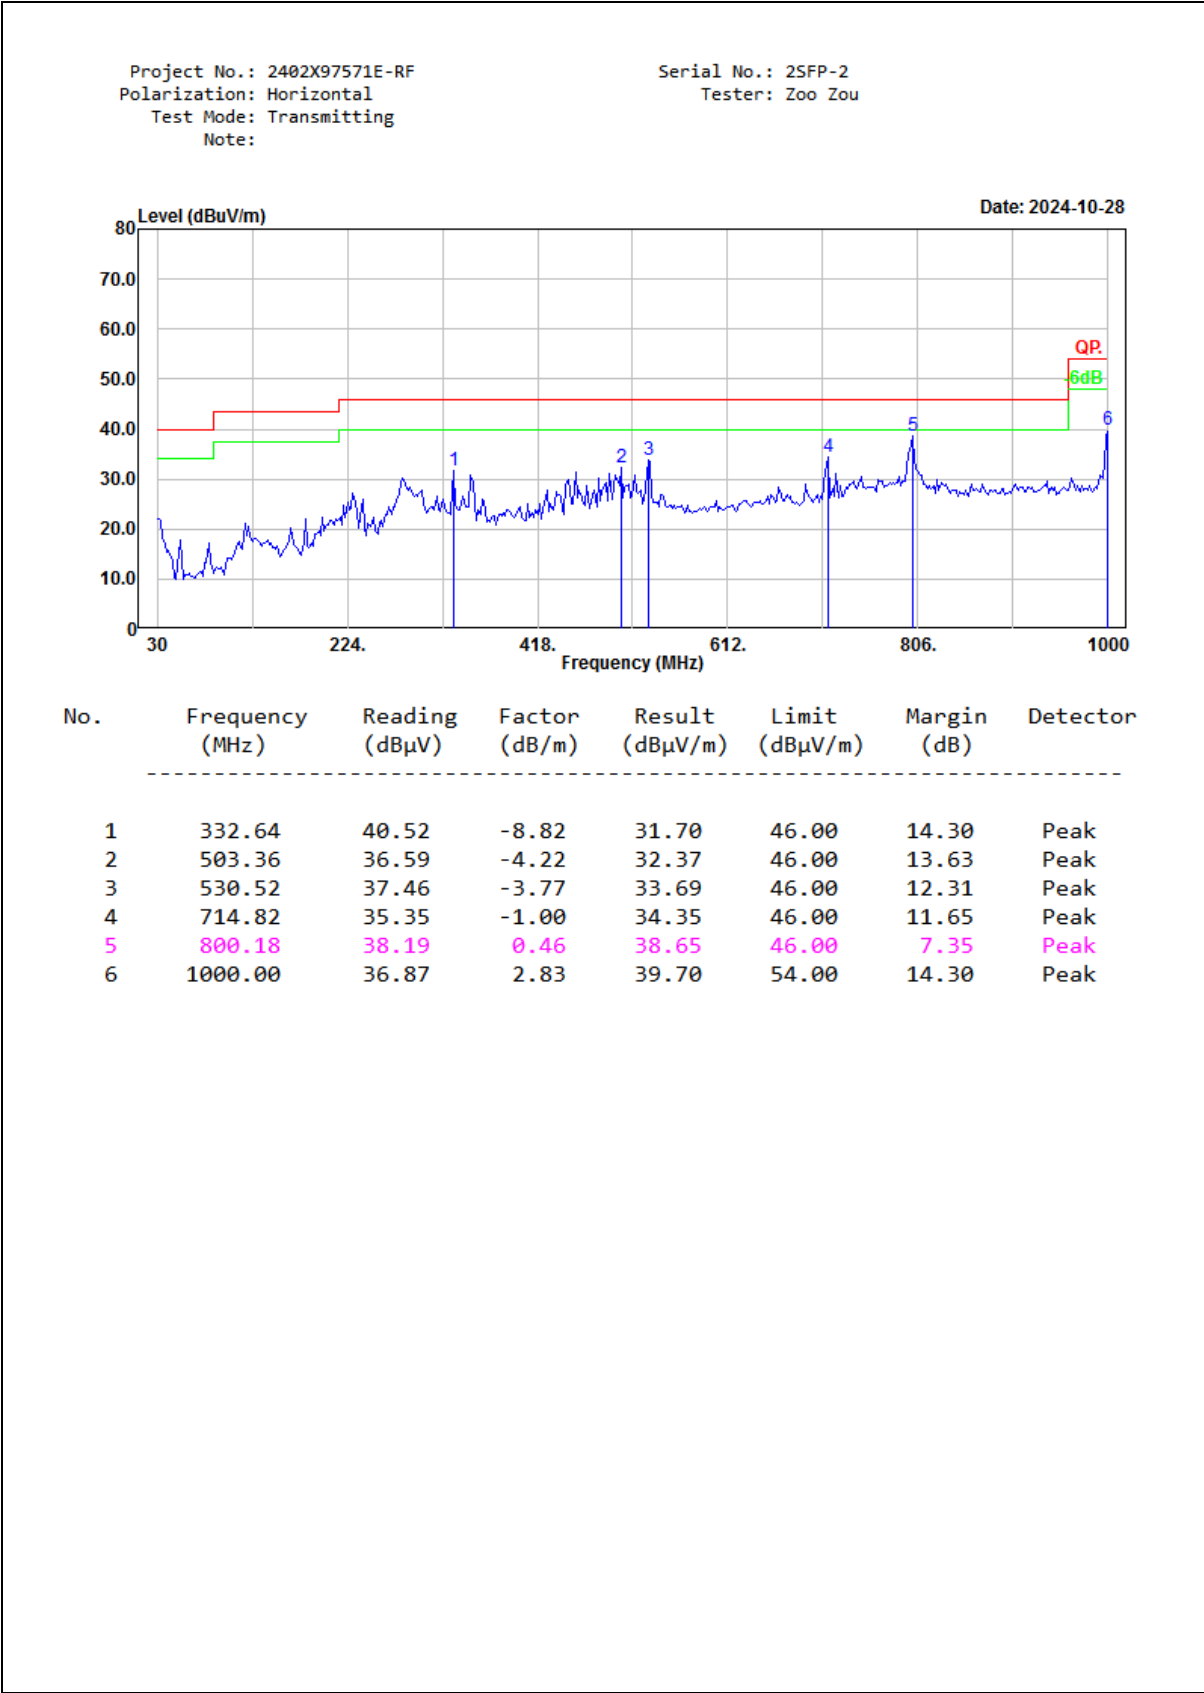

Project No.: 2402X97571E-RF
Polarization: Vertical
Test Mode: Transmitting
Note:

Serial No.: 2SFP-2
Tester: Zoo Zou

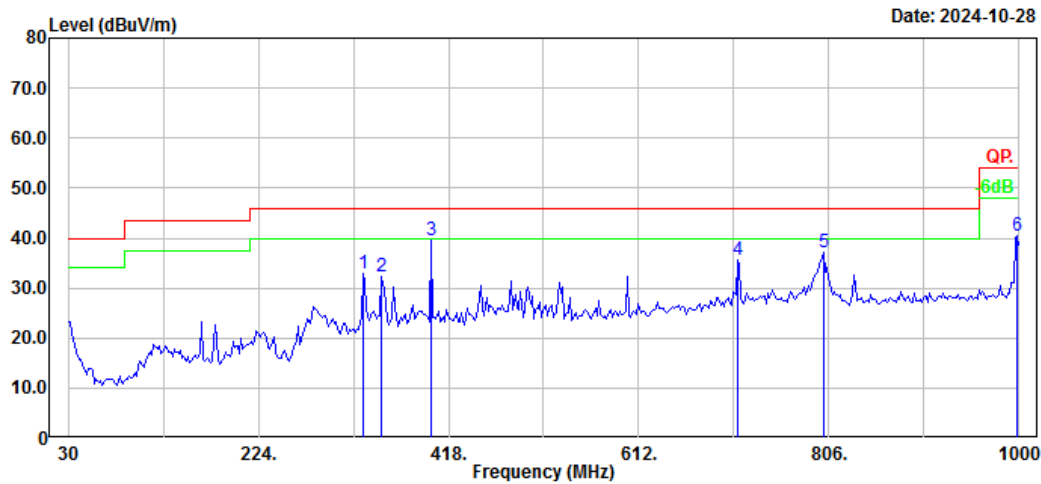

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	330.70	41.75	-8.84	32.91	46.00	13.09	Peak
2	350.10	40.88	-8.61	32.27	46.00	13.73	Peak
3	400.54	46.62	-6.96	39.66	46.00	6.34	Peak
4	712.88	36.66	-1.03	35.63	46.00	10.37	Peak
5	800.18	36.79	0.46	37.25	46.00	8.75	Peak
6	998.06	37.72	2.80	40.52	54.00	13.48	Peak

2) 1-20GHz:

Serial Number:	2SFP-1		Test Date:	2024/11/19~2024/12/10	
Test Site:	Chamber B		Test Mode:	Transmitting	
Tester:	Colin Yang, Jeff Wei		Test Result:	Pass	
Environmental Conditions:					
Temperature: (℃)	22.9~24.2	Relative Humidity: (%)	37~42	ATM Pressure: (kPa)	101.1~102
Test Equipment List and Details:					
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21

** Statement of Traceability: Bay Area Compliance Laboratories Corp.(Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Transmitting mode_peak**Frequency 1921.536 MHz**

Frequency	Reading	Polar	Factor	Corrected Amplitude	FCC 15D	
					Limit	Margin
MHz	dBμV	H/V	dB/m	dBμV/m	dBμV/m	dB
3843.07	53.34	H	-4.94	48.40	74.00	25.60
3843.07	58.79	V	-4.94	53.85	74.00	20.15
5764.61	70.69	H	-6.92	63.77	74.00	10.23
5764.61	67.15	V	-6.92	60.23	74.00	13.77
7686.14	47.81	H	-2.39	45.42	74.00	28.58
7686.14	48.31	V	-2.39	45.92	74.00	28.08
9607.68	53.00	H	1.18	54.18	74.00	19.82
9607.68	50.17	V	1.18	51.35	74.00	22.65

Transmitting mode_Average

Frequency (MHz)	Peak Measurement@3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dBμV/m)	FCC 15D	
					Limit (dBμV/m)	Margin (dB)
3843.07	48.40	H	-28.91	19.49	54.00	34.51
3843.07	53.85	V	-28.91	24.94	54.00	29.06
5764.61	63.77	H	-28.91	34.86	54.00	19.14
5764.61	60.23	V	-28.91	31.32	54.00	22.68
7686.14	45.42	H	-28.91	16.51	54.00	37.49
7686.14	45.92	V	-28.91	17.01	54.00	36.99
9607.68	54.18	H	-28.91	25.27	54.00	28.73
9607.68	51.35	V	-28.91	22.44	54.00	31.56

Transmitting mode_peak**Frequency 1924.992 MHz**

Frequency MHz	Reading dBμV	Polar H/V	Factor dB/m	Corrected Amplitude dBμV/m	FCC 15D	
					Limit dBμV/m	Margin dB
3849.98	59.01	H	-4.96	54.05	74.00	19.95
3849.98	68.44	V	-4.96	63.48	74.00	10.52
5774.98	68.65	H	-6.92	61.73	74.00	12.27
5774.98	64.82	V	-6.92	57.90	74.00	16.10
7699.97	48.71	H	-2.4	46.31	74.00	27.69
7699.97	49.90	V	-2.4	47.50	74.00	26.50
9624.96	55.10	H	1.18	56.28	74.00	17.72
9624.96	52.79	V	1.18	53.97	74.00	20.03

Transmitting mode_Average

Frequency (MHz)	Peak Measurement@3m(dBμV/ m)	Polar (H/V)	Duty Cycle Correction Factor(dB)	Average Amp. (dBμV/m)	FCC 15D	
					Limit (dBμV/m)	Margin (dB)
3849.98	54.05	H	-28.91	25.14	54.00	28.86
3849.98	63.48	V	-28.91	34.57	54.00	19.43
5774.98	61.73	H	-28.91	32.82	54.00	21.18
5774.98	57.90	V	-28.91	28.99	54.00	25.01
7699.97	46.31	H	-28.91	17.40	54.00	36.60
7699.97	47.50	V	-28.91	18.59	54.00	35.41
9624.96	56.28	H	-28.91	27.37	54.00	26.63
9624.96	53.97	V	-28.91	25.06	54.00	28.94

Transmitting mode_peak**Frequency 1928.448 MHz**



Frequency	Reading	Polar	Factor	Corrected Amplitude	FCC 15D	
					Limit	Margin
MHz	dBμV	H/V	dB/m	dBμV/m	dBμV/m	dB
3856.90	62.43	H	-4.95	57.48	74.00	16.52
3856.90	73.03	V	-4.95	68.08	74.00	5.92
5785.34	58.35	H	-6.92	51.43	74.00	22.57
5785.34	67.16	V	-6.92	60.24	74.00	13.76
7713.79	50.96	H	-2.41	48.55	74.00	25.45
7713.79	48.41	V	-2.41	46.00	74.00	28.00
9642.24	59.71	H	1.21	60.92	74.00	13.08
9642.24	55.04	V	1.21	56.25	74.00	17.75

Transmitting mode_Average

Frequency (MHz)	Peak Measurement@3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dBμV/m)	FCC 15D	
					Limit (dBμV/m)	Margin (dB)
3856.90	57.48	H	-28.91	28.57	54.00	25.43
3856.90	68.08	V	-28.91	39.17	54.00	14.83
5785.34	51.43	H	-28.91	22.52	54.00	31.48
5785.34	60.24	V	-28.91	31.33	54.00	22.67
7713.79	48.55	H	-28.91	19.64	54.00	34.36
7713.79	46.00	V	-28.91	17.09	54.00	36.91
9642.24	60.92	H	-28.91	32.01	54.00	21.99
9642.24	56.25	V	-28.91	27.34	54.00	26.66


Note:**For PK:****Corrected Amplitude = Receiver Reading + Factor****Factor = Cable loss + Antenna Factor – Amplifier Gain****Margin = Limit- Corrected. Amplitude****For AV:****Average Amp. = Peak Measurement@3m + Duty Cycle Correction Factor****Margin = Limit- Average Amp.****Duty Cycle Correction Factor=20*log(Ton/(Ton+Toff))=20*log(0.3587*10/100)=-28.91**

Duty Cycle


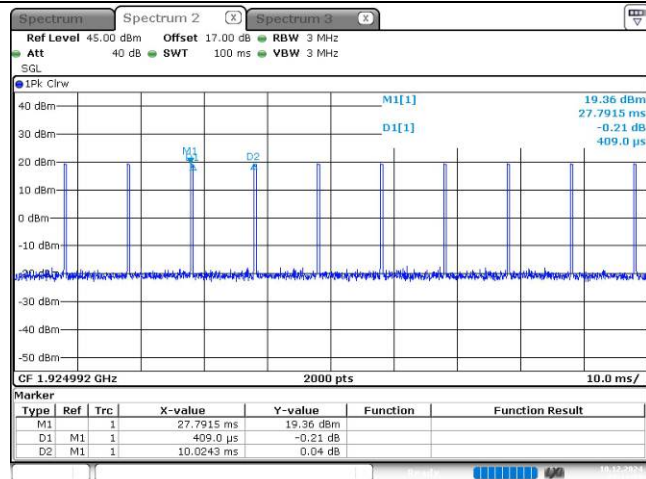
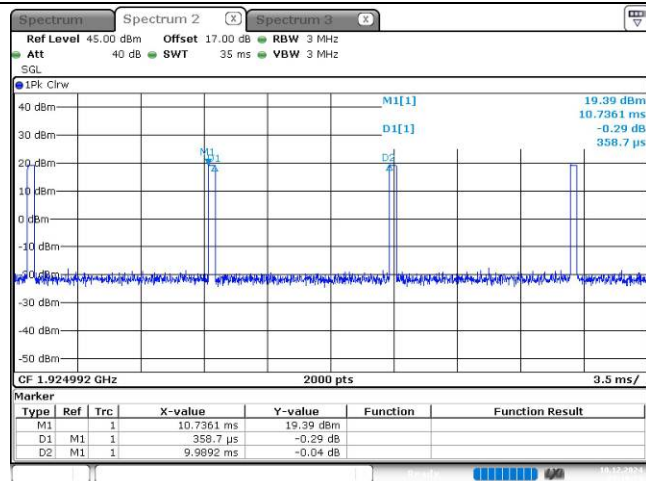


Test plots:

Low Channel, Horizontal

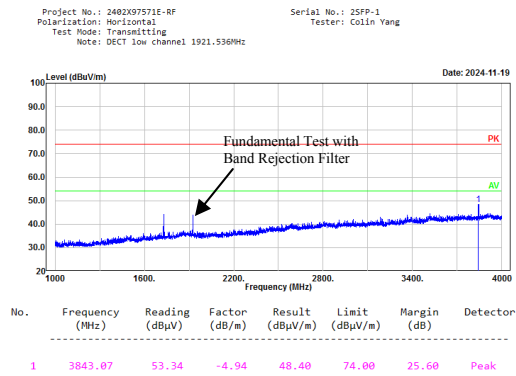

Low Channel, Vertical

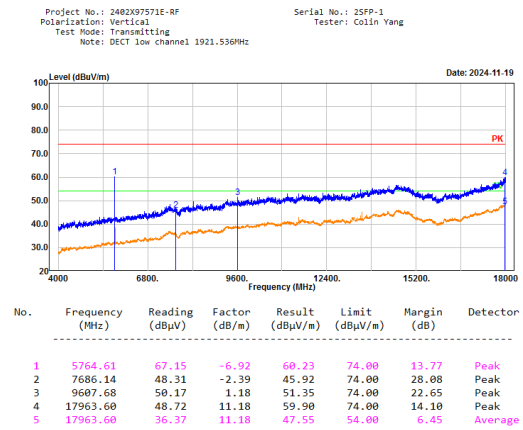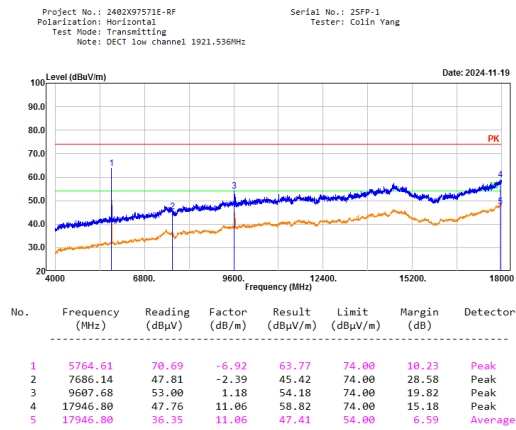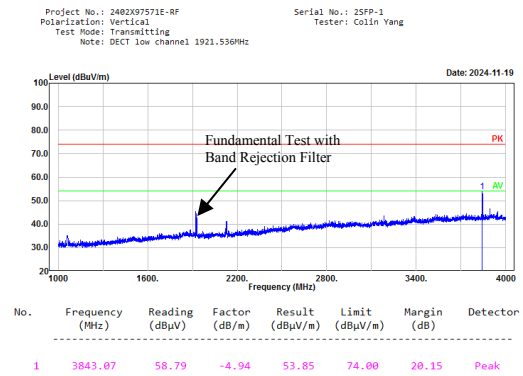


Low Channel, Horizontal

Project No.: 2402X97571E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: DECT low channel 1921.536MHz

Serial No.: 25FP-1
Tester: Colin Yang

Date: 2024-11-19

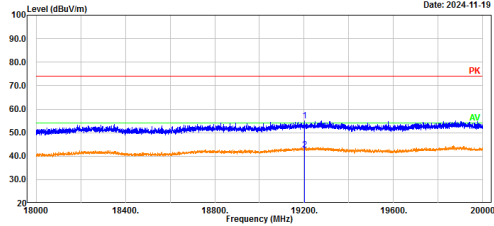


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19200.80	47.41	7.67	55.08	74.00	18.92	Peak
2	19200.80	35.09	7.67	42.76	54.00	11.24	Average

Low Channel, Vertical

Project No.: 2402X97571E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: DECT low channel 1921.536MHz

Serial No.: 25FP-1
Tester: Colin Yang

Date: 2024-11-19

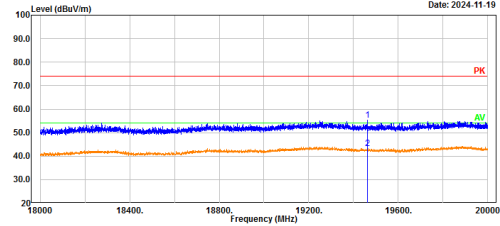


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19460.80	47.53	7.76	55.29	74.00	18.71	Peak
2	19460.80	35.38	7.76	43.14	54.00	10.86	Average

Middle Channel, Horizontal

Project No.: 2402X97571E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz

Serial No.: 25FP-1
Tester: Colin Yang

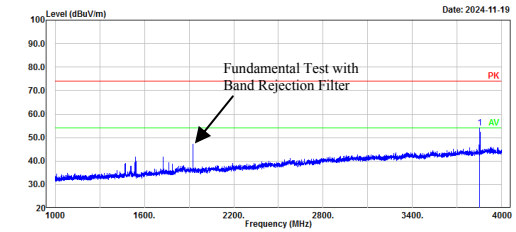


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3849.98	59.01	-4.96	54.05	74.00	19.95	Peak

Middle Channel, Vertical

Project No.: 2402X97571E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz


Serial No.: 25FP-1
Tester: Colin Yang

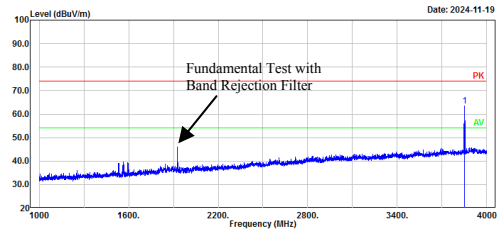

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3849.98	68.44	-4.96	63.48	74.00	10.52	Peak

Project No.: 2402X97571E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz


Serial No.: 25FP-1
Tester: Colin Yang

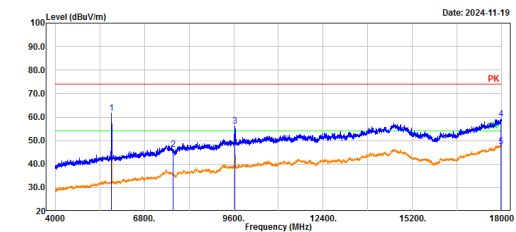

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5774.98	68.65	-6.92	61.73	74.00	12.27	Peak
2	7699.97	48.71	-2.40	46.31	74.00	27.69	Peak
3	9624.96	55.10	1.18	56.28	74.00	17.72	Peak
4	17966.40	48.18	11.20	59.38	74.00	14.62	Peak
5	17966.40	36.19	11.20	47.39	54.00	6.61	Average

Project No.: 2402X97571E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz

Serial No.: 25FP-1
Tester: Colin Yang

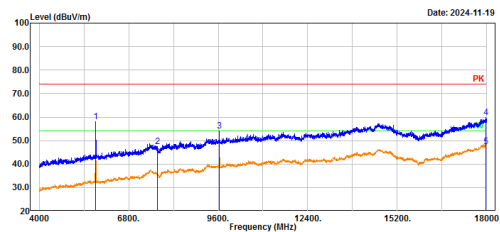


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5774.98	64.82	-6.92	57.90	74.00	16.10	Peak
2	7699.97	49.90	-2.40	47.50	74.00	26.50	Peak
3	9624.96	52.79	1.18	53.97	74.00	20.03	Peak
4	17969.20	48.63	11.22	59.85	74.00	14.15	Peak
5	17969.20	36.19	11.22	47.41	54.00	6.59	Average

Middle Channel, Horizontal

Project No.: 2402X97571E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz

Serial No.: 25FP-1
Tester: Colin Yang

Date: 2024-11-19

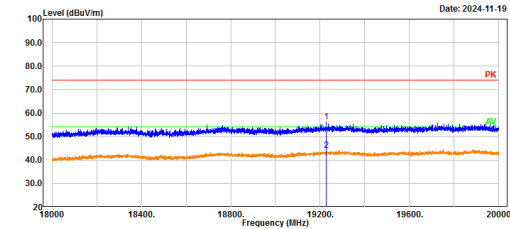


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19226.80	48.40	7.68	56.08	74.00	17.92	Peak
2	19226.80	36.37	7.68	44.05	54.00	9.95	Average

Middle Channel, Vertical


Project No.: 2402X97571E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: DECT middle channel 1924.992MHz

Serial No.: 25FP-1
Tester: Colin Yang

Date: 2024-11-19

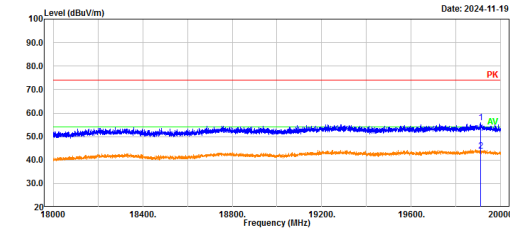

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19911.20	48.25	7.72	55.97	74.00	18.03	Peak
2	19911.20	36.18	7.72	43.90	54.00	10.10	Average

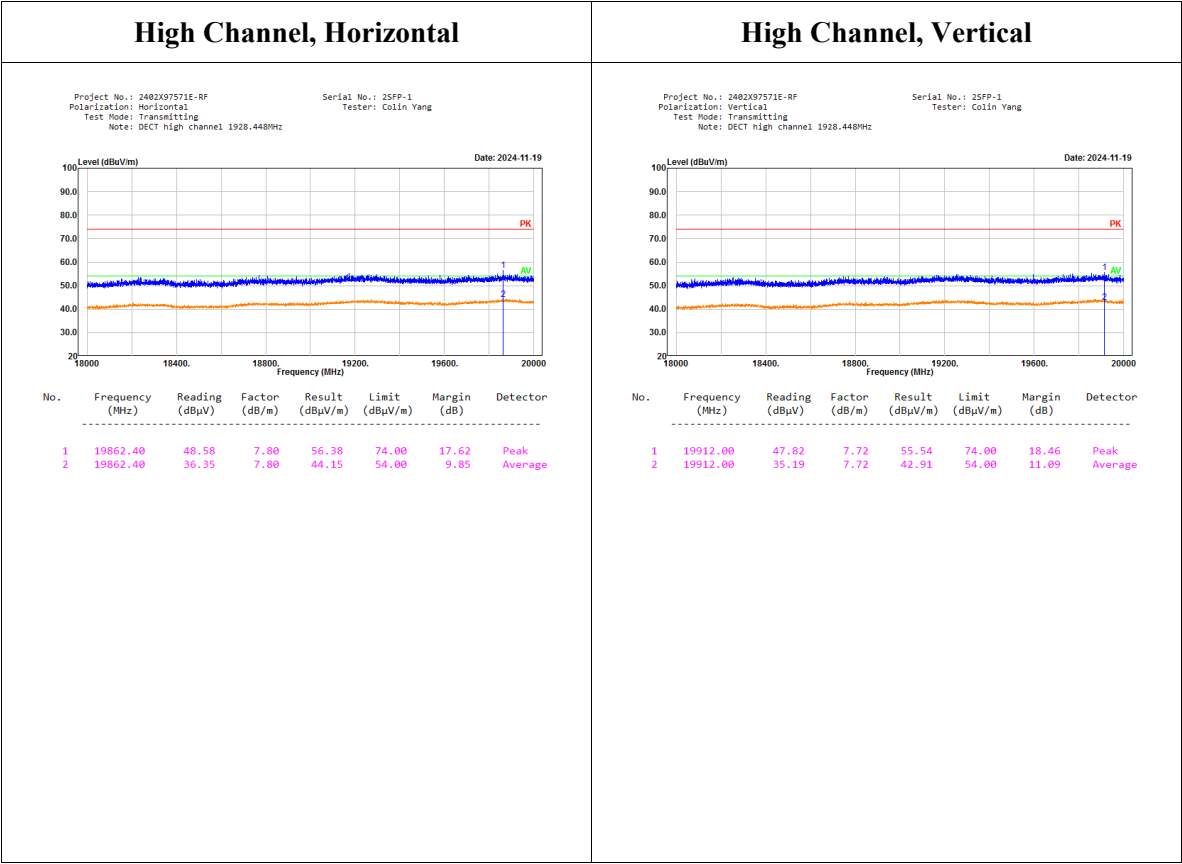

5.3 Emission Bandwidth

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.1
-------------------------------	------	---------------------------------------	----	--------------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/9/5	2025/9/4
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Test Channel	Test Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Limit
Lowest	1921.536	1.220	1.451	50 kHz ~ 2.5 MHz
Middle	1924.992	1.226	1.378	50 kHz ~ 2.5 MHz
Highest	1928.448	1.218	1.455	50 kHz ~ 2.5 MHz


Lowest Channel

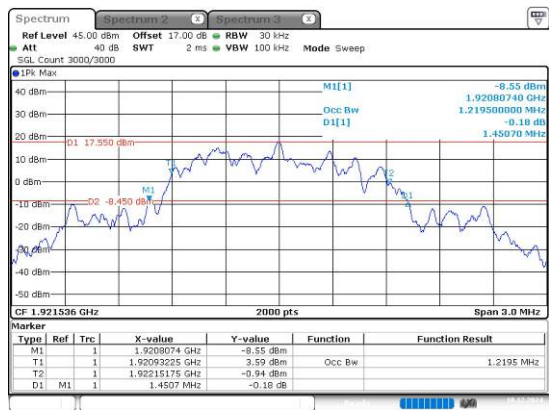

Middle Channel

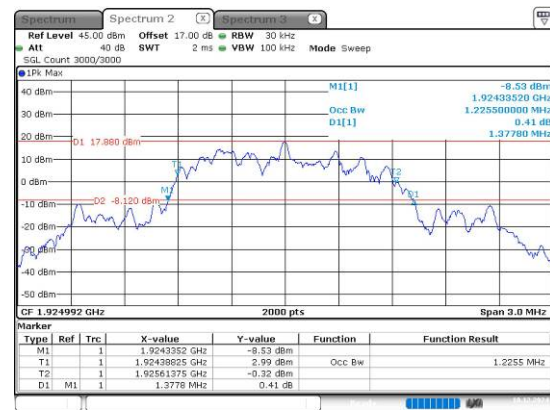

Highest Channel

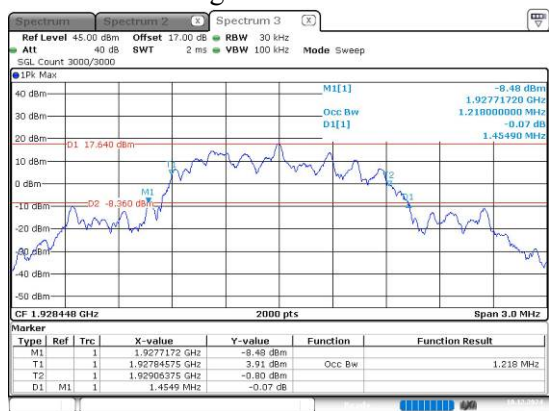

5.4 Peak Transmit Power

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/9/5	2025/9/4
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Channel	Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)
Lowest	1921.536	19.44	20.81
Middle	1924.992	19.45	20.70
Highest	1928.448	19.57	20.81

Note:


For FCC: Peak Transmit Power Limit = $100(EBW)^{1/2} \mu W$

Lowest Channel

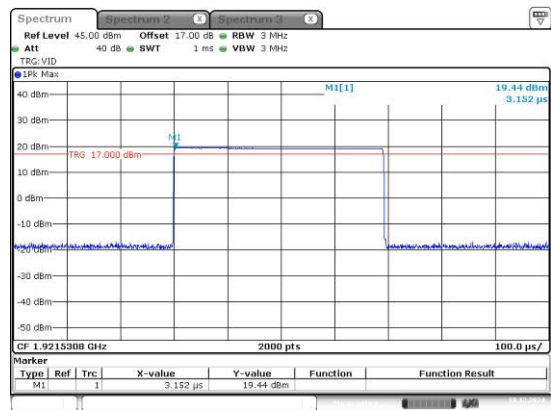


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 21:44:40

Middle Channel

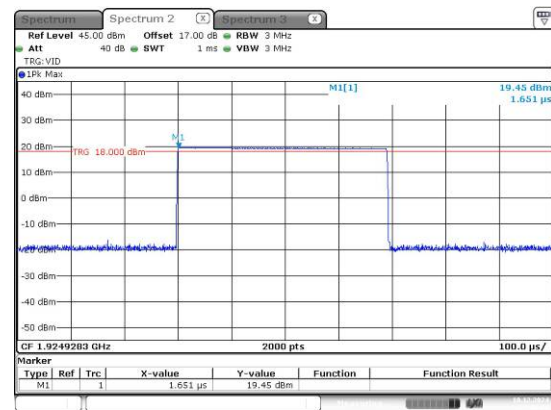

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 21:49:04

Highest Channel

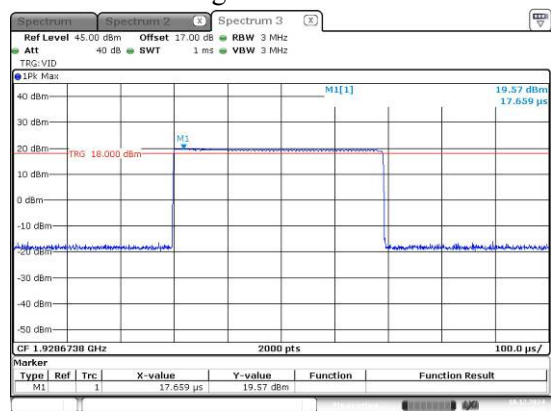

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 21:37:50

5.5 Power Spectral Density

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.7	Relative Humidity: (%)	44	ATM Pressure: (kPa)	101.8
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/9/5	2025/9/4
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Channel	Test Frequency (MHz)	Power Spectral Density		Limit (mW/3kHz)
		dBm/3kHz	mW/3kHz	
Lowest	1921.536	0.43	1.104	3
Middle	1924.992	0.55	1.135	3
Highest	1928.448	-1.00	0.794	3

Lowest Channel

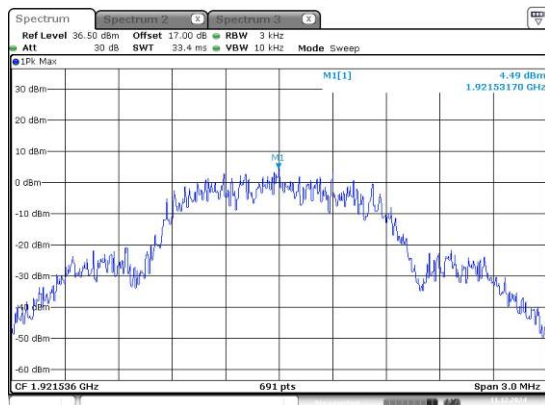


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 21:38:52

Lowest Channel

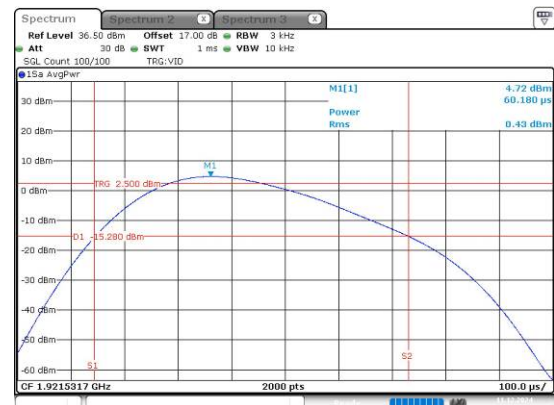


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 21:43:04

Middle Channel

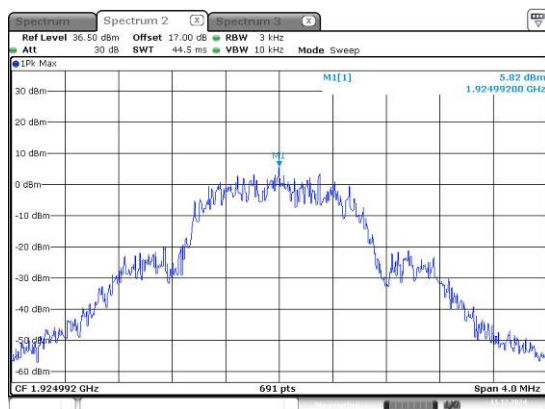


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 21:45:19

Middle Channel

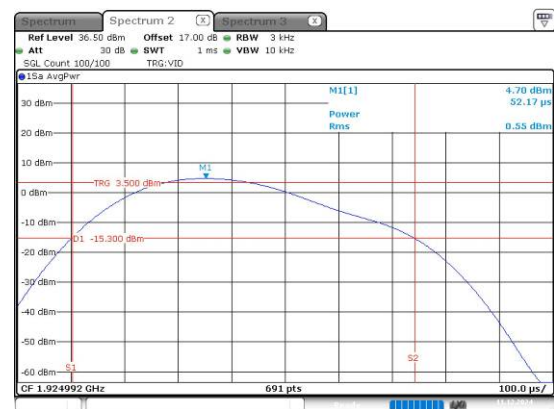


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 21:58:53

Highest Channel

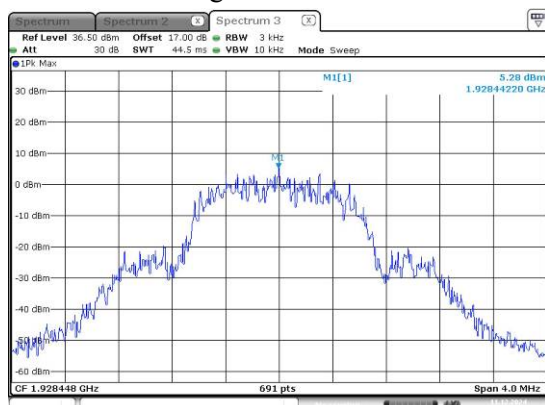

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 22:01:23

Highest Channel

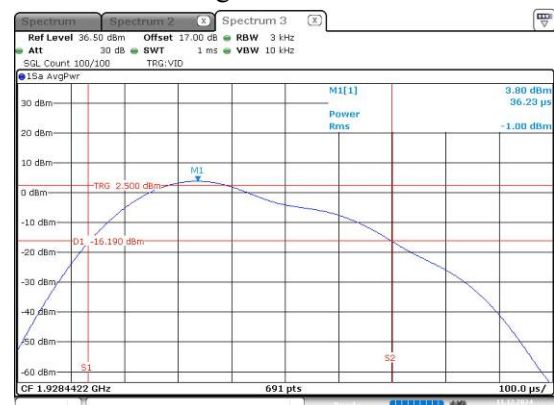

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 11.DEC.2024 22:06:14

5.6 Emission Inside and Outside the Sub-band

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/9/5	2025/9/4
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Unwanted Emission inside the Sub-band

Lowest Channel

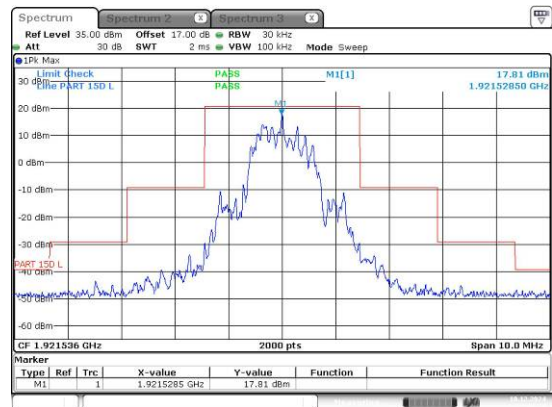


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 22:41:24

Middle Channel

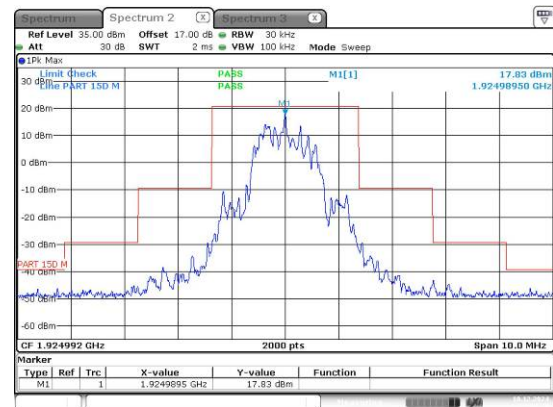


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 22:24:19

Highest Channel

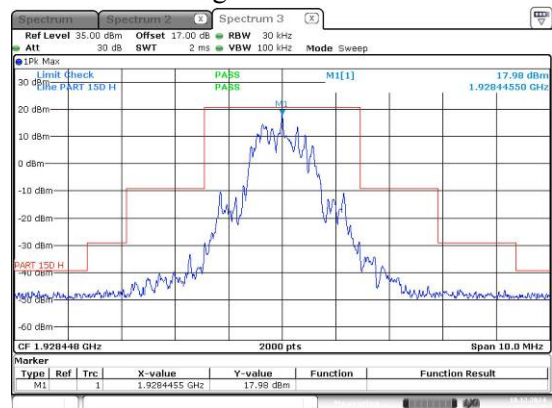


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 22:49:19


Low Channel (Unwanted Emission outside the Sub-band)

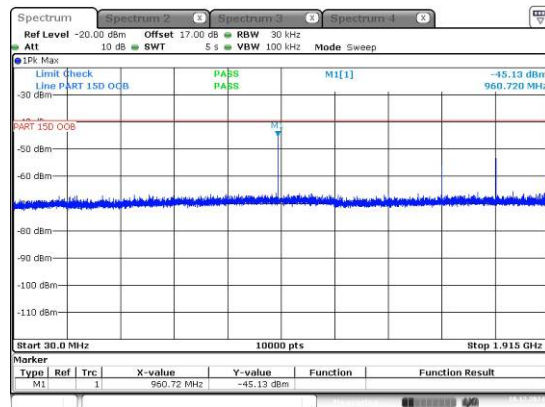


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10 DEC.2024 23:11:54

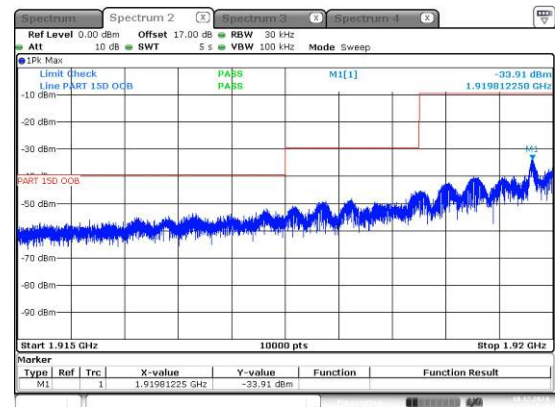


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10 DEC.2024 23:14:51

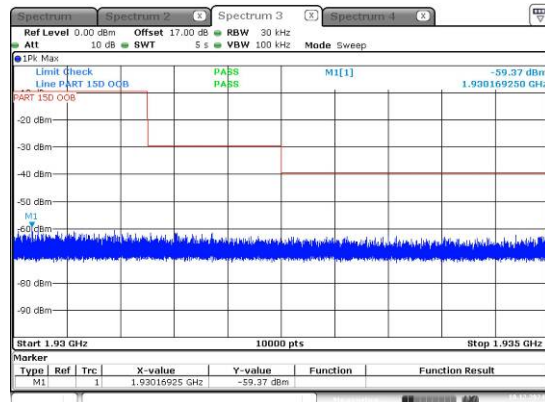

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10 DEC.2024 23:15:35

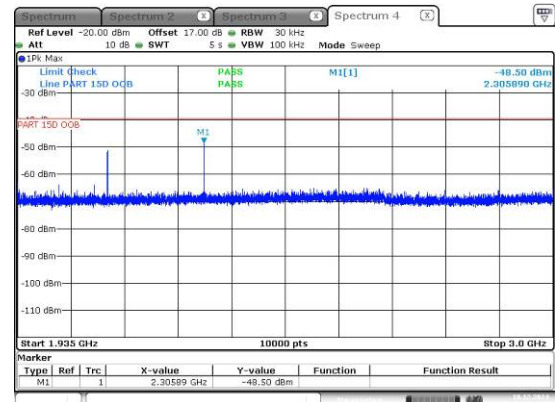


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10 DEC.2024 23:16:12

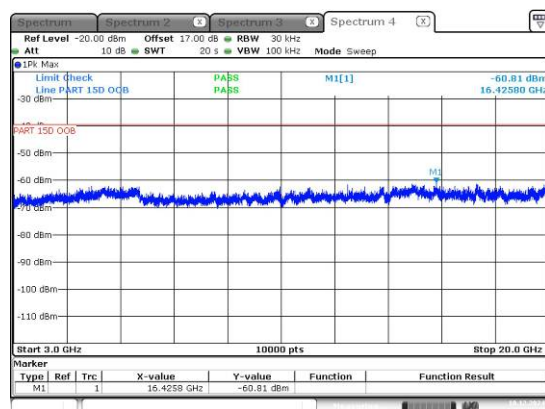


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10 DEC.2024 23:18:11


Middle Channel (Unwanted Emission outside the Sub-band)

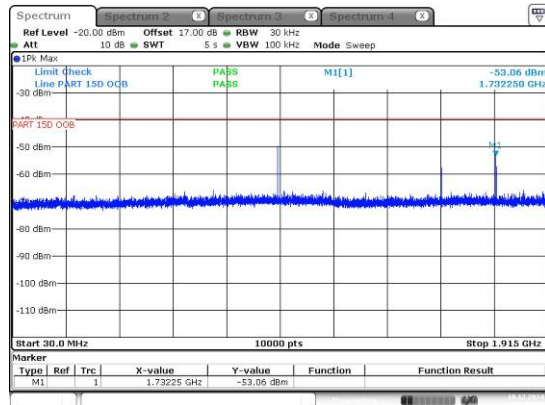


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:08:02

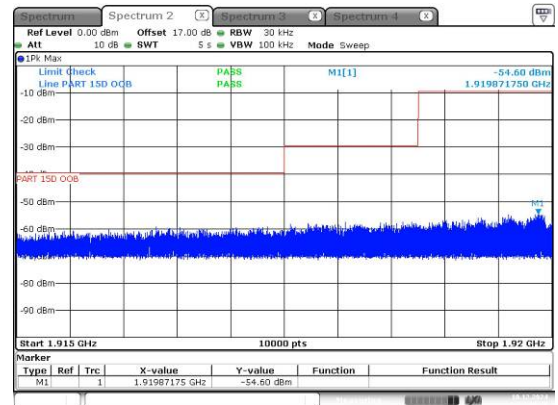


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:06:18

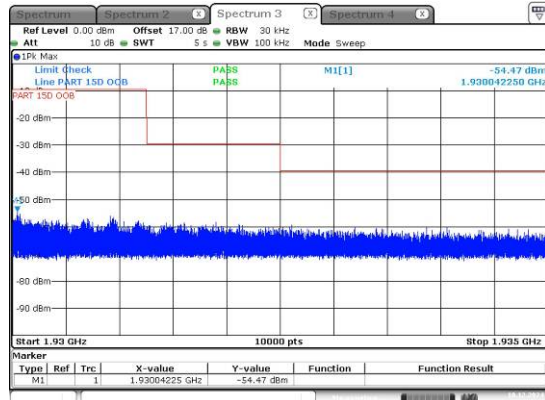

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:04:59

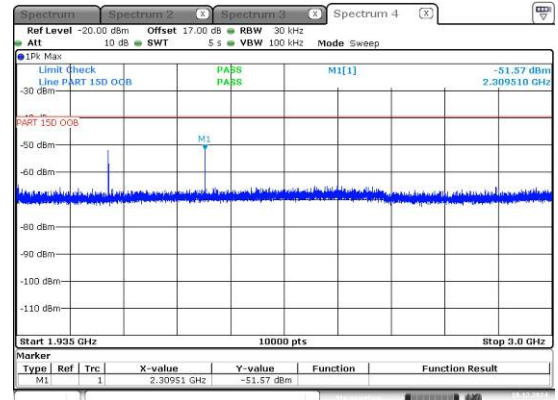


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:04:13

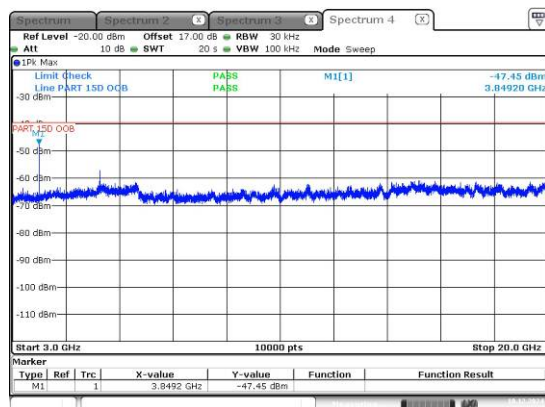


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:19:44


High Channel (Unwanted Emission outside the Sub-band)

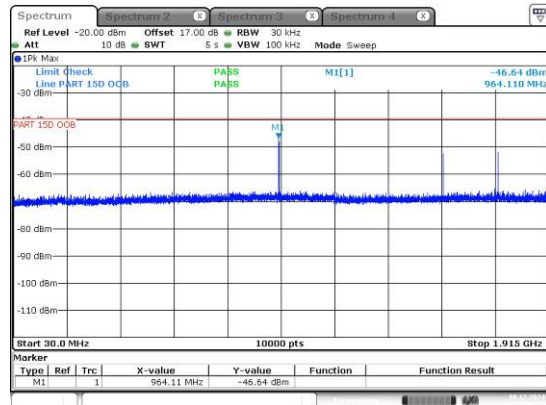


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 22:58:35

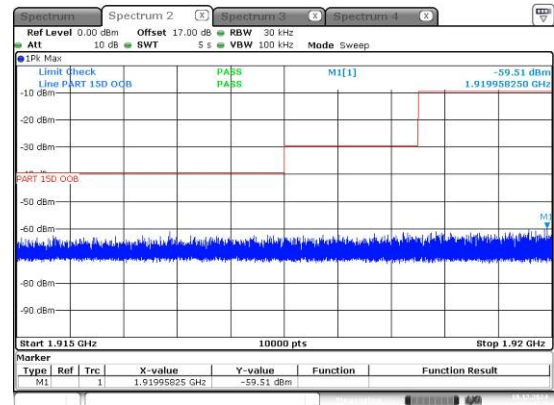


ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 22:59:13

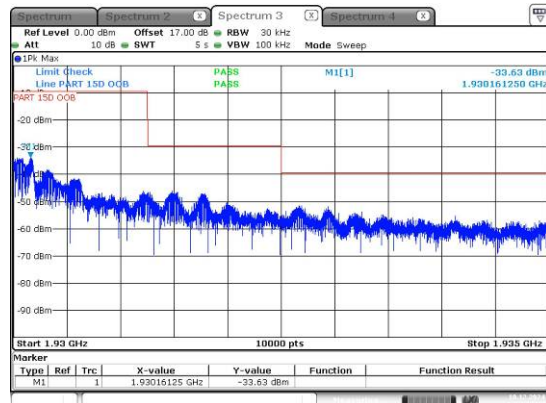

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:01:54

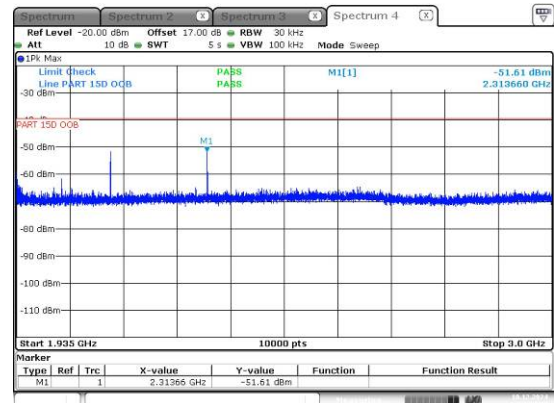

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:02:50

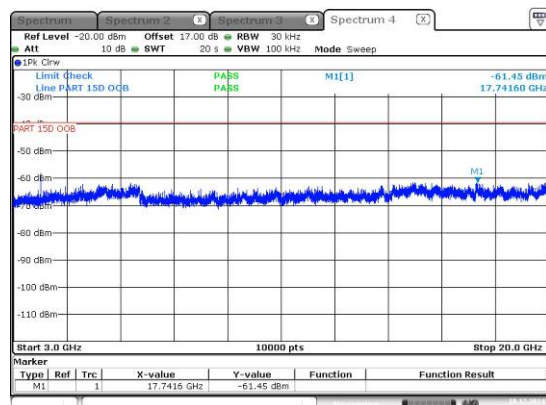

ProjectNo.:2402X97571E Tester:Jeff Wei
Date: 10.DEC.2024 23:25:05

5.7 Frequency Stability

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.1
------------------------------	------	----------------------------------	----	-------------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2024/9/6	2025/9/5
All-sun	Multimeter	EM305A	8348897	2024/8/16	2025/8/15
Daoxiang	AC Transformer	TDGC2-5KVA	F-08-EM011	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Temperature (°C)	Voltage (V _{AC})	Test Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	120	1924.992	5	2.60	±10
20	102	1924.992	6	3.12	±10
	138	1924.992	7	3.64	±10
50	120	1924.992	4	2.08	±10

Note: the voltage range was declared by manufacturer ▲.

5.8 Specific Requirements for UPCS Device

Test Information:

Serial No.:	2SFP-5	Test Date:	2024/12/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	24.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/9/5	2025/9/4
R&S	Digital Radio Communication Tester	CMD 60M	846956/010	2024/10/22	2025/10/21
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/6/13	2025/6/12
Gongee	Coaxial Power Splitters & Combiner	PD-0/6-2S	RF20230800110	2024/1/15	2025/1/14
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-02	2024/6/1	2025/5/31
Unknown	Coaxial Cable	C-SJSJ-50	C-0060-03	2024/6/1	2025/5/31
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2024/8/26	2025/8/25

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

1) Automatic Discontinuation of Transmission

Test result:

The following tests were performed after a connection had been established with headset.

Test condition	Reaction of EUT	Pass/Fail
The headset power off	Connection break down	Pass

2) Monitoring Time**Test result:**

This requirement is covered by the results of Least Interfered Channel (LIC).

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L+U_M+20\text{dB}$ and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level $T_L+U_M+20\text{dB}$ and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

3) Lower Monitoring Threshold**Test result:**

Not applicable because the EUT has more 40 defined duplex system access channels and meet the provision of the Least Interfered Channel (LIC).

4) Maximum Transmit Period**Test result:**

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	18594	28,800	Pass
Second	18691	28,950	Pass

5) System Acknowledgement**Test result:**

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.31	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time	3.92	30	Pass

Note: N/A=Not Applicable

6) Least Interfered Channel (LIC)

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold: $TL = -174 + 10\log_{10}B + ML + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

ML = dB the threshold may exceed thermal noise (30 for T_L)

$P_{MAX} = 5\log_{10}B - 10$ (dBm)

P_{EUT} = Transmitted power (dBm)

Calculated thresholds:

Monitor Threshold	B(MHz)	M_L (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
Lower threshold	1.455	30	20.81	19.57	-81.13

Note: 1. The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels

Test result:**LIC procedure test:**

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L + U_M + 7$ dB and the interference on f_2 at level $T_L + U_M$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
b) Apply the interference on f_1 at level $T_L + U_M$ and the interference on f_2 at level $T_L + U_M + 7$ dB. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass
c) Apply the interference on f_1 at level $T_L + U_M + 1$ dB the interference on f_2 at level $T_L + U_M - 6$ dB. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
d) Apply the interference on f_1 at level $T_L + U_M - 6$ dB and the interference on f_2 at level $T_L + U_M + 1$ dB. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass

Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_U + U_M$ and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level $T_L + U_M$ and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

7) Random waiting

Note: This is Not Applicable

8) Monitoring Bandwidth and Reaction Time**Test result:****Monitoring Bandwidth:**

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission

Reaction Time Test:

No.	Interference Pulse width (μs)	Reaction of EUT	Observing time (μs)	Result
1	50μs with level $T_L + U_M$	No transmission	25.35	Pass
2	35μs with level $T_L + U_M + 6\text{dB}$	No transmission	21.31	Pass

9) Monitoring Antenna**Test result:**

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

10) Monitoring threshold relaxation**Test result:**

This requirement is covered by the results of Least Interfered Channel (LIC).

11) Duplex Connections**Test result:**

Interference (Refer to ANSI C63.17 § 8.3& § 8.3.2)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) All Tx windows with level $T_L + U_M$ except one & Rx windows with level $T_L + U_M + 7\text{dB}$ except one, which are not the duplex mate.	Connected on the target Rx window and its duplex mate.	Pass
c) All Tx windows with level $T_L + U_M + 7\text{dB}$ except one & Rx windows with level $T_L + U_M$ except one, which are not duplex mate.	Connected on the target Tx window and its duplex mate.	Pass
d) All Tx & Rx windows with level $T_U + U_M$, except one for Tx window & one for Rx window, which are not duplex mate.	No connection possible	Pass

12) Alternative monitoring interval**Test result:**

Interference (Refer to ANSI C63.17 § 8.4)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) Apply interference with same parameters as EUT transmissions on all Tx windows with level TL+UM on the enabled carrier(s) and no interference on the Rx windows on the enabled carriers.	No connection is established	Pass

13) Fair Access**Test result:**

The manufacturer declares that this device does not use any mechanisms as provided by FCC §15.323(c)(10) or (11) & IC RSS-213 5.2(10) and (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

14) Frame Repetition Stability Frame Period and Jitter**Test result:**

Frame Period and Jitter:

Max. pos. Jitter (μ s)	Max. neg. Jitter (μ s)	Frame period (ms)	Limit	
			Frame Period (ms)	Jitter (μ s)
0.05	-0.2	11.33	20 or 10/X	25

Note: X is a positive whole number.

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402X97571E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402X97571E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402X97571E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******