


TEST REPORT

Applicant: SEUIC Technologies Co., Ltd.
Address: NO.15 Xinghuo Road, Nanjing New & High
Technology Industry Development Zone, 210061,
Nanjing City, Jiangsu Province, China
Equipment Type: Rugged Tablet PC
Model Name: AUTOID Pad Air(Win)
Brand Name: Seuic
FCC ID: 2AC68-PADAIRWIN
Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)
Sample Arrival Data: Nov. 07, 2022
Test Date: Nov. 10, 2022 - Nov. 28, 2022
Date of Issue: Jan. 16, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jan. 10, 2023</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jan. 16, 2023</u>	<u>Updated the test setup in 4.5.3</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	11
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	12
4.6	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16
5.2	Frequency Hopping Systems	17
5.3	Number of Hopping Frequencies	20
5.4	Peak Output Power	21

5.5	Occupied Bandwidth	22
5.6	Carrier Frequency Separation	23
5.7	Time of Occupancy (Dwell time)	24
5.8	Conducted Spurious Emission & Authorized-band band-edge	26
5.9	Conducted Emission	27
5.10	Radiated Spurious Emission	28
5.11	Band Edge (Restricted-band band-edge).....	30
ANNEX A	TEST RESULT	31
A.1	Number of Hopping Frequency	31
A.2	Peak Output Power	32
A.3	20 dB and 99% bandwidth	35
A.4	Hopping Frequency Separation.....	40
A.5	Average Time of Occupancy	41
A.6	Conducted Spurious Emissions & Authorized-band band-edge	44
A.7	Conducted Emissions.....	51
A.8	Radiated Spurious Emission	53
A.9	Band Edge (Restricted-band band-edge).....	67
ANNEX B	TEST SETUP PHOTOS	71
ANNEX C	EUT EXTERNAL PHOTOS	71
ANNEX D	EUT INTERNAL PHOTOS	71

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SEUIC Technologies Co., Ltd.
Address	NO.15 Xinghuo Road, Nanjing New & High Technology Industry Development Zone, 210061, Nanjing City, Jiangsu Province, China

2.2 Manufacturer Information

Manufacturer	SEUIC Technologies Co., Ltd.
Address	NO.15 Xinghuo Road, Nanjing New & High Technology Industry Development Zone, 210061, Nanjing City, Jiangsu Province, China

2.3 Factory Information

Factory	SEUIC Technologies Co., Ltd.
Address	3rd Floor, No.4 Building, Zhicheng Industrial Park, Zhida Road, Nanjing Jiangbei New Area, Nanjing City, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Rugged Tablet PC
Model Name Under Test	AUTOID Pad Air(Win)
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/2A/2C/3, NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	2.83 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	N/A	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	53% to 66%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22.2°C to +23.4°C
Working Voltage of the EUT	NV (Normal Voltage)	7.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2022.05.19	2023.05.18
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2022.09.06	2023.09.05
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2022.06.29	2023.06.28
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	02460	2021.05.19	2024.05.08
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.08.16	2024.08.15
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2022.09.09	2023.09.08
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2022.09.08	2023.09.07
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2020.03.16	2023.03.15
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	N/A	2022.02.19	2025.02.18
Amplifier (1-12GHz)	COM-MV	LSCX_LNA 1-12G-01	180602	2020.09.08	2023.09.07
Amplifier (7-18GHz)	COM-MV	XKu_LNA7-18G-01	180601	2020.09.08	2023.09.07
Amplifier (18-40GHz)	COM-MV	KA_LNA18-40G-01	18050001	2020.09.08	2023.09.07

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82℃
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

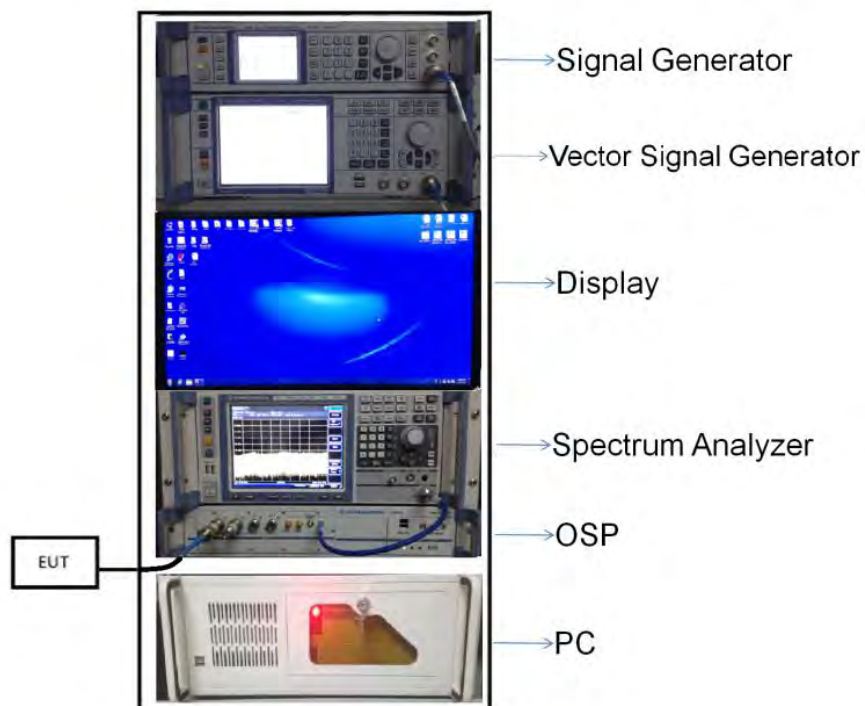


(Diagram 1)

4.5.2 For AC Power Supply Port Test

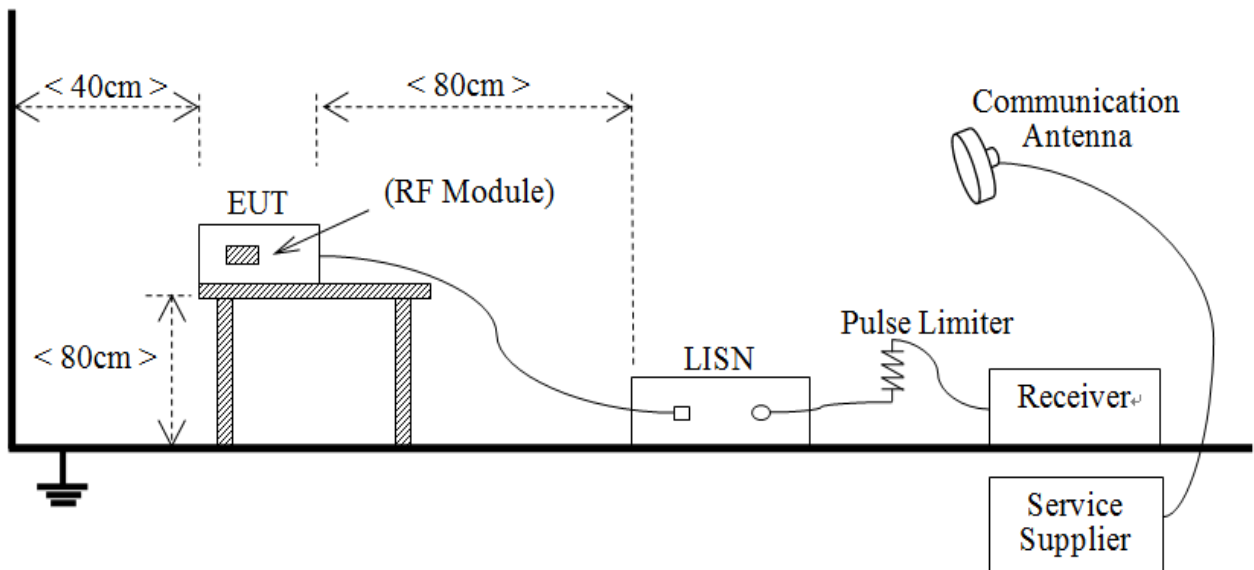


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

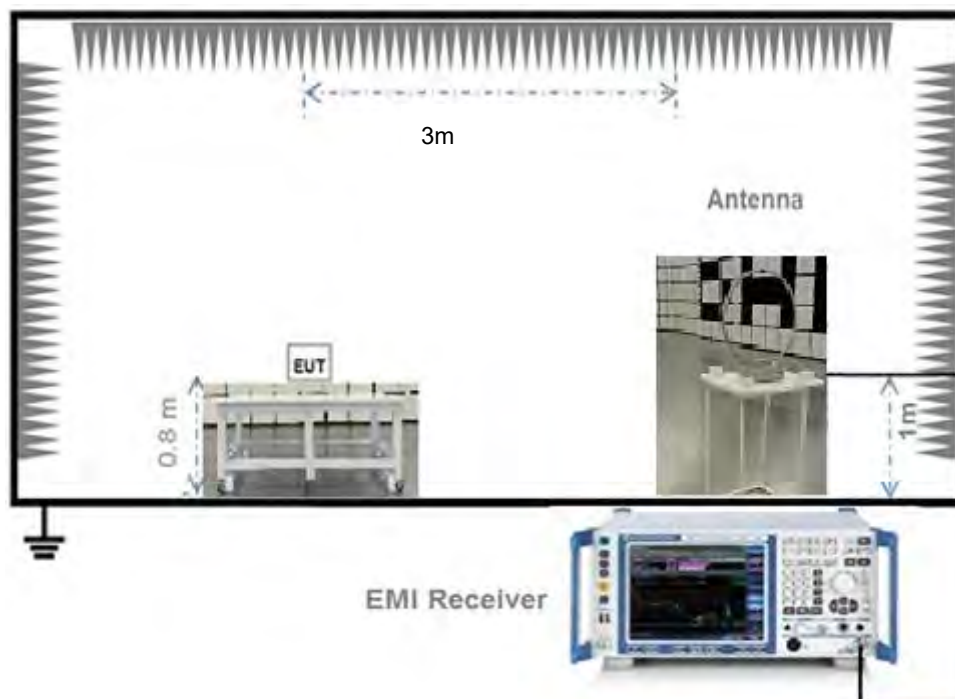


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

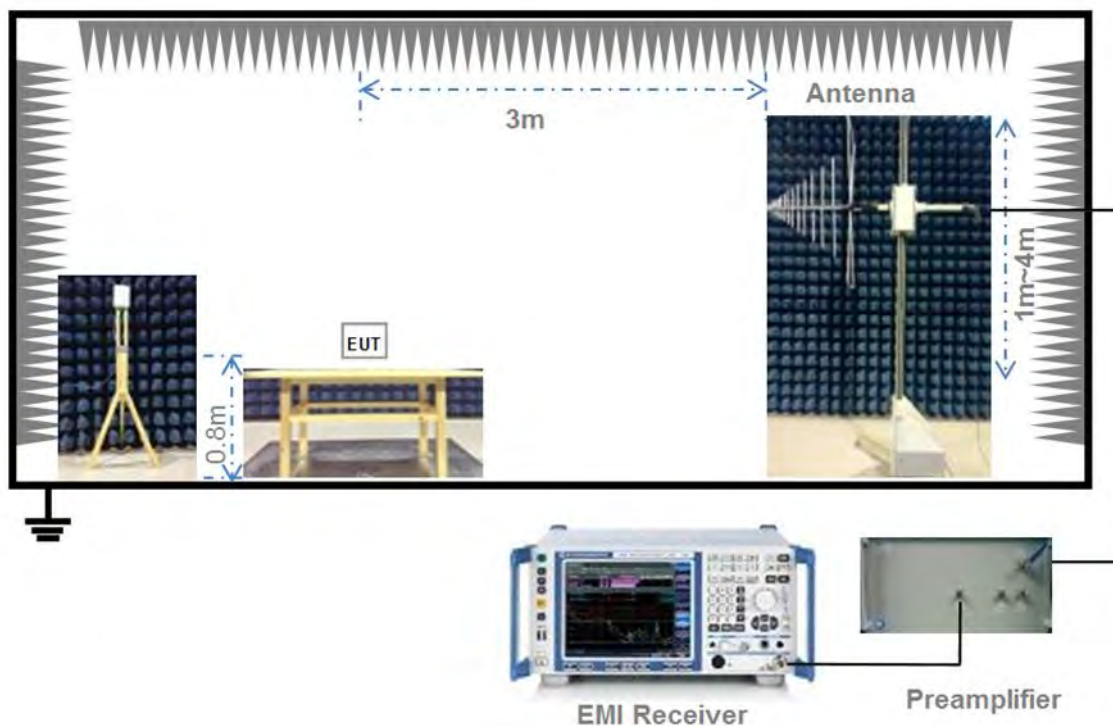

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

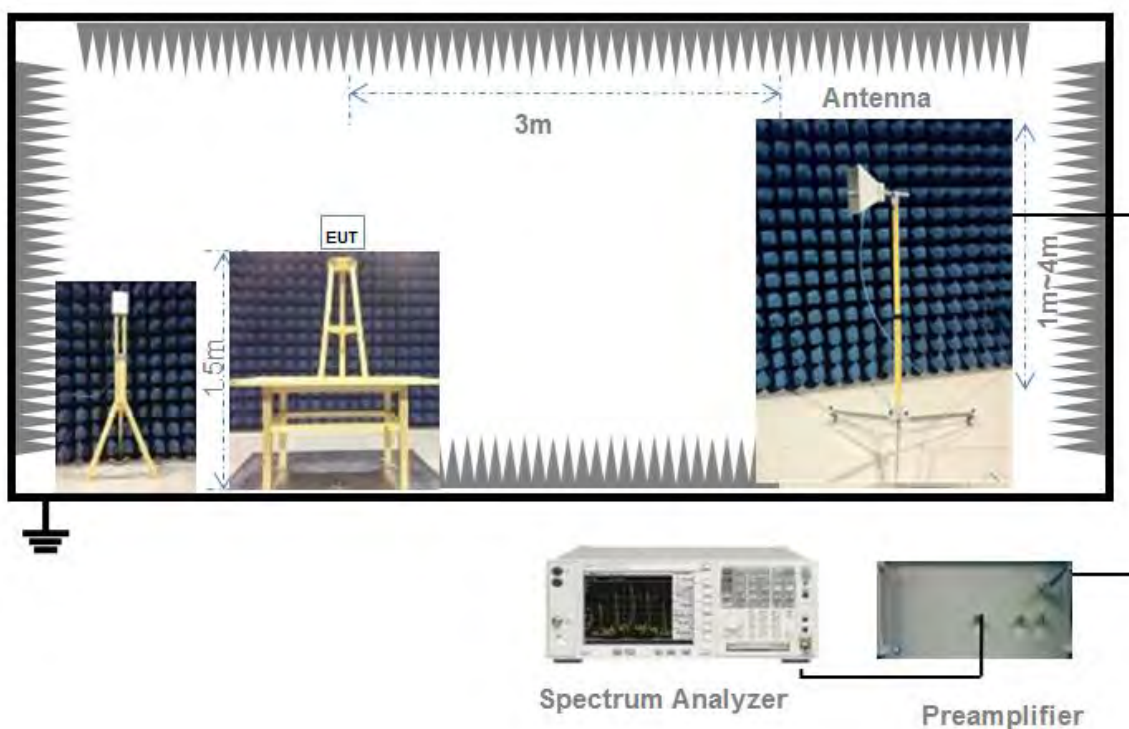

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents

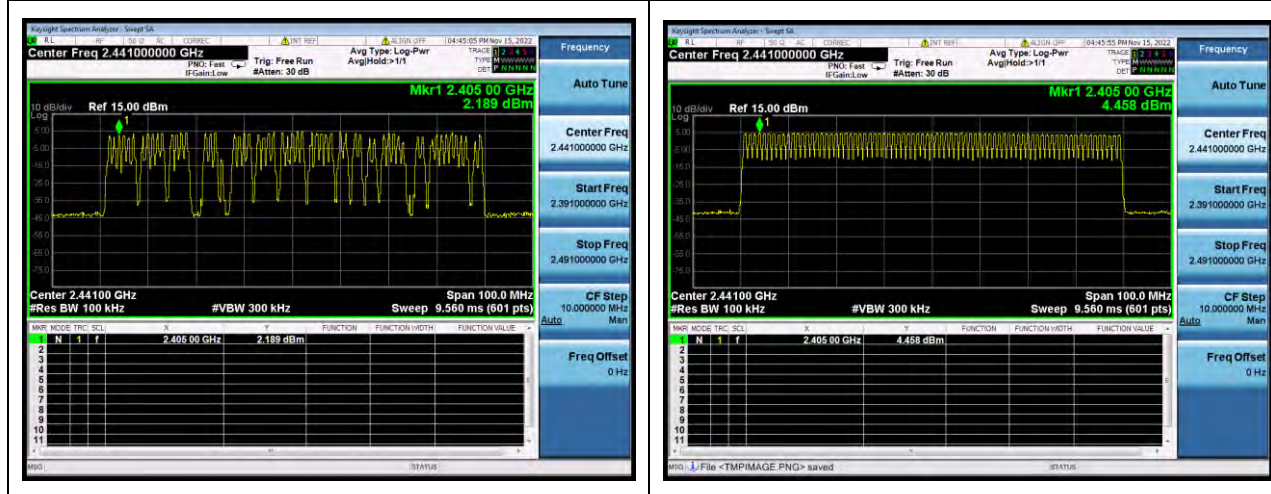

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots

GFSK 2.4 GHz ~ 2.4415 GHz

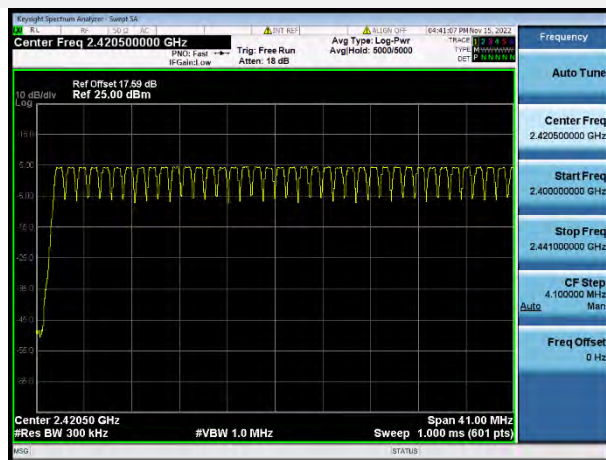

GFSK 2.4415 GHz ~ 2.4835 GHz

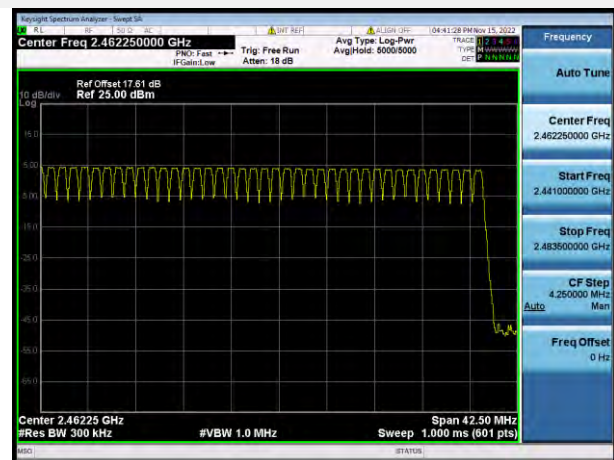

8-DPSK 2.4 GHz ~ 2.4415 GHz



8-DPSK 2.4415 GHz ~ 2.4835 GHz




A.2 Peak Output Power

Peak Power Test Data


Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	4.44	2.78	1.15	1.30	1.38	1.37	21	125	Pass
Middle	4.59	2.88	1.38	1.38	1.60	1.44			Pass
High	3.65	2.32	0.34	1.08	0.62	1.15			Pass

Test Plots


GFSK LOW CHANNEL


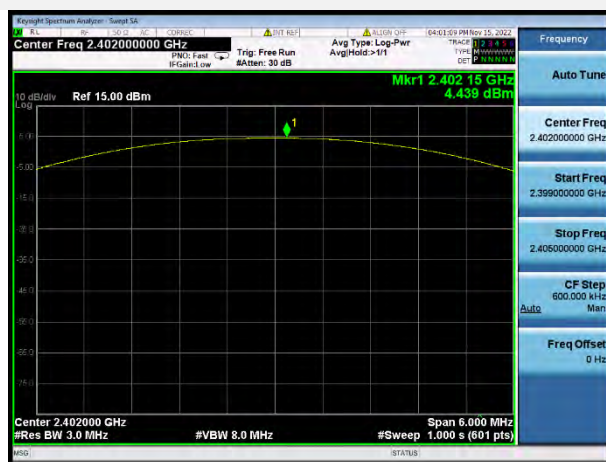


GFSK MIDDLE CHANNEL

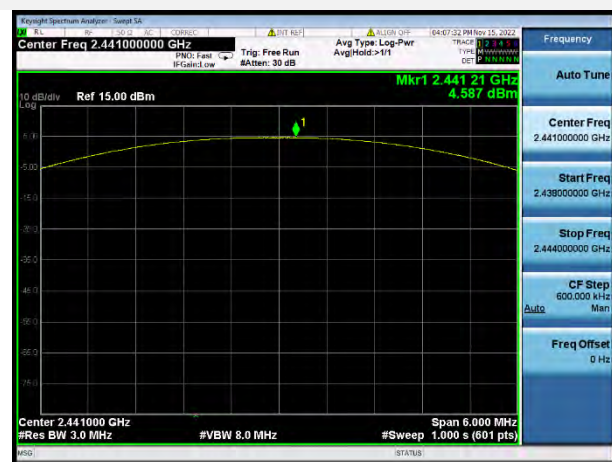


GFSK HIGH CHANNEL

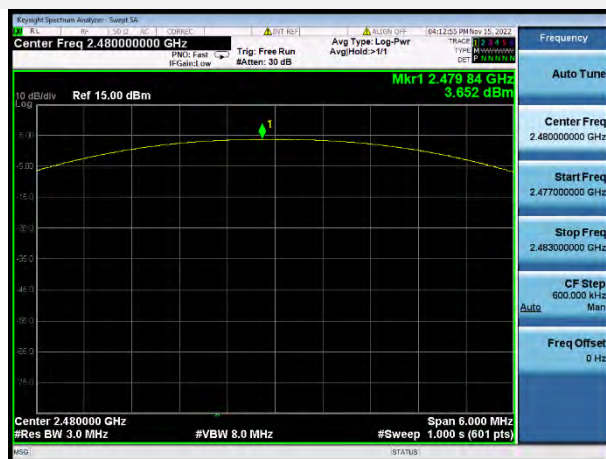


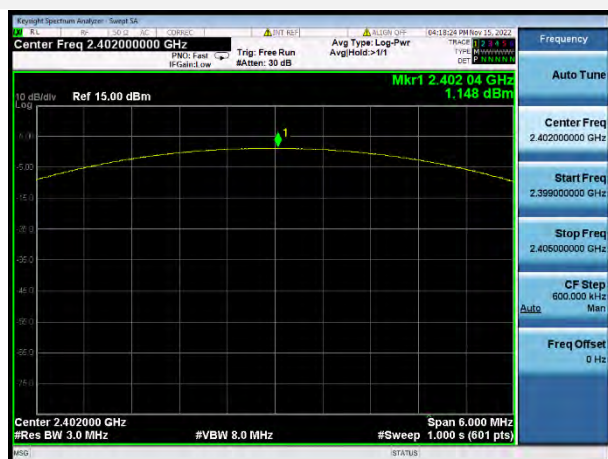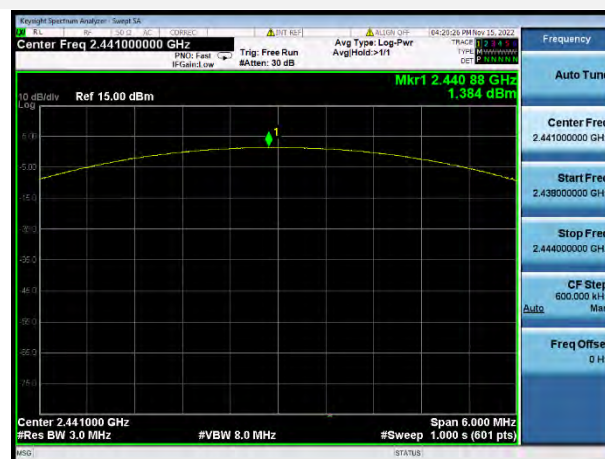$\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK HIGH CHANNEL

8-DPSK LOW CHANNEL

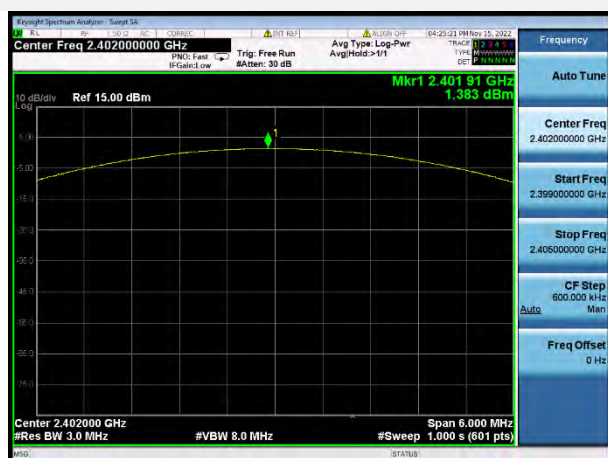

8-DPSK MIDDLE CHANNEL

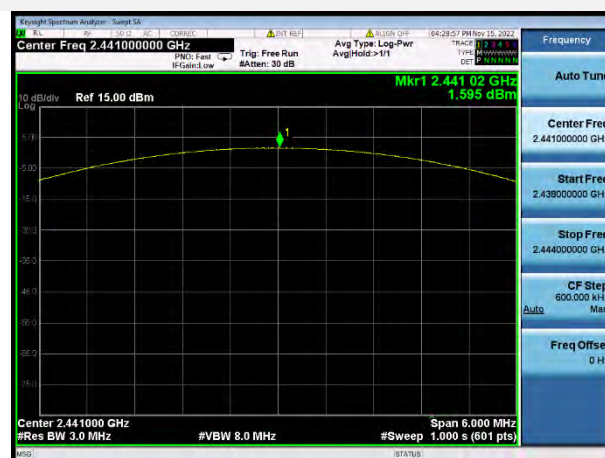

8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.950000	0.868630
Middle	0.950000	0.882160
High	0.950000	0.877790
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.510000	1.351700
Middle	1.515000	1.348500
High	1.510000	1.350000
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.450000	1.350600
Middle	1.445000	1.345700
High	1.450000	1.348900

Test Plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

 $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK LOW CHANNEL

Spectrum Analyzer - Saver 2k

Center Freq **2.480000000 GHz** Span **3.000 MHz**
 Res BW **30 kHz** #Sweep **500.0 ms (#01 pts)**

Ref Offset **17.5 dB** Ref **15.00 dBm**
 Trig: Free Run Avg Type: Log-Pwr
 IF Gain: Low Attenu: 0 dB

Date/Time: 04/23/15 Pmm 15.30Z
 Trace: 1: 2.48 GHz
 Type: Spectrum
 Scale: dBm [dB]

Auto Tune

Center Freq: 2.48000000 GHz
 Start Freq: 2.47850000 GHz
 Stop Freq: 2.48150000 GHz

CF Step: 300.000 kHz
 Auto: Manual

Freq Offset: 0 Hz

The main plot shows a spectrum with a peak labeled 'X3' and another labeled 'ΔA3'. The y-axis is logarithmic from 10 dBmV to 110 dBmV. The x-axis is frequency from 2.475 GHz to 2.485 GHz.

MNTR MODE TRIG ACCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	RW	1	F	(A) 2.479 980 MHz
2	A3	1	F	(A) 1.510 MHz
3	F	1	F	(A) 2.479 230 GHz
4				-6.113 dBm
5				-0.100 dB
6				-25.145 dBm

Center Freq 2.402000000 GHz

Ref Offset 17.58 dB
Ref 15.00 dBm

Span 3.000 MHz
#Res BW 30 kHz
#Sweep 500.0 ms (#01 pds)

ΔMkr2 1.450 MHz
0.447 dB

MNTR	MODE	TRIG	SCN	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	AVG	1	1	2.402 145 GHz	-33.31 dBm		
2	A3	1	1	1.450 MHz	(A)	0.447 dB	
3	F	1	1	2.401 280 GHz	-23.93 dB		

Keysight Spectrum Analyzer - Sweet SA

Center Freq 2.441000000 GHz

Ref Offset 17.72 dB
Ref 15.00 dBm

DMR REF

Auto Lock Off

104.29-29 MHz Nov 15, 2020

Avq Type: Log-Pwr
Avq Hold: 20/20

PRB: Wide →
IF Gain: Low

Trig: Free Run
Atten: 5 dB

TRACE 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 99

Center Freq 2.480000000 GHz

Ref Offset 17.5 dB
Ref 15.00 dBm

ΔMkr2 1.450 MHz
0.092 dB

Center 2.480000 GHz
#Res BW 30 kHz
VBW 91 kHz
Span 3.000 MHz
#Sweep 500.0 ms (#01 pts)

INSTR	MODE	TRIG	SCN	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ3	1	f	(Δ)	2.480 100 GHz	-4.018 dBm		
2	Δ3	1	f	(Δ)	1.450 MHz	0.092 dB		
3	F	1	f	(Δ)	2.479 260 GHz	-24.649 dBm		

99% Bandwidth


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL

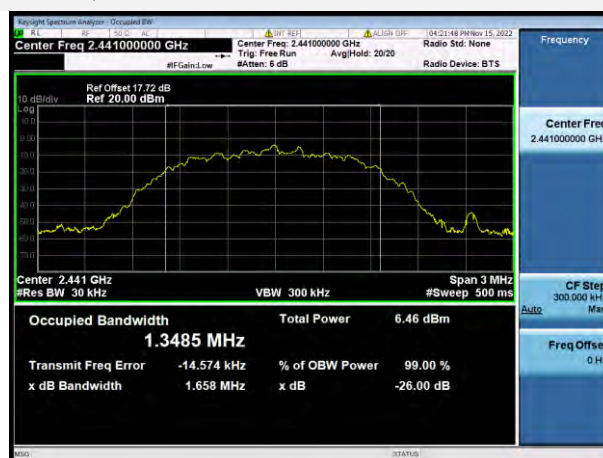 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL


$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL

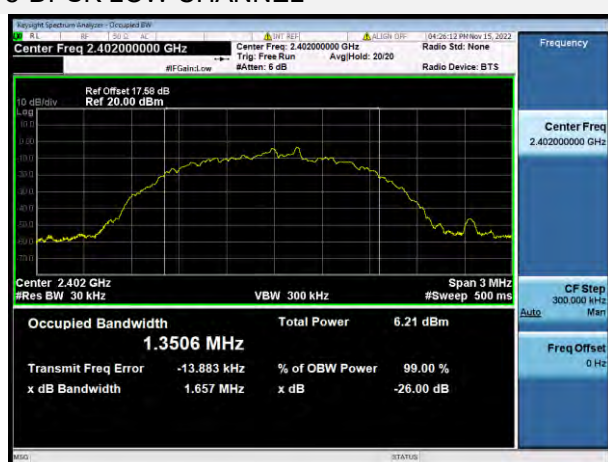

8-DPSK MIDDLE CHANNEL

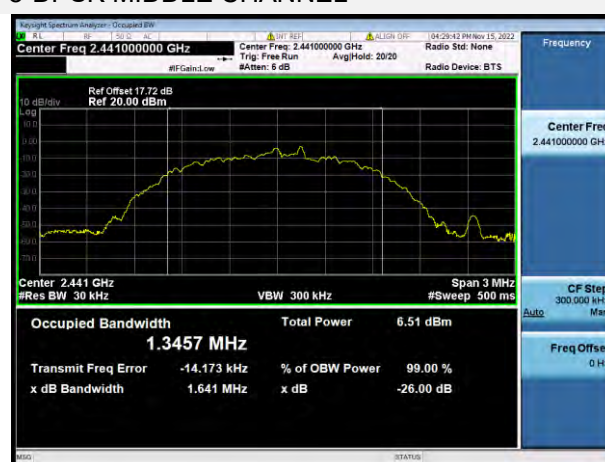

8-DPSK HIGH CHANNEL




A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.000	0.633	Pass
8-DPSK	0.985	0.967	Pass

Test Plots

GFSK

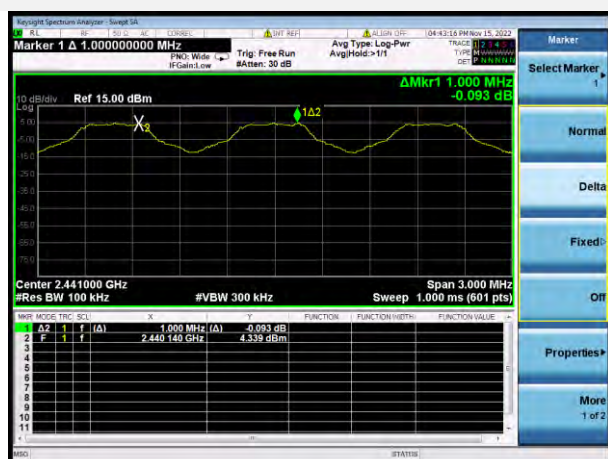

8-DPSK




A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37760	120.832	0.4	Pass
DH 3	1.63400	261.440	0.4	Pass
DH 5	2.87600	306.773	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38720	123.904	0.4	Pass
DH 3	1.64100	262.560	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37920	60.672	0.4	Pass
DH 3	1.64100	131.280	0.4	Pass
DH 5	2.87600	153.387	0.4	Pass

Test Plots


GFSK DH1

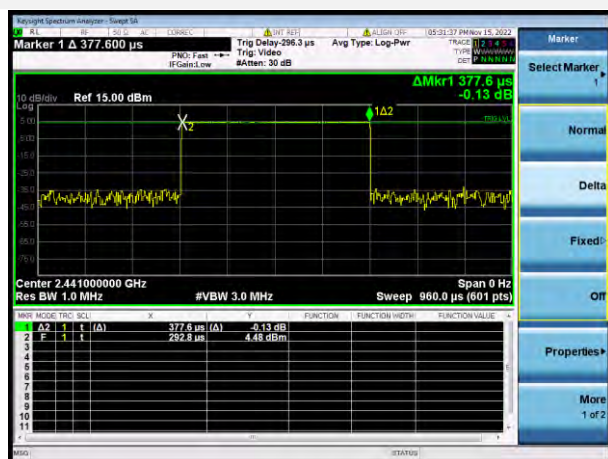


GFSK DH3

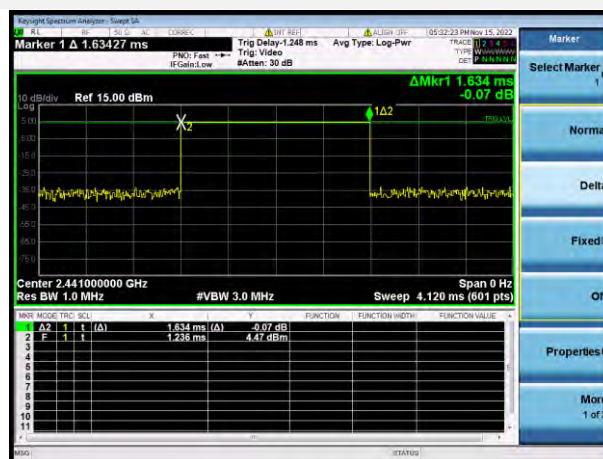


GFSK DH5

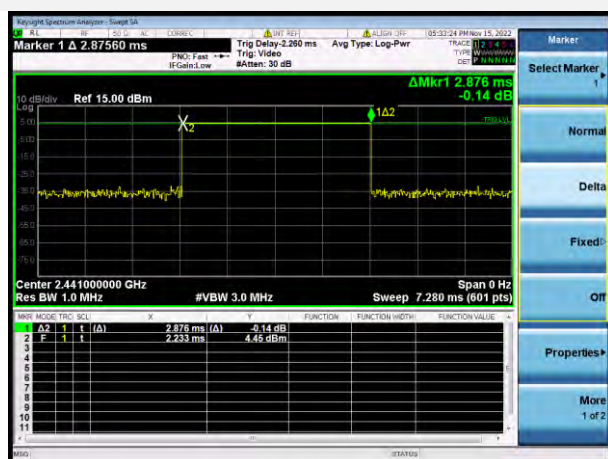


8-DPSK DH1

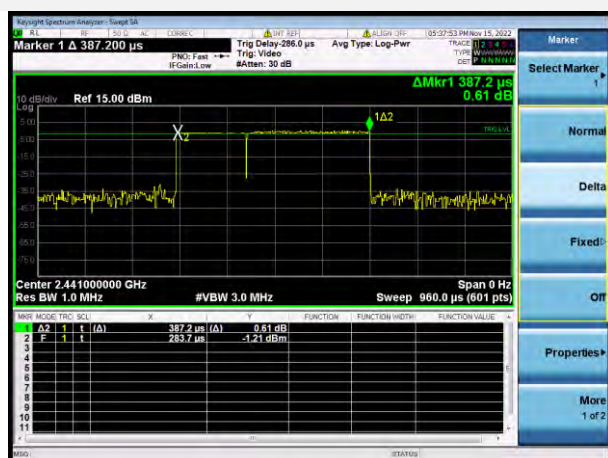


8-DPSK DH3

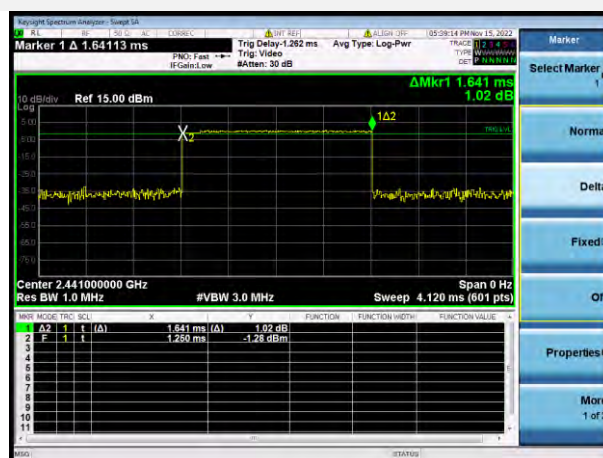


8-DPSK DH5

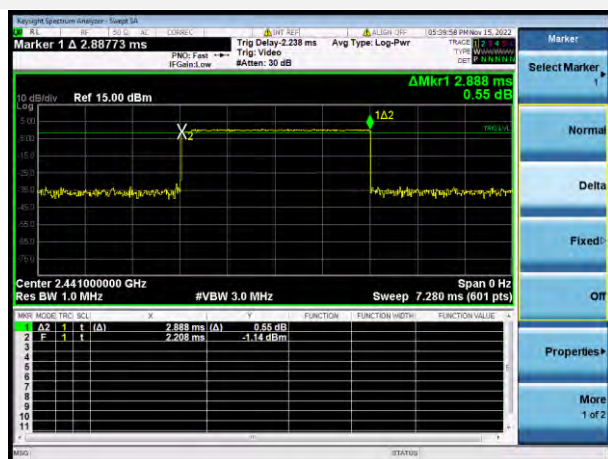


AFH Mode DH1

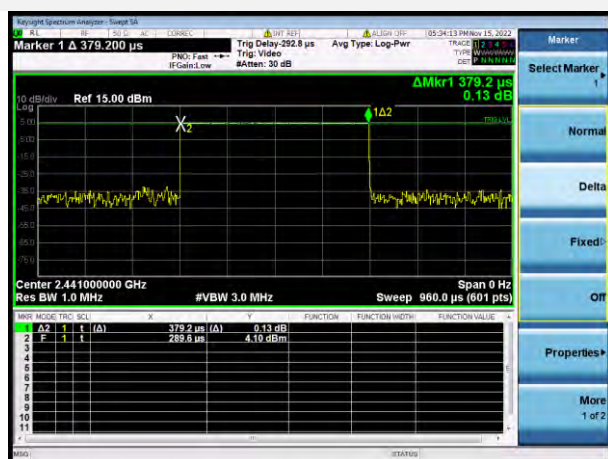

AFH Mode DH3

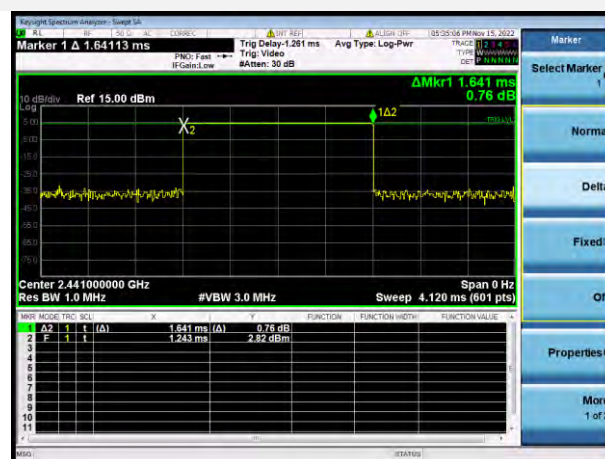

AFH Mode DH5

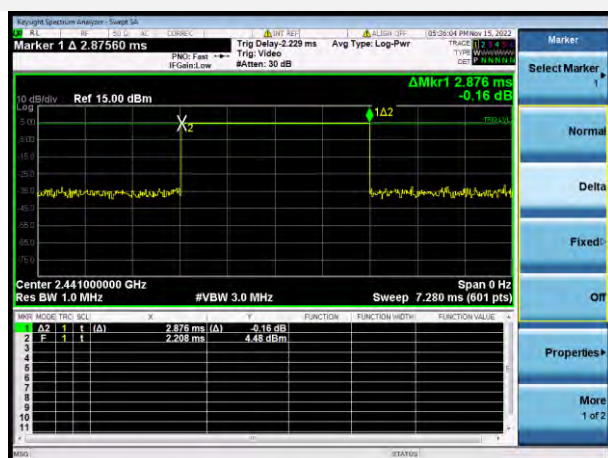


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-26.34	4.24	-15.76	Pass
Middle	-25.32	4.34	-15.67	Pass
High	-27.64	3.36	-16.64	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-33.43	-1.59	-21.59	Pass
Middle	-32.33	-1.24	-21.24	Pass
High	-33.52	-2.26	-22.26	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-28.97	4.20	-15.80	Pass
8-DPSK	-33.08	-1.03	-21.03	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

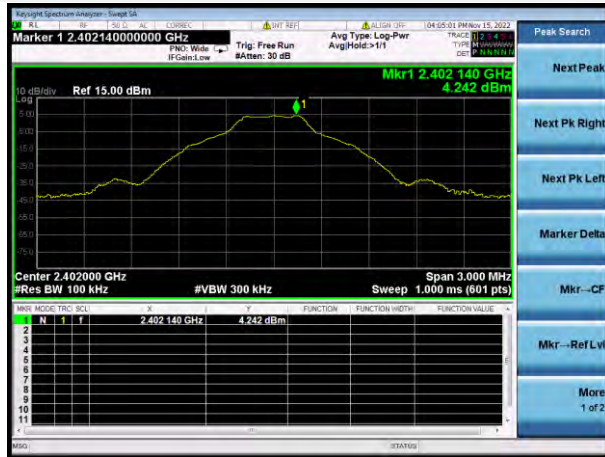


GFSK LOW CHANNEL, BAND EDGE

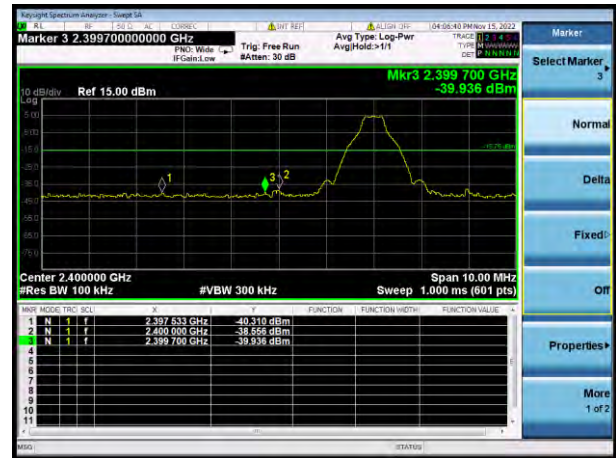


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

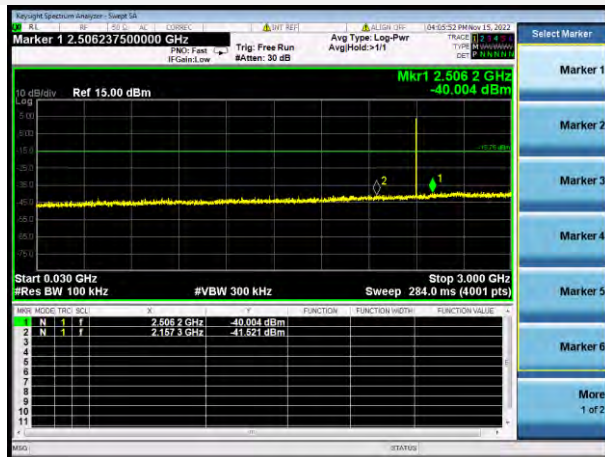


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

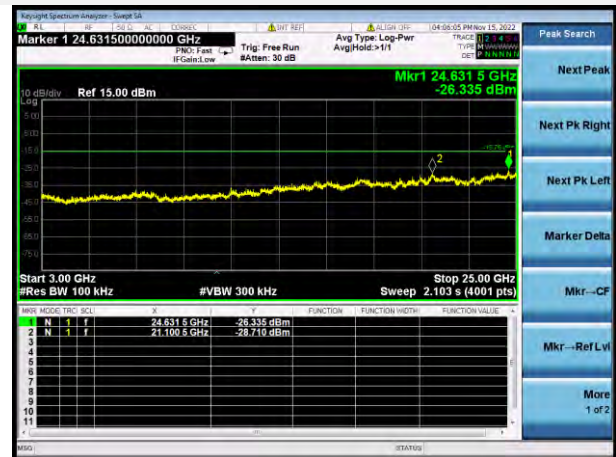


GFSK MIDDLE CHANNEL, CARRIER LEVEL

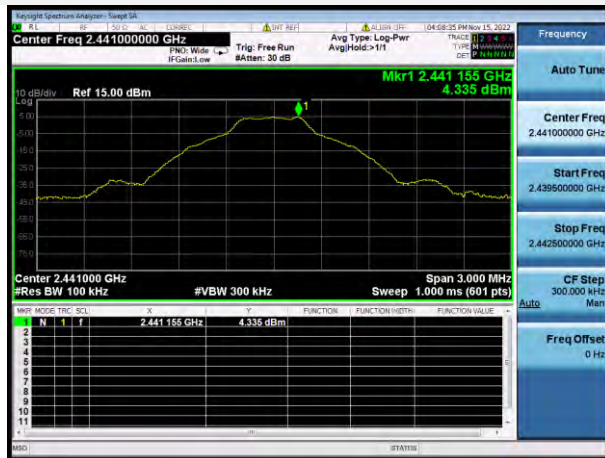


GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

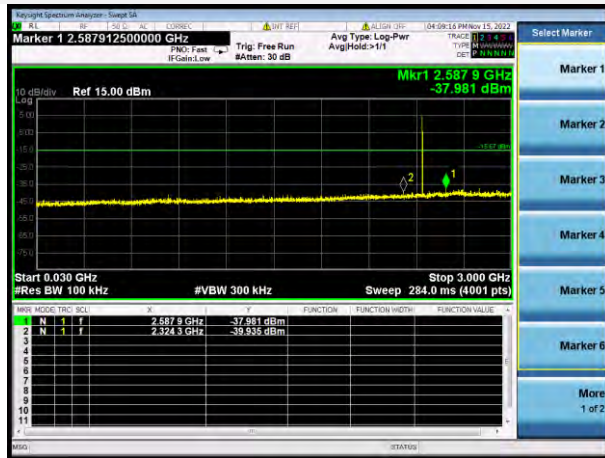

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

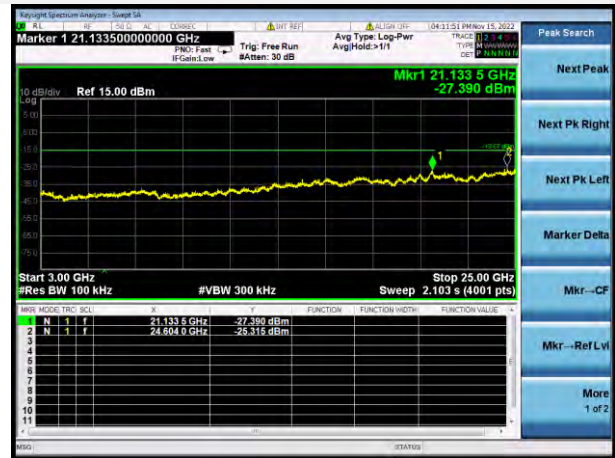


GFSK HIGH CHANNEL, CARRIER LEVEL

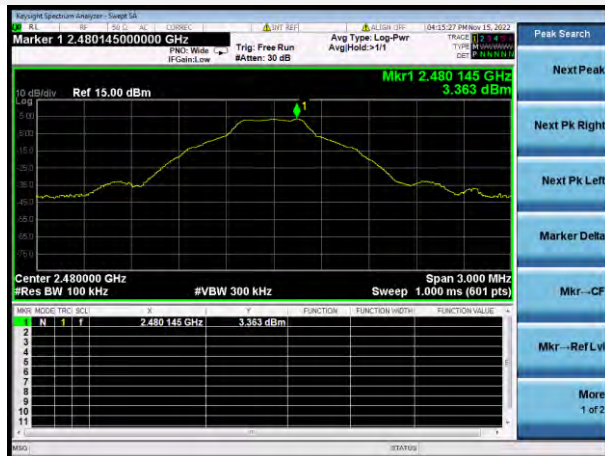


GFSK HIGH CHANNEL, BAND EDGE




GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

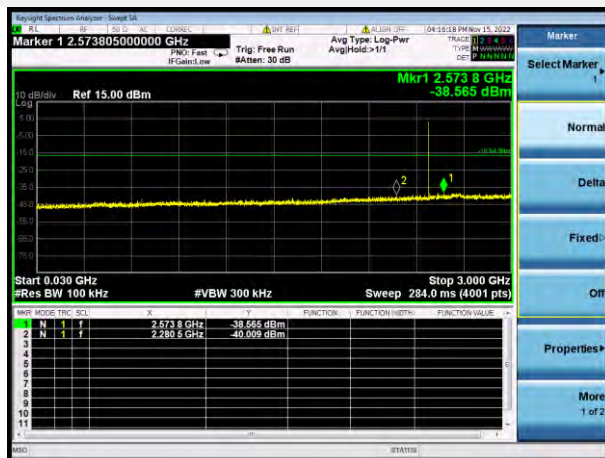


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

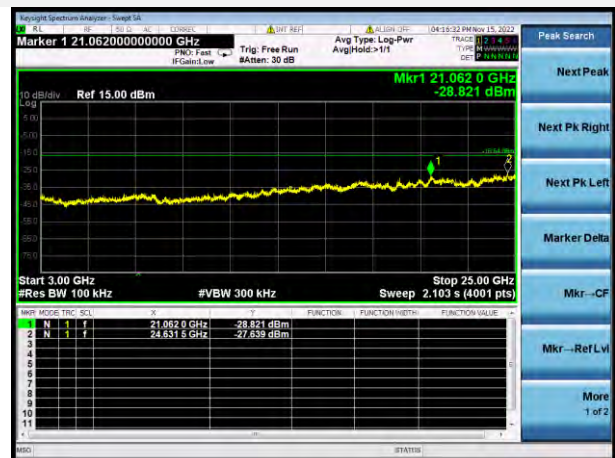

8-DPSK LOW CHANNEL, CARRIER LEVEL

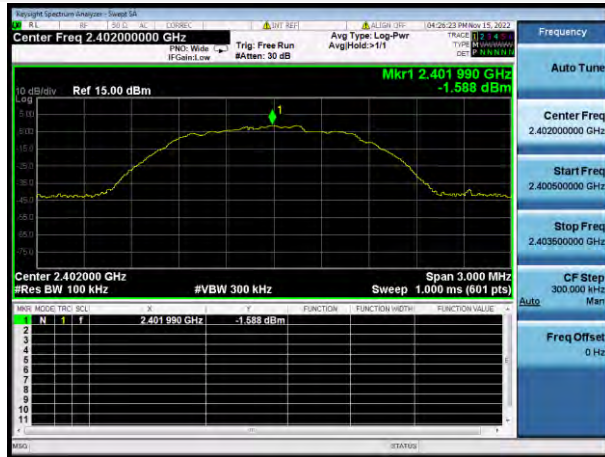


8-DPSK LOW CHANNEL, BAND EDGE

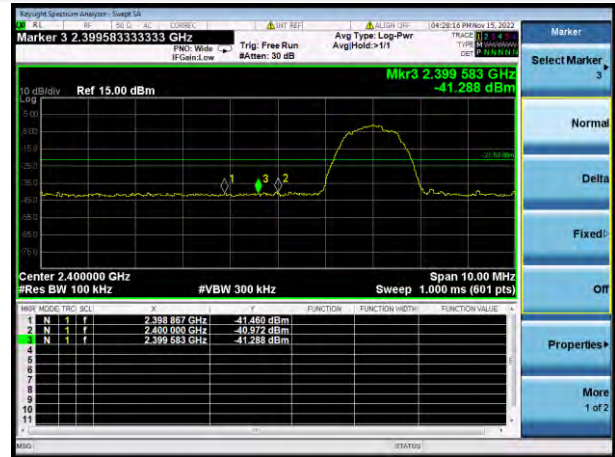


8-DPSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

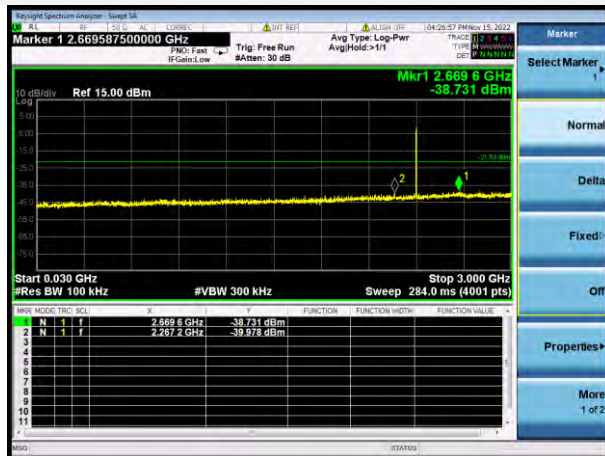

8-DPSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

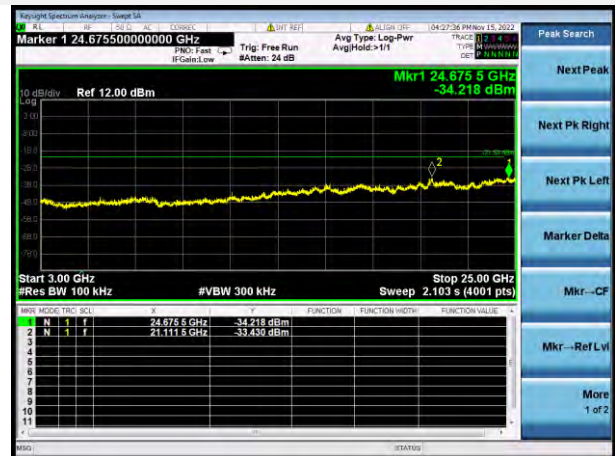


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL



8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

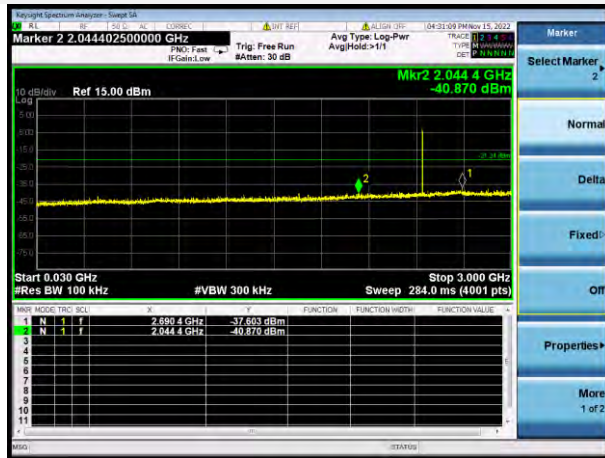

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

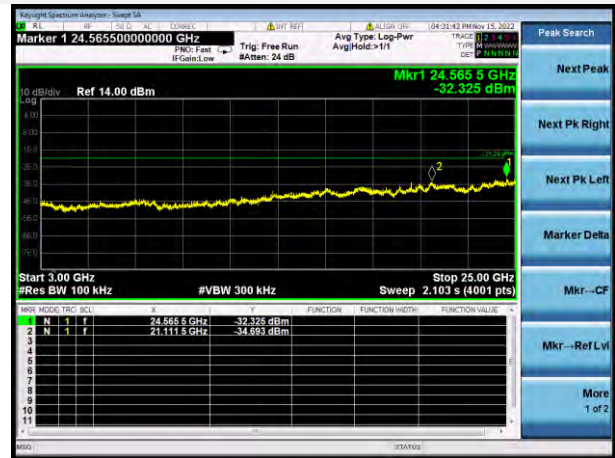


8-DPSK HIGH CHANNEL, CARRIER LEVEL




8-DPSK HIGH CHANNEL, BAND EDGE




8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

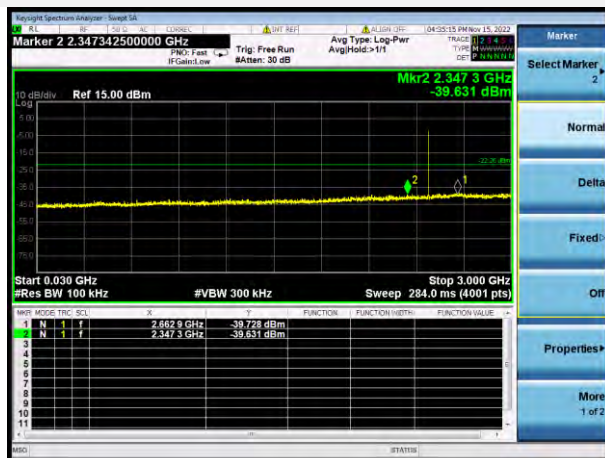

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

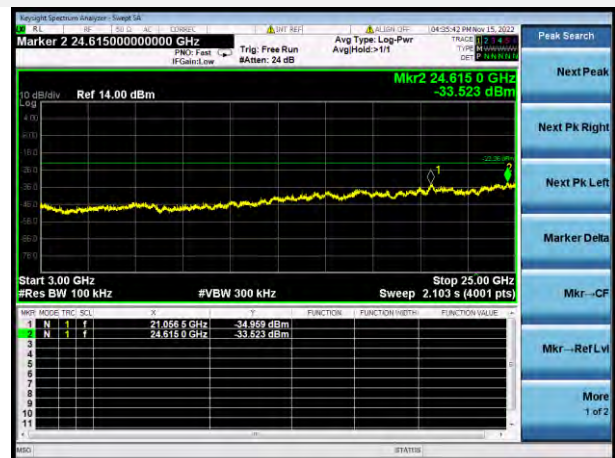




GFSK HOPPING, CARRIER LEVEL

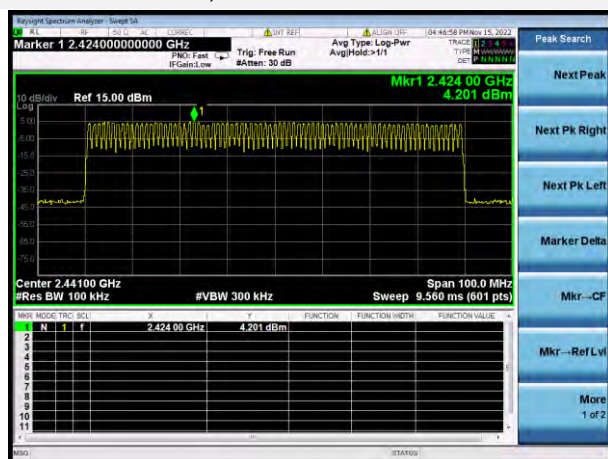


GFSK HOPPING BAND EDGE (LOW)




GFSK HOPPING BAND EDGE (HIGH)

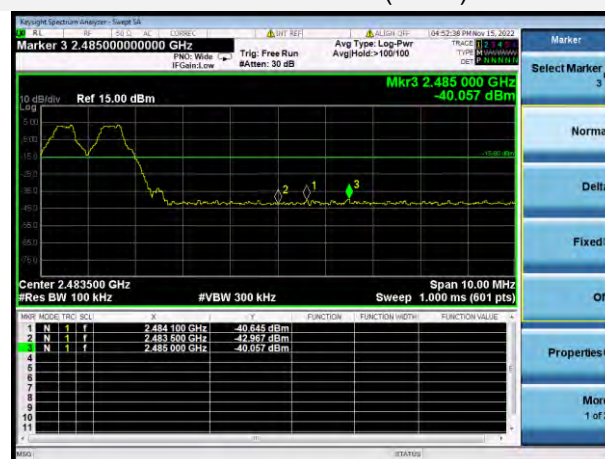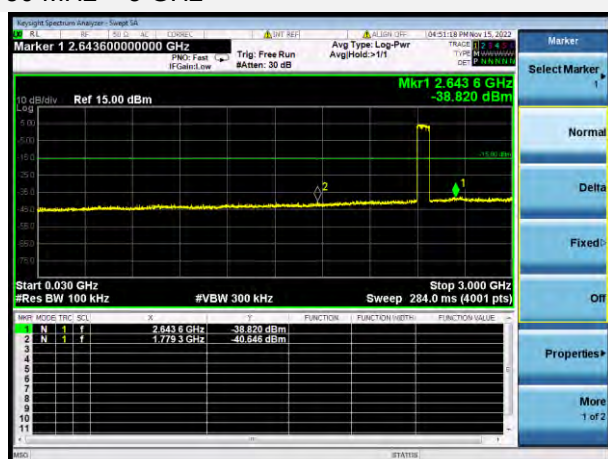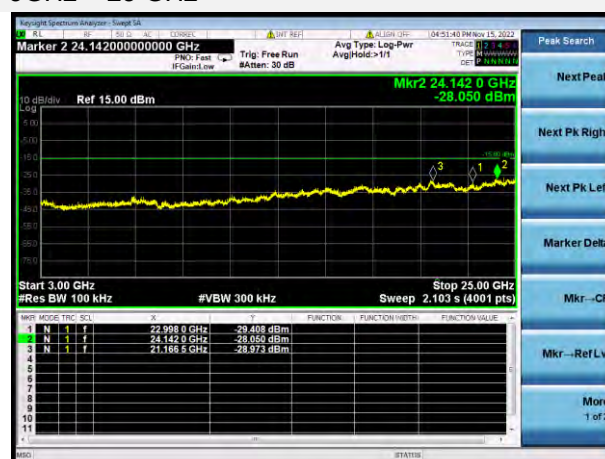GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz




8-DPSK HOPPING, CARRIER LEVEL

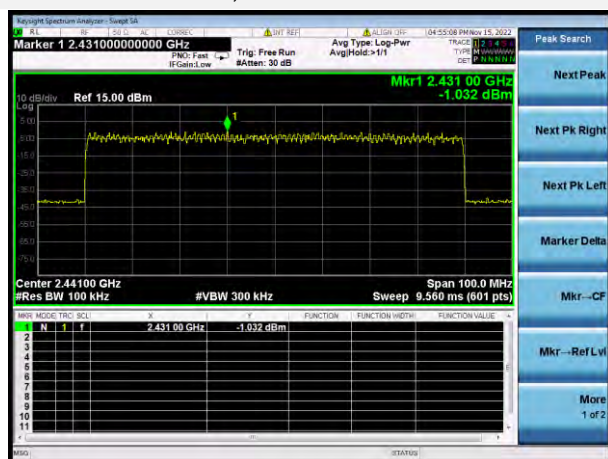

8-DPSK Hopping BAND EDGE (LOW)

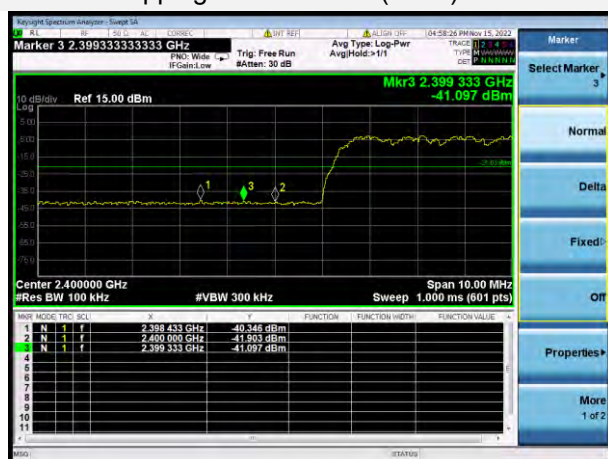

8-DPSK Hopping BAND EDGE (HIGH)

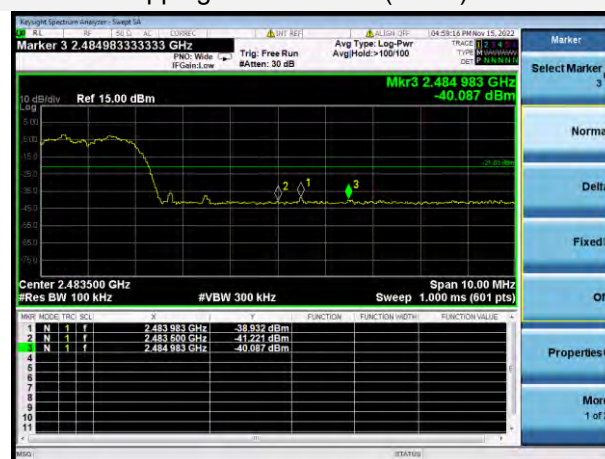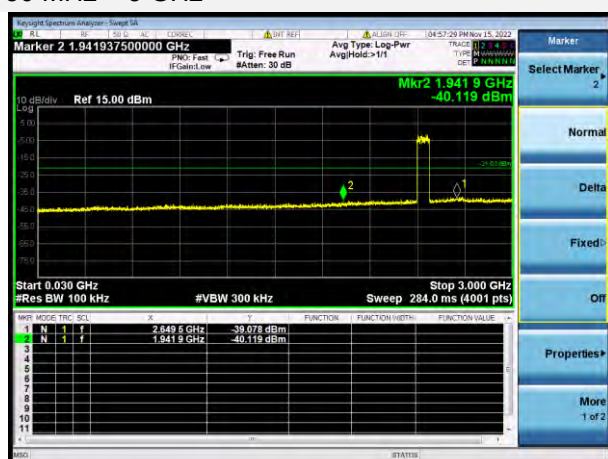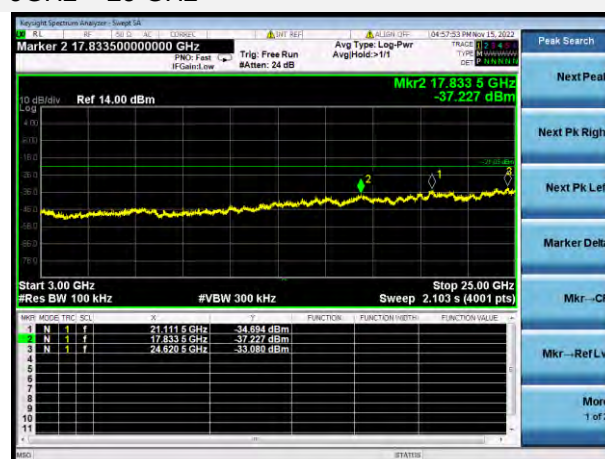8-DPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz8-DPSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

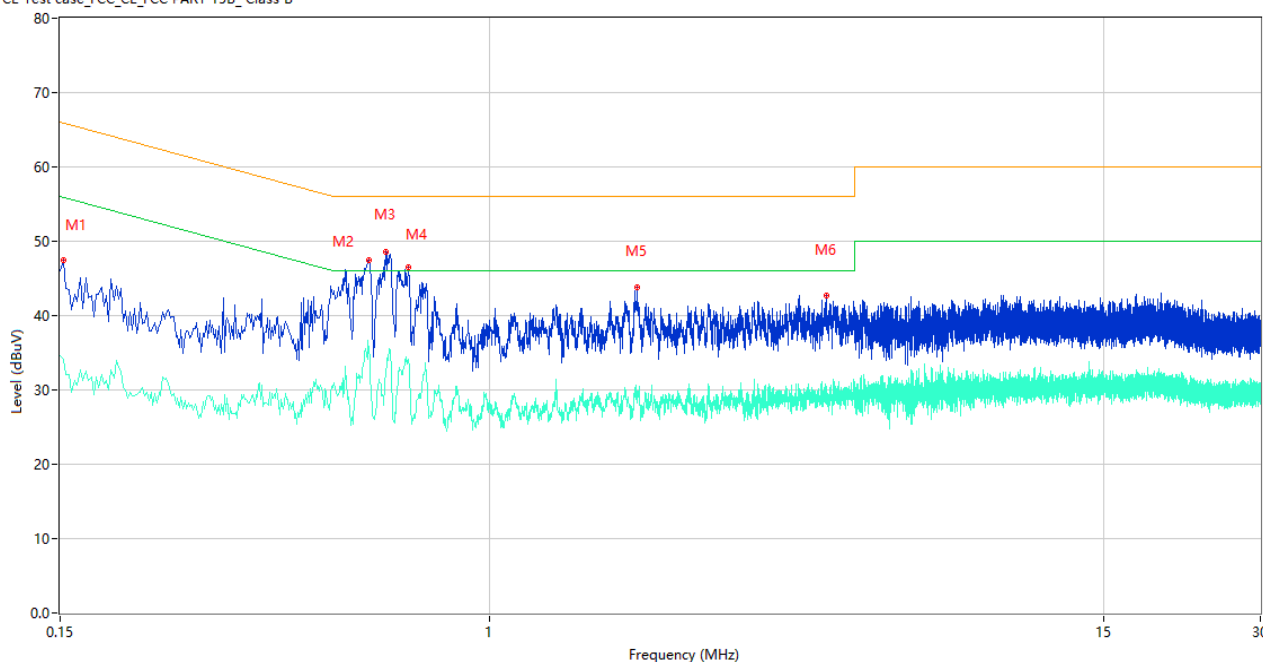

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	47.42	10.09	65.89	18.47	Peak	L	Pass
1**	0.152	34.12	10.09	55.89	21.77	AV	L	Pass
2	0.586	47.48	10.30	56.00	8.52	Peak	L	Pass
2**	0.586	35.31	10.30	46.00	10.69	AV	L	Pass
3	0.632	48.60	10.36	56.00	7.40	Peak	L	Pass
3**	0.632	32.64	10.36	46.00	13.36	AV	L	Pass
4	0.698	46.45	10.80	56.00	9.55	Peak	L	Pass
4**	0.698	34.16	10.80	46.00	11.84	AV	L	Pass
5	1.914	43.79	10.65	56.00	12.21	Peak	L	Pass
5**	1.914	29.69	10.65	46.00	16.31	AV	L	Pass
6	4.412	42.69	10.34	56.00	13.31	Peak	L	Pass
6**	4.412	30.01	10.34	46.00	15.99	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

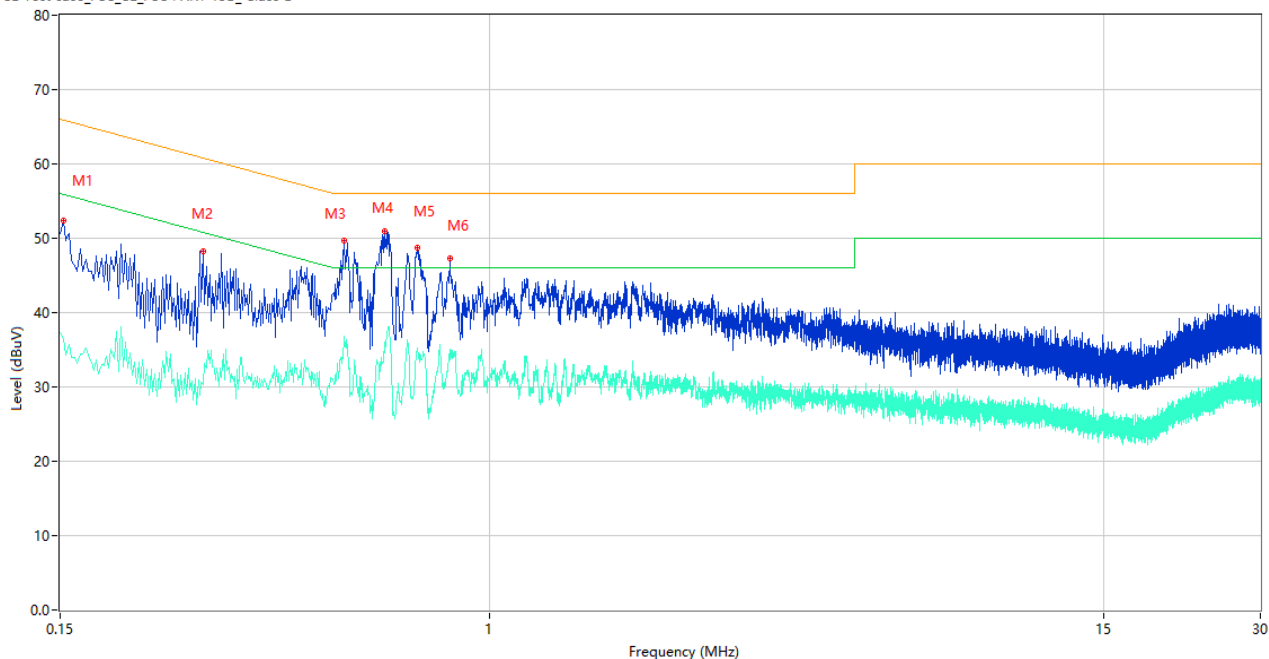

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	52.40	10.09	65.89	13.49	Peak	N	Pass
1**	0.152	36.54	10.09	55.89	19.35	AV	N	Pass
2	0.282	48.28	9.99	60.76	12.48	Peak	N	Pass
2**	0.282	30.31	9.99	50.76	20.45	AV	N	Pass
3	0.526	49.65	10.19	56.00	6.35	Peak	N	Pass
3**	0.526	36.79	10.19	46.00	9.21	AV	N	Pass
4	0.630	50.94	10.36	56.00	5.06	Peak	N	Pass
4**	0.630	36.00	10.36	46.00	10.00	AV	N	Pass
5	0.726	48.70	10.55	56.00	7.30	Peak	N	Pass
5**	0.726	35.23	10.55	46.00	10.77	AV	N	Pass
6	0.838	47.26	10.74	56.00	8.74	Peak	N	Pass
6**	0.838	35.13	10.74	46.00	10.87	AV	N	Pass

A.8 Radiated Spurious Emission

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots


30 MHz to 1 GHz, ANT H

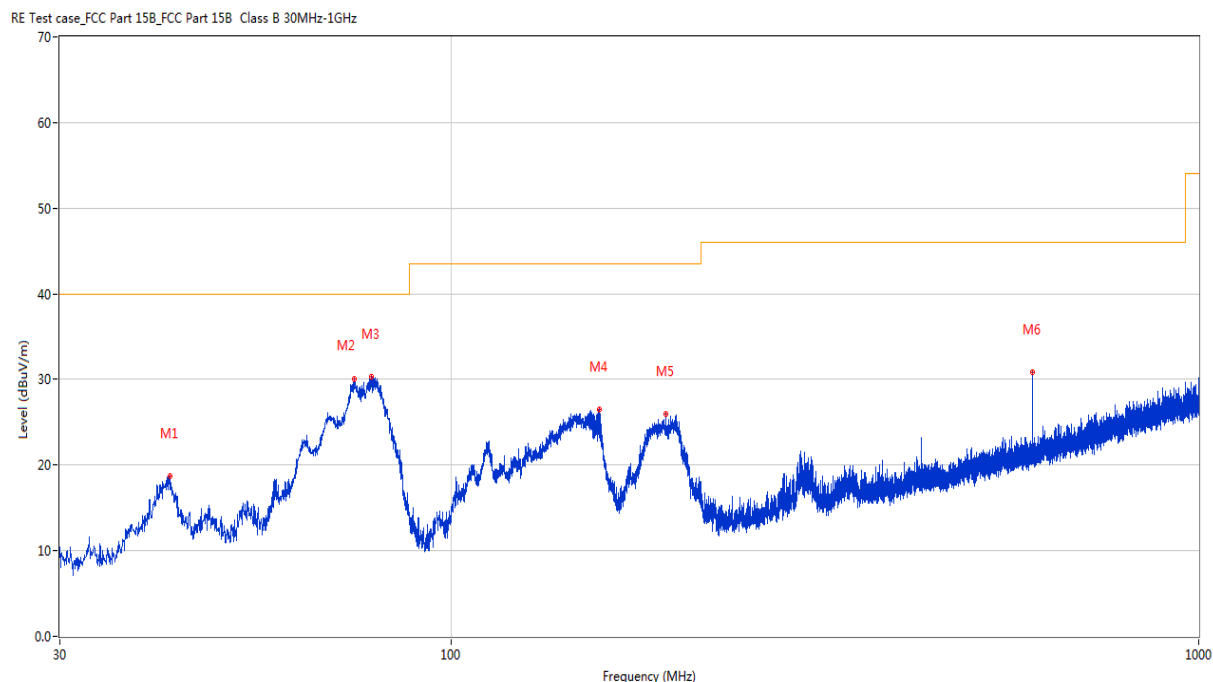

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.077	18.68	-23.45	40.0	21.32	Peak	129.70	100	Horizontal	Pass
2	74.329	30.02	-28.52	40.0	9.98	Peak	218.80	200	Horizontal	Pass
3	78.403	30.37	-28.42	40.0	9.63	Peak	234.70	200	Horizontal	Pass
4	158.137	26.48	-27.57	43.5	17.02	Peak	99.10	200	Horizontal	Pass
5	193.784	25.93	-24.90	43.5	17.57	Peak	90.60	100	Horizontal	Pass
6	599.972	30.85	-14.57	46.0	15.15	Peak	264.20	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

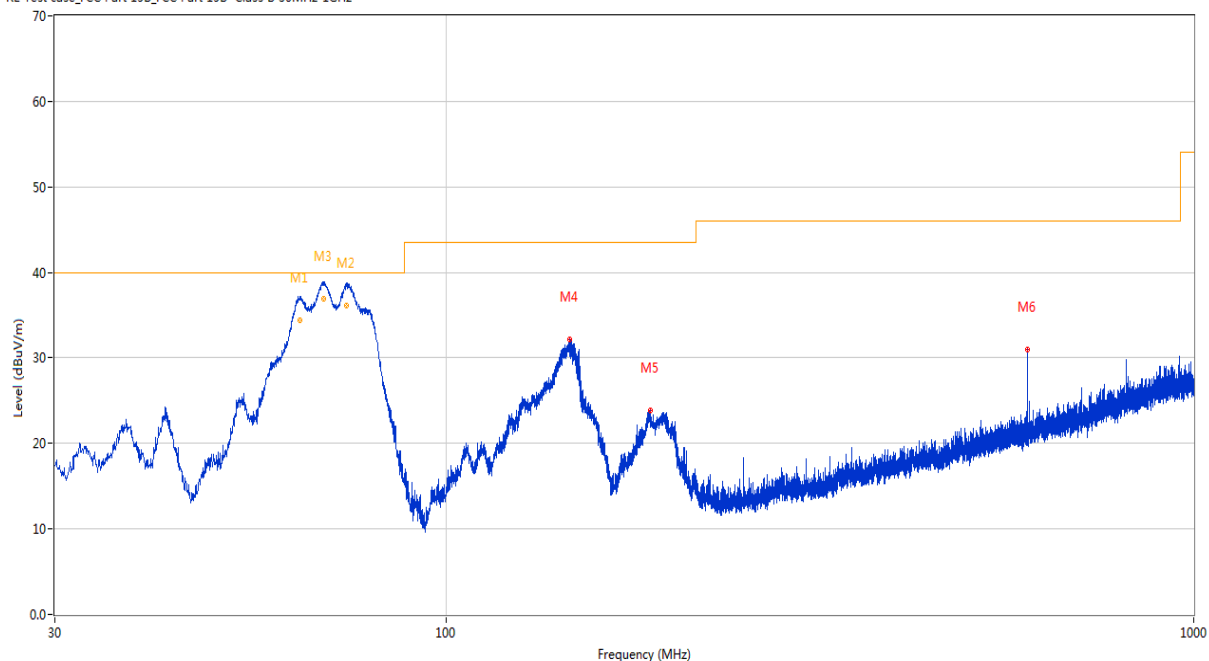


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	63.872	36.29	-24.83	40.0	3.71	Peak	213.80	102	Vertical	N/A
1*	63.872	34.38	-24.83	40.0	5.62	QP	213.80	102	Vertical	Pass
2	73.641	38.22	-28.50	40.0	1.78	Peak	143.70	192	Vertical	N/A
2*	73.641	36.10	-28.50	40.0	3.90	QP	143.70	192	Vertical	Pass
3	68.732	38.72	-26.36	40.0	1.28	Peak	241.40	126	Vertical	N/A
3*	68.732	36.87	-26.36	40.0	3.13	QP	241.40	126	Vertical	Pass
4	146.497	32.12	-27.62	43.5	11.38	Peak	351.00	100	Vertical	Pass
5	187.480	23.85	-25.44	43.5	19.65	Peak	142.70	100	Vertical	Pass
6	600.020	31.00	-14.57	46.0	15.00	Peak	188.80	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

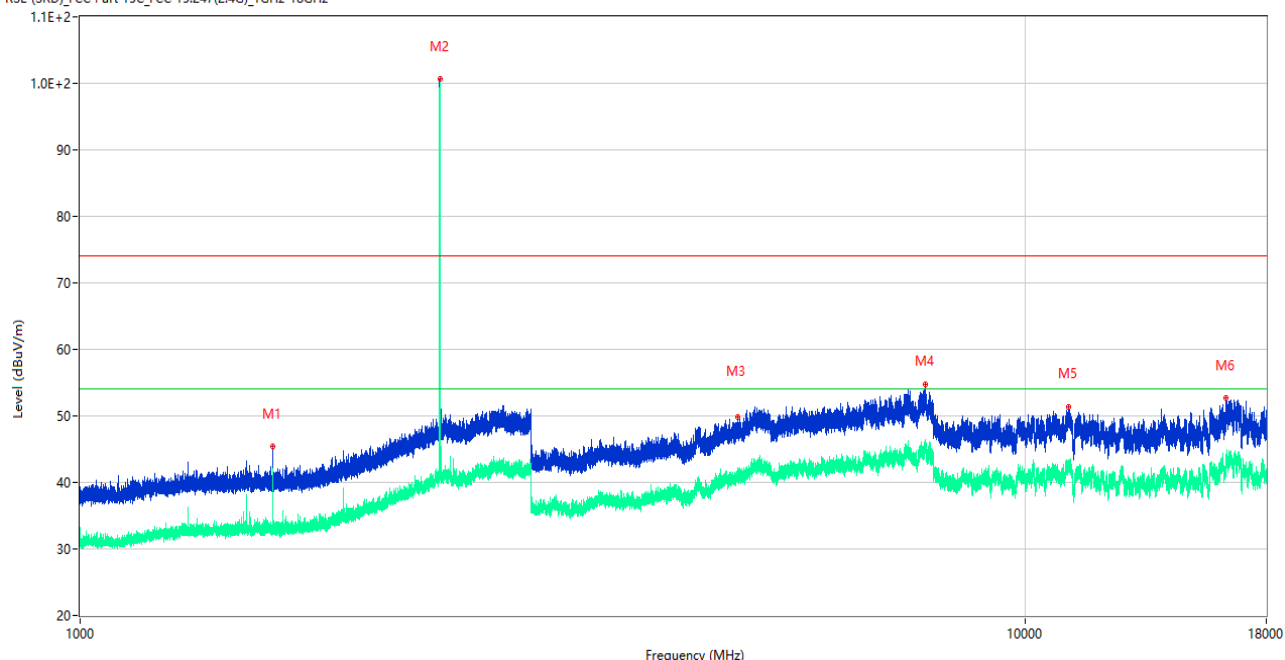

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	45.40	-16.85	74.0	28.60	Peak	273.00	100	Horizontal	Pass
1**	1599.900	42.03	-16.85	54.0	11.97	AV	273.00	100	Horizontal	Pass
2	2402.100	100.65	-10.10	74.0	-26.65	Peak	126.00	200	Horizontal	N/A
2**	2402.100	100.46	-10.10	54.0	-46.46	AV	126.00	200	Horizontal	N/A
3	4964.000	49.80	-2.83	74.0	24.20	Peak	126.00	200	Horizontal	Pass
3**	4964.000	41.05	-2.83	54.0	12.95	AV	126.00	200	Horizontal	Pass
4	7843.750	54.74	2.93	74.0	19.26	Peak	241.00	100	Horizontal	Pass
4**	7843.750	45.31	2.93	54.0	8.69	AV	241.00	100	Horizontal	Pass
5	11119.325	51.36	-0.99	74.0	22.64	Peak	39.00	100	Horizontal	Pass
5**	11119.325	42.25	-0.99	54.0	11.75	AV	39.00	100	Horizontal	Pass
6	16326.563	52.65	0.18	74.0	21.35	Peak	35.00	400	Horizontal	Pass
6**	16326.563	43.19	0.18	54.0	10.81	AV	35.00	400	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

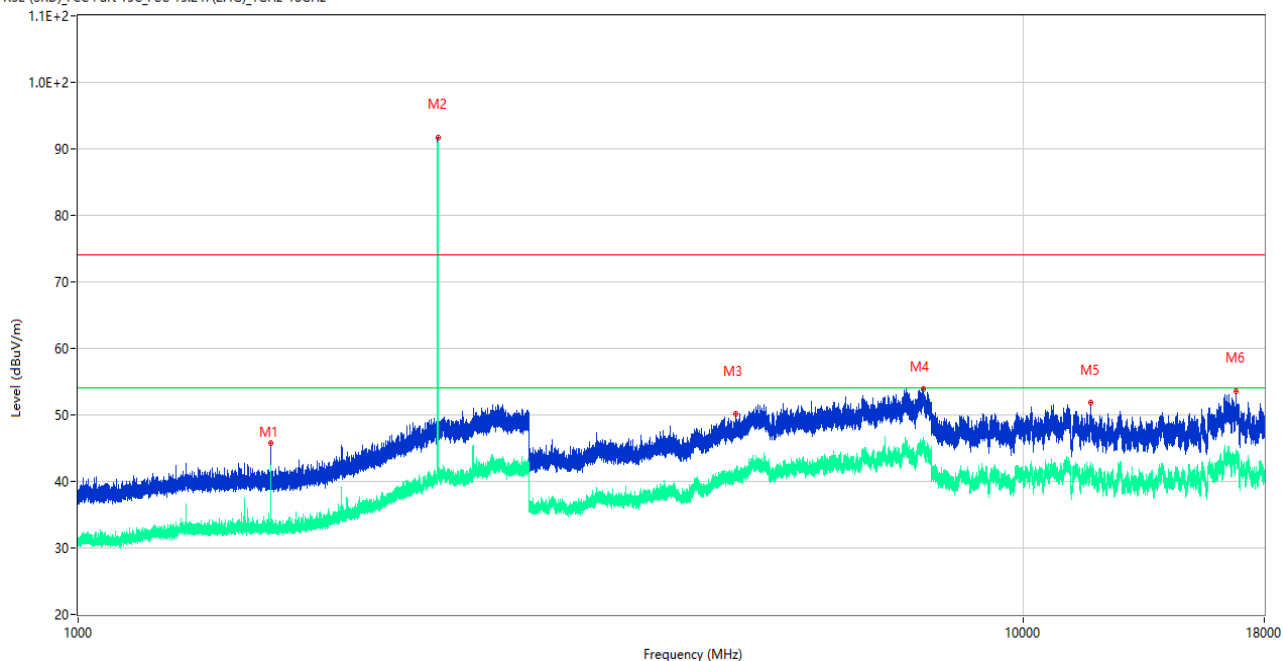

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	45.71	-16.85	74.0	28.29	Peak	337.00	400	Vertical	Pass
1**	1599.900	41.87	-16.85	54.0	12.13	AV	337.00	400	Vertical	Pass
2	2402.200	91.76	-10.10	74.0	-17.76	Peak	122.00	150	Vertical	N/A
2**	2402.200	91.50	-10.10	54.0	-37.50	AV	122.00	150	Vertical	N/A
3	4967.250	50.13	-2.68	74.0	23.87	Peak	39.00	150	Vertical	Pass
3**	4967.250	41.06	-2.68	54.0	12.94	AV	39.00	150	Vertical	Pass
4	7844.500	53.96	2.85	74.0	20.04	Peak	90.00	400	Vertical	Pass
4**	7844.500	45.30	2.85	54.0	8.70	AV	90.00	400	Vertical	Pass
5	11788.838	51.78	-1.75	74.0	22.22	Peak	256.00	100	Vertical	Pass
5**	11788.838	41.82	-1.75	54.0	12.18	AV	256.00	100	Vertical	Pass
6	16801.950	53.63	1.14	74.0	20.37	Peak	343.00	300	Vertical	Pass
6**	16801.950	43.95	1.14	54.0	10.05	AV	343.00	300	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

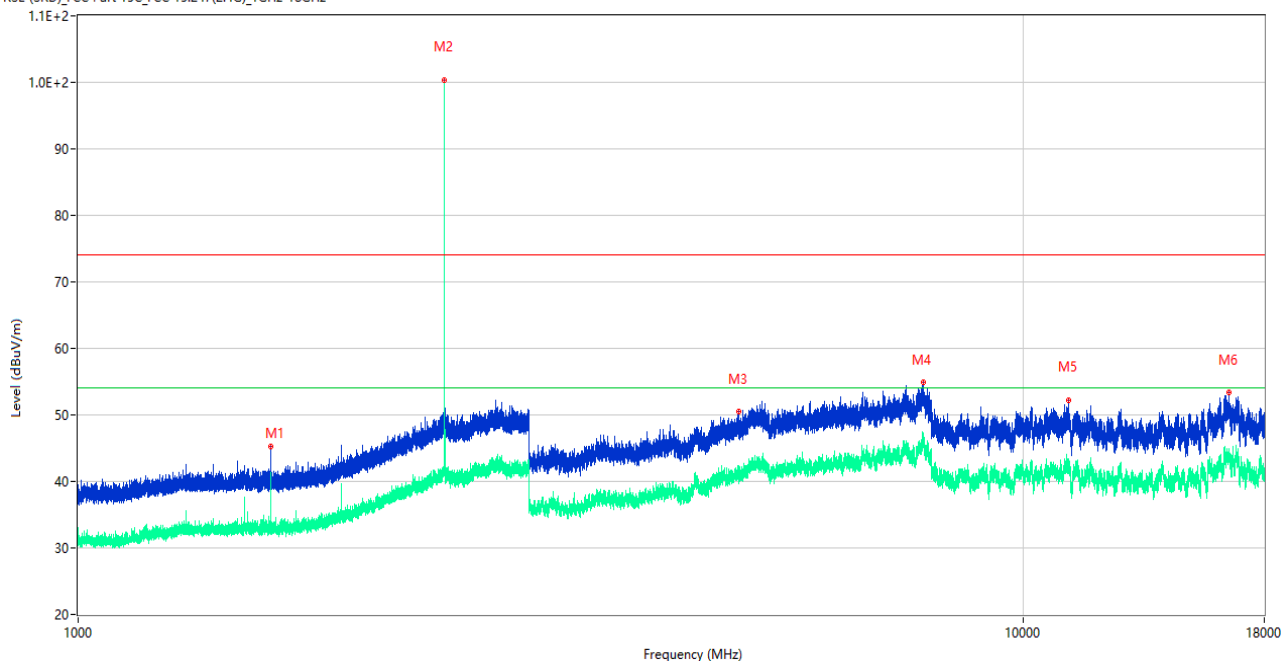

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.100	45.24	-16.86	74.0	28.76	Peak	279.00	150	Horizontal	Pass
1**	1600.100	41.09	-16.86	54.0	12.91	AV	279.00	150	Horizontal	Pass
2	2441.100	100.37	-9.40	74.0	-26.37	Peak	127.00	100	Horizontal	N/A
2**	2441.100	100.19	-9.40	54.0	-46.19	AV	127.00	100	Horizontal	N/A
3	4997.500	50.43	-2.20	74.0	23.57	Peak	290.00	150	Horizontal	Pass
3**	4997.500	40.77	-2.20	54.0	13.23	AV	290.00	150	Horizontal	Pass
4	7833.750	54.87	3.42	74.0	19.13	Peak	177.00	300	Horizontal	Pass
4**	7833.750	46.06	3.42	54.0	7.94	AV	177.00	300	Horizontal	Pass
5	11172.525	52.25	-1.33	74.0	21.75	Peak	202.00	300	Horizontal	Pass
5**	11172.525	42.10	-1.33	54.0	11.90	AV	202.00	300	Horizontal	Pass
6	16497.188	53.38	0.36	74.0	20.62	Peak	211.00	300	Horizontal	Pass
6**	16497.188	44.06	0.36	54.0	9.94	AV	211.00	300	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

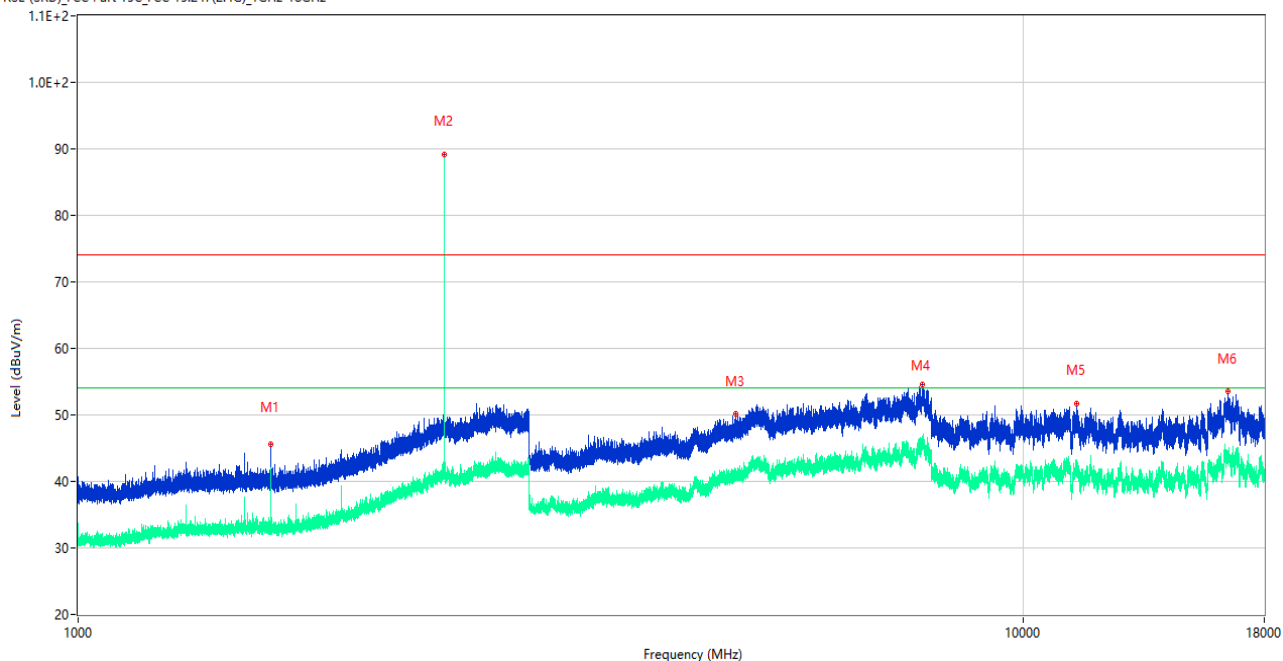

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	45.64	-16.85	74.0	28.36	Peak	88.00	300	Vertical	Pass
1**	1599.900	41.59	-16.85	54.0	12.41	AV	88.00	300	Vertical	Pass
2	2441.100	89.17	-9.40	74.0	-15.17	Peak	184.00	100	Vertical	N/A
2**	2441.100	88.91	-9.40	54.0	-34.91	AV	184.00	100	Vertical	N/A
3	4968.500	50.12	-2.77	74.0	23.88	Peak	0.00	200	Vertical	Pass
3**	4968.500	41.20	-2.77	54.0	12.80	AV	0.00	200	Vertical	Pass
4	7832.750	54.62	3.38	74.0	19.38	Peak	231.00	200	Vertical	Pass
4**	7832.750	46.43	3.38	54.0	7.57	AV	231.00	200	Vertical	Pass
5	11404.088	51.76	-1.70	74.0	22.24	Peak	341.00	200	Vertical	Pass
5**	11404.088	41.84	-1.70	54.0	12.16	AV	341.00	200	Vertical	Pass
6	16478.026	53.50	0.43	74.0	20.50	Peak	0.00	400	Vertical	Pass
6**	16478.026	42.91	0.43	54.0	11.09	AV	0.00	400	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

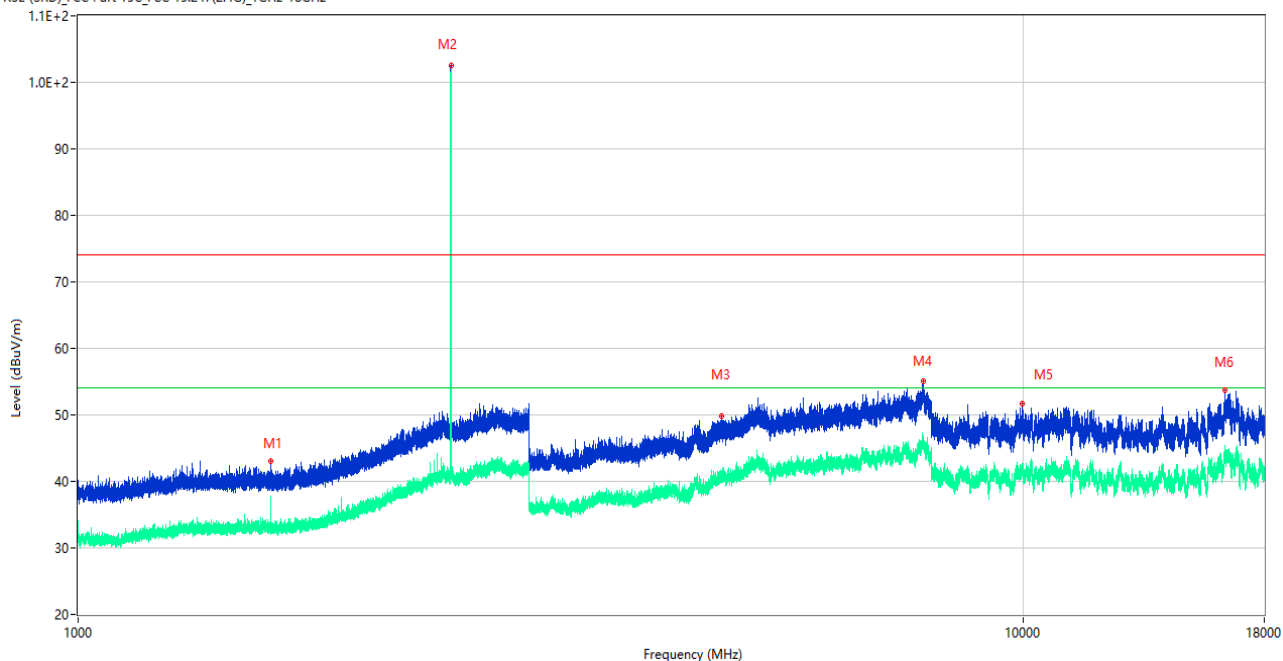

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.800	43.02	-16.85	74.0	30.98	Peak	360.00	400	Horizontal	Pass
1**	1599.800	36.66	-16.85	54.0	17.34	AV	360.00	400	Horizontal	Pass
2	2479.800	102.59	-10.55	74.0	-28.59	Peak	128.00	100	Horizontal	N/A
2**	2479.800	102.02	-10.55	54.0	-48.02	AV	128.00	100	Horizontal	N/A
3	4793.000	49.87	-2.92	74.0	24.13	Peak	67.00	200	Horizontal	Pass
3**	4793.000	40.85	-2.92	54.0	13.15	AV	67.00	200	Horizontal	Pass
4	7852.250	55.00	2.27	74.0	19.00	Peak	31.00	400	Horizontal	Pass
4**	7852.250	45.63	2.27	54.0	8.37	AV	31.00	400	Horizontal	Pass
5	9979.563	51.77	-2.63	74.0	22.23	Peak	9.00	100	Horizontal	Pass
5**	9979.563	41.89	-2.63	54.0	12.11	AV	9.00	100	Horizontal	Pass
6	16348.088	53.77	0.79	74.0	20.23	Peak	33.00	300	Horizontal	Pass
6**	16348.088	44.79	0.79	54.0	9.21	AV	33.00	300	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

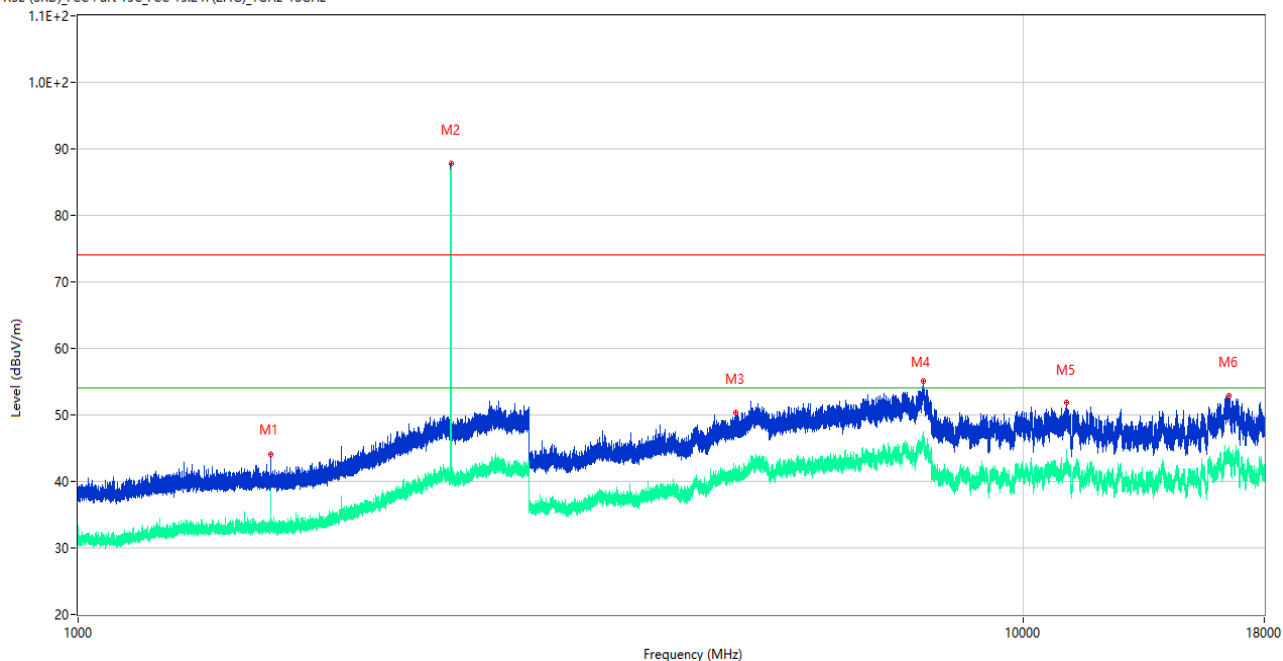

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	44.10	-16.85	74.0	29.90	Peak	49.00	200	Vertical	Pass
1**	1599.900	37.89	-16.85	54.0	16.11	AV	49.00	200	Vertical	Pass
2	2479.800	87.82	-10.55	74.0	-13.82	Peak	135.00	100	Vertical	N/A
2**	2479.800	87.25	-10.55	54.0	-33.25	AV	135.00	100	Vertical	N/A
3	4970.000	50.35	-2.68	74.0	23.65	Peak	314.00	200	Vertical	Pass
3**	4970.000	41.43	-2.68	54.0	12.57	AV	314.00	200	Vertical	Pass
4	7843.000	55.08	2.99	74.0	18.92	Peak	180.00	400	Vertical	Pass
4**	7843.000	45.89	2.99	54.0	8.11	AV	180.00	400	Vertical	Pass
5	11112.674	51.84	-0.99	74.0	22.16	Peak	0.00	400	Vertical	Pass
5**	11112.674	44.71	-0.99	54.0	9.29	AV	0.00	400	Vertical	Pass
6	16509.525	52.92	0.29	74.0	21.08	Peak	111.00	200	Vertical	Pass
6**	16509.525	43.75	0.29	54.0	10.25	AV	111.00	200	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

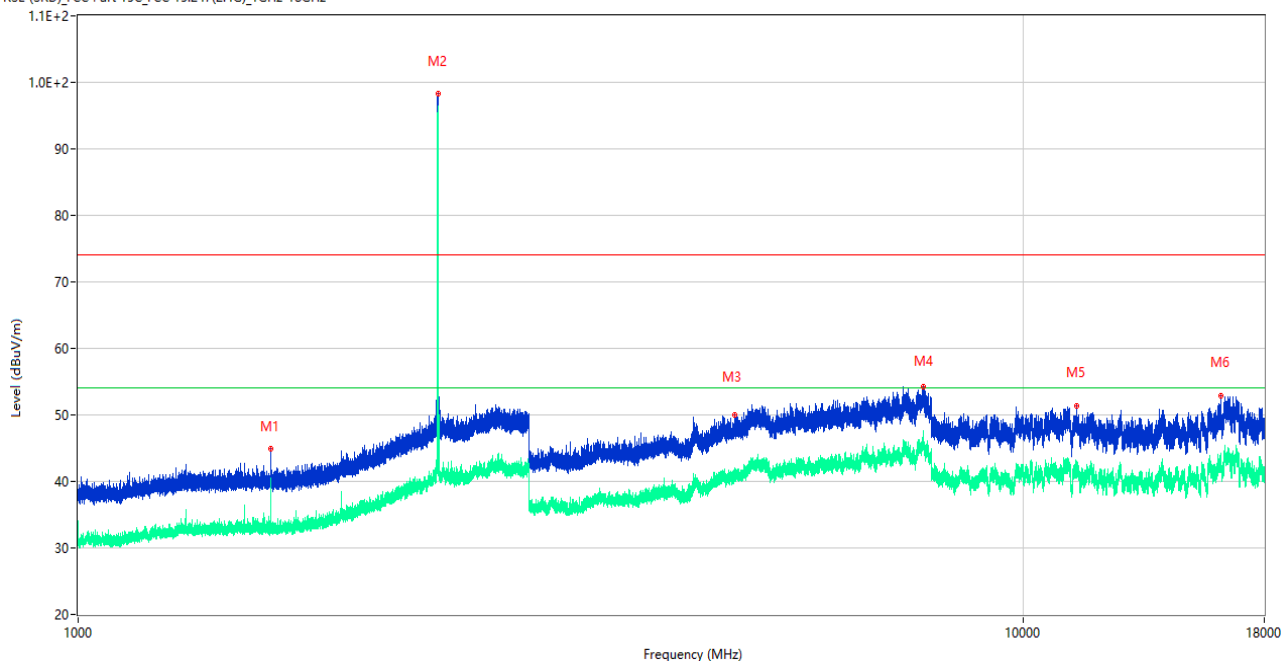

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.100	44.85	-16.86	74.0	29.15	Peak	360.00	150	Horizontal	Pass
1**	1600.100	40.54	-16.86	54.0	13.46	AV	360.00	150	Horizontal	Pass
2	2402.000	98.27	-10.11	74.0	-24.27	Peak	133.00	200	Horizontal	N/A
2**	2402.000	95.75	-10.11	54.0	-41.75	AV	133.00	200	Horizontal	N/A
3	4952.750	50.03	-2.28	74.0	23.97	Peak	306.00	200	Horizontal	Pass
3**	4952.750	40.40	-2.28	54.0	13.60	AV	306.00	200	Horizontal	Pass
4	7846.750	54.30	2.56	74.0	19.70	Peak	133.00	300	Horizontal	Pass
4**	7846.750	45.76	2.56	54.0	8.24	AV	133.00	300	Horizontal	Pass
5	11399.812	51.42	-1.65	74.0	22.58	Peak	353.00	200	Horizontal	Pass
5**	11399.812	41.25	-1.65	54.0	12.75	AV	353.00	200	Horizontal	Pass
6	16206.862	52.92	0.20	74.0	21.08	Peak	107.00	300	Horizontal	Pass
6**	16206.862	43.16	0.20	54.0	10.84	AV	107.00	300	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

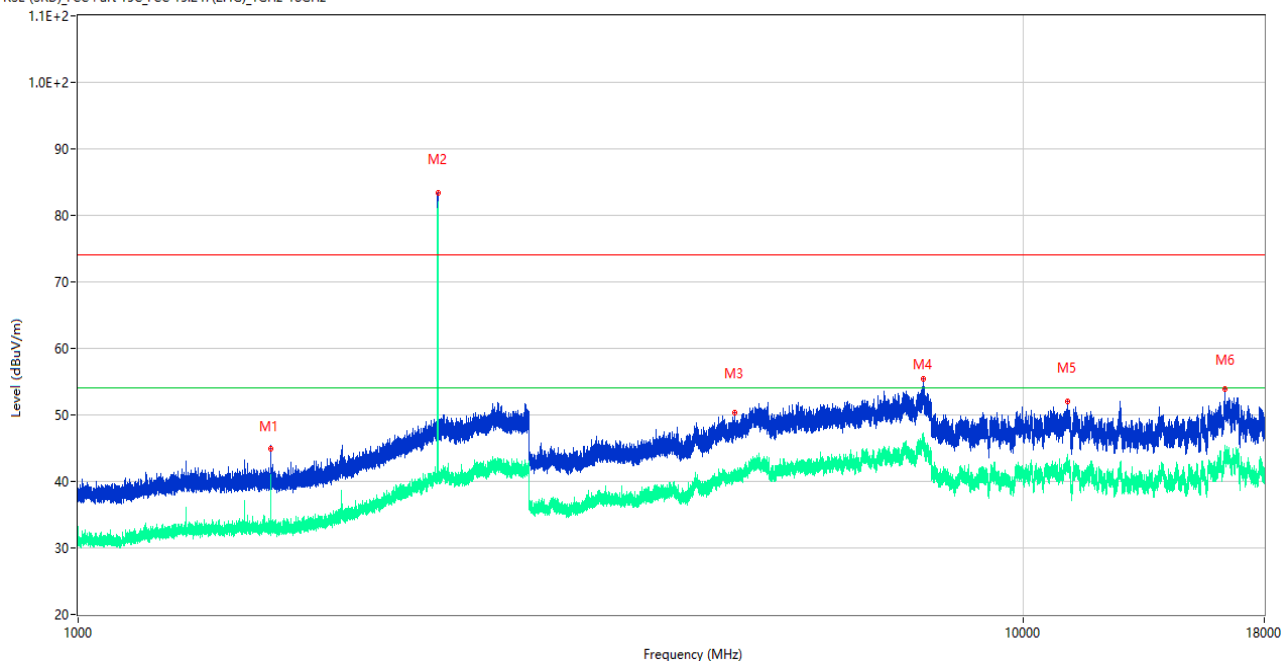

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	44.88	-16.85	74.0	29.12	Peak	133.00	400	Vertical	Pass
1**	1599.900	40.36	-16.85	54.0	13.64	AV	133.00	400	Vertical	Pass
2	2402.100	83.47	-10.10	74.0	-9.47	Peak	186.00	150	Vertical	N/A
2**	2402.100	81.72	-10.10	54.0	-27.72	AV	186.00	150	Vertical	N/A
3	4948.250	50.32	-2.22	74.0	23.68	Peak	0.00	100	Vertical	Pass
3**	4948.250	40.67	-2.22	54.0	13.33	AV	0.00	100	Vertical	Pass
4	7843.500	55.36	2.95	74.0	18.64	Peak	99.00	200	Vertical	Pass
4**	7843.500	45.74	2.95	54.0	8.26	AV	99.00	200	Vertical	Pass
5	11136.900	52.11	-0.96	74.0	21.89	Peak	49.00	300	Vertical	Pass
5**	11136.900	43.17	-0.96	54.0	10.83	AV	49.00	300	Vertical	Pass
6	16348.613	53.91	0.81	74.0	20.09	Peak	307.00	100	Vertical	Pass
6**	16348.613	44.28	0.81	54.0	9.72	AV	307.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

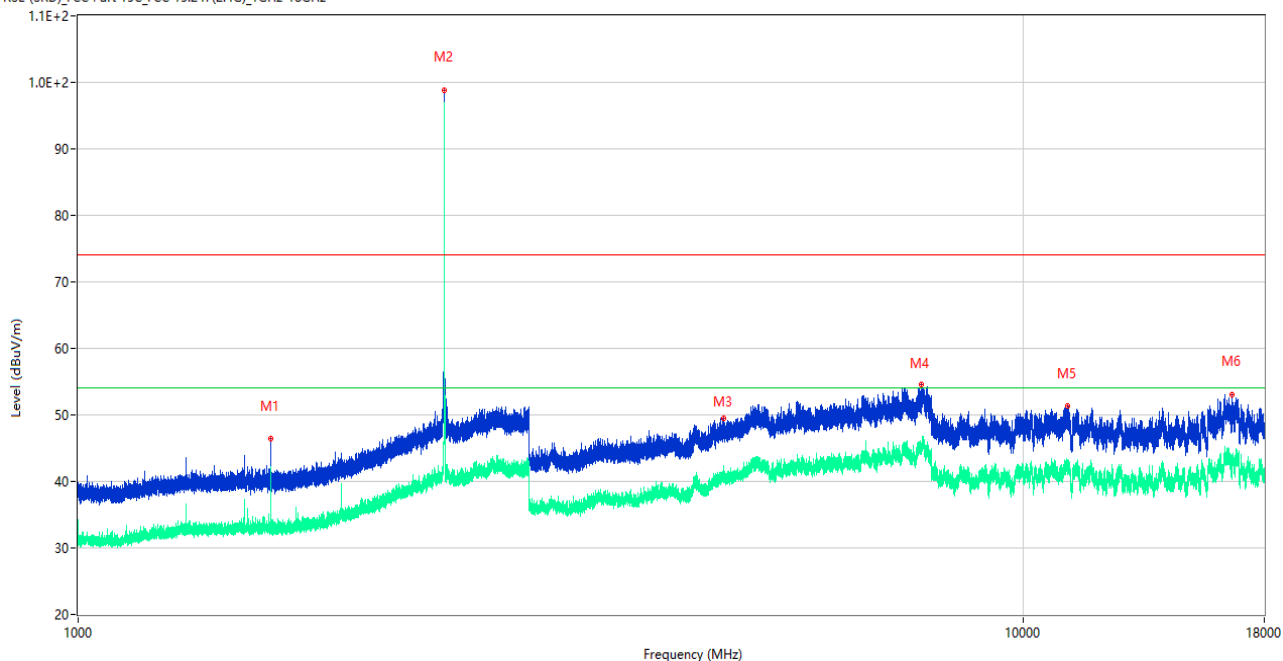

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.800	46.42	-16.85	74.0	27.58	Peak	15.00	300	Horizontal	Pass
1**	1599.800	41.35	-16.85	54.0	12.65	AV	15.00	300	Horizontal	Pass
2	2441.000	98.87	-9.40	74.0	-24.87	Peak	127.00	200	Horizontal	N/A
2**	2441.000	96.74	-9.40	54.0	-42.74	AV	127.00	200	Horizontal	N/A
3	4816.750	49.56	-1.84	74.0	24.44	Peak	262.00	100	Horizontal	Pass
3**	4816.750	41.12	-1.84	54.0	12.88	AV	262.00	100	Horizontal	Pass
4	7813.500	54.62	2.17	74.0	19.38	Peak	102.00	300	Horizontal	Pass
4**	7813.500	45.65	2.17	54.0	8.35	AV	102.00	300	Horizontal	Pass
5	11133.100	51.34	-0.97	74.0	22.66	Peak	0.00	200	Horizontal	Pass
5**	11133.100	42.35	-0.97	54.0	11.65	AV	0.00	200	Horizontal	Pass
6	16656.525	53.12	1.07	74.0	20.88	Peak	331.00	300	Horizontal	Pass
6**	16656.525	43.31	1.07	54.0	10.69	AV	331.00	300	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

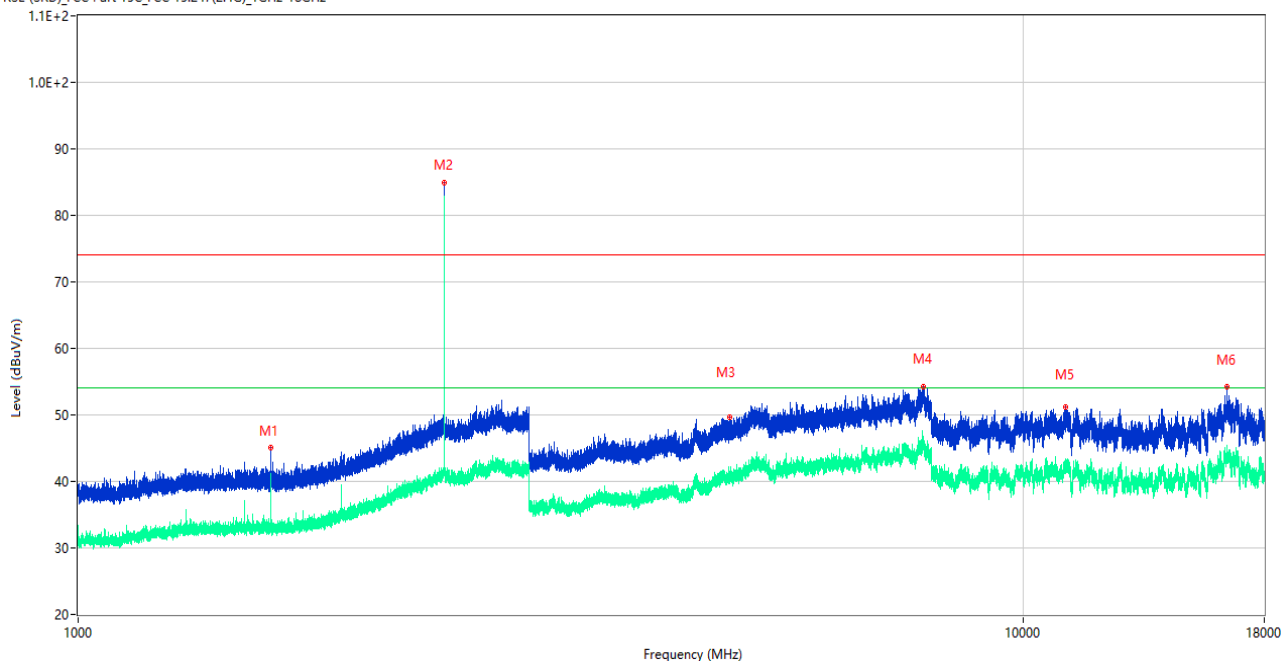

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.800	45.01	-16.85	74.0	28.99	Peak	120.00	400	Vertical	Pass
1**	1599.800	40.33	-16.85	54.0	13.67	AV	120.00	400	Vertical	Pass
2	2441.000	84.92	-9.40	74.0	-10.92	Peak	184.00	200	Vertical	N/A
2**	2441.000	82.83	-9.40	54.0	-28.83	AV	184.00	200	Vertical	N/A
3	4896.750	49.72	-2.56	74.0	24.28	Peak	231.00	150	Vertical	Pass
3**	4896.750	40.21	-2.56	54.0	13.79	AV	231.00	150	Vertical	Pass
4	7840.500	54.19	3.19	74.0	19.81	Peak	284.00	100	Vertical	Pass
4**	7840.500	46.04	3.19	54.0	7.96	AV	284.00	100	Vertical	Pass
5	11092.963	51.14	-1.14	74.0	22.86	Peak	292.00	400	Vertical	Pass
5**	11092.963	43.47	-1.14	54.0	10.53	AV	292.00	400	Vertical	Pass
6	16451.511	54.18	0.52	74.0	19.82	Peak	230.00	150	Vertical	Pass
6**	16451.511	42.89	0.52	54.0	11.11	AV	230.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

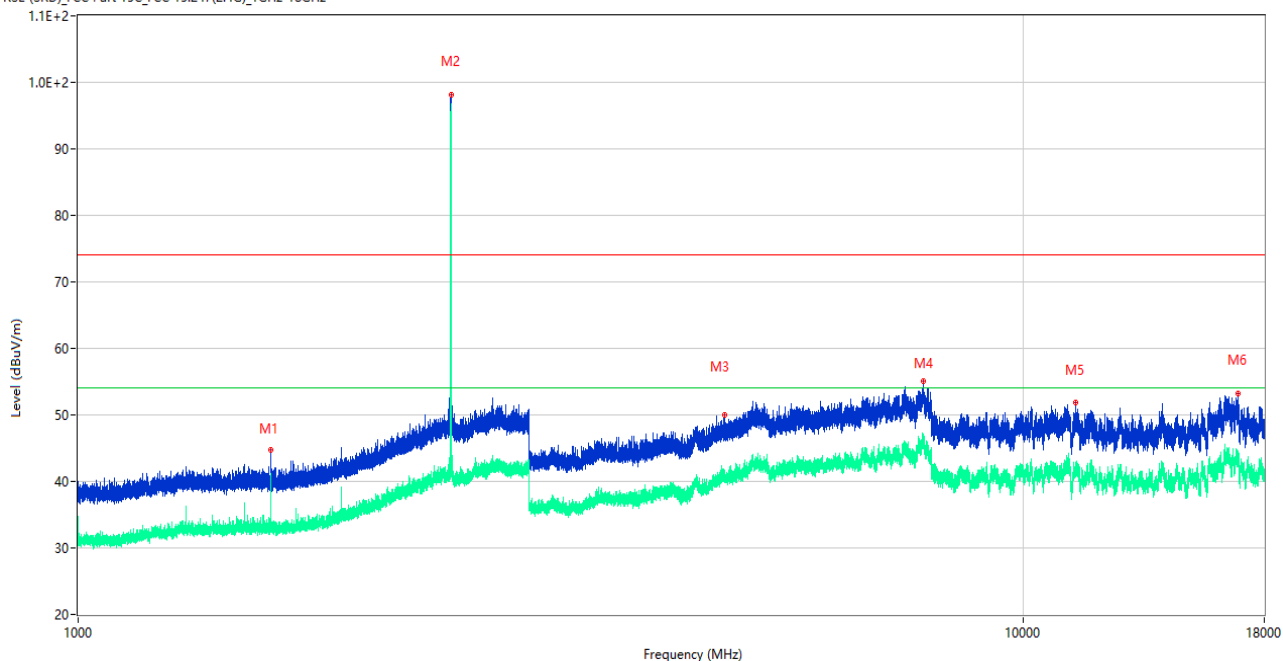

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	44.76	-16.85	74.0	29.24	Peak	342.00	300	Horizontal	Pass
1**	1599.900	40.95	-16.85	54.0	13.05	AV	342.00	300	Horizontal	Pass
2	2479.800	98.19	-10.55	74.0	-24.19	Peak	128.00	100	Horizontal	N/A
2**	2479.800	96.20	-10.55	54.0	-42.20	AV	128.00	100	Horizontal	N/A
3	4836.000	49.93	-2.00	74.0	24.07	Peak	23.00	200	Horizontal	Pass
3**	4836.000	40.80	-2.00	54.0	13.20	AV	23.00	200	Horizontal	Pass
4	7835.000	55.17	3.48	74.0	18.83	Peak	0.00	400	Horizontal	Pass
4**	7835.000	46.22	3.48	54.0	7.78	AV	0.00	400	Horizontal	Pass
5	11366.799	51.78	-1.79	74.0	22.22	Peak	17.00	100	Horizontal	Pass
5**	11366.799	42.67	-1.79	54.0	11.33	AV	17.00	100	Horizontal	Pass
6	16902.750	53.27	0.70	74.0	20.73	Peak	238.00	300	Horizontal	Pass
6**	16902.750	43.12	0.70	54.0	10.88	AV	238.00	300	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

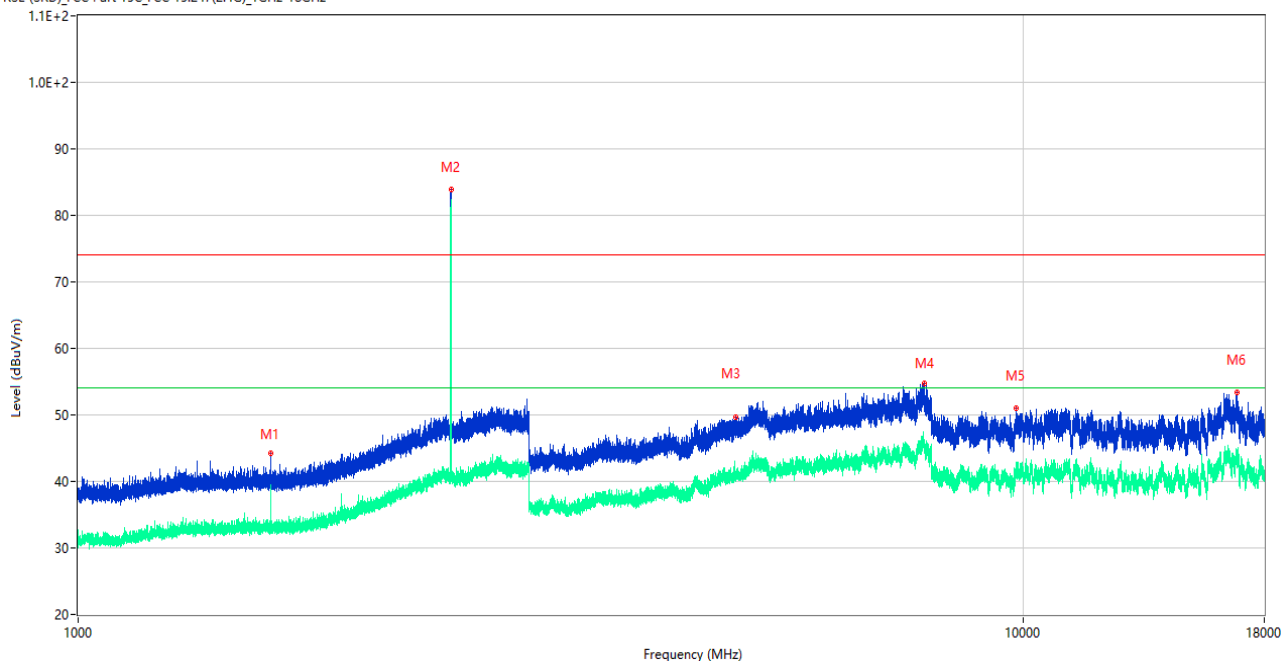

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	44.21	-16.85	74.0	29.79	Peak	105.00	400	Vertical	Pass
1**	1599.900	38.95	-16.85	54.0	15.05	AV	105.00	400	Vertical	Pass
2	2479.900	83.86	-10.56	74.0	-9.86	Peak	132.00	200	Vertical	N/A
2**	2479.900	81.90	-10.56	54.0	-27.90	AV	132.00	200	Vertical	N/A
3	4966.250	49.74	-2.59	74.0	24.26	Peak	313.00	150	Vertical	Pass
3**	4966.250	41.52	-2.59	54.0	12.48	AV	313.00	150	Vertical	Pass
4	7858.750	54.72	2.16	74.0	19.28	Peak	182.00	100	Vertical	Pass
4**	7858.750	45.93	2.16	54.0	8.07	AV	182.00	100	Vertical	Pass
5	9838.725	50.97	-2.28	74.0	23.03	Peak	105.00	300	Vertical	Pass
5**	9838.725	41.26	-2.28	54.0	12.74	AV	105.00	300	Vertical	Pass
6	16832.663	53.33	0.91	74.0	20.67	Peak	314.00	300	Vertical	Pass
6**	16832.663	44.00	0.91	54.0	10.00	AV	314.00	300	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data and Plots

GFSK LOW CHANNEL

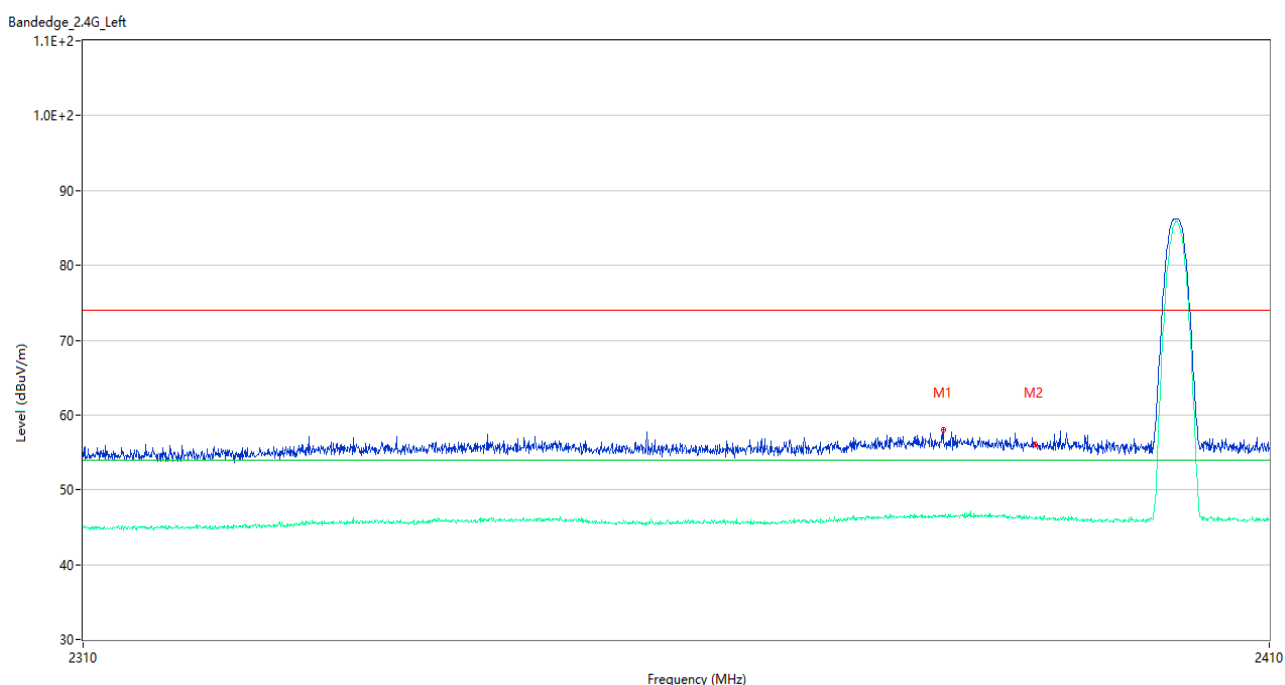


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2382.100	58.06	2.00	74.0	15.94	Peak	175.00	150	Horizontal	Pass
1**	2382.100	46.37	2.00	54.0	7.63	AV	175.00	150	Horizontal	Pass
2	2389.950	56.00	1.86	74.0	18.00	Peak	189.00	150	Horizontal	Pass
2**	2389.950	46.20	1.86	54.0	7.80	AV	189.00	150	Horizontal	Pass

GFSK HIGH CHANNEL

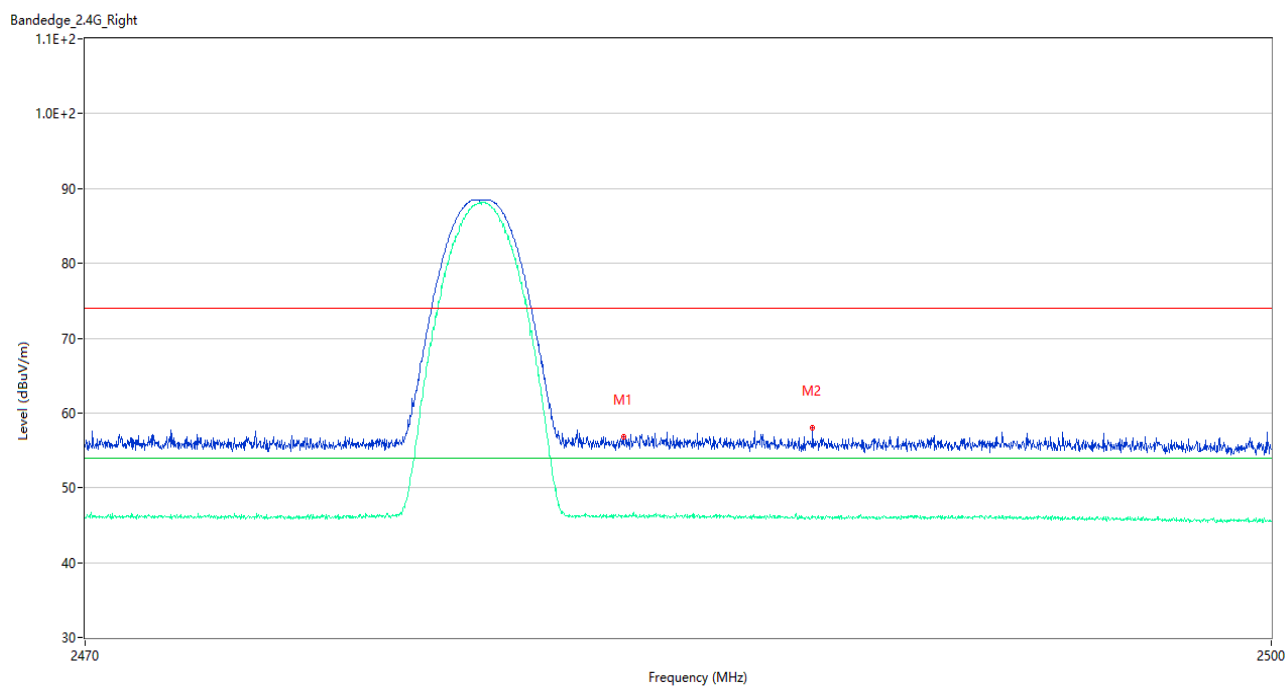


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	56.78	1.77	74.0	17.22	Peak	305.00	150	Horizontal	Pass
1**	2483.575	46.14	1.77	54.0	7.86	AV	305.00	150	Horizontal	Pass
2	2488.360	58.02	1.63	74.0	15.98	Peak	113.00	200	Horizontal	Pass
2**	2488.360	46.02	1.63	54.0	7.98	AV	113.00	200	Horizontal	Pass

8-DPSK LOW CHANNEL

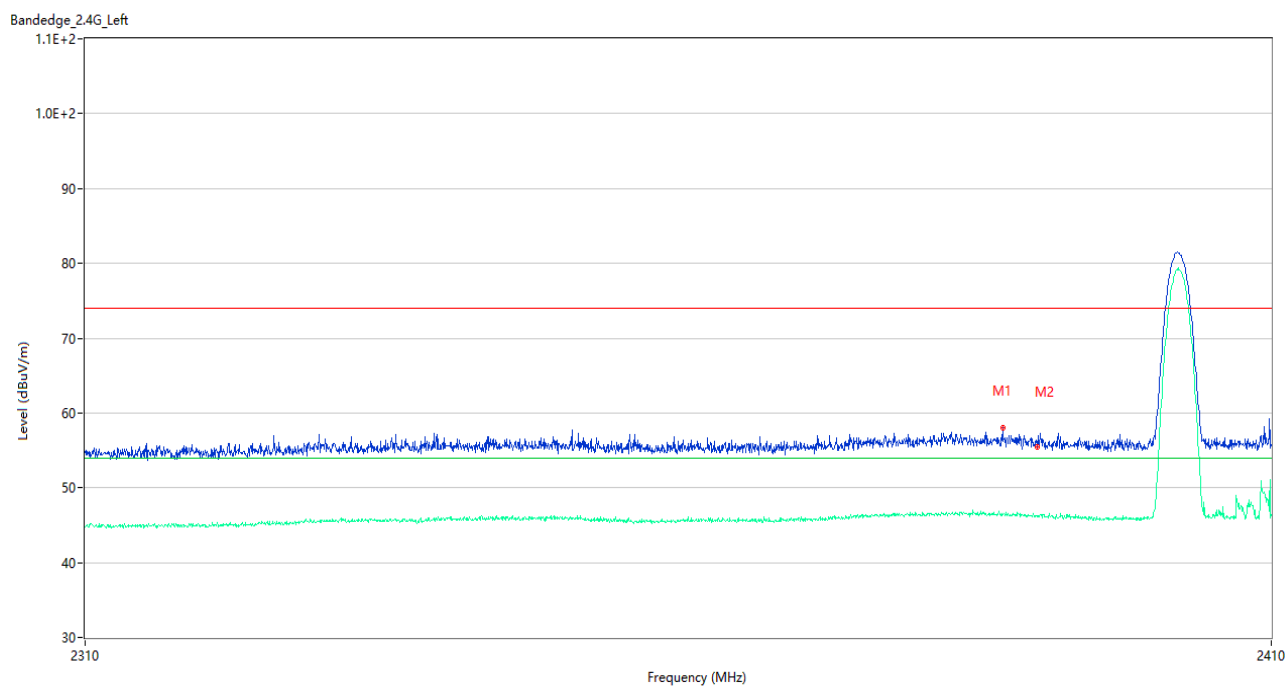

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.000	58.00	2.03	74.0	16.00	Peak	0.00	200	Horizontal	Pass
1**	2387.000	46.39	2.03	54.0	7.61	AV	0.00	200	Horizontal	Pass
2	2389.950	55.45	1.86	74.0	18.55	Peak	96.00	150	Horizontal	Pass
2**	2389.950	46.05	1.86	54.0	7.95	AV	96.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL

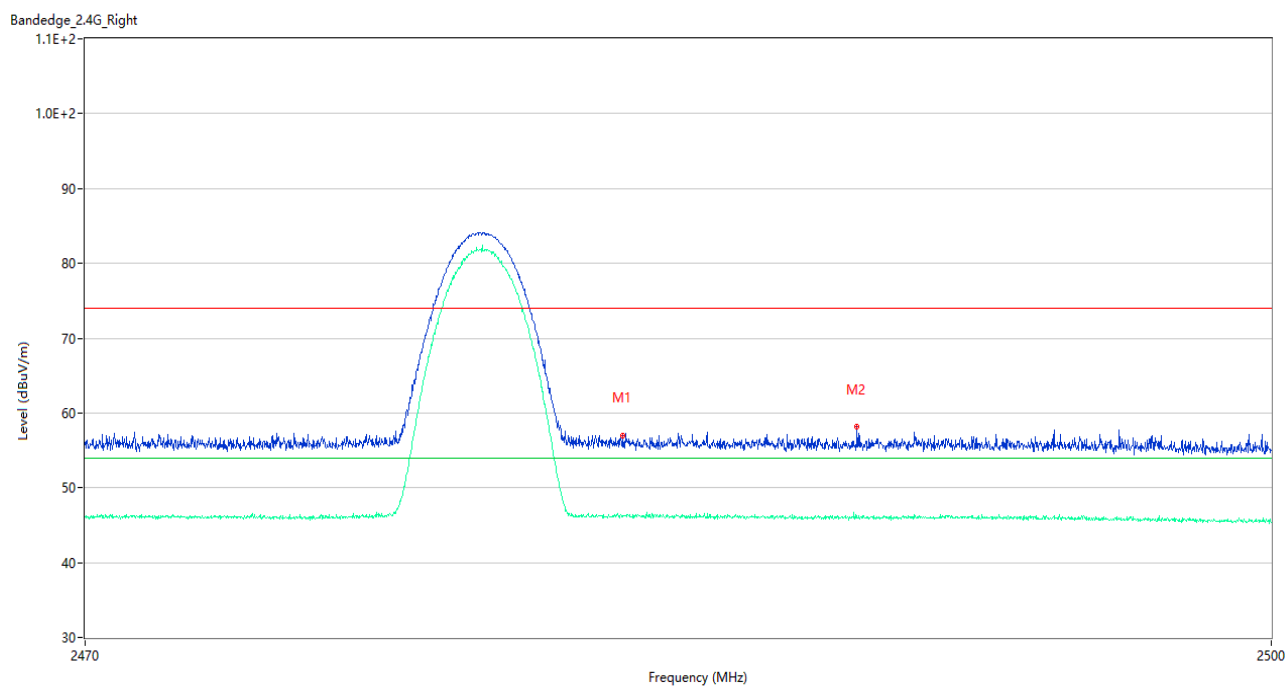

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.560	57.02	1.77	74.0	16.98	Peak	177.00	200	Horizontal	Pass
1**	2483.560	46.09	1.77	54.0	7.91	AV	177.00	200	Horizontal	Pass
2	2489.485	58.19	1.64	74.0	15.81	Peak	289.00	150	Horizontal	Pass
2**	2489.485	45.99	1.64	54.0	8.01	AV	289.00	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ22B0401-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ22B0401-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ22B0401-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--