



TEST REPORT

APPLICANT : Shenzhen Chainway Information
Technology Co., Ltd.

PRODUCT NAME : Mobile Data Terminal

MODEL NAME : C60

BRAND NAME : CHAINWAY

FCC ID : 2AC6AC60

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-10-14

TEST DATE : 2020-11-04 to 2020-12-25

ISSUE DATE : 2020-12-28

Edited by: Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15C Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of Test Signal	10
2.3. Maximum Peak and Average Conducted Output Power	14
2.4. Bandwidth	17
2.5. Conducted Spurious Emissions and Band Edge	26
2.6. Power Spectral Density (PSD)	39
2.7. Conducted Emission	48
2.8. Restricted Frequency Bands	52
2.9. Radiated Emission	65
Annex A Test Uncertainty	81
Annex B Testing Laboratory Information	82

Change History		
Version	Date	Reason for change
1.0	2020-12-28	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co., Ltd.
Applicant Address:	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Chainway Information Technology Co., Ltd.
Manufacturer Address:	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Data Terminal	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	A115_MB_V2	
Software Version:	c60_yuancheng_gitb4ed7c0_20200924	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section 1.3	
Operating Frequency Range:	802.11b/g/n (HT20): 2412MHz–2472MHz 802.11n (HT40): 2422MHz–2462MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.3dBi	
Accessory Information:	Battery	
	Brand Name:	Hixon
	Model No.:	J855
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4250.00mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	Hixon(Shenzhen) Technology Limited



Accessory Information:	AC Adapter	
	Brand Name:	
	Model No.:	NA010050020
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Shenzhen Shi Ying Yuan Electronics Co., Ltd.

Note 1: According to the certificate holder, they declared that the model C60 has two internal models 4710 and 6603. The difference between the two internal models is that the scan head is different. Except for the above differences, their circuit design, layout and internal wiring are the same. Due to the above changes, we have evaluated and retested worst case of internal model 6603, the test results are better than internal model 4710, all other test items are no need to be retested. The main measuring internal model is 4710, only the results for 4710 were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	11	2462
	7	2442		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Nov 04, 2020	Ouyang Feng	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Dec 25, 2020	Ouyang Feng	PASS	No deviation
4	15.247(a)	Bandwidth	Nov 04, 2020	Ouyang Feng	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Nov 04&09, 2020	Ouyang Feng	PASS	No deviation
6	15.247(e)	Power Spectral Density (PSD)	Nov 04, 2020	Ouyang Feng	PASS	No deviation
7	15.207	Conducted Emission	Dec 19, 2020	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Dec 22, 2020	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Dec 21&22, 2020	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting



in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

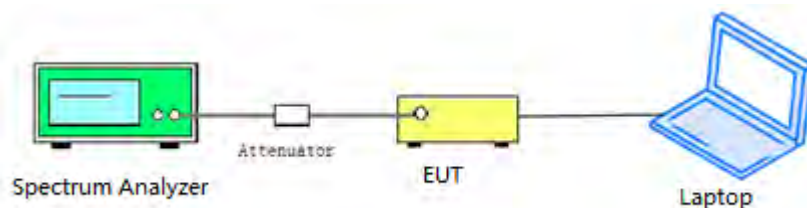

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
802.11b	97.51	0.11
802.11g	87.82	0.56
802.11n (HT20)	86.39	0.64
802.11n (HT40)	75.90	1.20


B. Test Plot:

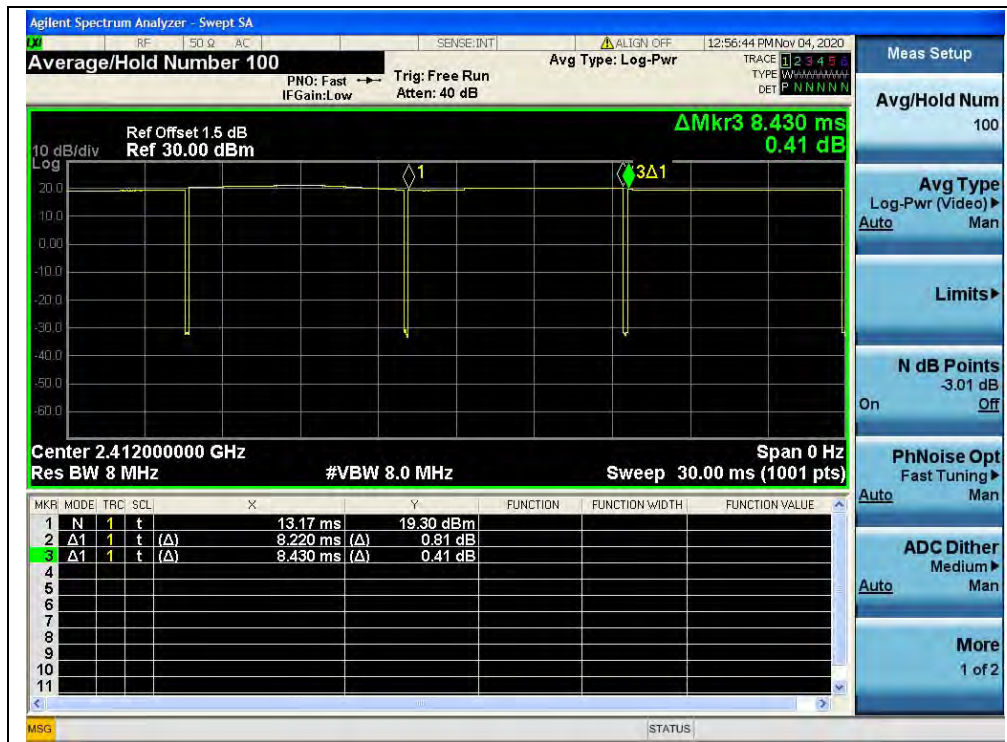


(Channel 1, 802.11b)

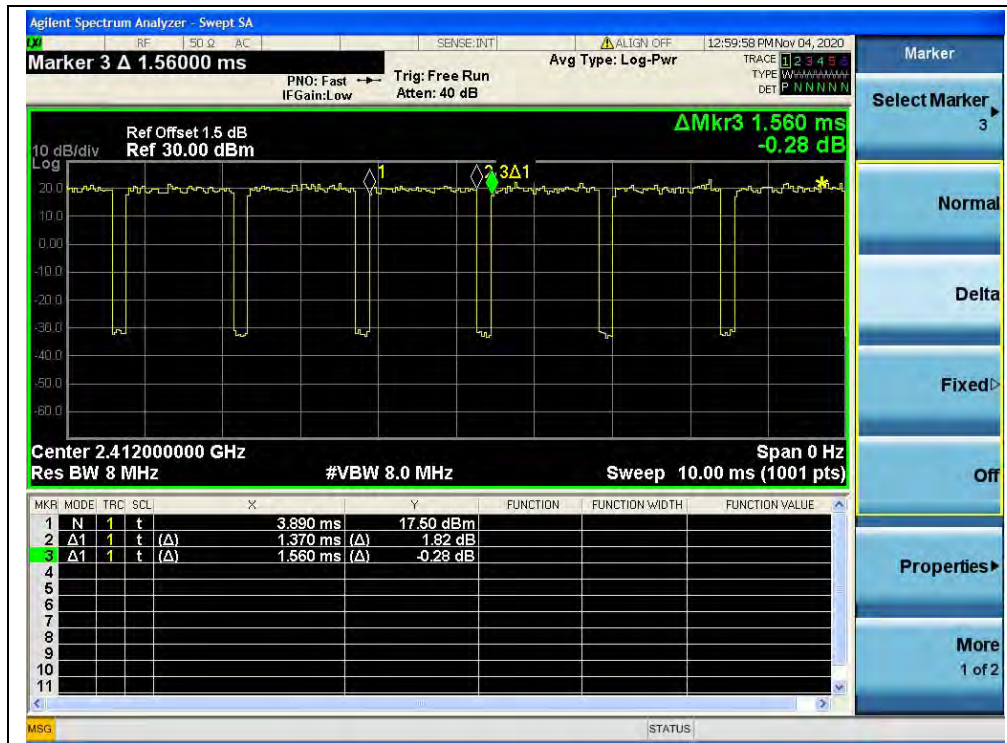

(Channel 1, 802.11g)

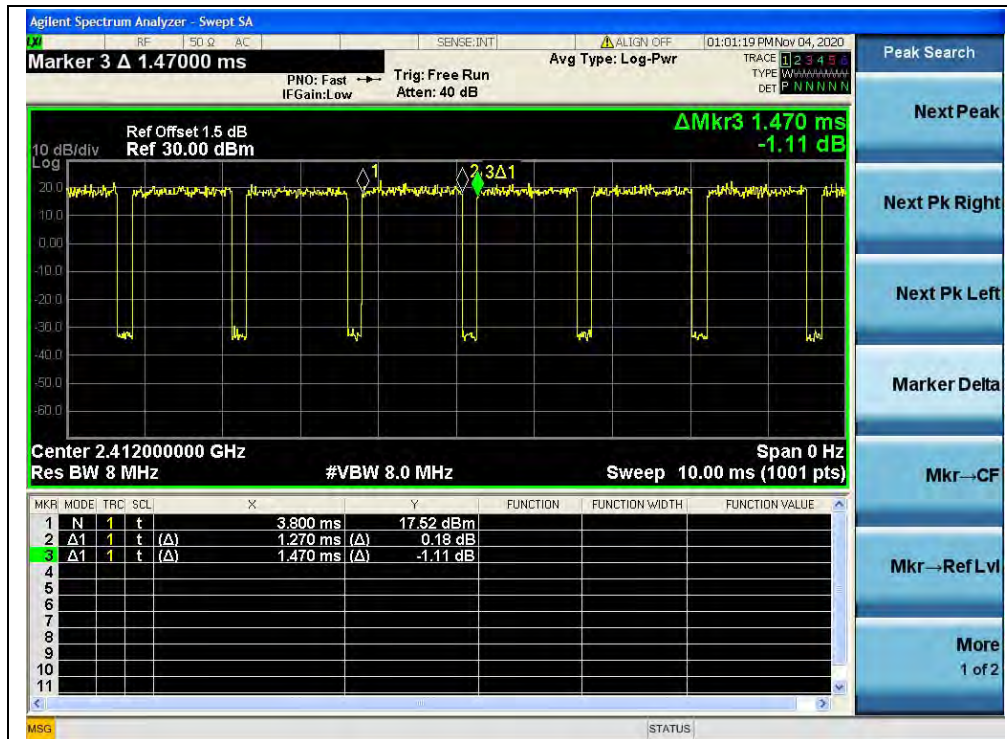

(Channel 1, 802.11n (HT20))

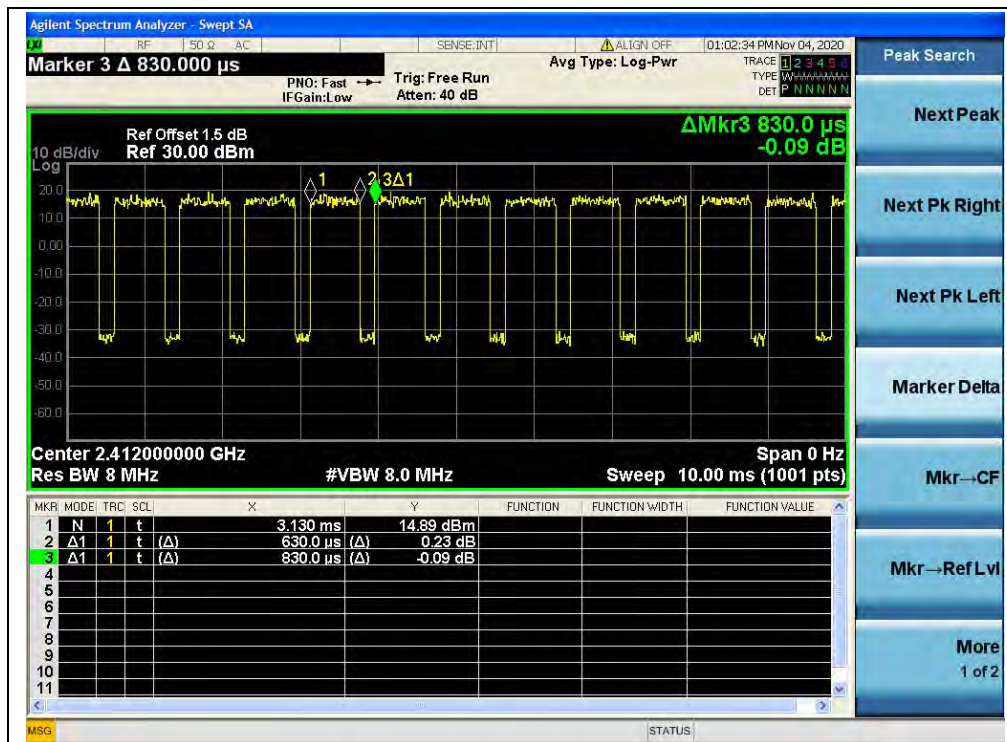

(Channel 3, 802.11n (HT40))

2.3. Maximum Peak and Average Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

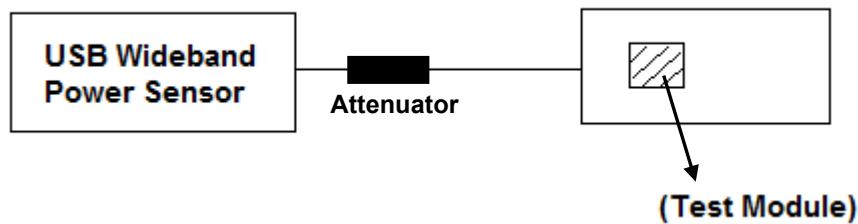

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.3.3. Test Result

Maximum Peak Conducted Output Power

802.11b Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.25	0.084	30	1	PASS
7	2442	19.05	0.080			PASS
13	2472	20.04	0.101			PASS

802.11g Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	24.04	0.254	30	1	PASS
7	2442	24.15	0.260			PASS
13	2472	23.81	0.240			PASS

802.11n (HT20) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	24.23	0.265	30	1	PASS
7	2442	24.05	0.254			PASS
13	2472	23.28	0.213			PASS

802.11n (HT40) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	22.91	0.195	30	1	PASS
7	2442	23.76	0.238			PASS
11	2462	19.52	0.090			PASS

**Maximum Average Conducted Output Power****802.11b Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	16.35	0.11	16.46	0.044	30	1	PASS
7	2442	16.18		16.29	0.043			PASS
13	2472	16.78		16.89	0.049			PASS

802.11g Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	15.57	0.56	16.13	0.041	30	1	PASS
7	2442	15.21		15.77	0.038			PASS
13	2472	13.70		14.26	0.027			PASS

802.11n (HT20) Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	15.57	0.64	15.92	0.039	30	1	PASS
7	2442	15.21		16.25	0.042			PASS
13	2472	13.70		13.71	0.023			PASS

802.11n (HT40) Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
3	2422	14.75	1.20	15.95	0.039	30	1	PASS
7	2442	14.98		16.18	0.041			PASS
11	2462	9.25		10.45	0.011			PASS


2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

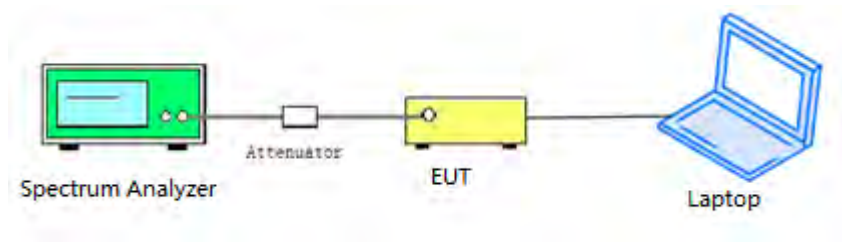

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.



2.4.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.076	≥500	PASS
7	2442	8.068	≥500	PASS
13	2472	8.070	≥500	PASS

B.Test Plot:



(Channel 1, 802.11b)




(Channel 7, 802.11b)




(Channel 13, 802.11b)

**802.11g Mode****A.Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.38	≥500	PASS
7	2442	16.39	≥500	PASS
13	2472	16.40	≥500	PASS

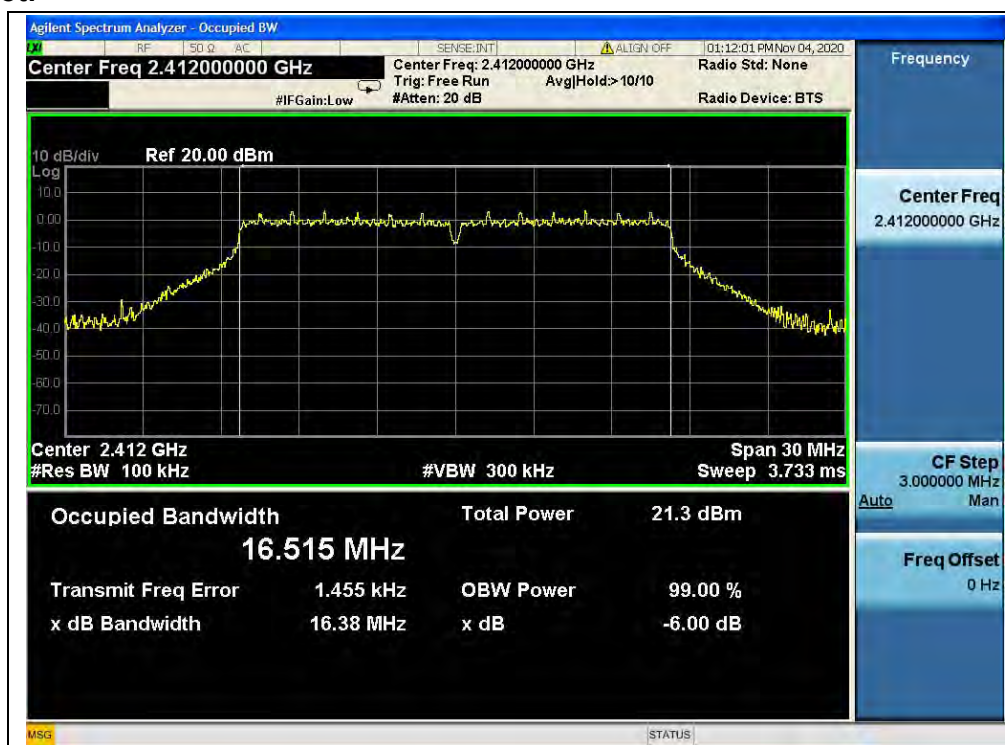B.Test Plot:

(Channel 1, 802.11g)

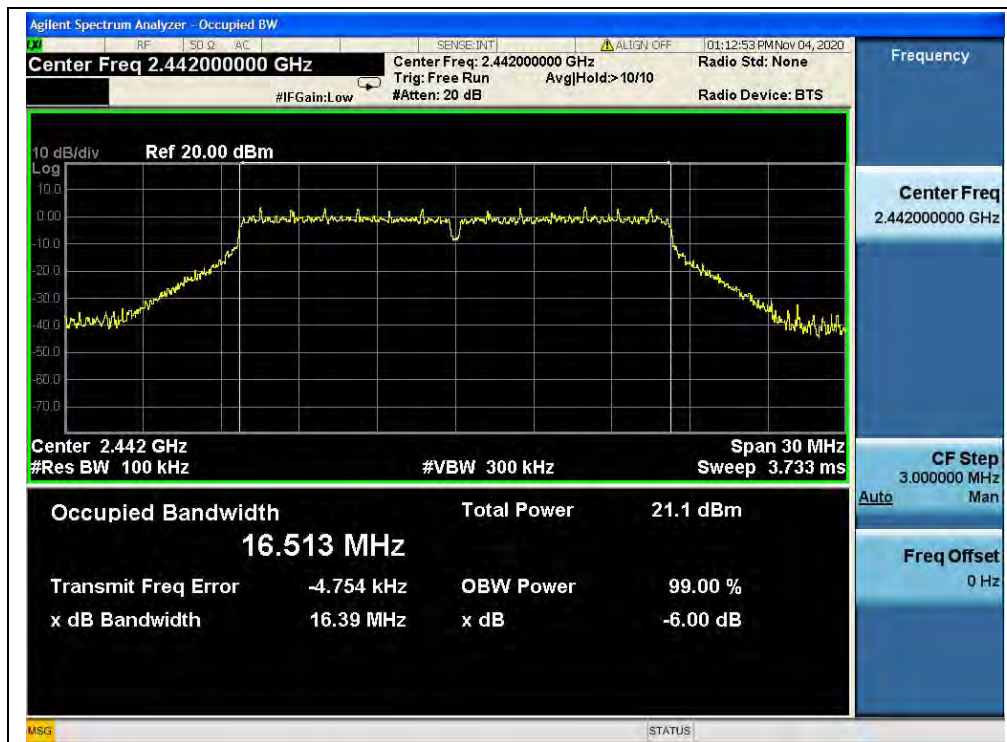


(Channel 7, 802.11g)



(Channel 13, 802.11g)

**802.11n (HT20) Mode****A.Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	17.62	≥500	PASS
7	2442	17.60	≥500	PASS
13	2472	17.62	≥500	PASS

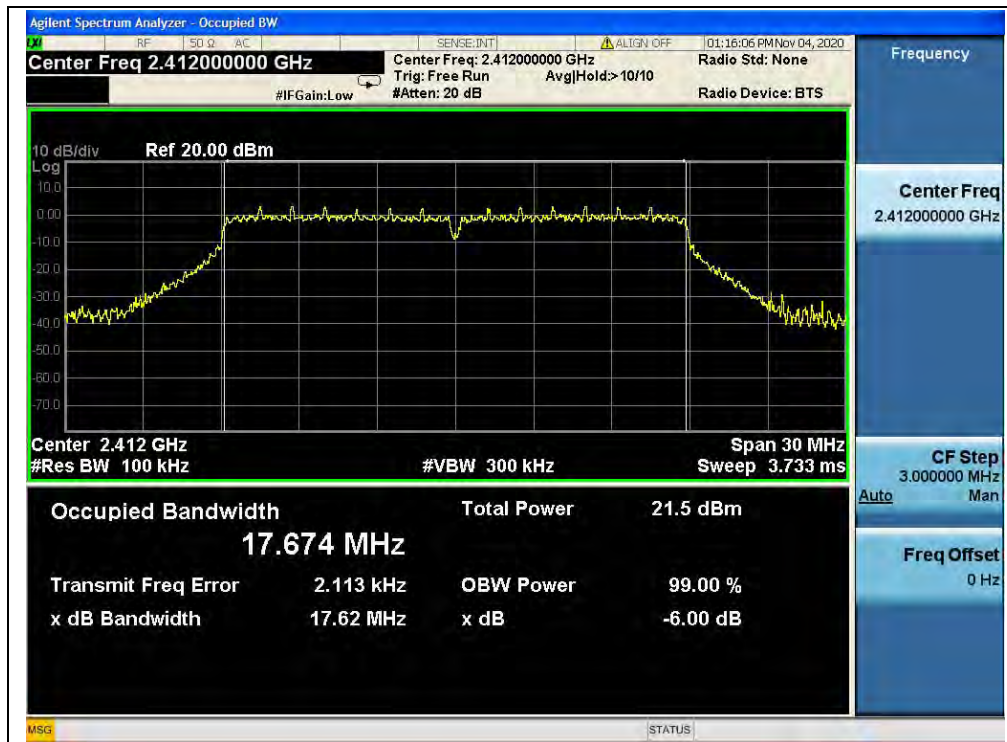B.Test Plot:

(Channel 1, 802.11n (HT20))



(Channel 7, 802.11n (HT20))



(Channel 13, 802.11n (HT20))




802.11n (HT40) Mode

A.Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.34	≥500	PASS
7	2442	35.35	≥500	PASS
11	2462	35.46	≥500	PASS

B.Test Plot:

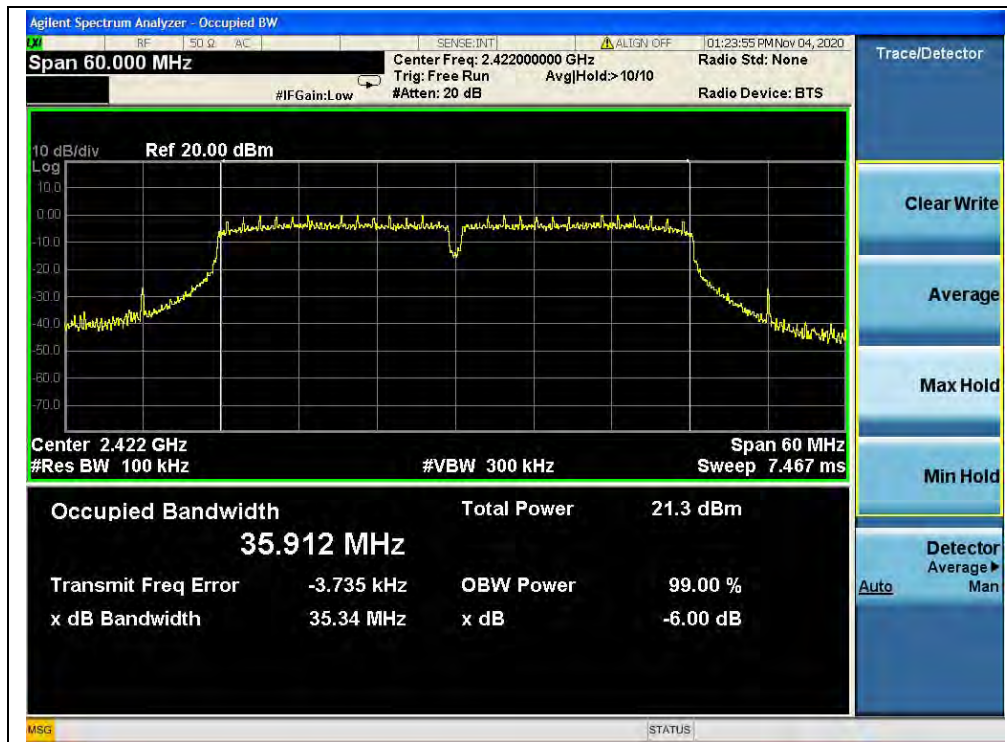

(Channel 3, 802.11n (HT40))



(Channel 7, 802.11n (HT40))



(Channel 11, 802.11n (HT40))


2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

Test Setup:

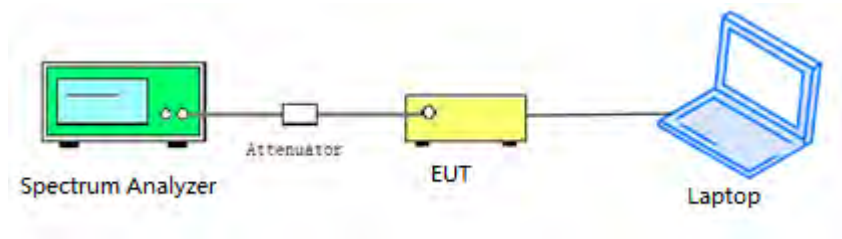

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.5.4. Test Result

802.11b Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-51.70	-3.08	-23.08	PASS
7	2442	-52.69	-3.31	-23.31	PASS
13	2472	-53.85	-4.40	-24.40	PASS


B. Test Plot:

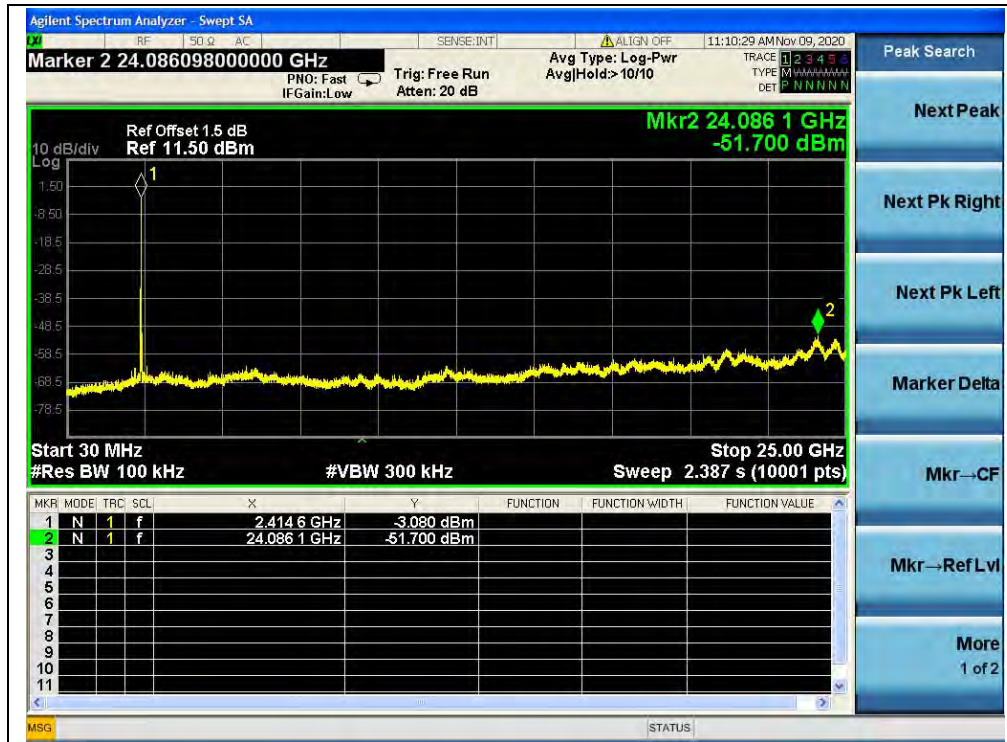


(30MHz to 25GHz, Channel 1, 802.11b)

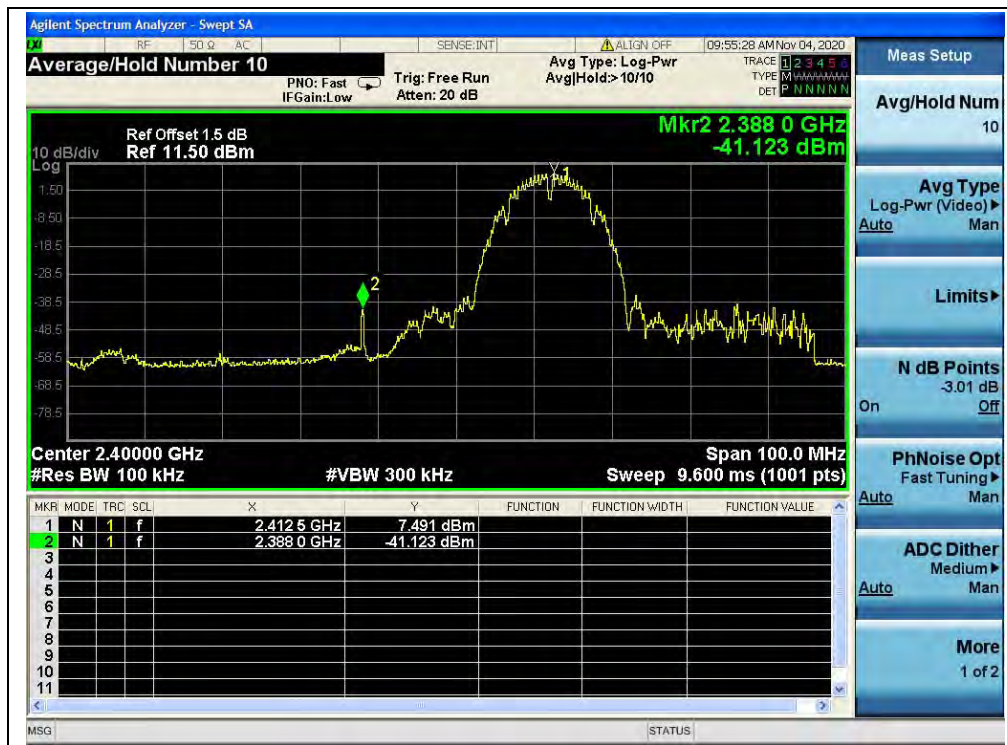


(Band Edge, Channel 1, 802.11b)

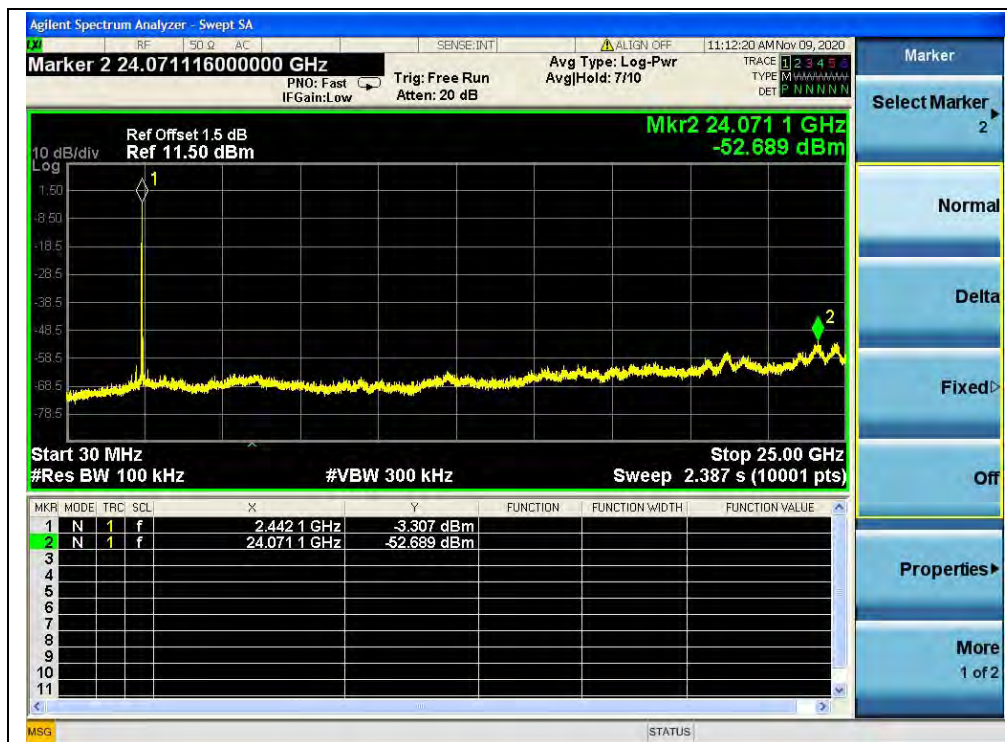

(30MHz to 25GHz, Channel 7, 802.11b)

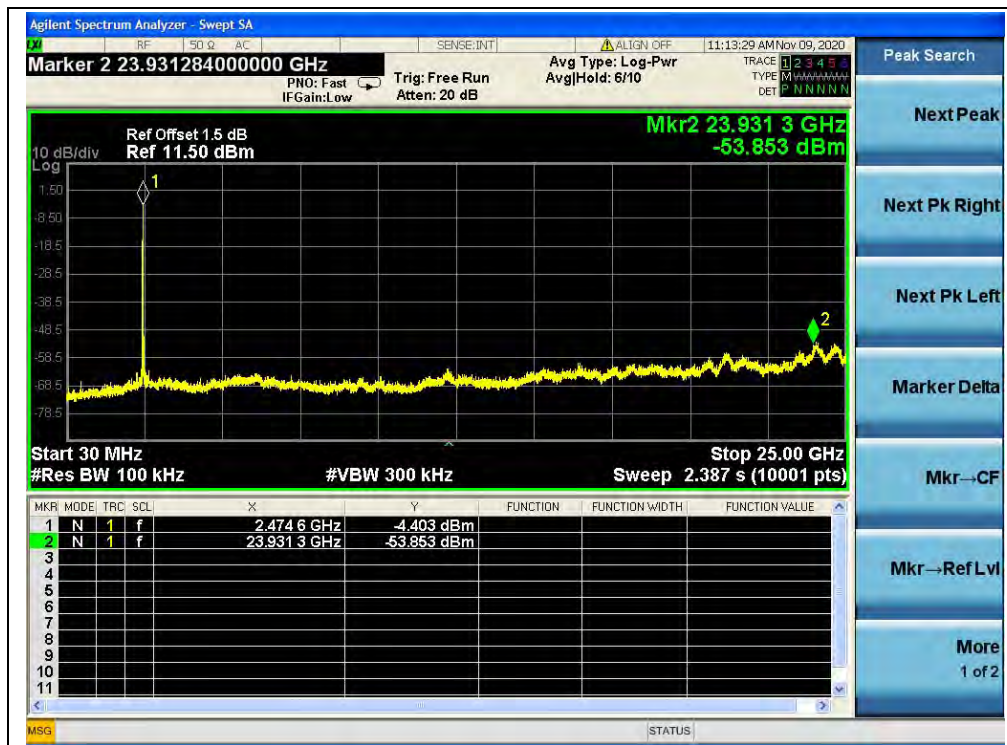

(30MHz to 25GHz, Channel 13, 802.11b)

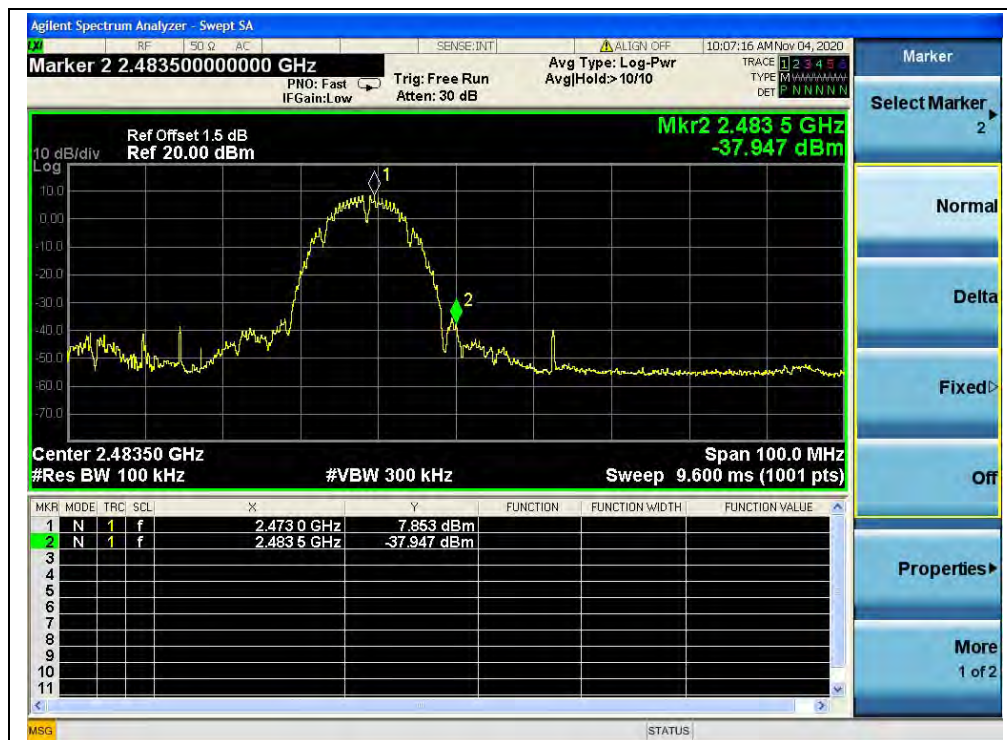

(Band Edge, Channel 13, 802.11b)




802.11g Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.57	3.60	-16.40	PASS
7	2442	-45.60	0.61	-19.39	PASS
13	2472	-44.93	1.50	-18.50	PASS


B.Test Plot:

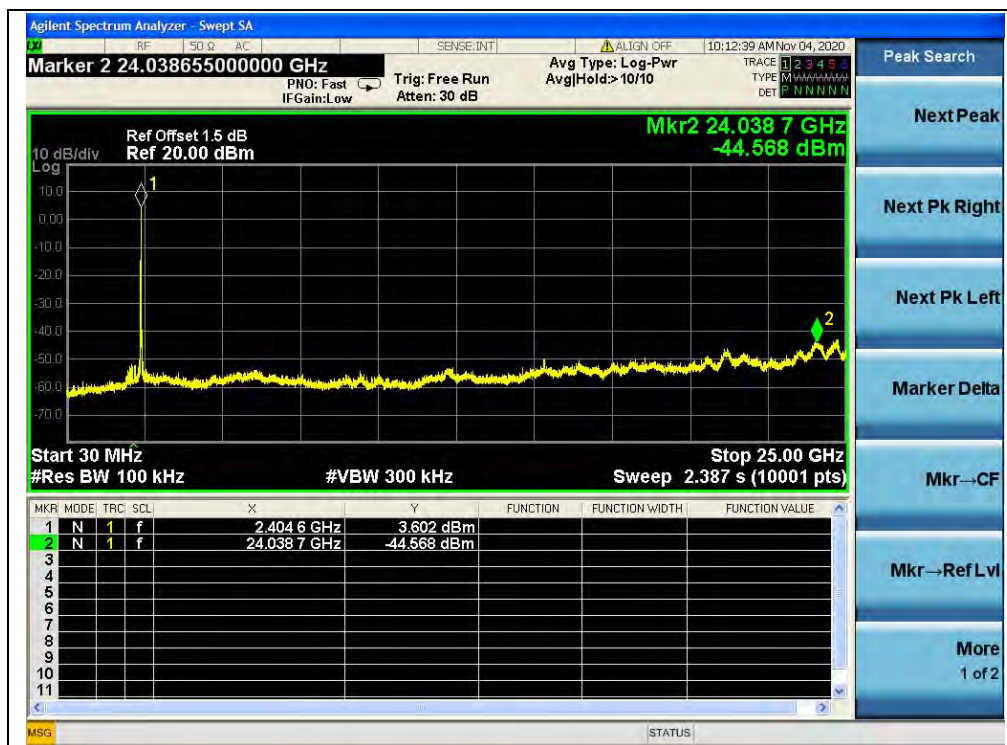


(30MHz to 25GHz, Channel 1, 802.11g)



(Band Edge, Channel 1, 802.11g)

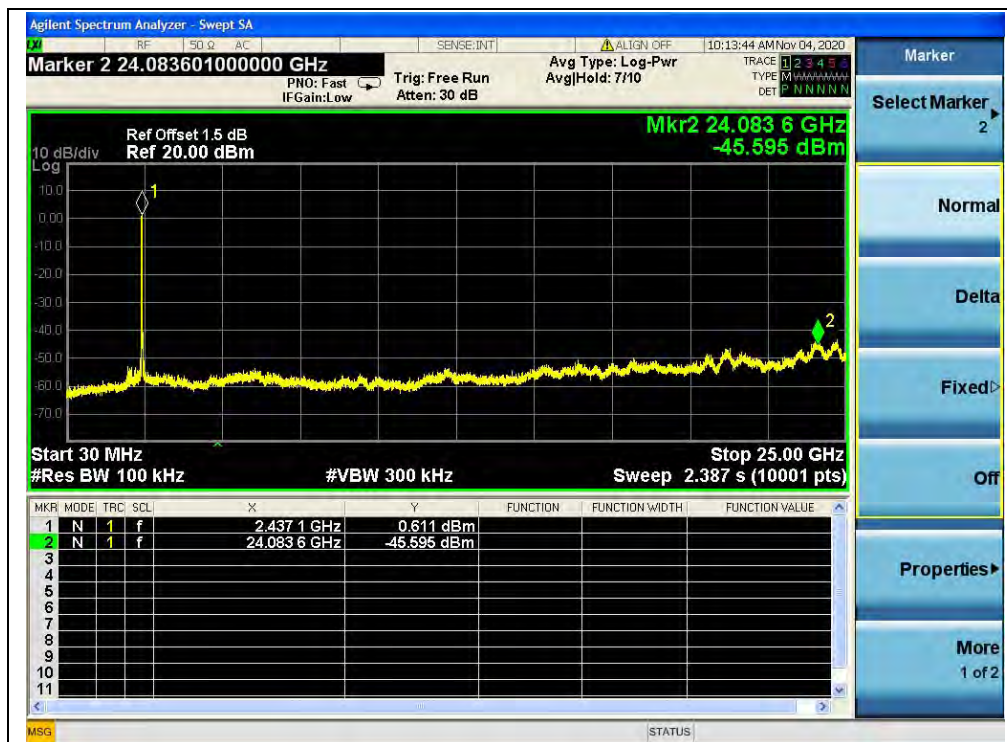

(30MHz to 25GHz, Channel 7, 802.11g)

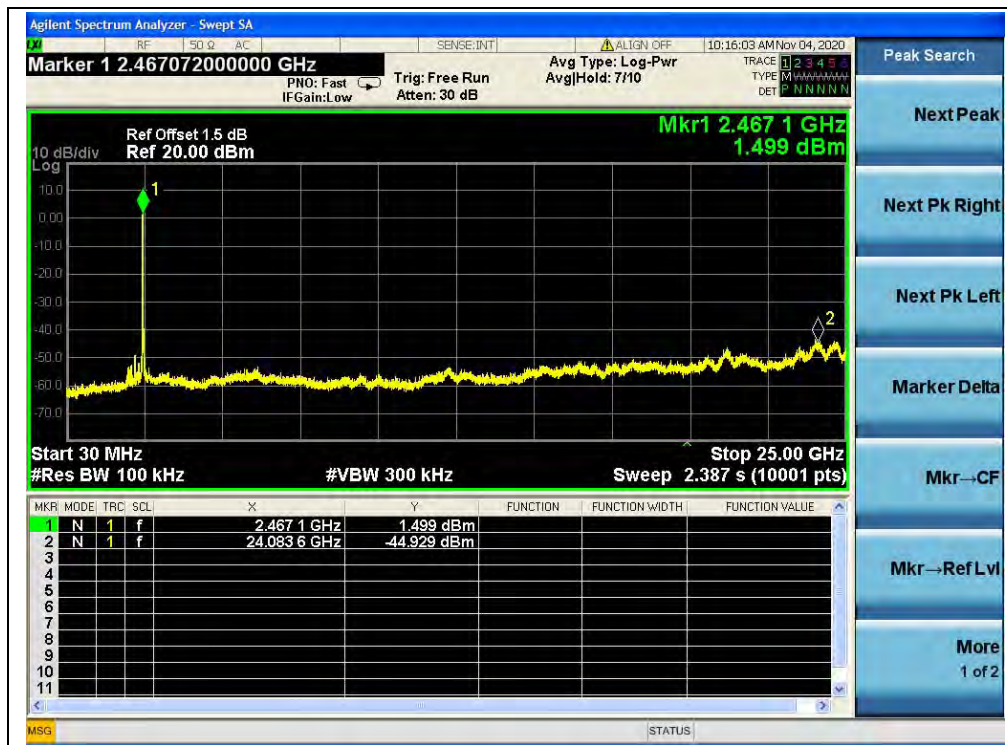

(30MHz to 25GHz, Channel 13, 802.11g)



(Band Edge, Channel 13, 802.11g)




802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.56	0.31	-19.69	PASS
7	2442	-44.69	3.74	-16.26	PASS
13	2472	-45.15	0.25	-19.75	PASS


B. Test Plot:

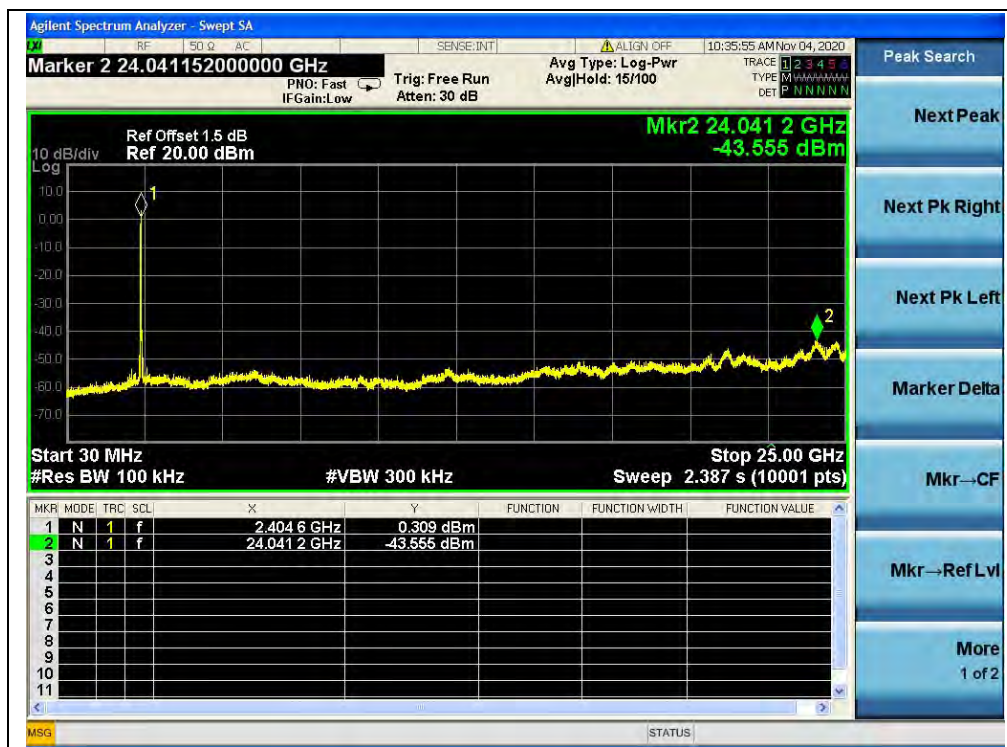


(30MHz to 25GHz, Channel 1, 802.11n (HT20))



(Band Edge, Channel 1, 802.11n (HT20))

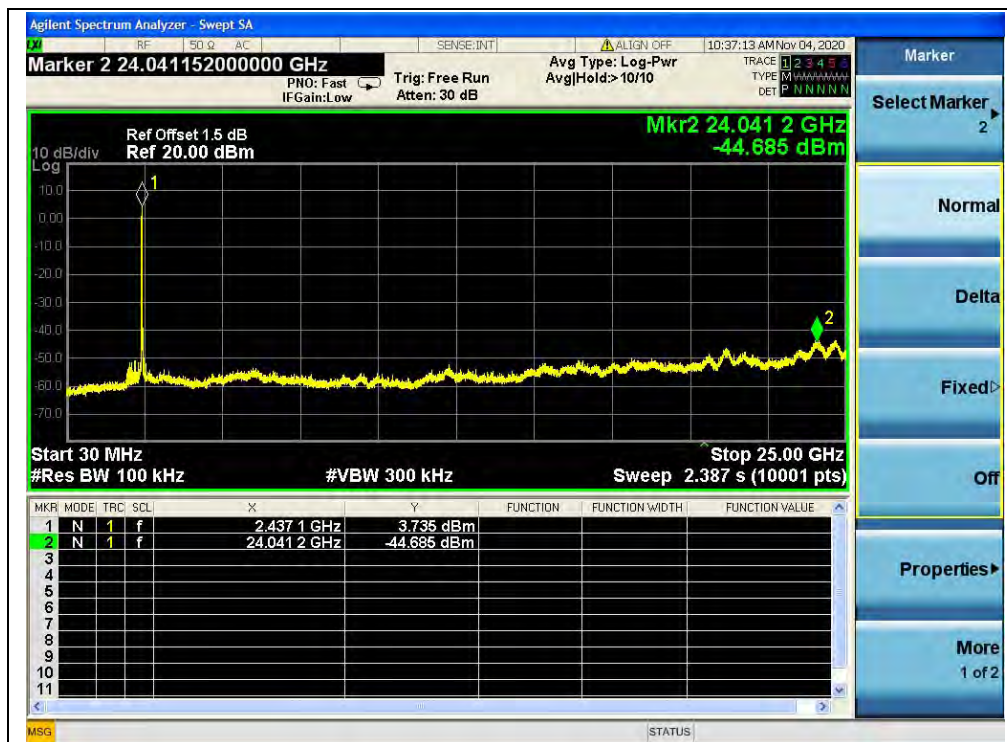

(30MHz to 25GHz, Channel 7,802.11n (HT20))

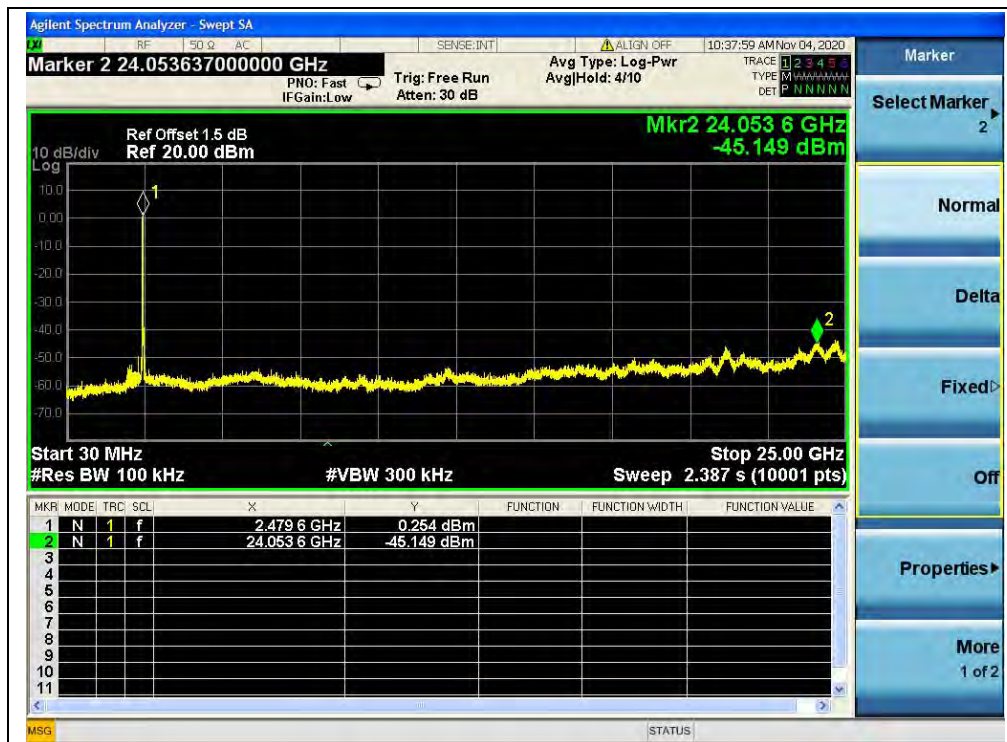

(30MHz to 25GHz, Channel 13, 802.11n (HT20))



(Band Edge, Channel 13, 802.11n (HT20))




802.11n (HT40) Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-43.20	-1.78	-21.78	PASS
7	2442	-46.41	-1.74	-21.74	PASS
11	2462	-45.76	-1.10	-21.10	PASS

B.Test Plot:

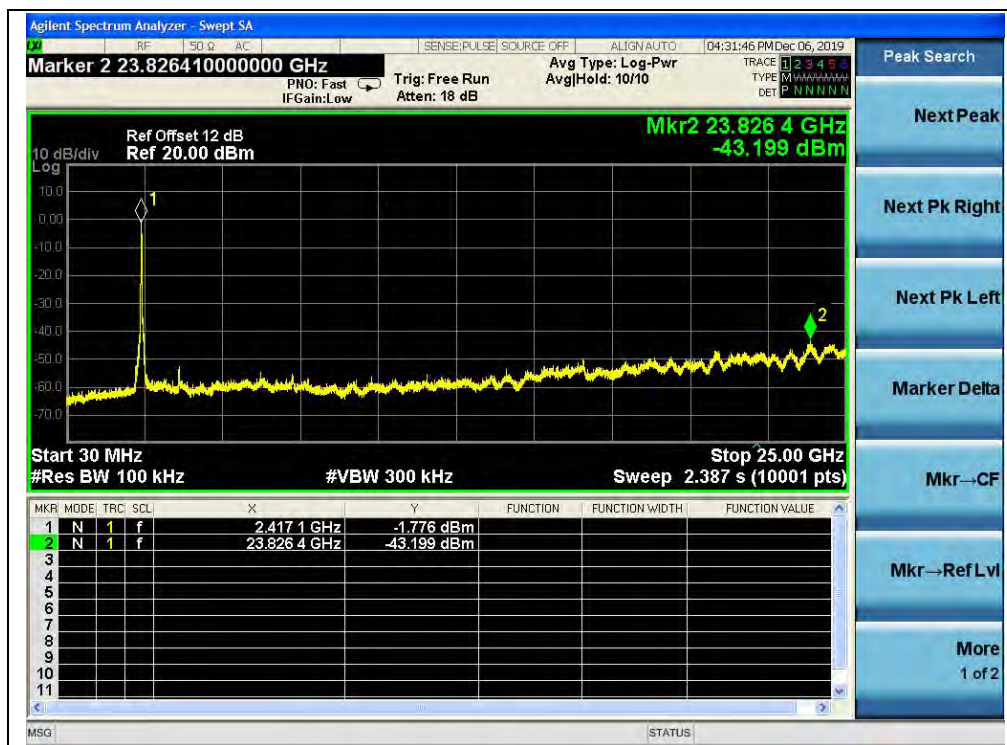


(30MHz to 25GHz, Channel 3, 802.11n (HT40))



(Band Edge, Channel 3, 802.11n (HT40))



(30MHz to 25GHz, Channel 7, 802.11n (HT40))

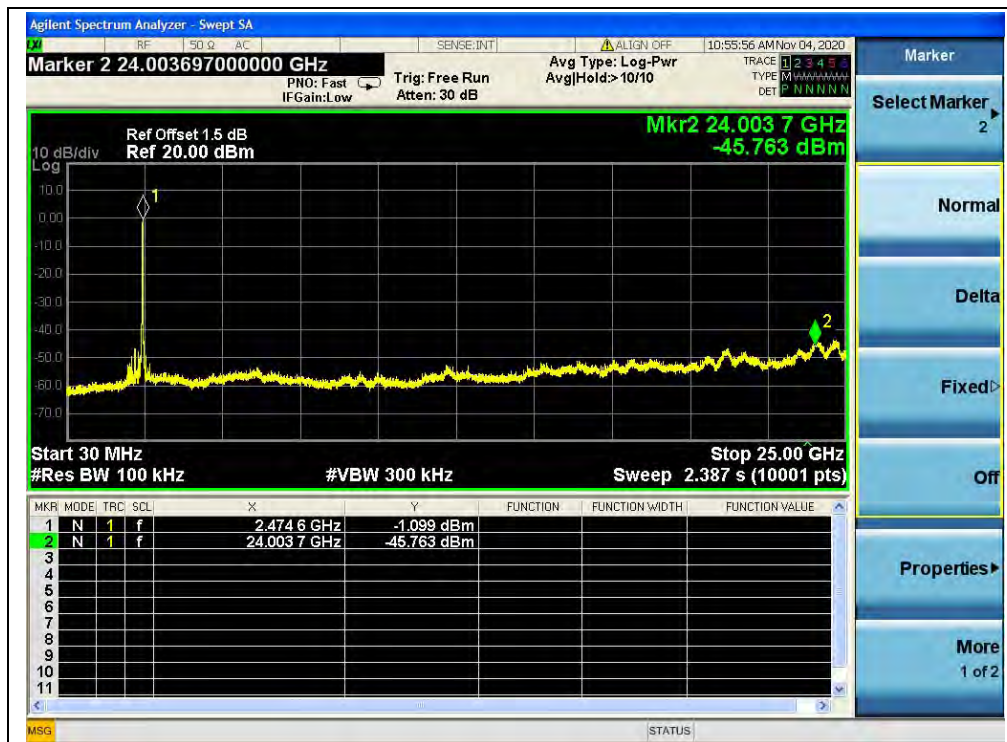

(30MHz to 25GHz, Channel 11, 802.11n (HT40))



(Band Edge, Channel 11, 802.11n (HT40))


2.6. Power Spectral Density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.6.2. Test Description

Test Setup:

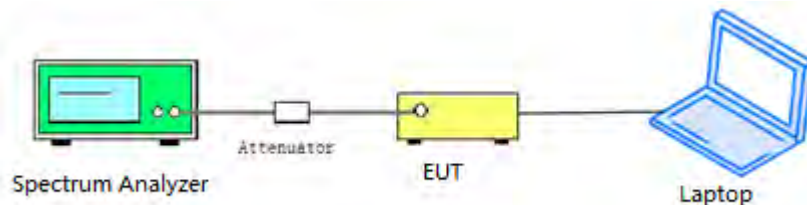

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.56	8	PASS
7	2442	-5.66	8	PASS
13	2472	-5.90	8	PASS

B. Test Plot:



(Channel 1, 802.11b)



(Channel 7, 802.11b)



(Channel 13, 802.11b)



802.11g Mode

A.Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.25	8	PASS
7	2442	-9.04	8	PASS
13	2472	-9.26	8	PASS

B.Test Plot:



(Channel 1, 802.11g)




(Channel 7, 802.11g)



(Channel 13, 802.11g)

**802.11n (HT20) Mode****A.Test Verdict:**


Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-8.66	8	PASS
7	2442	-8.56	8	PASS
13	2472	-7.39	8	PASS

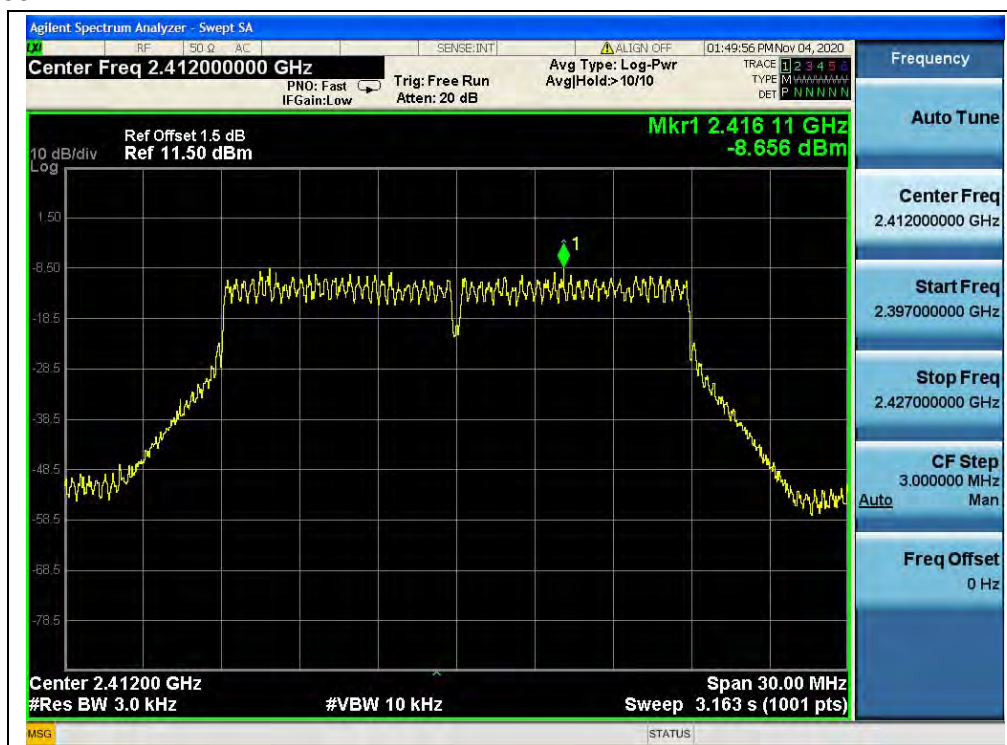B.Test Plot:

(Channel 1, 802.11n (HT20))



(Channel 7, 802.11n (HT20))

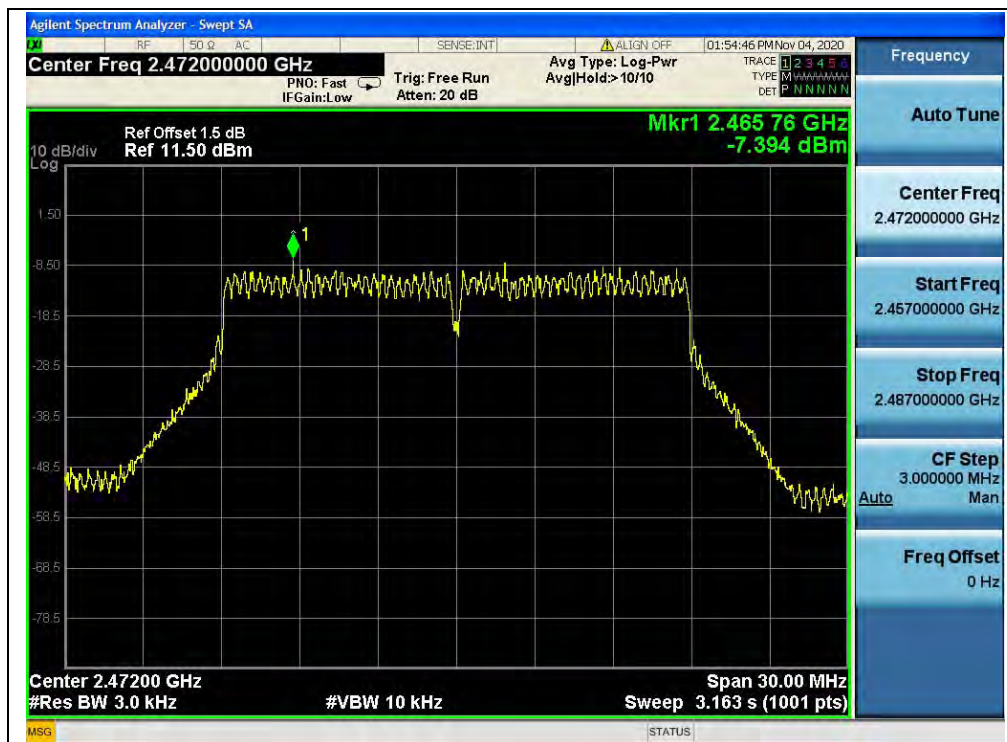

(Channel 13, 802.11n (HT20))

**802.11n (HT40) Mode****A.Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-13.02	8	PASS
7	2442	-11.80	8	PASS
11	2462	-12.79	8	PASS

B.Test Plot:

(Channel 3, 802.11n (HT40))



(Channel 7, 802.11n (HT40))



(Channel 11, 802.11n (HT40))

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

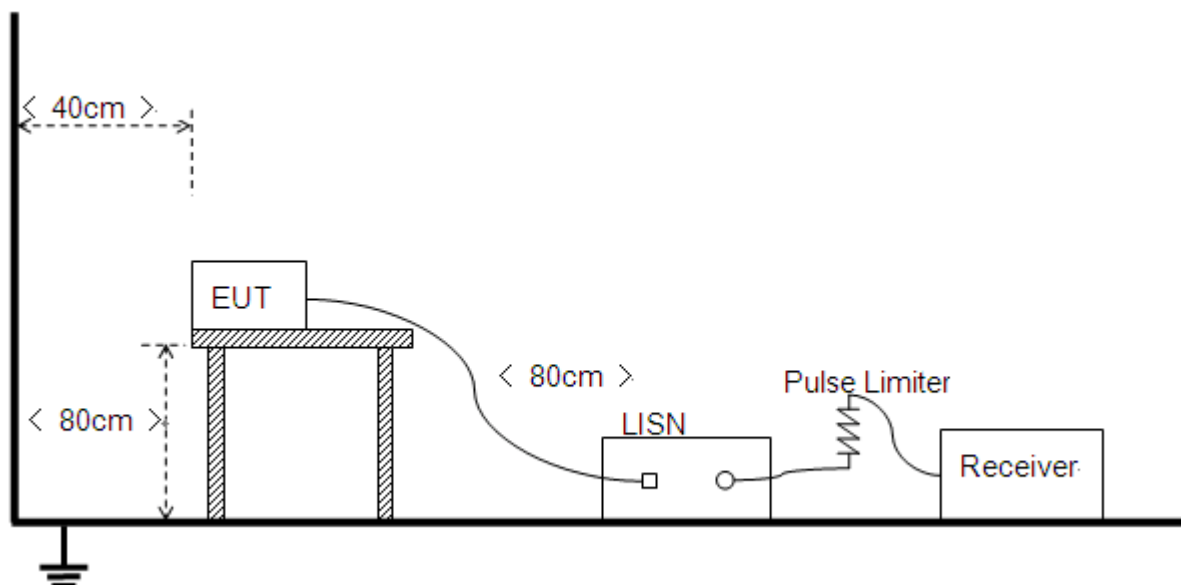

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ADAPTER+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

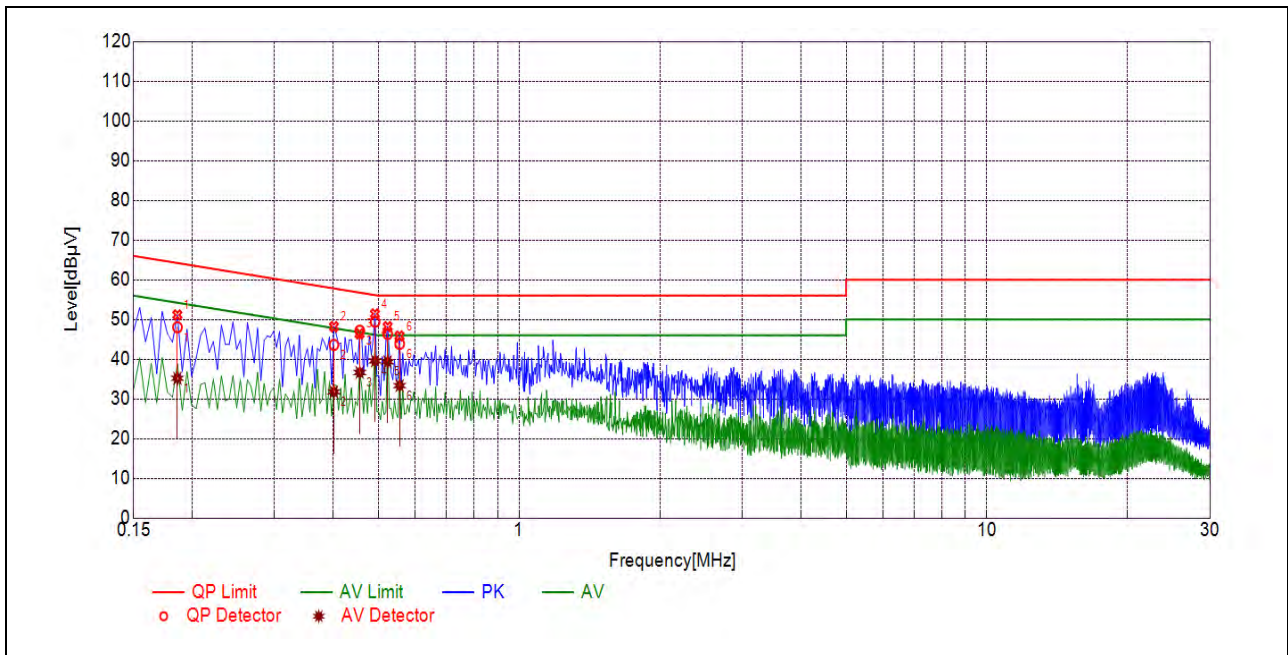

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1860	48.04	35.19	64.21	54.21	Line	PASS
2	0.4019	43.60	31.79	57.81	47.81		PASS
3	0.4563	47.19	36.64	56.76	46.76		PASS
4	0.4922	49.44	39.57	56.13	46.13		PASS
5	0.5235	46.37	39.34	56.00	46.00		PASS
6	0.5555	43.87	33.35	56.00	46.00		PASS

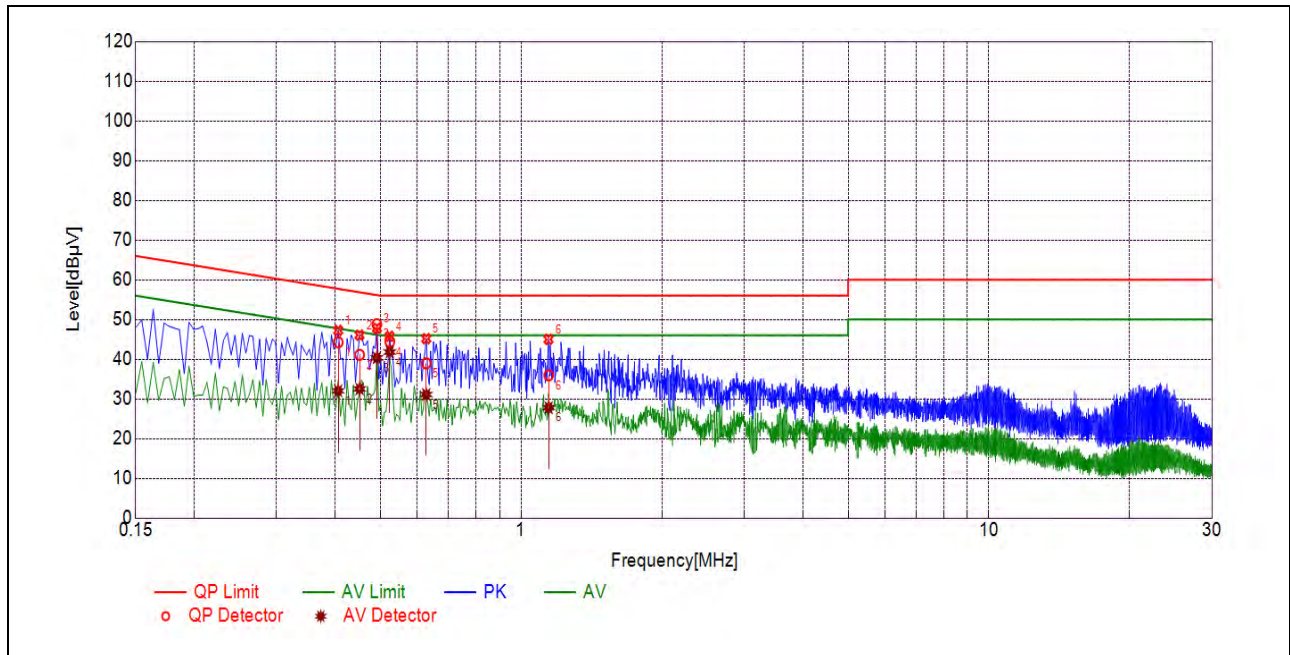

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.4064	0.4064	32.05	57.72	47.72	Neutral	PASS
2	0.4516	0.4516	32.51	56.85	46.85		PASS
3	0.4915	0.4915	40.35	56.14	46.14		PASS
4	0.5239	0.5239	41.82	56.00	46.00		PASS
5	0.6269	0.6269	31.12	56.00	46.00		PASS
6	1.1453	1.1453	27.82	56.00	46.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

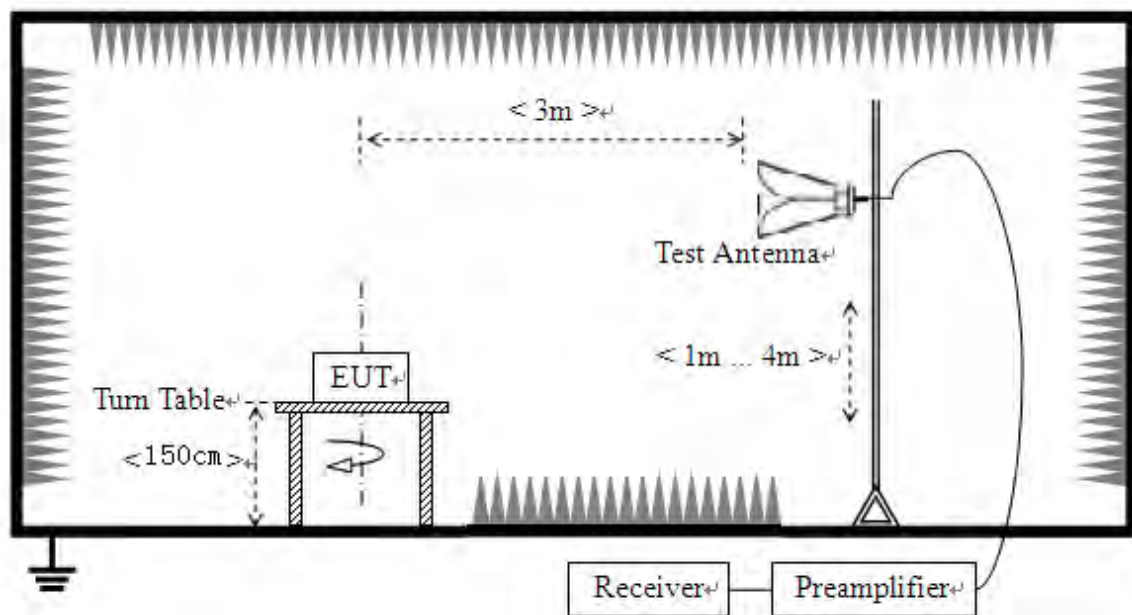

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


802.11b Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2385.79	PK	26.00	6.74	27.20	59.94	74	PASS
1	2387.92	AV	14.71	6.74	27.20	48.65	54	PASS
13	2486.93	PK	26.33	6.74	27.20	60.27	74	PASS
13	2483.50	AV	14.73	6.74	27.20	48.67	54	PASS




B.Test Plot:

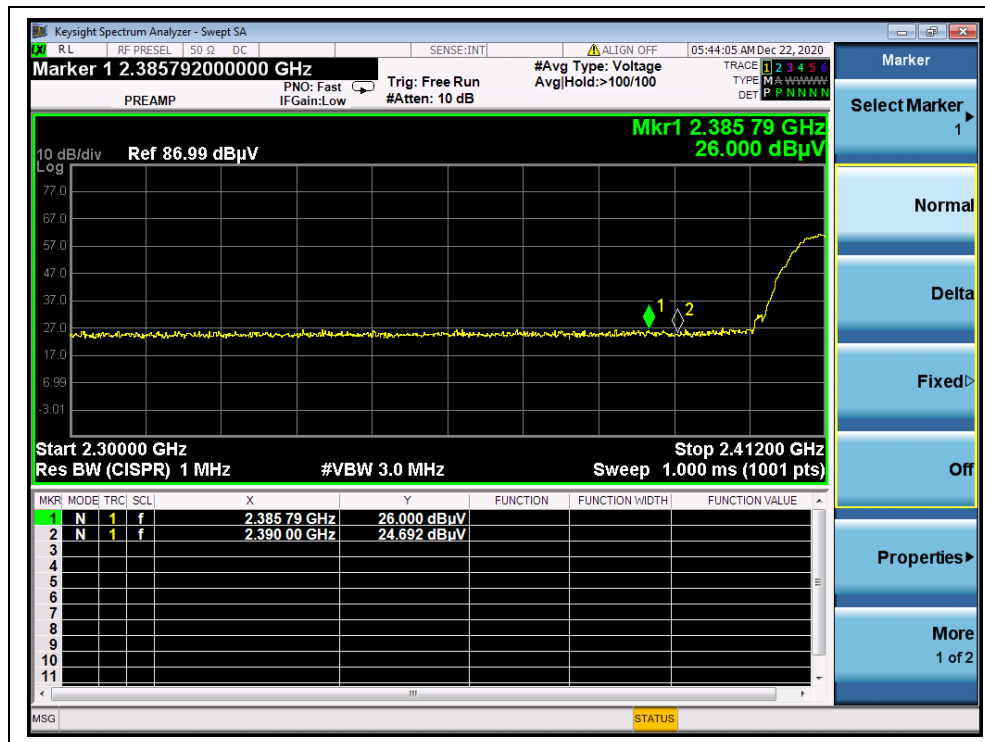


(PEAK, Channel 1, 802.11b)

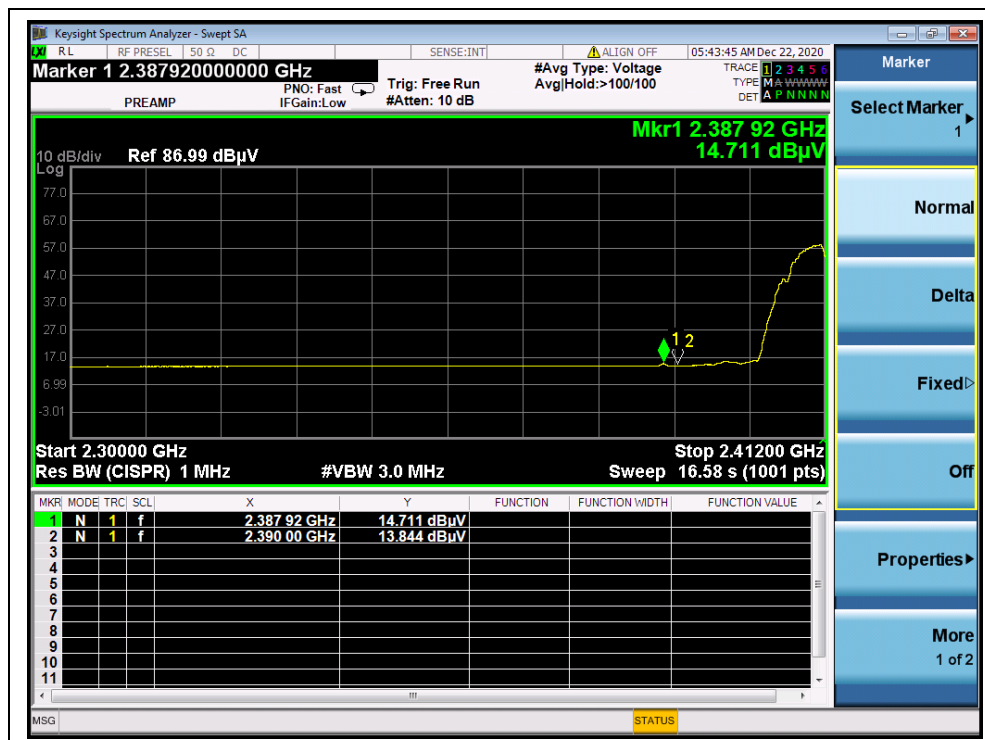

(AVERAGE, Channel 1, 802.11b)

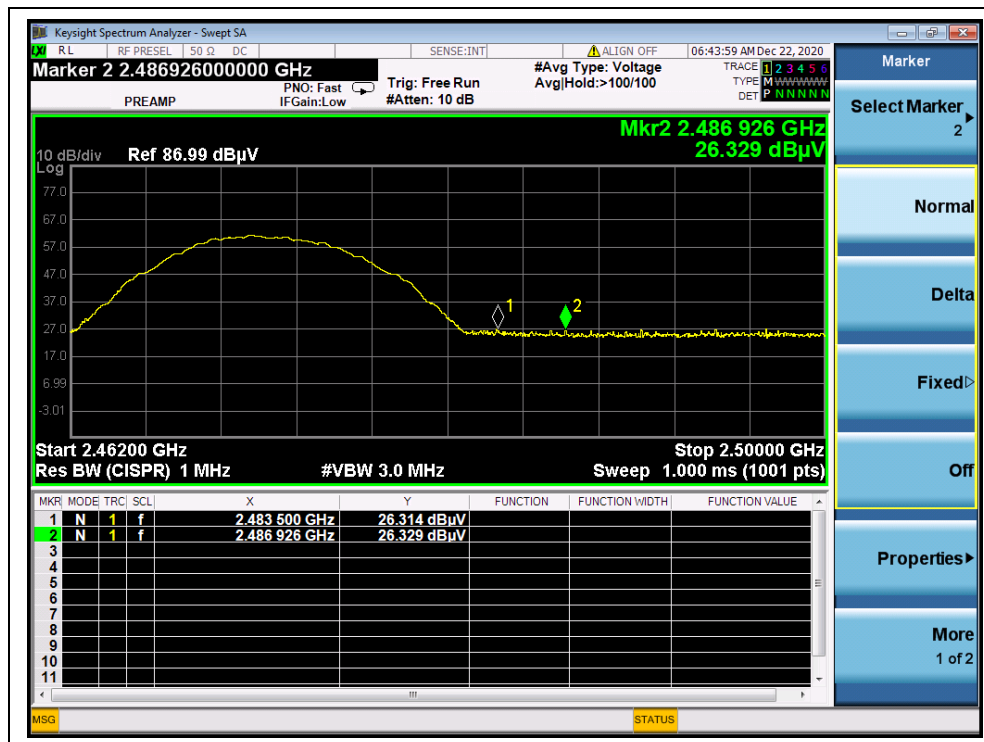

(PEAK, Channel 13, 802.11b)

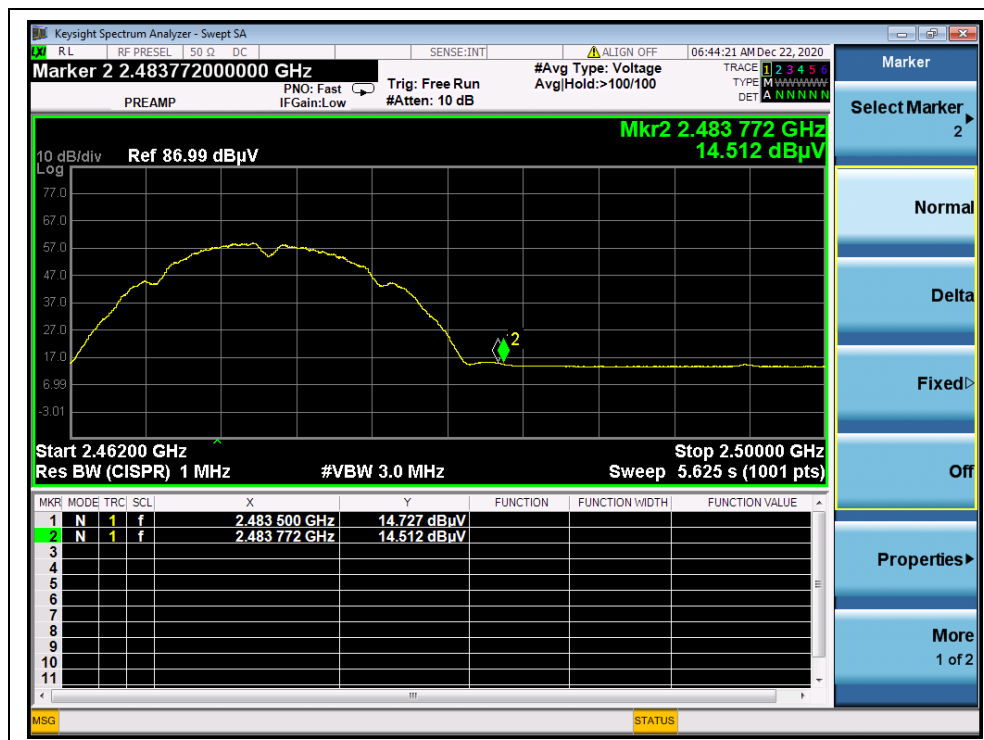

(AVERAGE, Channel 13, 802.11b)




802.11g Mode


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2387.92	PK	28.07	6.74	27.20	62.01	74	PASS
1	2387.92	AV	15.05	6.74	27.20	48.99	54	PASS
13	2484.15	PK	36.53	6.74	27.20	70.47	74	PASS
13	2483.50	AV	17.99	6.74	27.20	51.93	54	PASS


B.Test Plot:

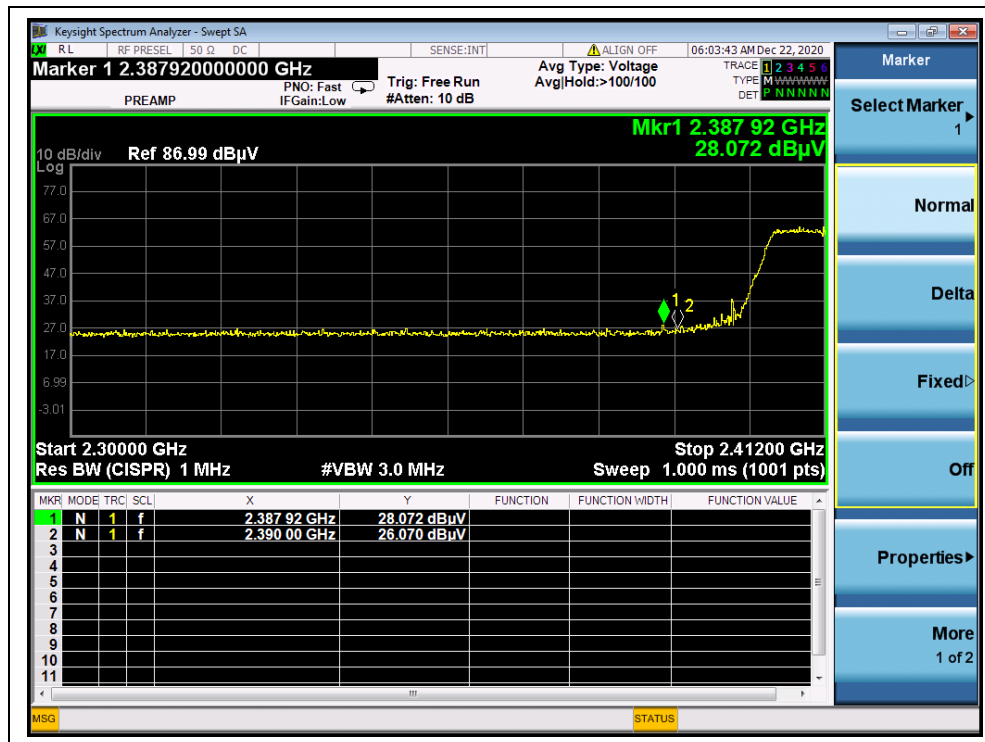


(PEAK, Channel 1, 802.11g)

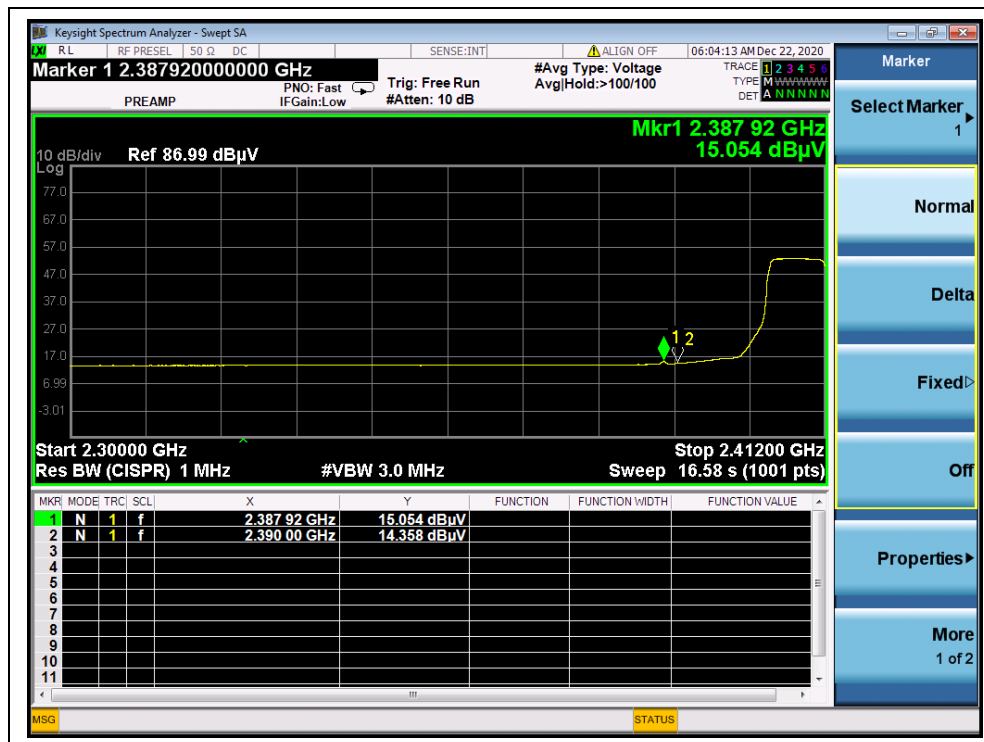

(AVERAGE, Channel 1, 802.11g)

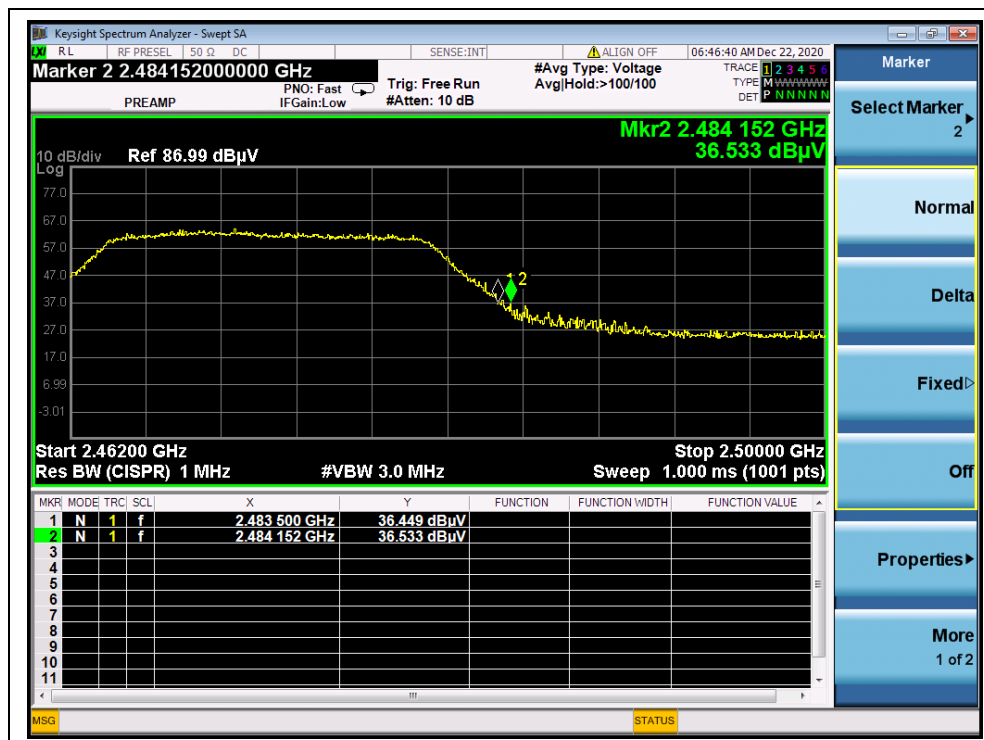

(PEAK, Channel 13, 802.11g)

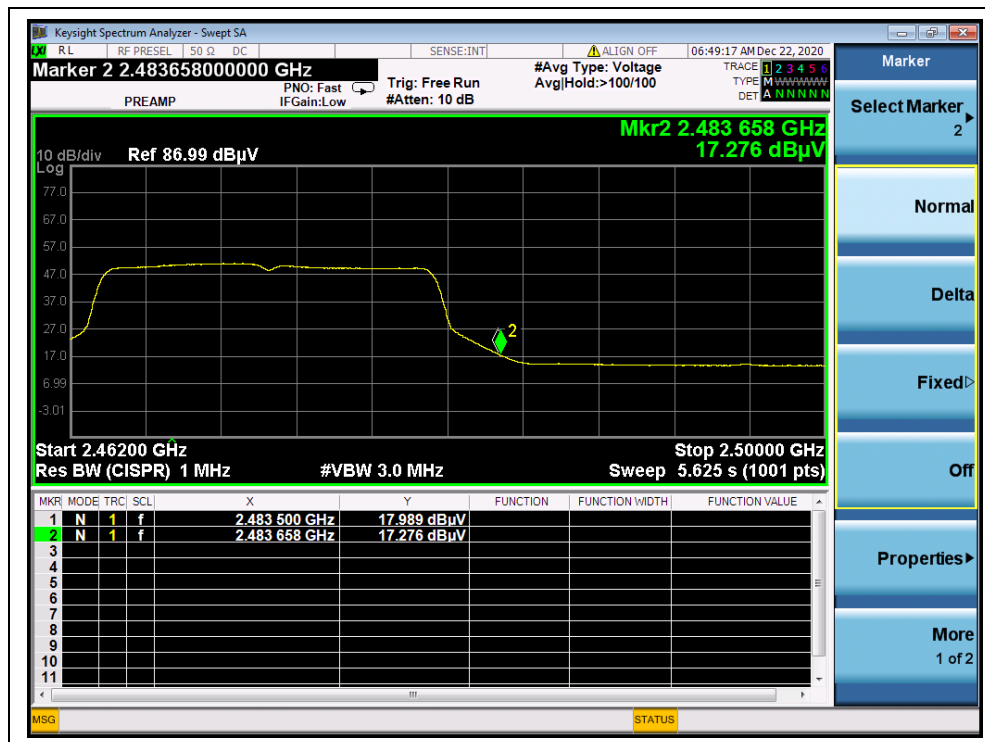

(AVERAGE, Channel 13, 802.11g)




802.11 n (HT20) Mode


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	27.04	6.74	27.20	60.98	74	PASS
1	2387.81	AV	14.88	6.74	27.20	48.82	54	PASS
13	2483.50	PK	36.06	6.74	27.20	70.00	74	PASS
13	2483.50	AV	17.69	6.74	27.20	51.63	54	PASS


B.Test Plot:

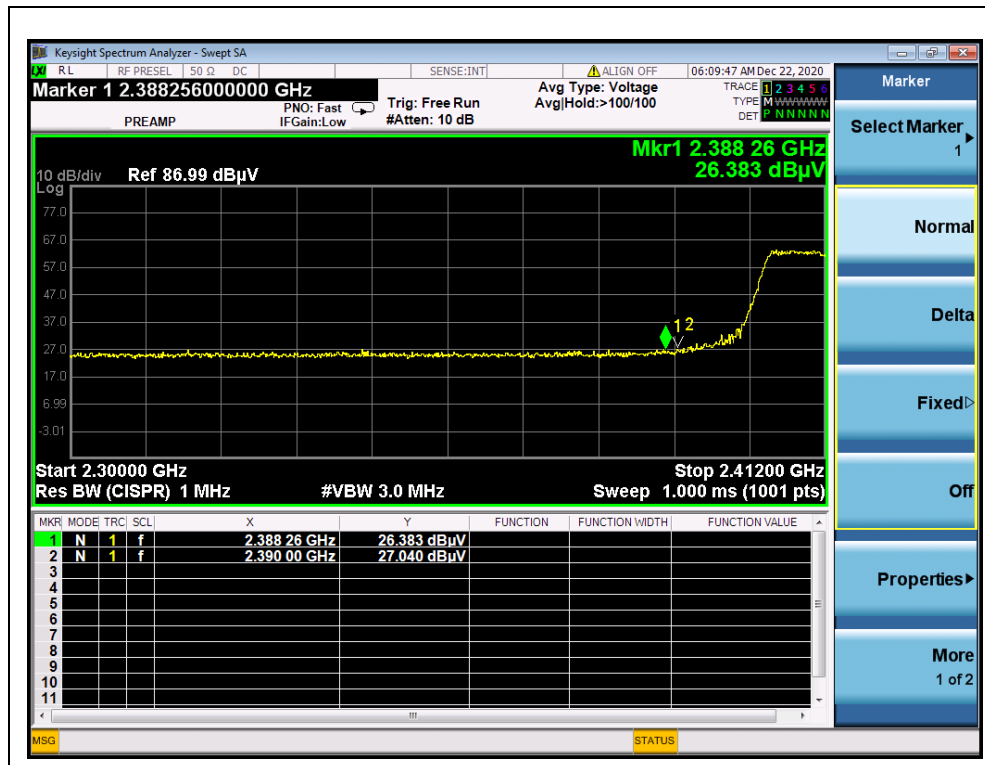


(PEAK, Channel 1, 802.11n (HT20))

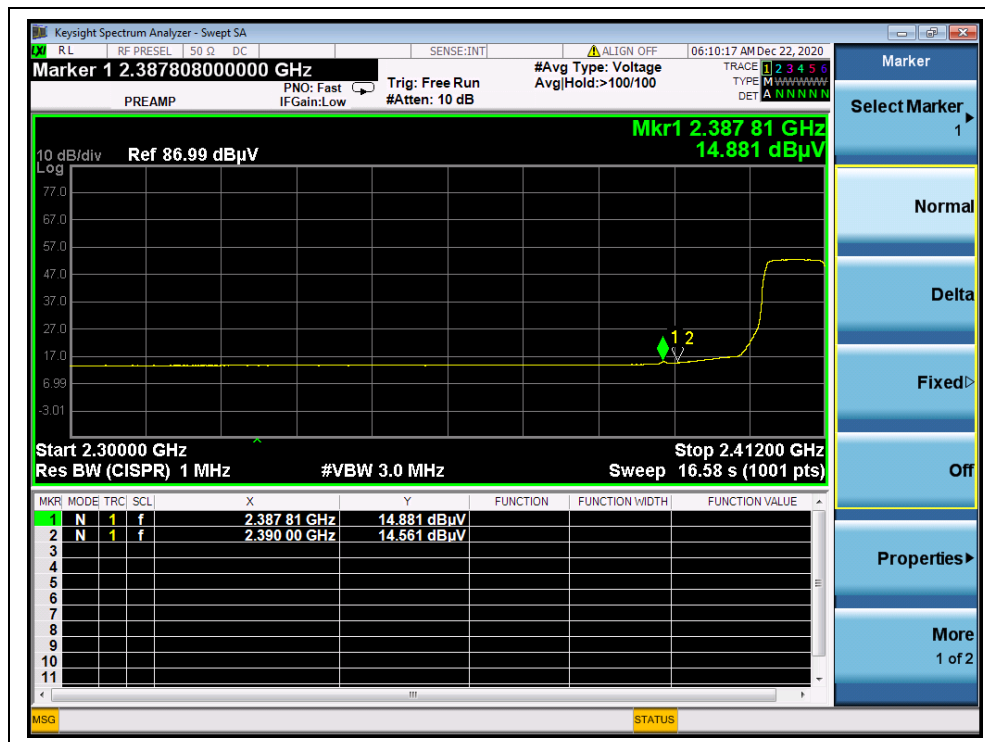

(AVERAGE, Channel 1, 802.11n (HT20))

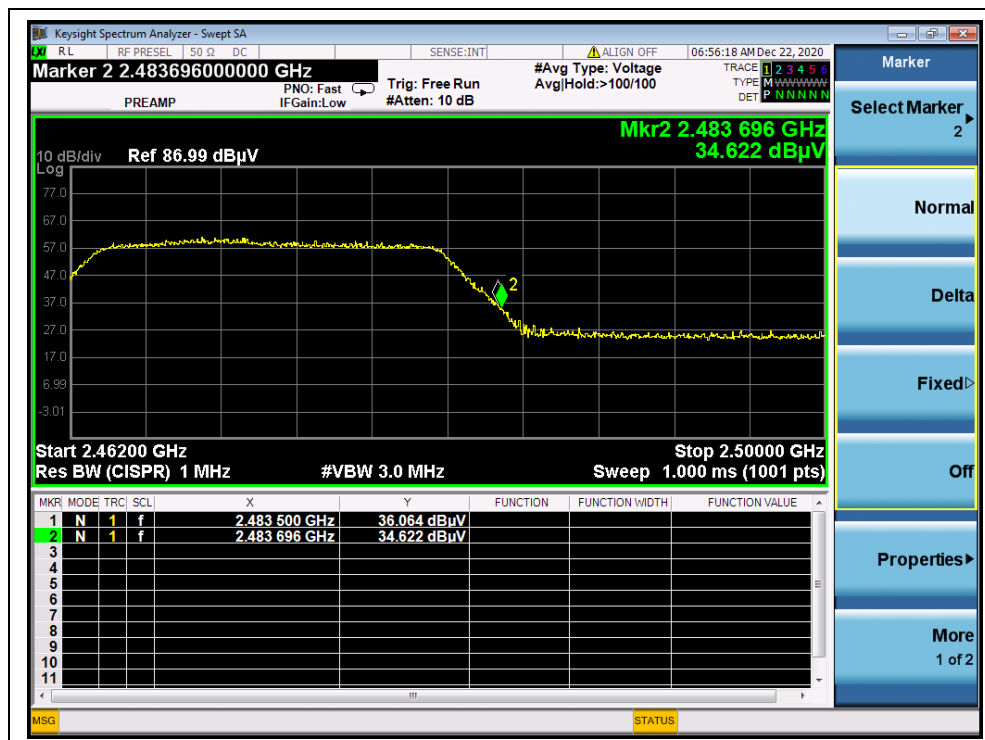

(PEAK, Channel 13, 802.11n (HT20))

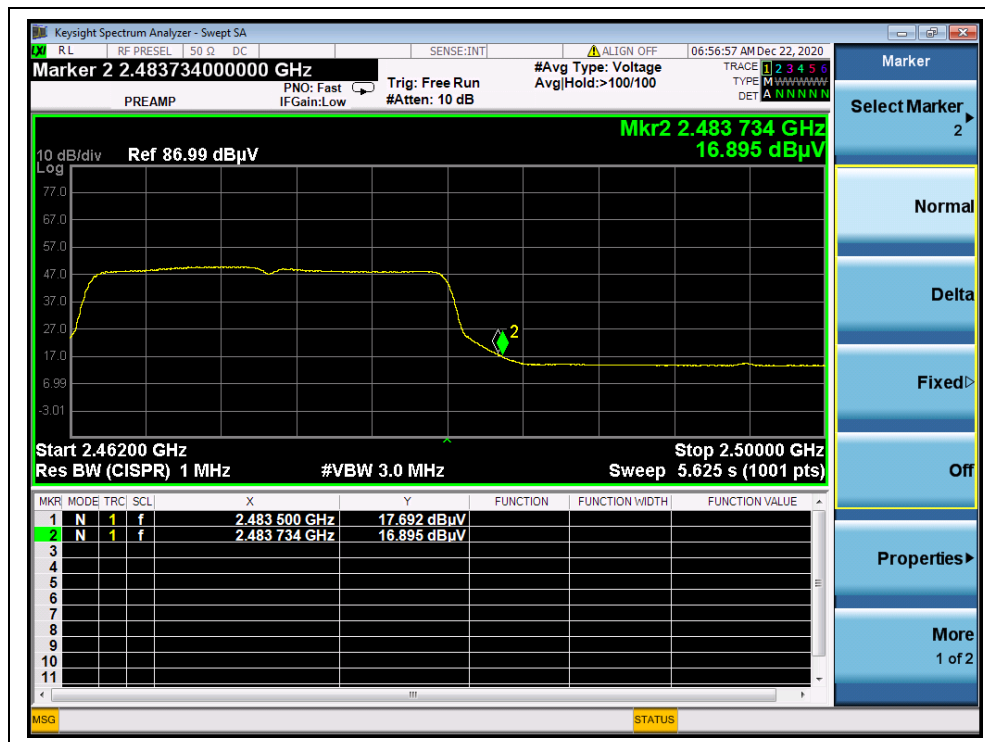

(AVERAGE, Channel 13, 802.11n (HT20))




802.11n (HT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2383.22	PK	26.77	6.74	27.20	60.71	74	PASS
3	2390.00	AV	14.25	6.74	27.20	48.19	54	PASS
11	2483.50	PK	36.78	6.74	27.20	70.72	74	PASS
11	2485.98	AV	17.41	6.74	27.20	51.35	54	PASS


B. Test Plot:

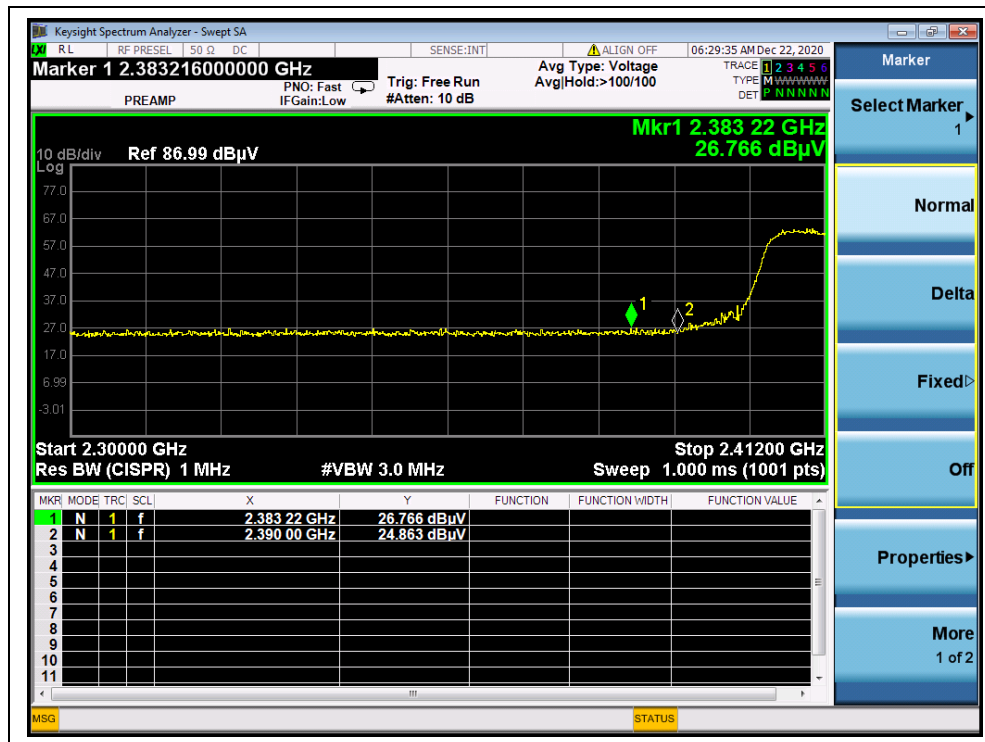


(PEAK, Channel 3, 802.11n (HT40))

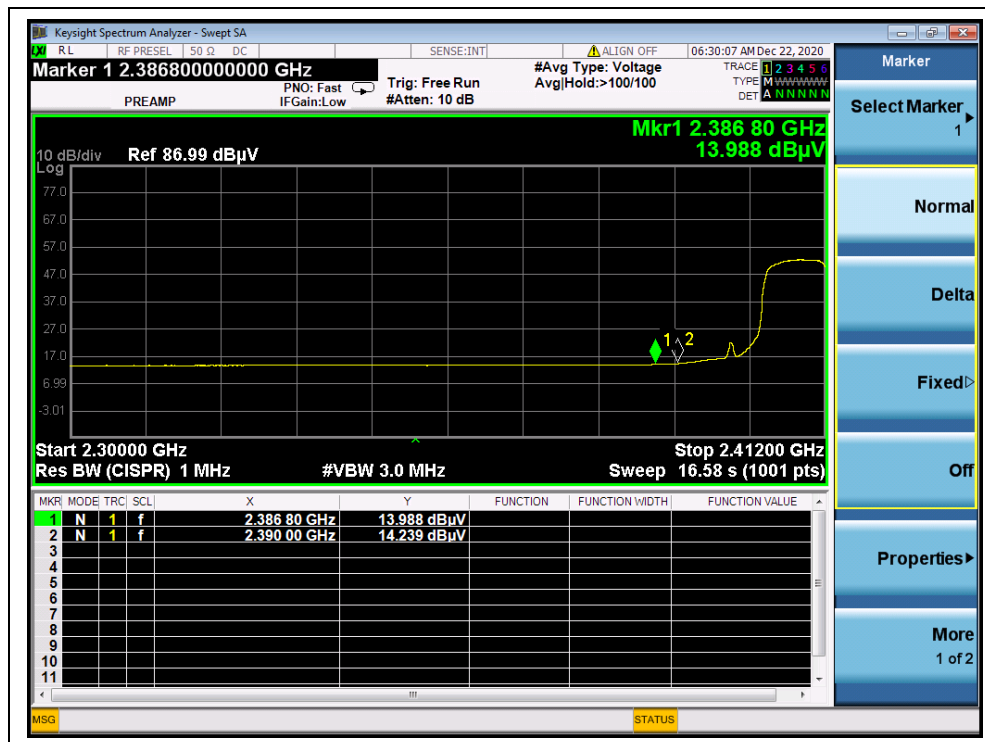

(AVERAGE, Channel 3, 802.11n (HT40))

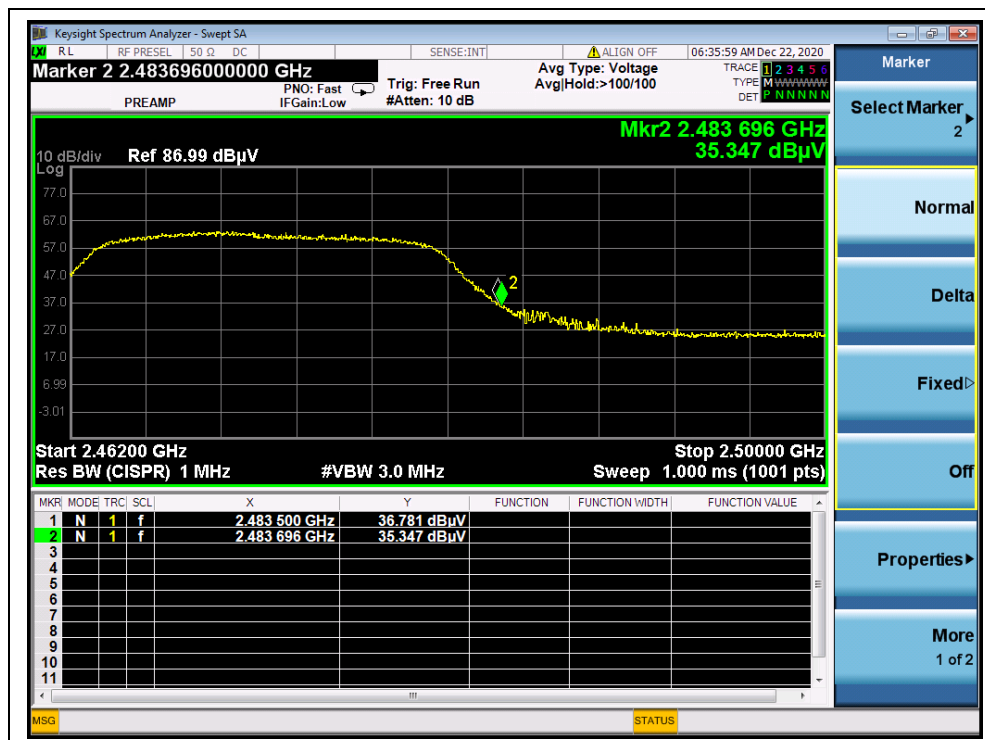

(PEAK, Channel 11, 802.11n (HT40))



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

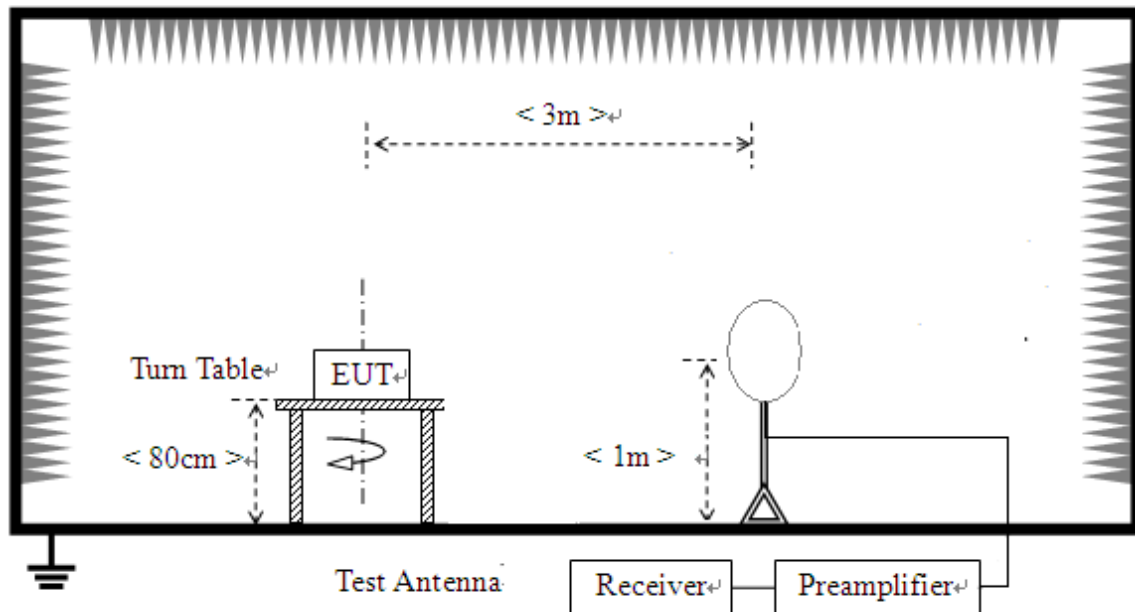

- 2) For radiated emissions from 30MHz to 1GHz

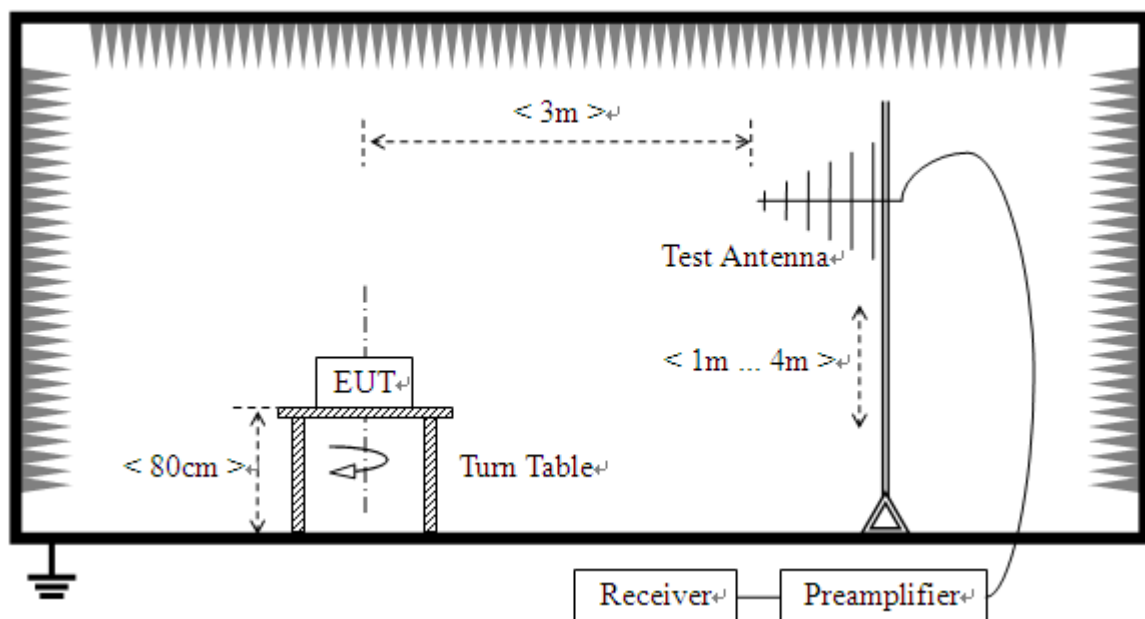

3) For radiated emissions above 1GHz

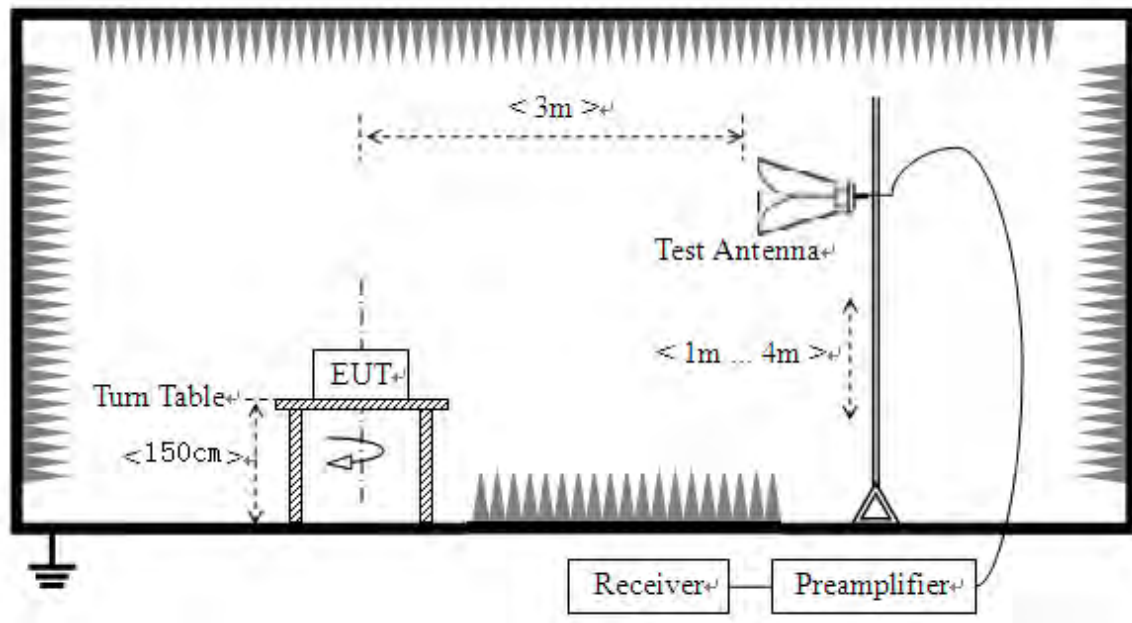

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Mode**

Plot for Channel 1

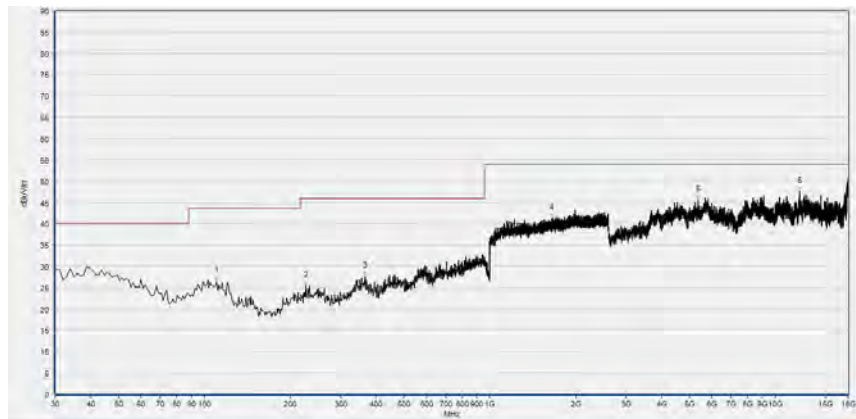

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	26.56	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
226.910	25.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
366.590	27.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1646.933	41.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5356.600	45.62	N/A	48.24	74.00	N/A	54.00	Horizontal	PASS
12166.480	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

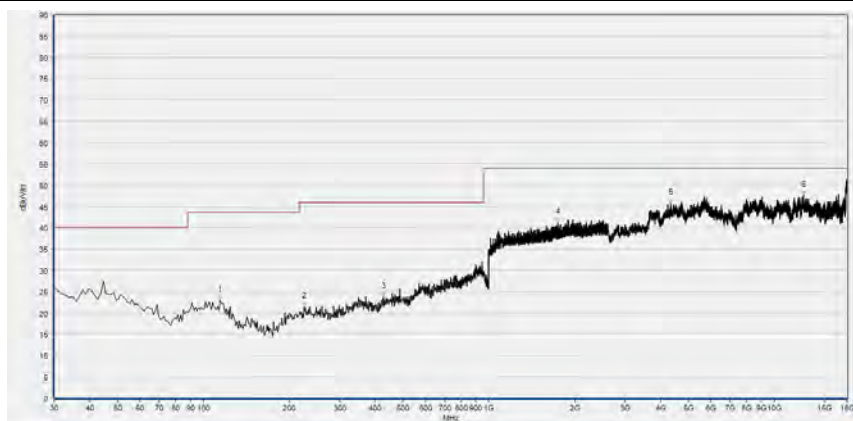

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
114.390	22.99	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
224.970	21.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
426.730	23.76	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1741.333	41.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4346.360	45.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12683.920	47.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

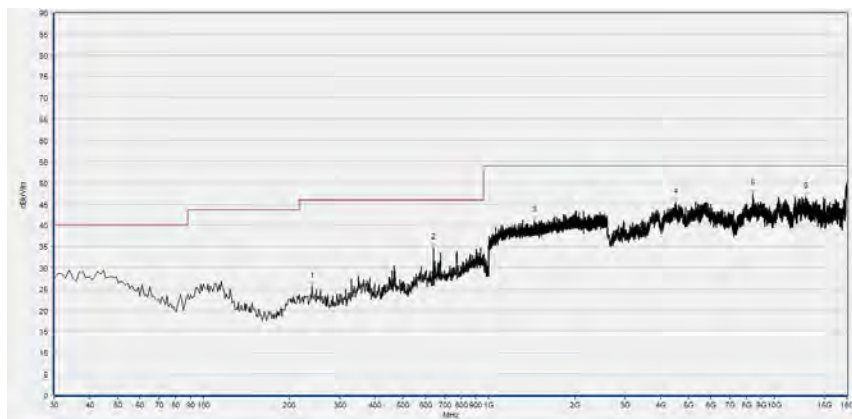

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
240.490	25.70	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
641.100	34.73	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1441.600	41.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4515.760	45.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8393.480	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12914.920	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

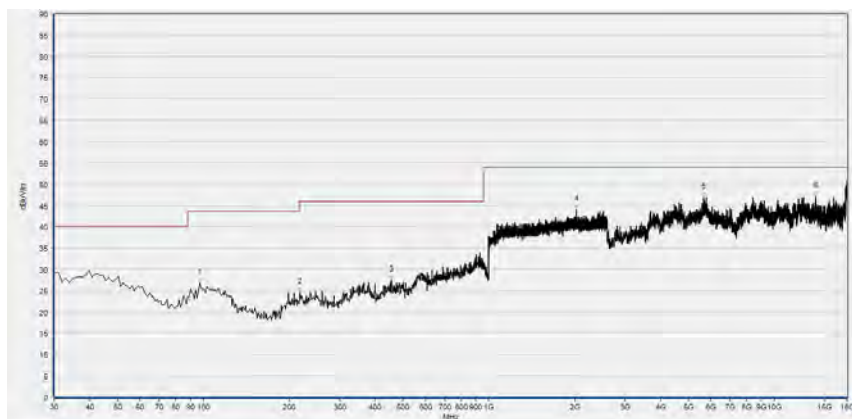


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.930	26.75	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
217.210	24.61	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
455.830	27.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2028.800	44.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5649.200	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13999.080	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 13

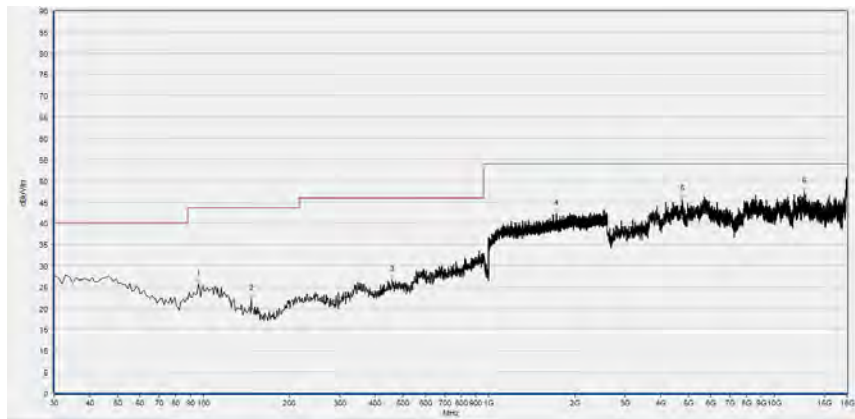

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	25.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
147.370	22.14	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
458.740	26.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1719.467	42.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4752.920	45.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12723.960	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

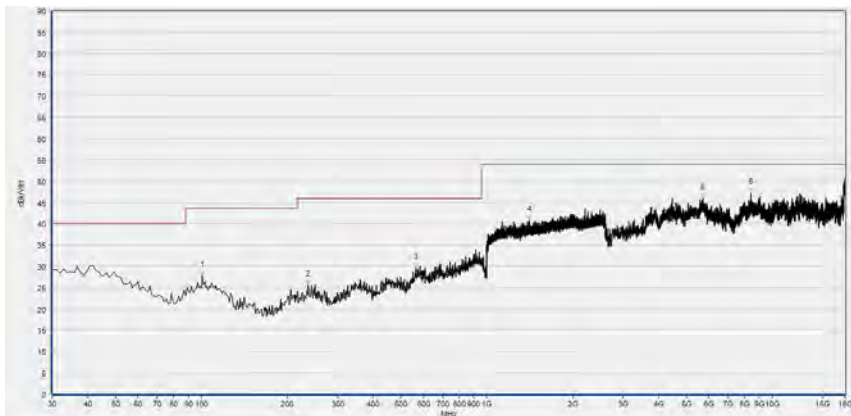


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	27.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
236.610	25.65	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
562.530	29.75	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1406.933	40.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5707.720	45.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8411.960	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11g Mode**

Plot for Channel 1

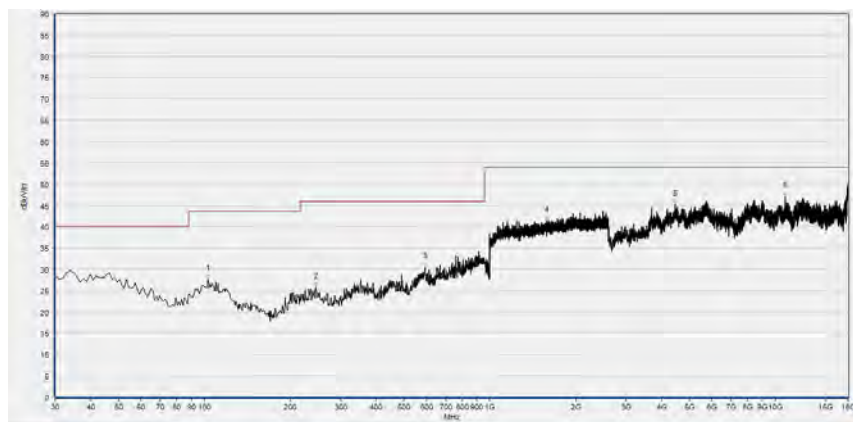

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	27.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
245.340	25.79	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
593.570	30.42	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1578.133	41.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4466.480	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10854.400	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

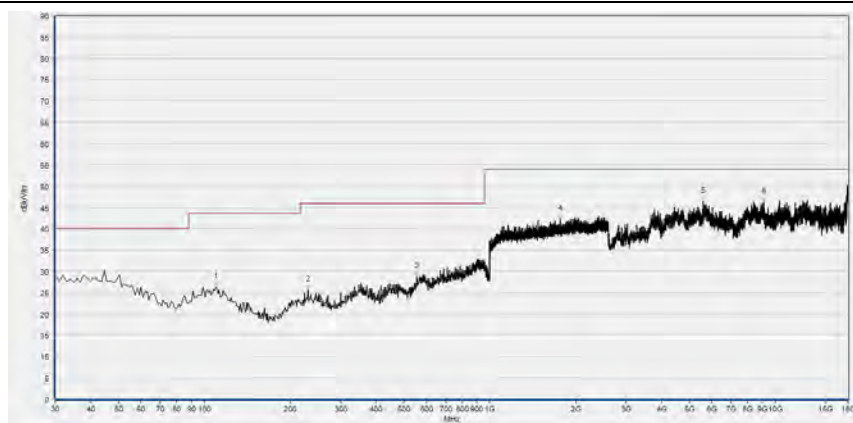

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	26.24	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
230.790	25.68	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
554.770	28.75	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1764.800	42.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5603.000	46.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9132.680	46.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

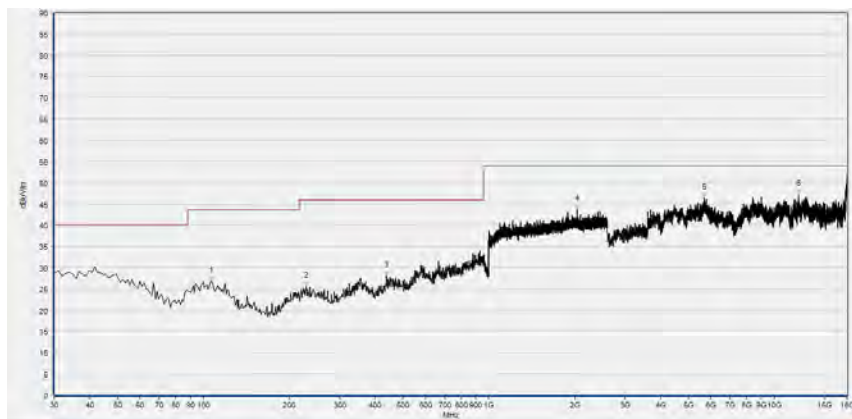

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	26.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
228.850	25.68	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
438.370	28.18	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2041.600	43.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5686.160	46.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12154.160	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

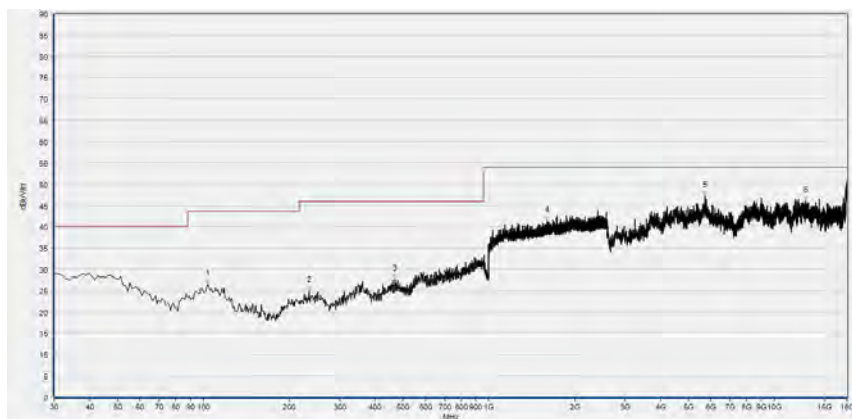


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	26.41	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
234.670	25.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
468.440	27.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1601.600	41.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5716.960	47.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12908.760	46.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 13

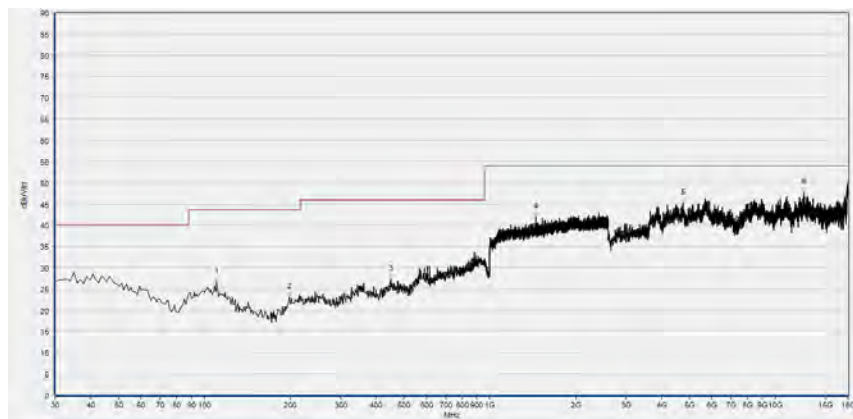

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	26.65	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
198.780	23.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
450.010	27.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1453.867	41.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4746.760	45.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12600.760	47.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

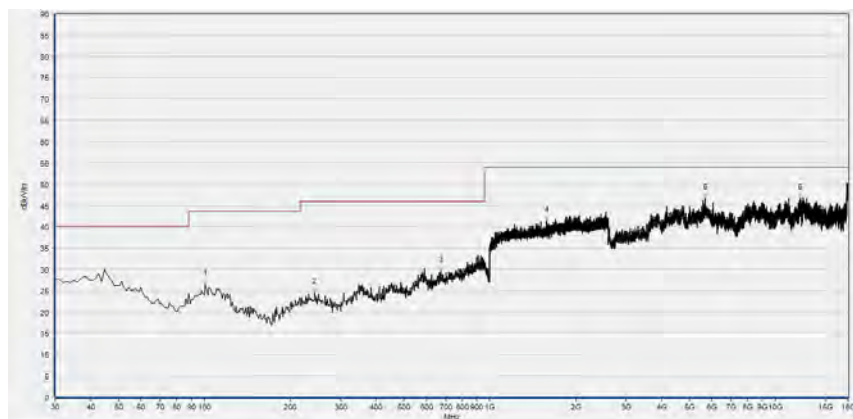


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	26.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
243.400	24.64	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
674.080	29.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1578.133	41.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5692.320	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12218.840	46.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT20) Mode**

Plot for Channel 1

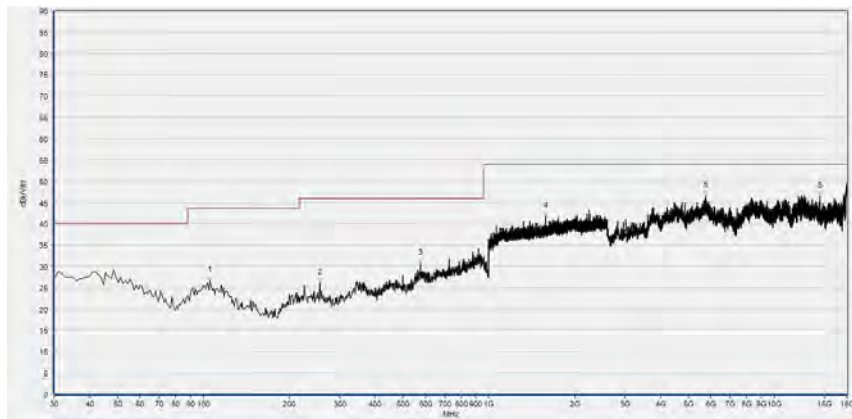

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	26.63	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
256.010	26.14	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
576.110	30.62	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1584.533	41.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5735.440	46.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14427.200	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

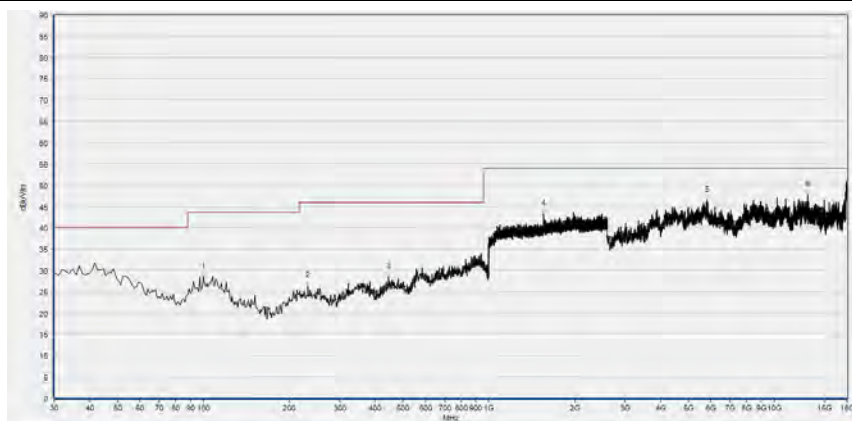


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	28.43	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
232.730	26.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
444.190	28.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1553.067	43.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5818.600	46.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13081.240	47.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 7

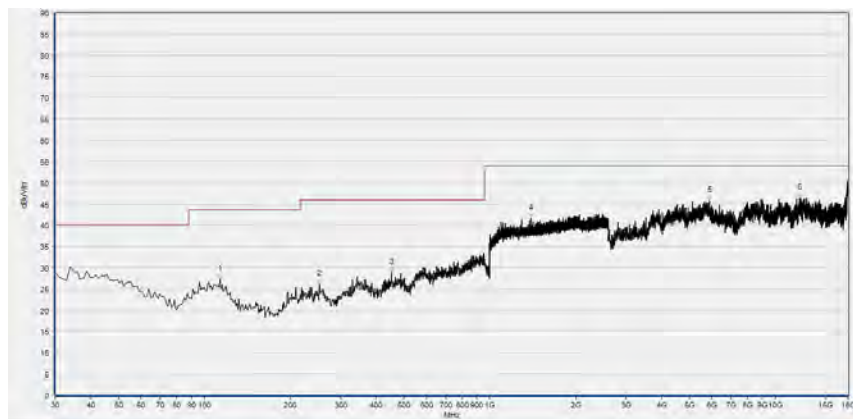

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	27.28	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
253.100	26.21	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
451.950	28.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1394.667	41.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5889.440	45.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12191.120	46.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

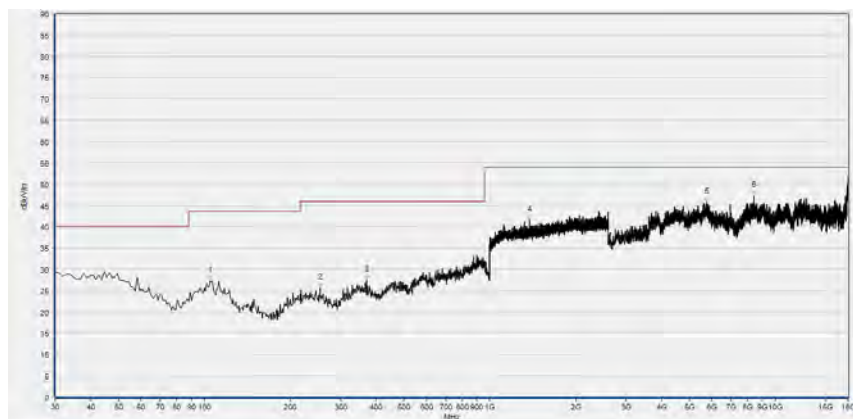


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	27.25	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
254.070	25.64	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
369.500	27.50	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1379.200	41.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5753.920	45.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8421.200	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 13

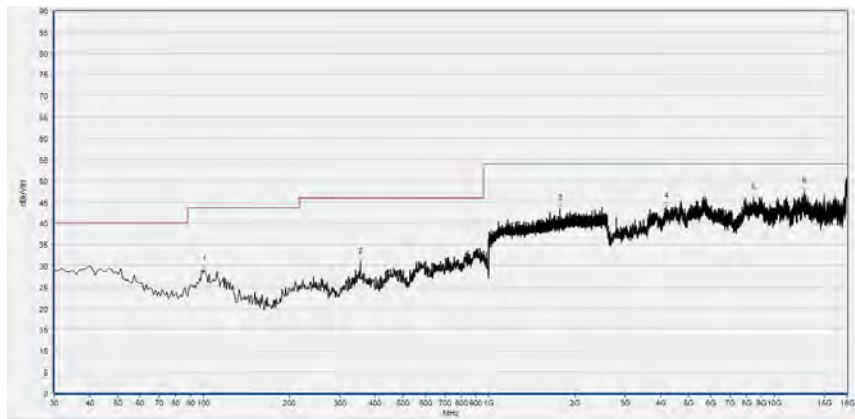

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	28.99	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
354.950	30.90	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1771.200	43.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4189.280	43.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8445.840	45.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12702.400	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

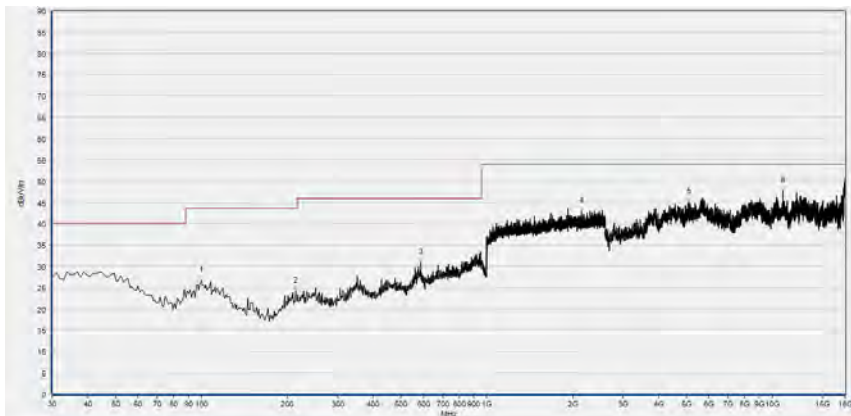


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	26.58	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
214.300	24.16	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
586.780	30.85	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2152.000	42.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5107.120	45.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10882.120	47.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

Plot for Channel 3

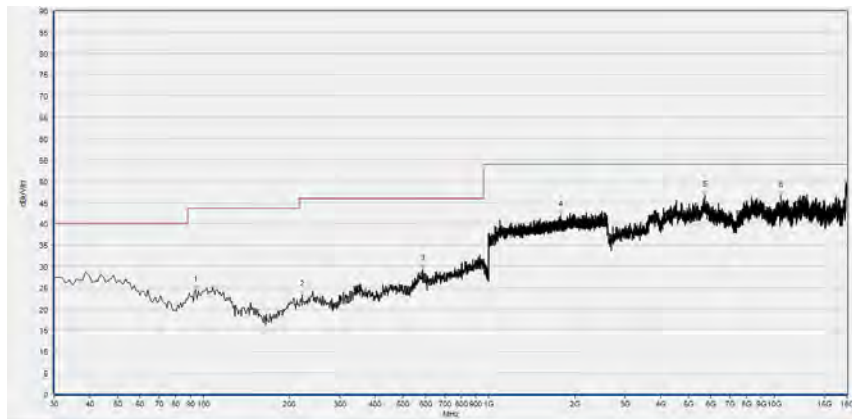

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.020	24.42	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
222.060	23.31	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
586.780	29.33	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1789.867	42.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5710.800	46.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10561.800	46.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

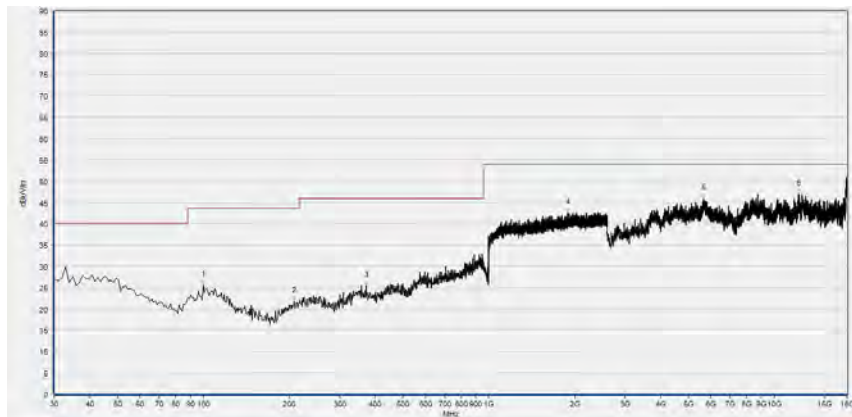

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	25.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
208.480	21.83	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
371.440	25.54	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1888.533	42.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5652.280	45.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12144.920	46.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

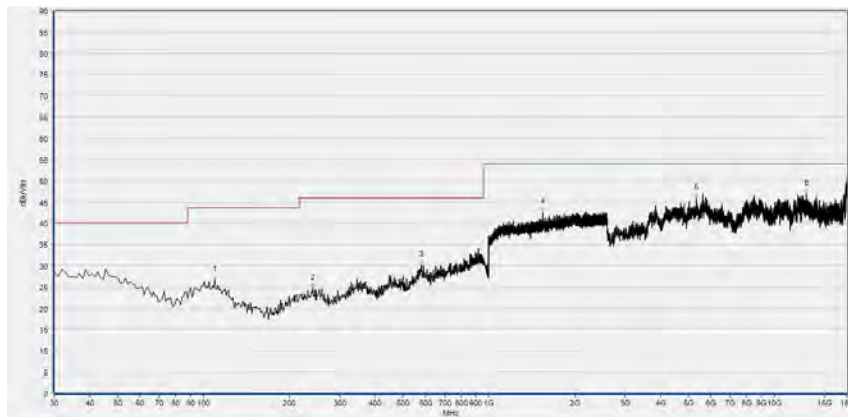

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	26.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
241.460	24.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
580.960	30.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1546.133	42.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5341.200	45.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12961.120	46.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

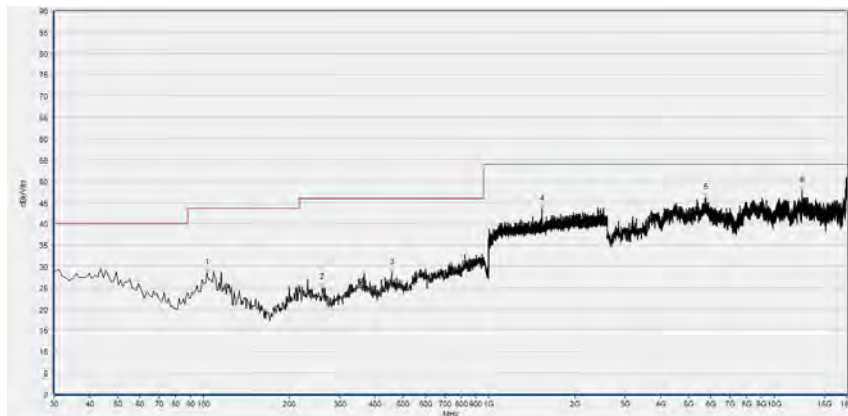

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	28.52	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
260.860	25.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
456.800	28.51	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1532.267	43.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5738.520	46.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12533.000	47.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

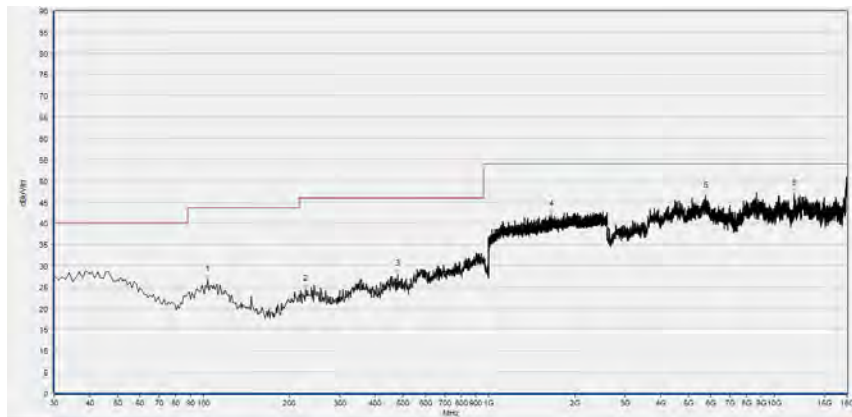

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	26.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
227.880	24.51	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.050	27.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1656.000	42.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5741.600	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11759.920	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

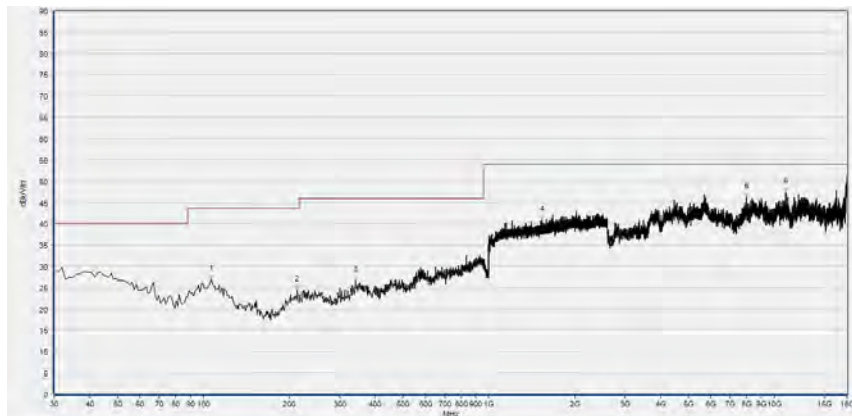

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	27.04	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
213.330	24.40	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
341.370	26.59	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1539.733	40.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7993.080	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10974.520	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____