



TEST REPORT

APPLICANT : Shenzhen Chainway Information
Technology Co., Ltd.

PRODUCT NAME : Mobile Data Terminal

MODEL NAME : C60

BRAND NAME : CHAINWAY

FCC ID : 2AC6AC60

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2020-10-14


TEST DATE : 2020-11-05 to 2020-12-26

ISSUE DATE : 2020-12-28

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15E Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of the Test Signal	10
2.3. Maximum Conducted Output Power	15
2.4. Emission Bandwidth	19
2.5. Peak Power Spectral Density	40
2.6. Frequency Stability	61
2.7. Conducted Emission	63
2.8. Restricted Frequency Bands	67
2.9. Radiated Emission	80
Annex A Test Uncertainty	96
Annex B Testing Laboratory Information	97

Change History		
Version	Date	Reason for change
1.0	2020-12-28	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co., Ltd.
Applicant Address:	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Chainway Information Technology Co., Ltd.
Manufacturer Address:	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Data Terminal	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	A115_MB_V2	
Software Version:	c60_yuancheng_gitb4ed7c0_20200924	
Modulation Type:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80),	
Operating Frequency Range:	5180MHz-5240MHz; 5745MHz-5825MHz	
Channel Number:	Refer to 1.3	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.50dBi	
Accessory Information:	Battery	
	Brand Name:	Hixon
	Model No.:	J855
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4250.00mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	Hixon(Shenzhen) Technology Limited



Accessory Information:	AC Adapter	
	Brand Name:	
	Model No.:	NA010050020
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Shenzhen Shi Ying Yuan Electronics Co., Ltd.

Note 1: According to the certificate holder, they declared that the model C60 has two internal models 4710 and 6603. The difference between the two internal models is that the scan head is different. Except for the above differences, their circuit design, layout and internal wiring are the same. Due to the above changes, we have evaluated and retested worst case of internal model 6603, the test results are better than internal model 4710, all other test items are no need to be retested. The main measuring internal model is 4710, only the results for 4710 were recorded in this report.

Note 2: WIFI hotspot does not support U-NII band.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
OFDM (802.11a)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11ac)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
	256QAM	78

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



1.4. The Channel Number and Frequency

Frequency Range: 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
Frequency Range: 5745-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Nov 05, 2020	Ouyang Feng	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Dec 25, 2020	Ouyang Feng	PASS	No deviation
4	15.407(a) (e)	Emission Bandwidth	Nov 05, 2020	Ouyang Feng	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Nov 05, 2020	Ouyang Feng	PASS	No deviation
6	15.407(g)	Frequency Stability	Nov 11, 2020	Ouyang Feng	PASS	No deviation
7	15.207	Conducted Emission	Dec 19, 2020	Huang Zhiye	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Dec 23&26, 2020	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Dec 23, 2020	Gao Jianrou	PASS	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v01r03.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.



Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

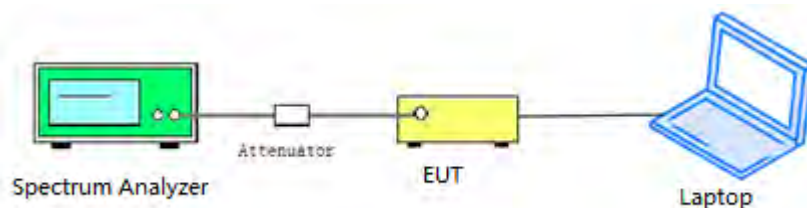

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	86.54	0.63
802.11n (HT20)	82.82	0.82
802.11n (HT40)	68.41	1.65
802.11ac(VHT20)	82.07	0.86
802.11ac(VHT40)	70.59	1.51
802.11ac(VHT80)	55.39	2.57


B. Test Plot:

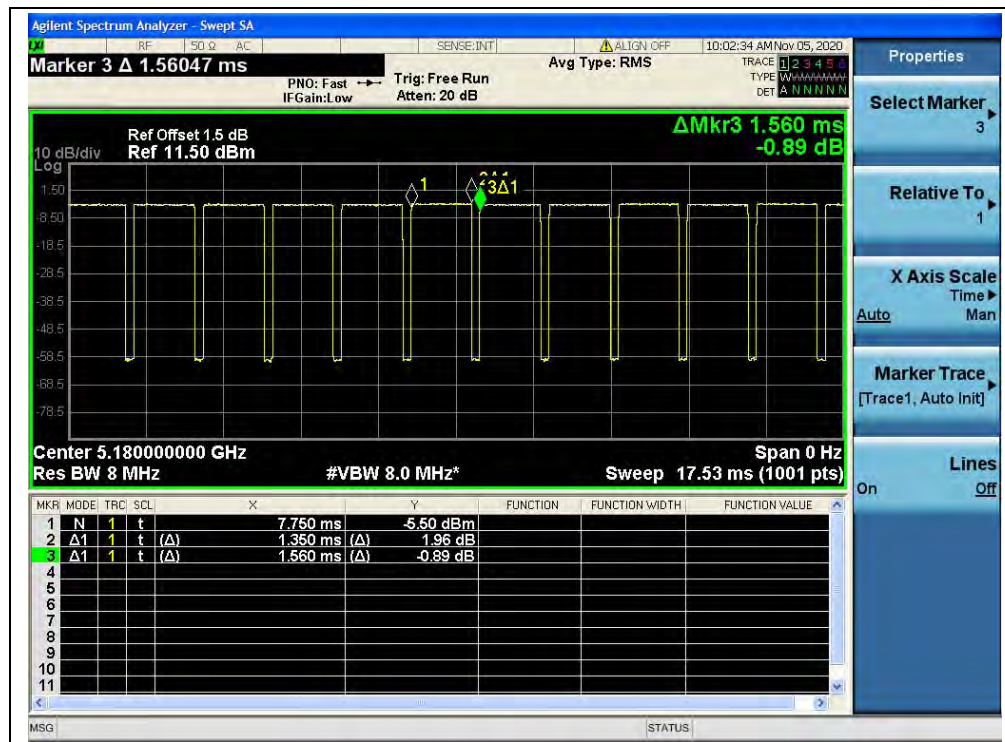


(Channel 36, 5180MHz, 802.11a)

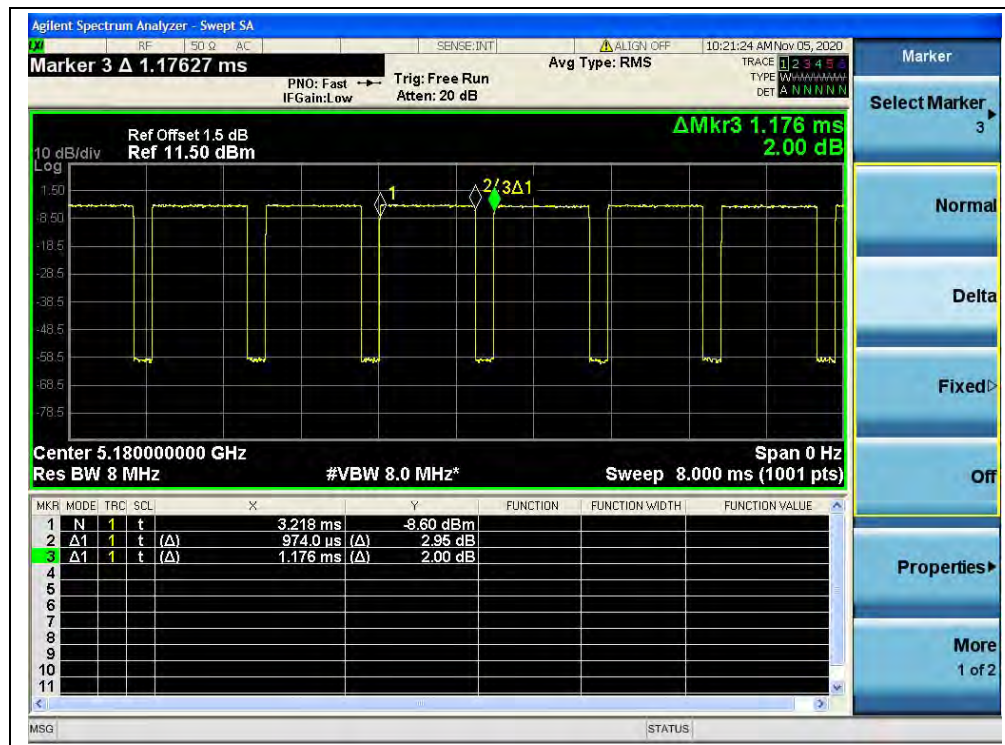


(Channel 36, 5180MHz, 802.11n (HT20))

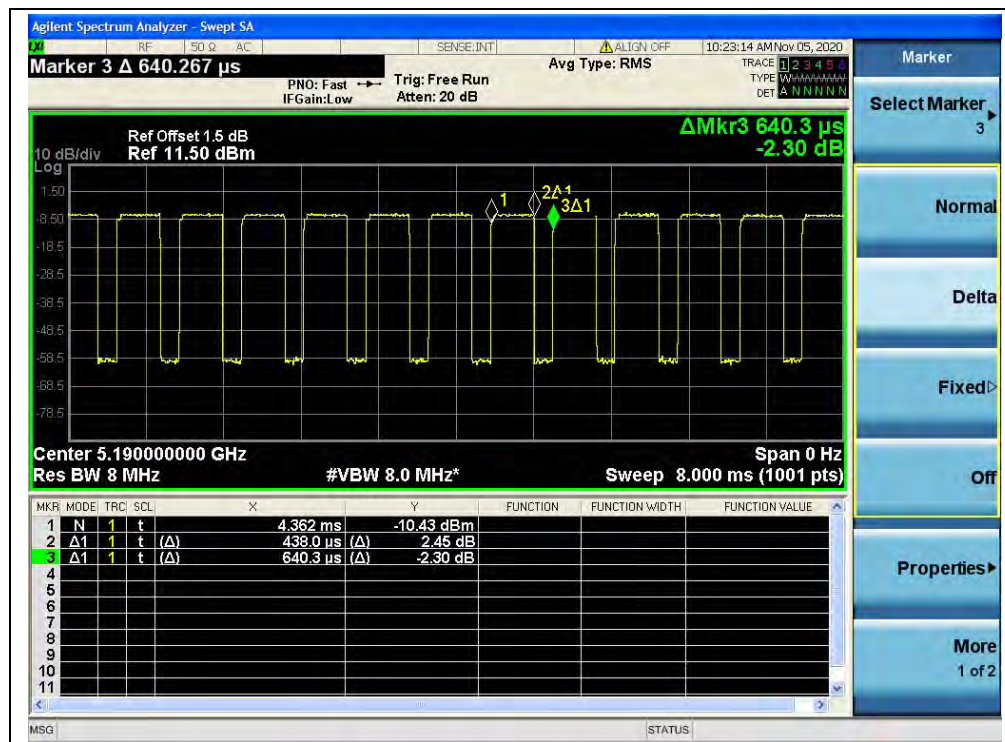


(Channel 38, 5190MHz, 802.11n (HT40))

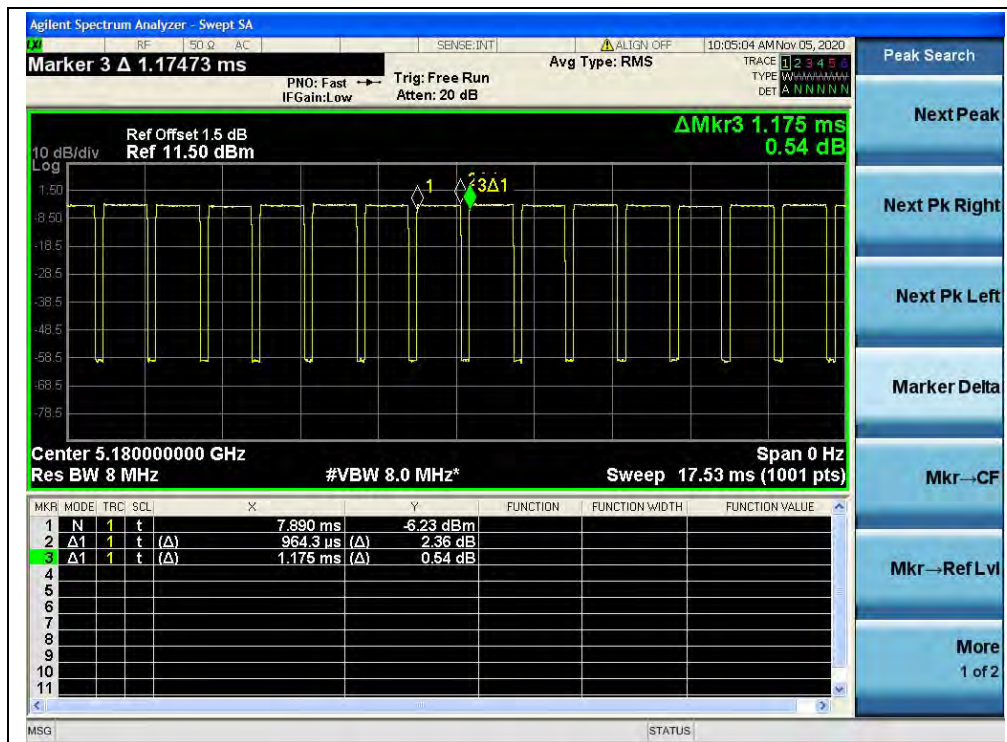

(CH36_5180MHz_802.11ac (VHT20))

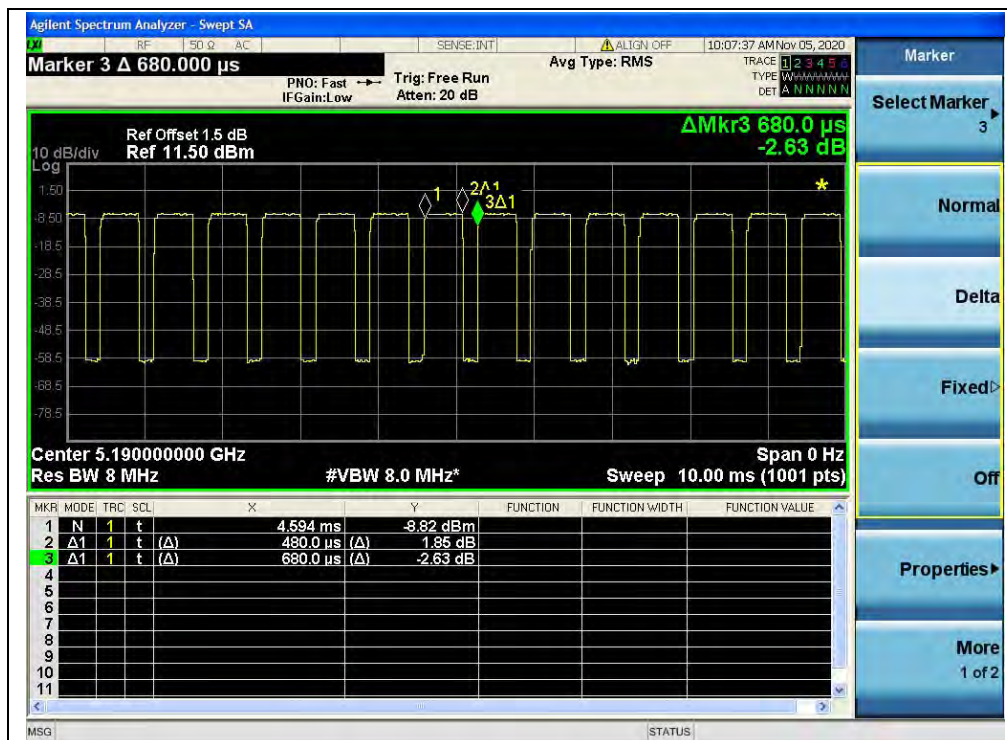

(CH38_5190MHz_802.11ac (VHT40))

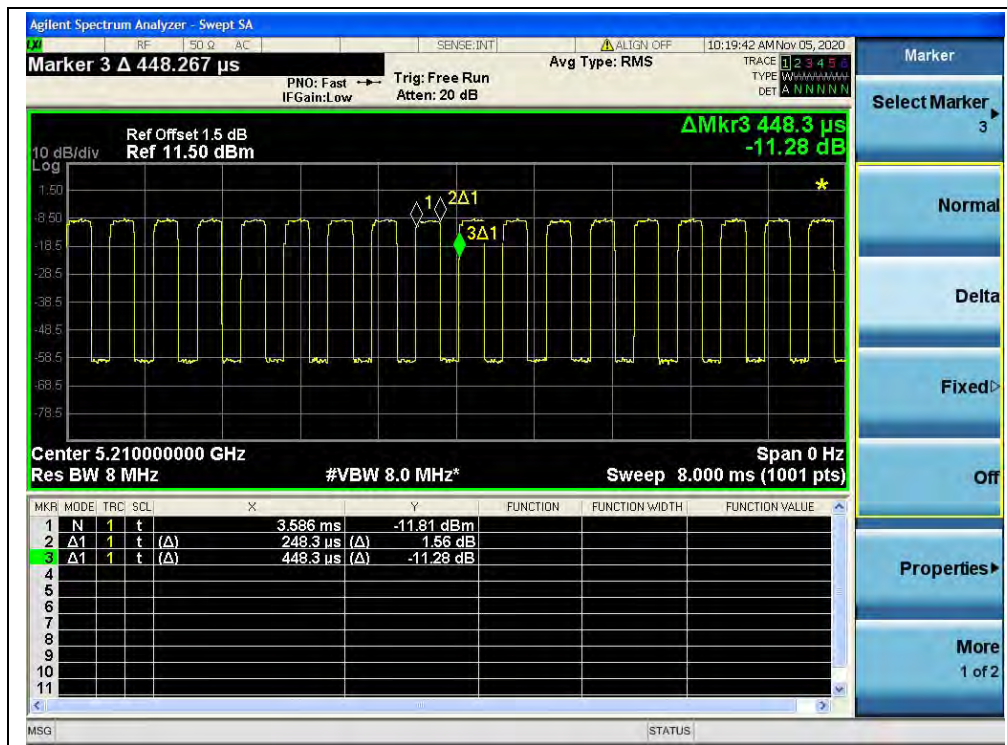

(CH42_5210MHz_802.11ac (VHT80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.


2.3.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

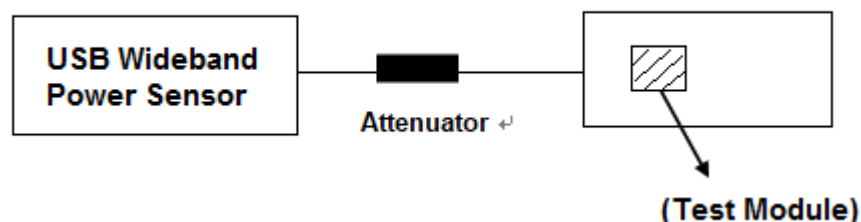

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

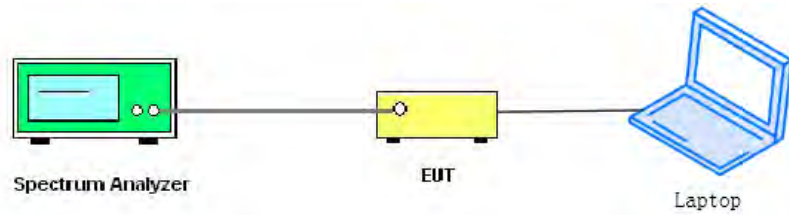For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



2.3.3. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
36	5180	9.09	0.63	9.72	0.009	24	0.25	PASS
44	5220	9.27		9.90	0.010			
48	5240	9.52		10.15	0.010			
149	5745	9.85		10.48	0.011	30	1	
157	5785	9.65		10.28	0.011			
165	5825	9.32		9.95	0.010			

802.11n (HT20) Mode

Channel	Frequency (MHz)	Average Power (dBm)				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
36	5180	8.96	0.82	9.78	0.010	24	0.25	PASS
44	5220	9.42		10.24	0.011			
48	5240	9.47		10.29	0.011			
149	5745	10.09		10.91	0.012	30	1	
157	5785	9.71		10.53	0.011			
165	5825	9.37		10.19	0.010			

802.11n (HT40) Mode

Channel	Frequency (MHz)	Average Power				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
38	5190	8.77	1.65	10.42	0.011	24	0.25	PASS
46	5230	9.01		10.66	0.012			
151	5755	9.35		11.00	0.013	30	1	
159	5795	9.39		11.04	0.013			

**802.11ac (VHT20) Mode**

Channel	Frequency (MHz)	Average Power (dBm)				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated		dBm	W	
		dBm		dBm	W			
36	5180	8.76	0.86	9.62	0.009	24	0.25	PASS
44	5220	9.24		10.10	0.010			
48	5240	9.29		10.15	0.010			
149	5745	9.85		10.71	0.012	30	1	
157	5785	9.49		10.35	0.011			
165	5825	9.25		10.11	0.010			

802.11ac (VHT40) Mode

Channel	Frequency (MHz)	Average Power				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated		dBm	W	
		dBm		dBm	W			
38	5190	8.51	1.51	10.02	0.010	24	0.25	PASS
46	5230	8.84		10.35	0.011			
151	5755	9.34		10.85	0.012	30	1	
159	5795	8.97		10.48	0.011			

802.11ac (VHT80) Mode

Channel	Frequency (MHz)	Average Power				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
42	5210	7.59	2.57	10.16	0.010	24	0.25	PASS
155	5775	8.08		10.65	0.012	30	1	


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

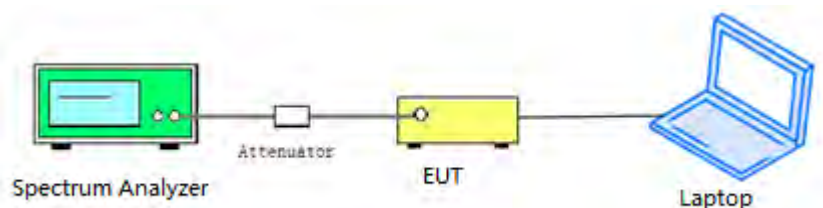

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
 2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
- Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.92
44	5220	22.21
48	5240	21.78
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.46
157	5785	16.49
165	5825	16.42



B.Test Plot:



(Channel 36, 5180MHz, 802.11a)



(Channel 44, 5220 MHz, 802.11a)




(Channel 48, 5240MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)

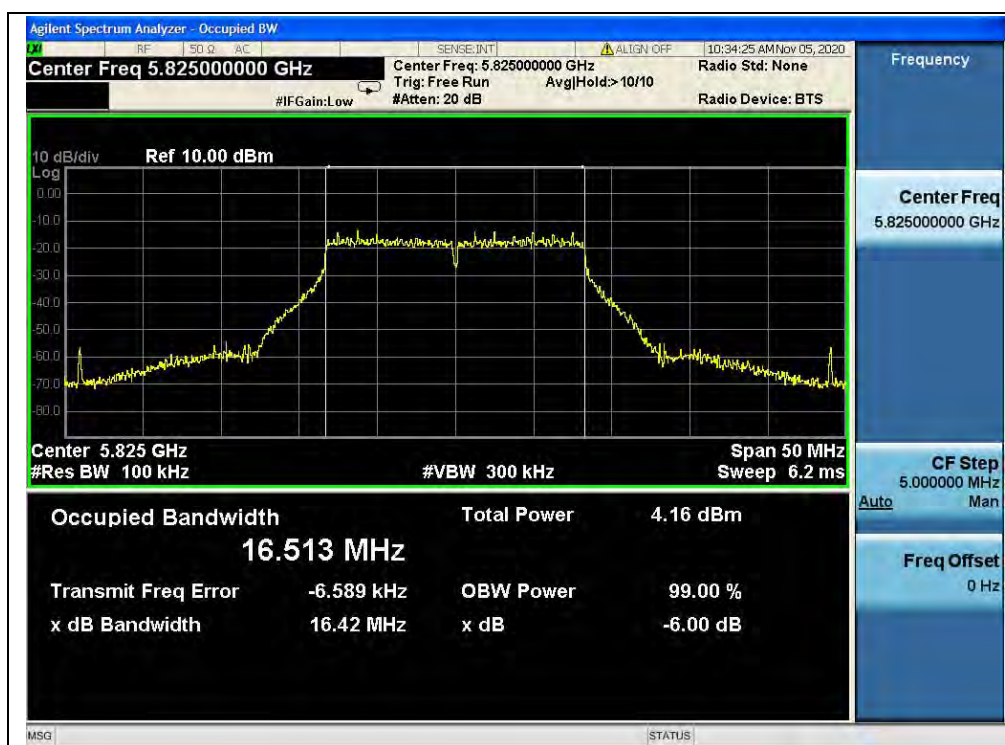

(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	22.49
44	5220	22.36
48	5240	22.02
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.64
157	5785	16.47
165	5825	17.63

B.Test Plot:



(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	43.01
46	5230	42.10
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	35.49
159	5795	35.44


B.Test Plot:




(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230MHz, 802.11n (HT40))

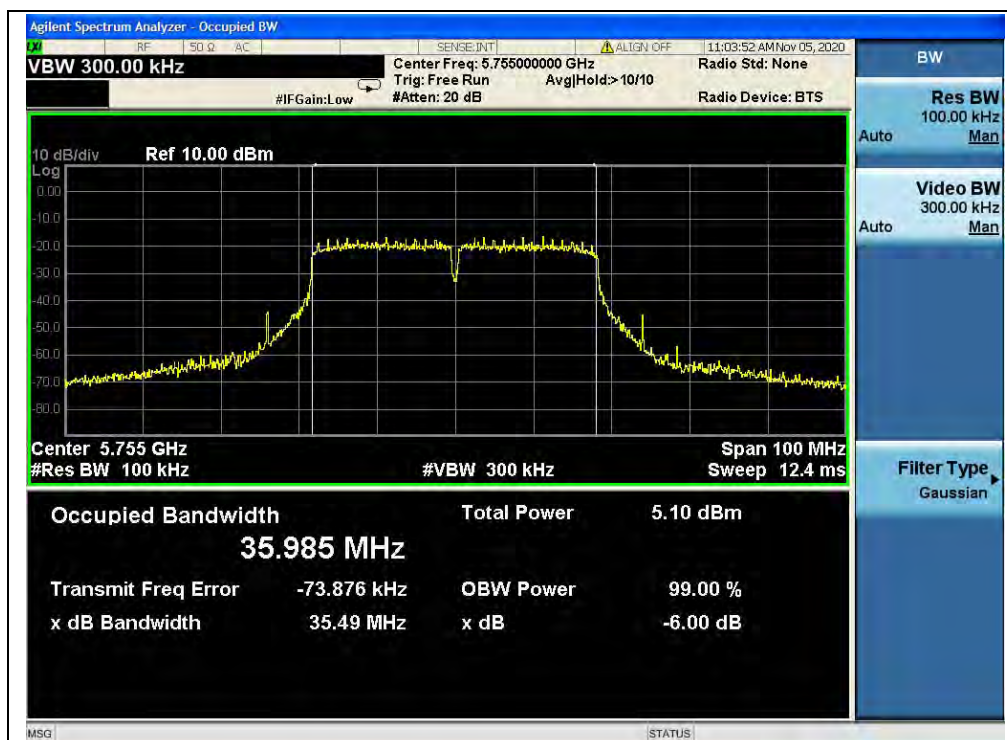

(Channel 151, 5755MHz, 802.11n (HT40))

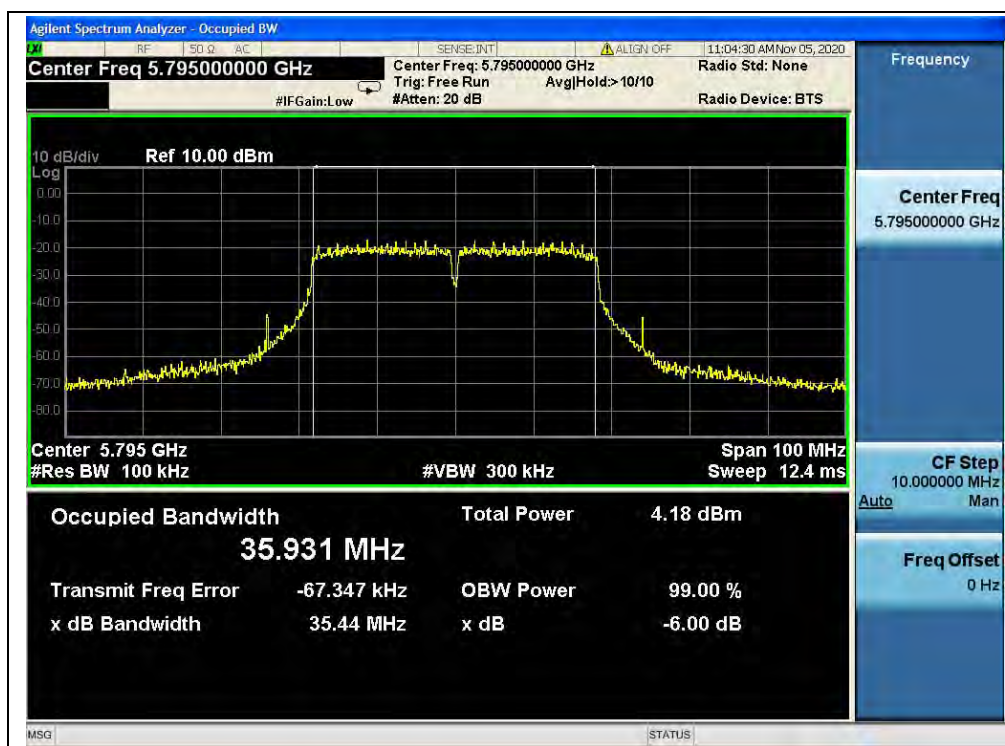

(Channel 159, 5795MHz, 802.11n (HT40))

**802.11ac (VHT20) Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	22.26
44	5220	22.28
48	5240	22.42
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	17.64
157	5785	17.65
165	5825	17.64

B. Test Plot:

(Channel 36, 5180MHz, 802.11ac (VHT20))




(Channel 44, 5220 MHz, 802.11ac (VHT20))




(Channel 48, 5240MHz, 802.11ac (VHT20))



(Channel 149, 5745MHz, 802.11ac (VHT20))

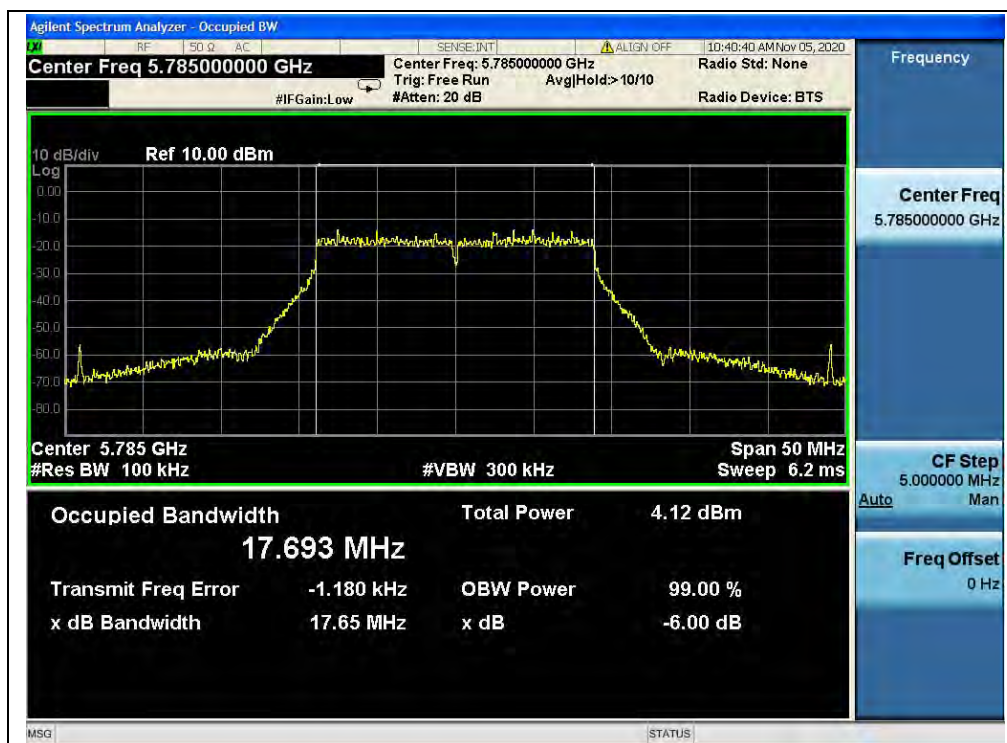

(Channel 157, 5785MHz, 802.11ac (VHT20))

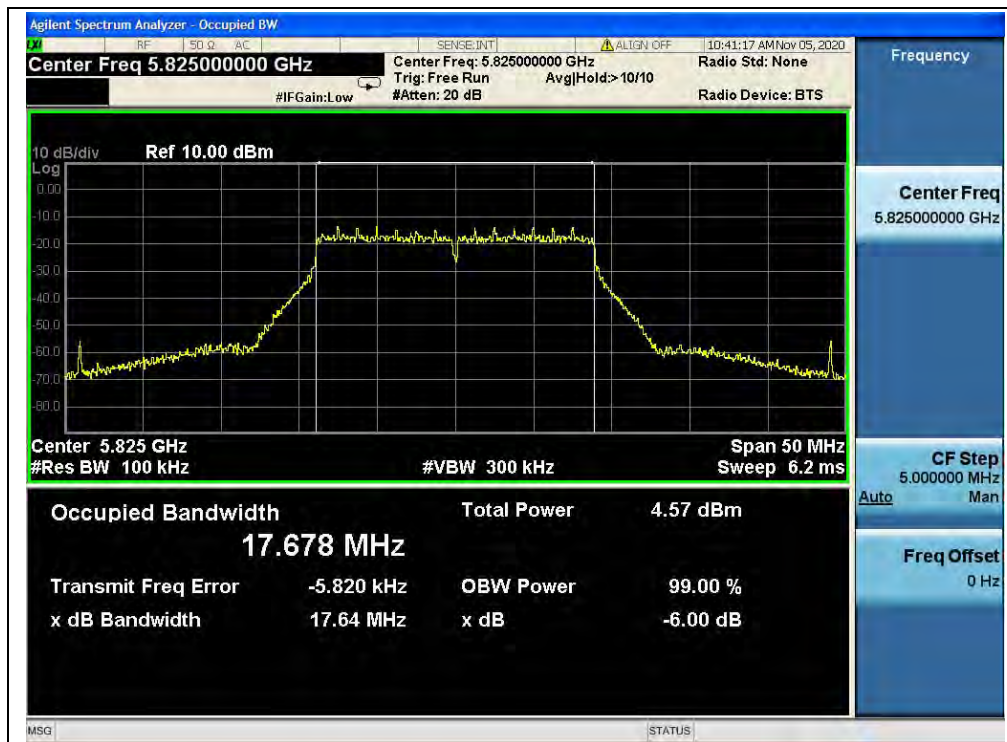

(Channel 165, 5825MHz, 802.11ac (VHT20))

**802.11 ac (VHT40) Test mode****A. Test Verdict:**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	42.44
46	5230	42.45
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
151	5755	35.53
159	5795	35.44

B. Test Plot:


(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230 MHz, 802.11ac (VHT40))

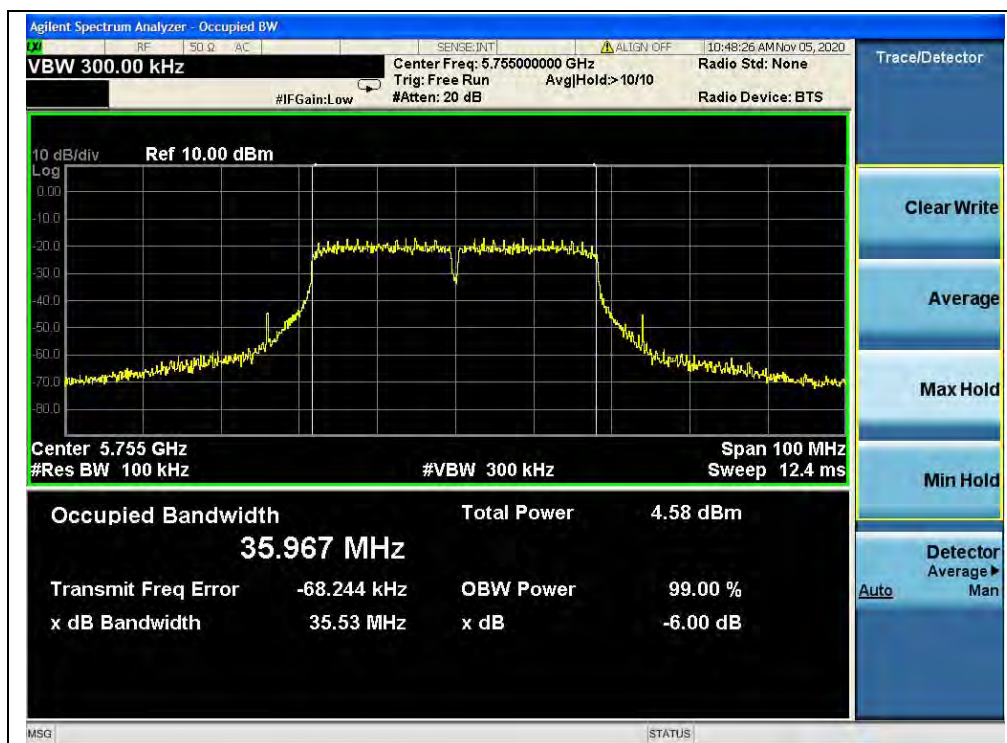


(Channel 151, 5755 MHz, 802.11ac (VHT40))

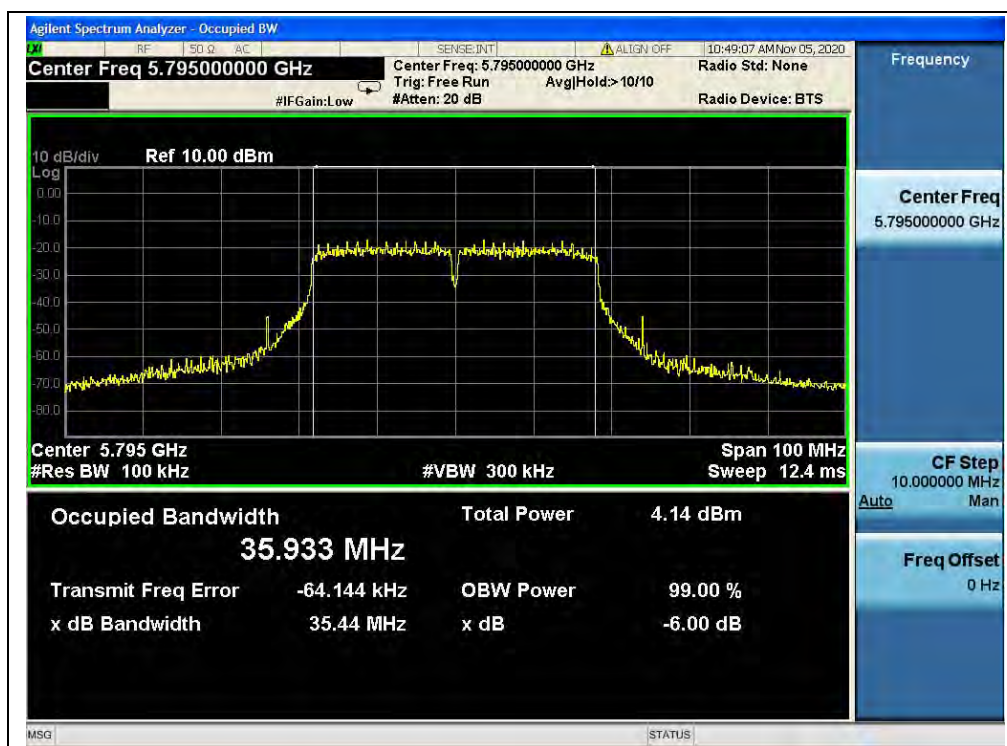


(Channel 159, 5795MHz, 802.11ac (VHT40))

**802.11 ac (VHT80) Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	83.42
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
155	5775	75.04

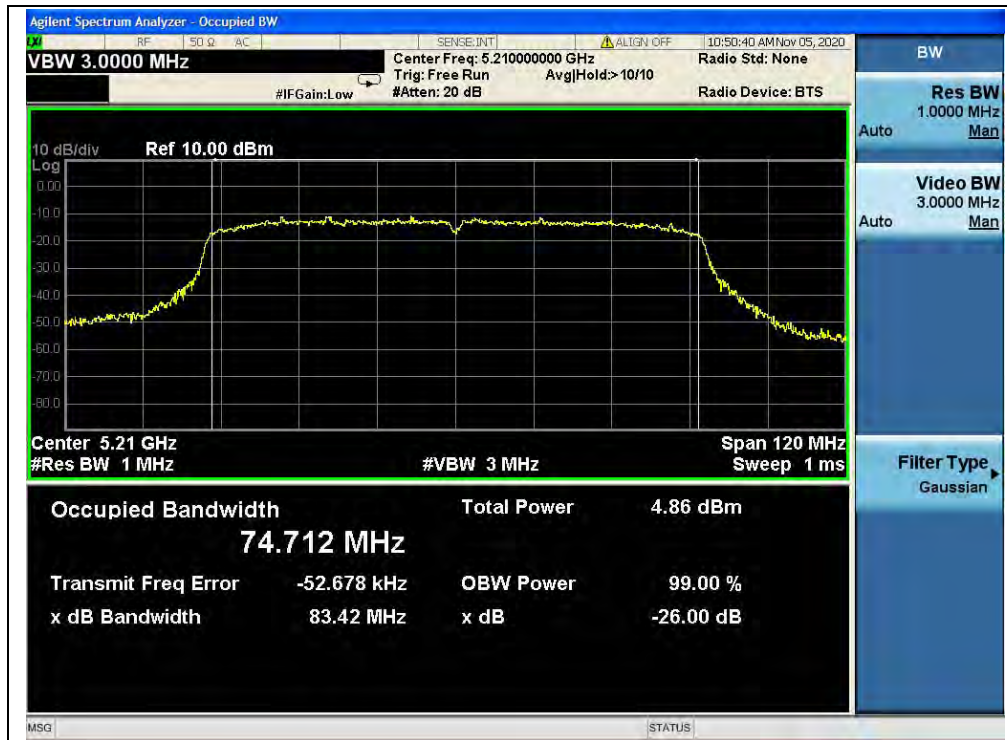B. Test Plot:

(Channel 42, 5210MHz, 802.11ac (VHT80))

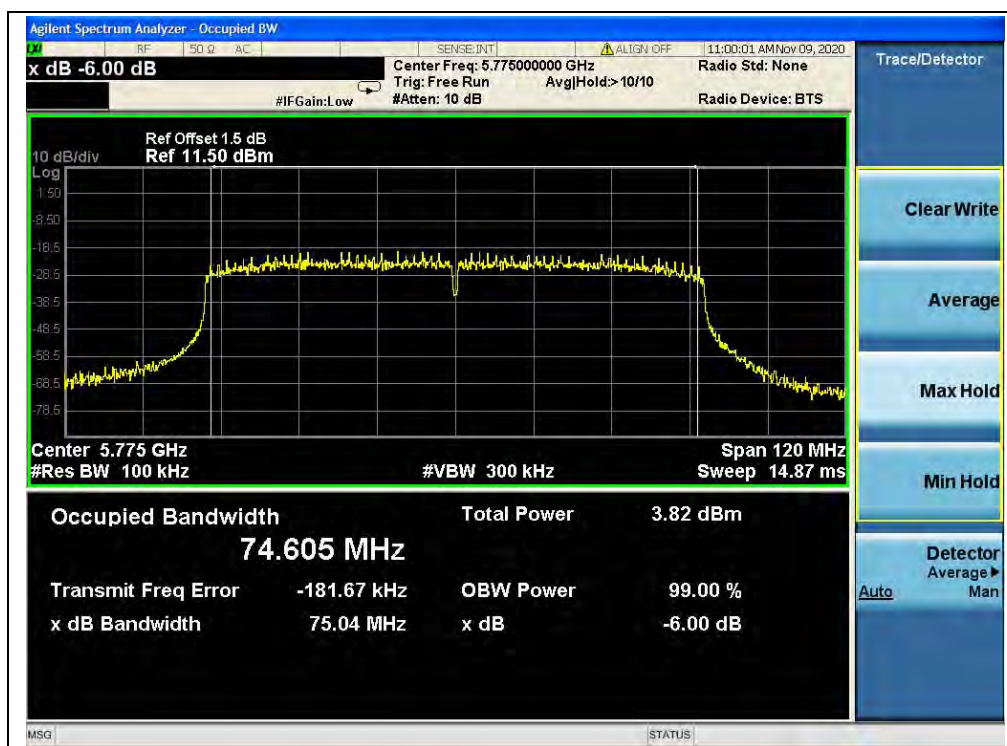

(Channel 155, 5775 MHz, 802.11ac (VHT80))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

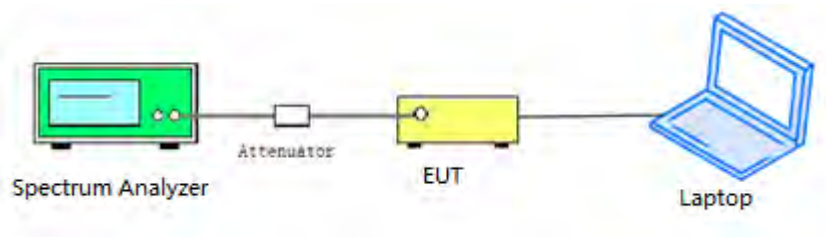

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3.Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-1 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW $\geq$ 3MHz
- 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto
- 4) Detector = Peak
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4.Test Result

802.11a Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	-11.61	0.63	-10.98	11	PASS
44	5220	-11.76		-11.13		
48	5240	-11.60		-10.97		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	-13.76	0.63	-13.13	30	PASS
157	5785	-14.12		-13.49		
165	5825	-14.41		-13.78		



B.Test Plot:



(Channel 36, 5180MHz, 802.11)



(Channel 44, 5220MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	-12.23	0.82	-11.41	11	PASS
44	5220	-12.07		-11.25		
48	5240	-12.03		-11.21		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	-13.88	0.82	-13.06	30	PASS
157	5785	-14.39		-13.57		
165	5825	-14.68		-13.86		

B. Test Plot:



(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))



(Channel 149, 5745MHz, 802.11n (HT20))



(Channel 157, 5785MHz, 802.11n (HT20))



(Channel 165, 5825MHz, 802.11n (HT20))



802.11n (HT40) Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	-15.76	1.65	-14.11	11	PASS
46	5230	-15.50		-13.85		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	-17.46	1.65	-15.81	30	PASS
159	5795	-17.77		-16.12		

B.Test Plot:



(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230MHz, 802.11n (HT40))



(Channel 151, 5755MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))



802.11ac (VHT20) Test mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	-12.51	0.86	-11.65	11	PASS
44	5220	-12.24		-11.38		
48	5240	-12.15		-11.29		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	-14.18	0.86	-13.32	30	PASS
157	5785	-14.40		-13.54		
165	5825	-14.78		-13.92		

B.Test Plot:



(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220 MHz, 802.11ac (VHT20))



(Channel 48, 5240MHz, 802.11ac (VHT20))



(Channel 149, 5745MHz, 802.11ac (VHT20))



(Channel 157, 5785MHz, 802.11ac (VHT20))



(Channel 165, 5825MHz, 802.11ac (VHT20))



802.11ac (VHT40) Test mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	-15.73	1.51	-14.22	11	PASS
46	5230	-15.50		-13.99		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	-17.39	1.51	-15.88	30	PASS
159	5795	-17.72		-16.21		

B.Test Plot:



(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230 MHz, 802.11ac (VHT40))



(Channel 151, 5755MHz, 802.11ac (VHT40))



(Channel 159, 5795MHz, 802.11ac (VHT40))



802.11ac (VHT80) Test mode


A.Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	-19.94	2.57	-17.37	11	PASS
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	-21.91	2.57	-19.34	30	PASS

B.Test Plot:



(Channel 42, 5210MHz, 802.11ac (VHT80))

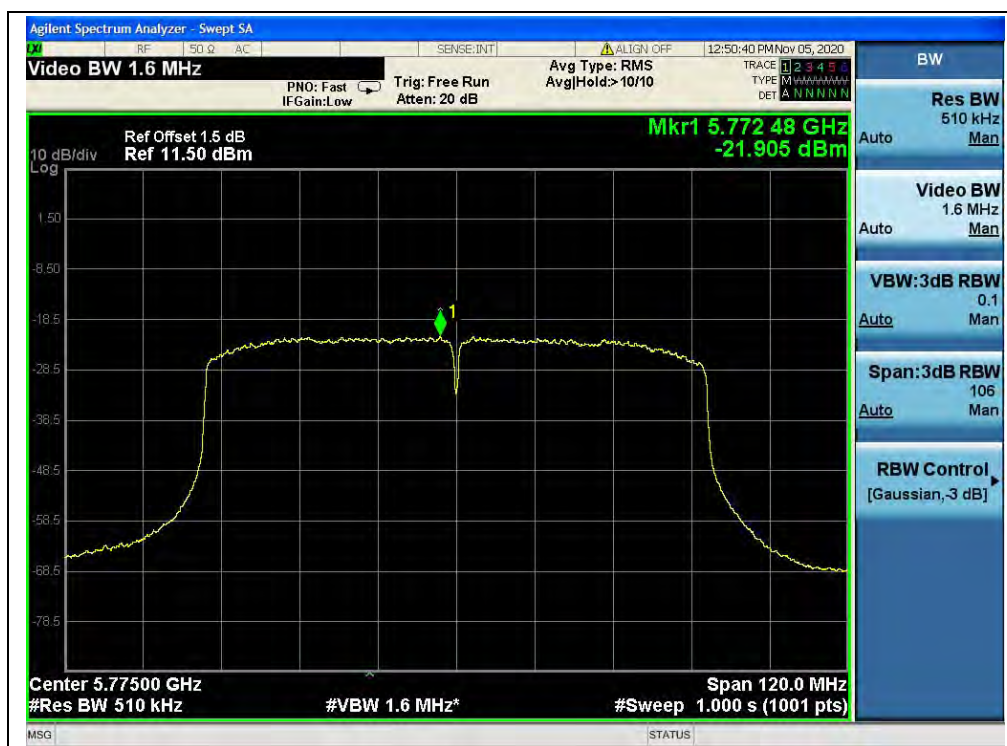

(Channel 155, 5775MHz, 802.11ac (VHT80))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.80	+20(Ref)	26	5.019
100%		-30	31	5.985
100%		-20	29	5.598
100%		-10	26	5.019
100%		0	25	4.826
100%		+10	22	4.247
100%		+20	20	3.861
100%		+30	23	4.440
100%		+40	26	5.019
100%		+50	23	4.440
85%	3.23	+20	30	5.792
115%	4.35	+20	28	5.405



U-NII-3 (Ch. 149) 5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.80	+20(Ref)	22	3.829
100%		-30	26	4.526
100%		-20	27	4.700
100%		-10	21	3.655
100%		0	29	5.048
100%		+10	24	4.178
100%		+20	26	4.526
100%		+30	26	4.526
100%		+40	28	4.874
100%		+50	27	4.700
85%	3.23	+20	29	5.048
115%	4.35	+20	31	5.396

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

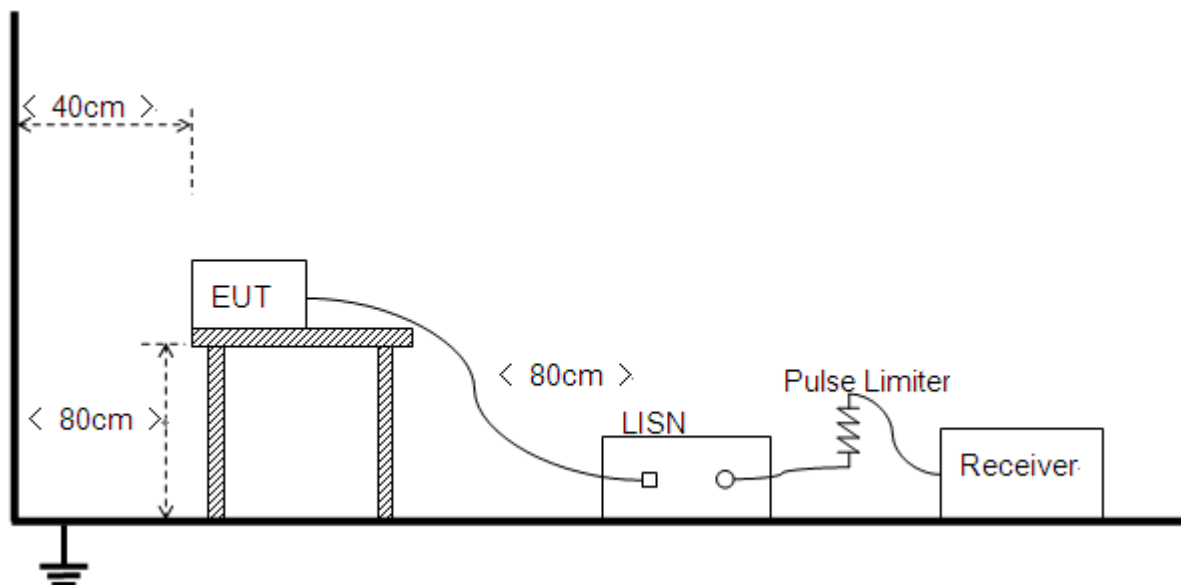

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ADAPTER + WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

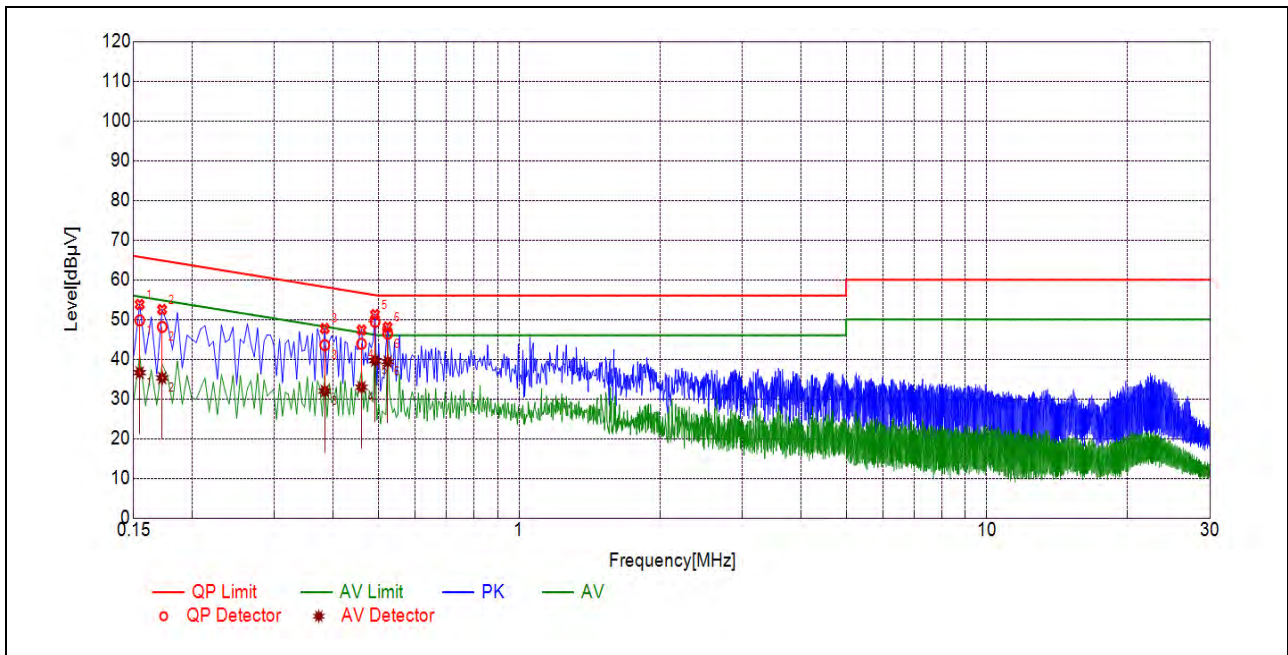

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	49.77	36.59	65.75	55.75	Line	PASS
2	0.1726	48.12	35.26	64.83	54.83		PASS
3	0.3841	43.56	31.98	58.19	48.19		PASS
4	0.4602	43.88	32.93	56.69	46.69		PASS
5	0.4921	49.40	39.64	56.13	46.13		PASS
6	0.5238	46.41	39.36	56.00	46.00		PASS

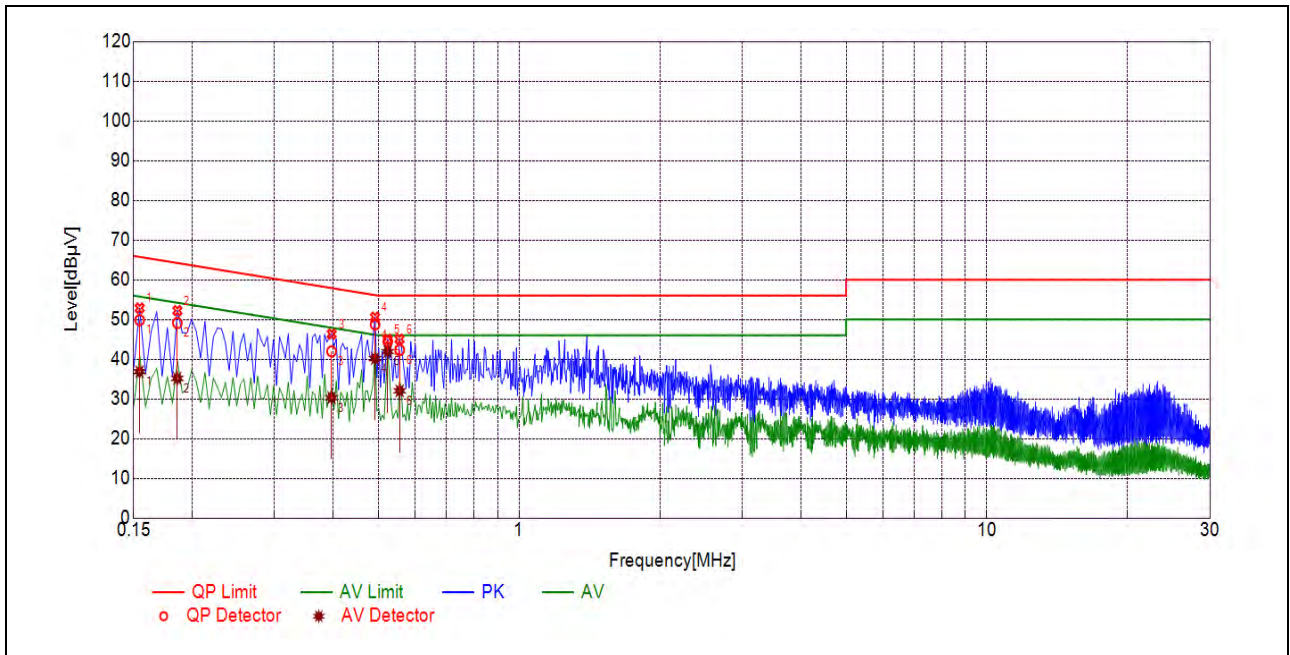

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1544	49.84	36.84	65.76	55.76	Neutral	PASS
2	0.1859	49.12	35.17	64.22	54.22		PASS
3	0.3972	41.98	30.29	57.91	47.91		PASS
4	0.4920	48.76	40.17	56.13	46.13		PASS
5	0.5237	44.49	41.92	56.00	46.00		PASS
6	0.5555	42.32	32.04	56.00	46.00		PASS

2.8. Restricted Frequency Bands

2.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

2.8.2.Test Description

Test Setup

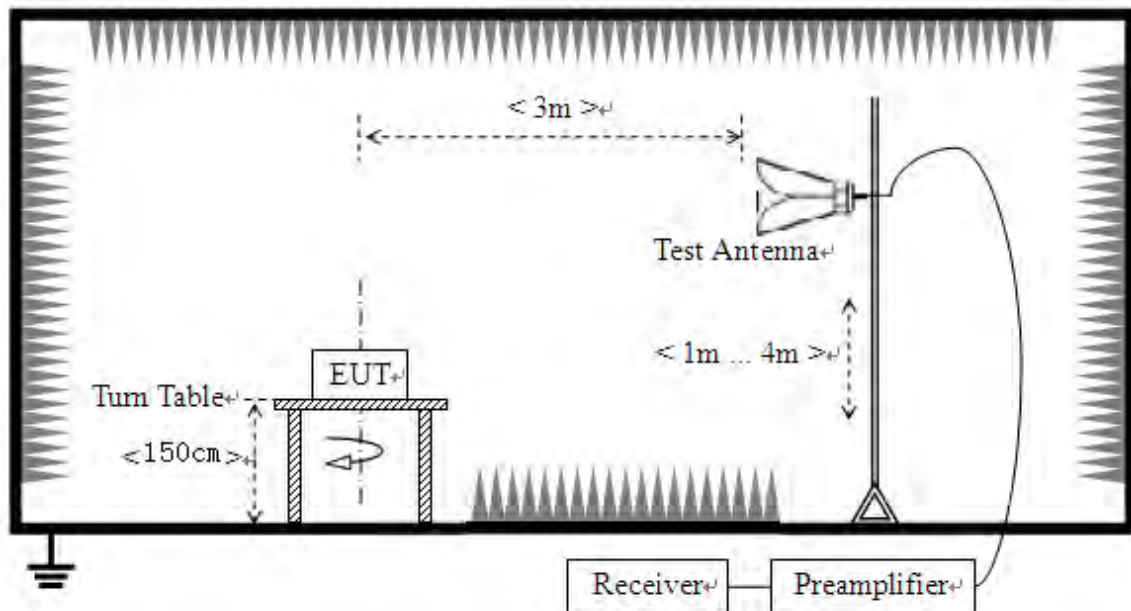



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

2.8.3.Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


802.11a Mode

A.Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
36	5036.52	PK	41.77	-16.92	32.20	57.05	74	PASS
36	5150.00	AV	29.93	-16.92	32.20	45.21	54	PASS
48	5383.52	PK	38.93	-16.92	32.20	54.21	74	PASS
48	5357.56	AV	27.83	-16.92	32.20	43.11	54	PASS
149	5650.00	PK	38.38	-16.23	32.20	54.35	68.23	PASS
165	5850.00	PK	38.16	-16.23	32.20	54.13	122.23	PASS




B.Test Plot:

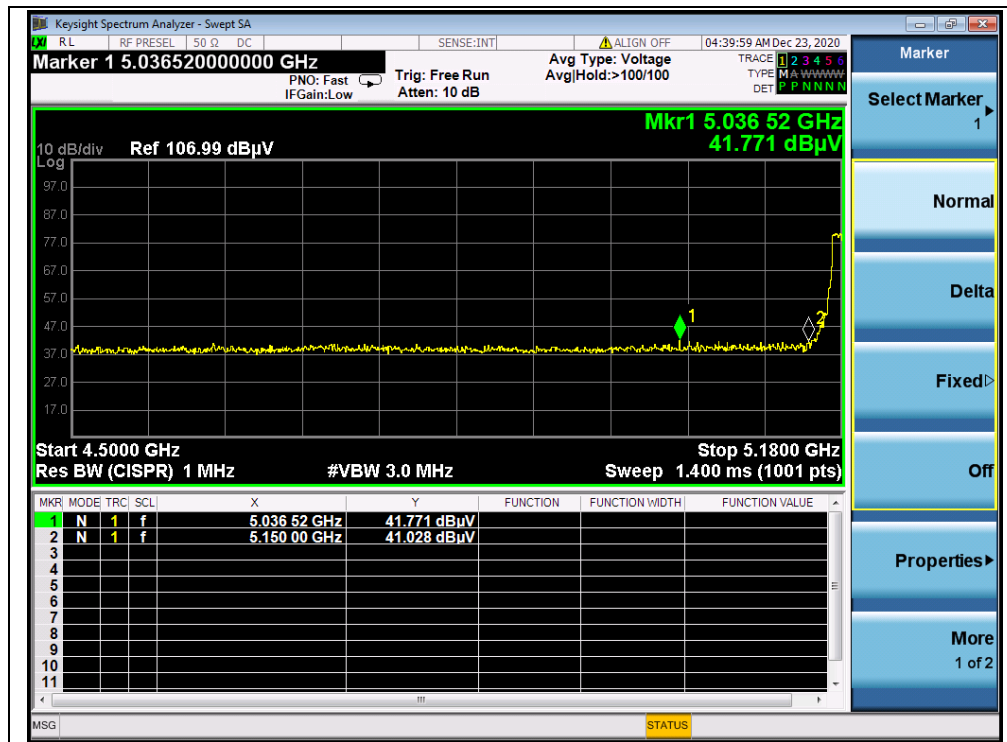


(PEAK, Channel 36, 802.11a)

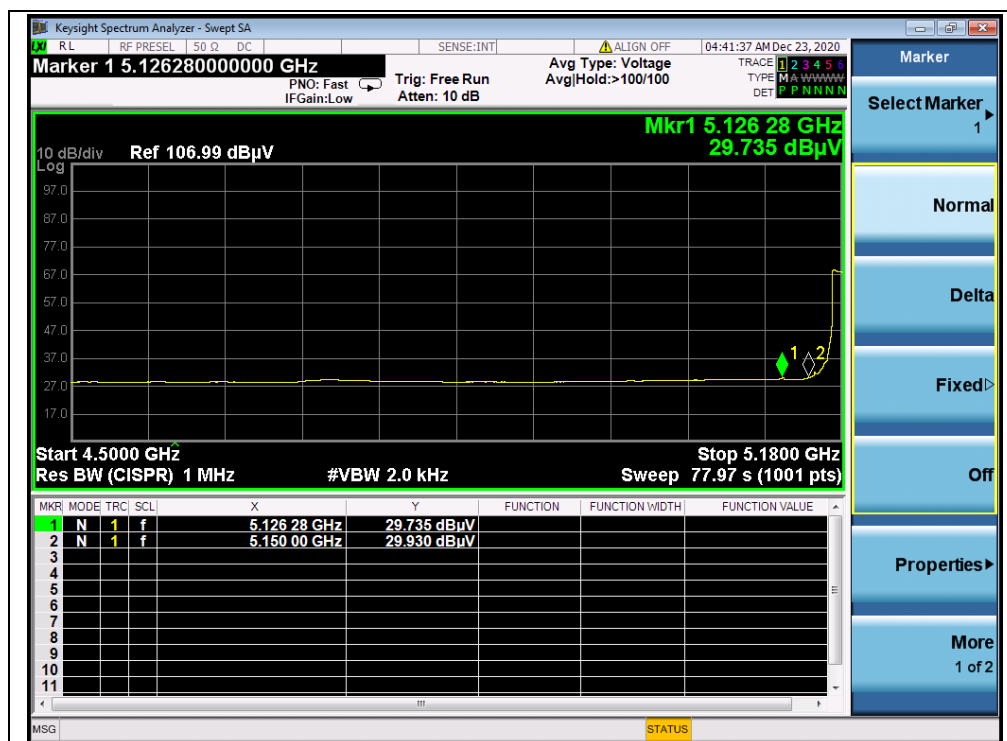


(AVERAGE, Channel 36, 802.11a)

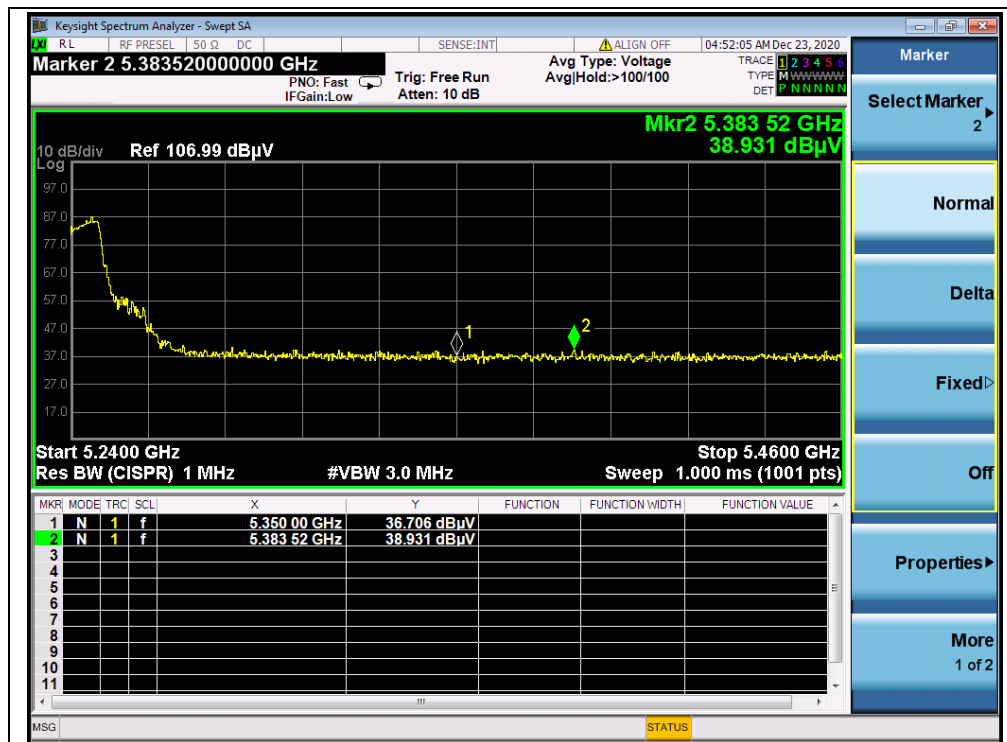


(PEAK, Channel 48, 802.11a)

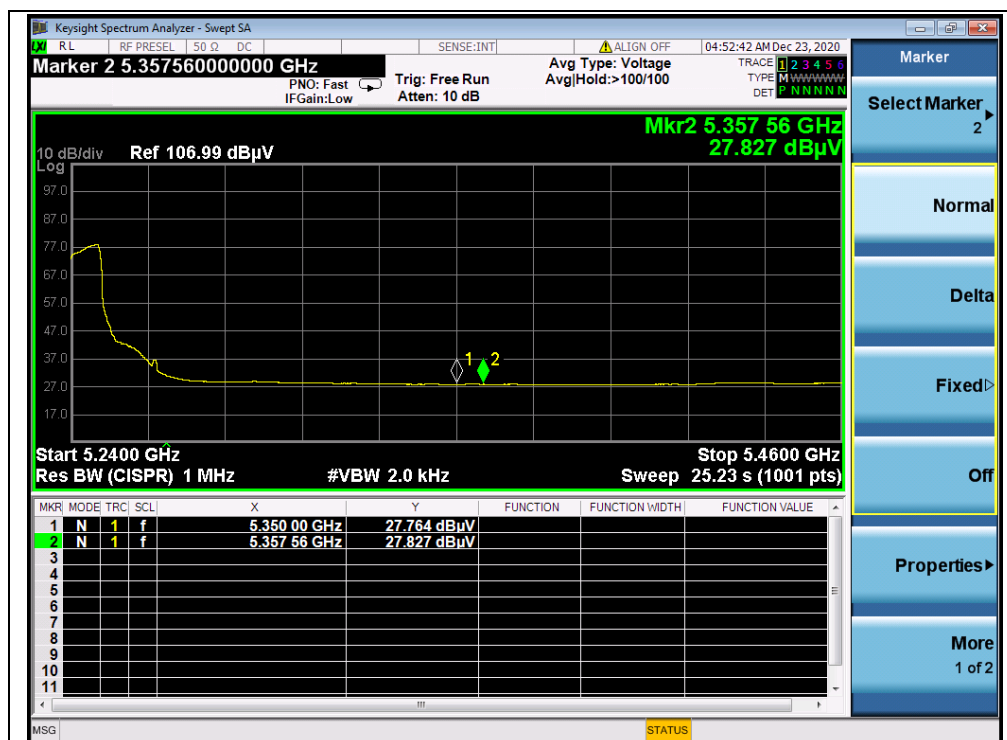

(AVERAGE, Channel 48, 802.11a)

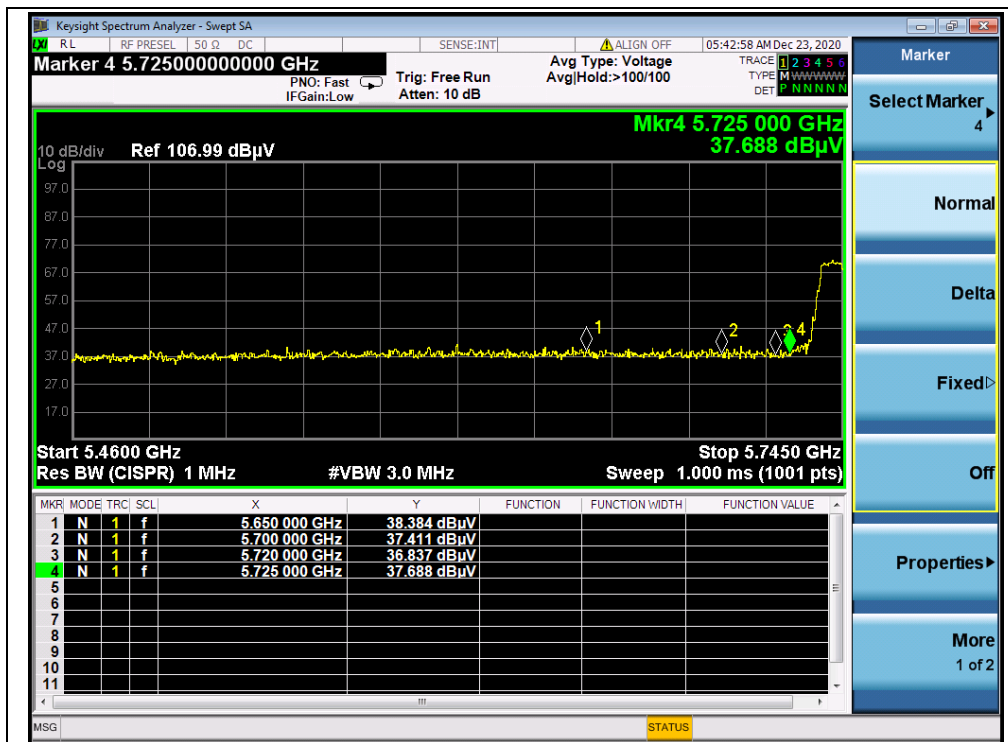

(PEAK, Channel 149, 802.11a)

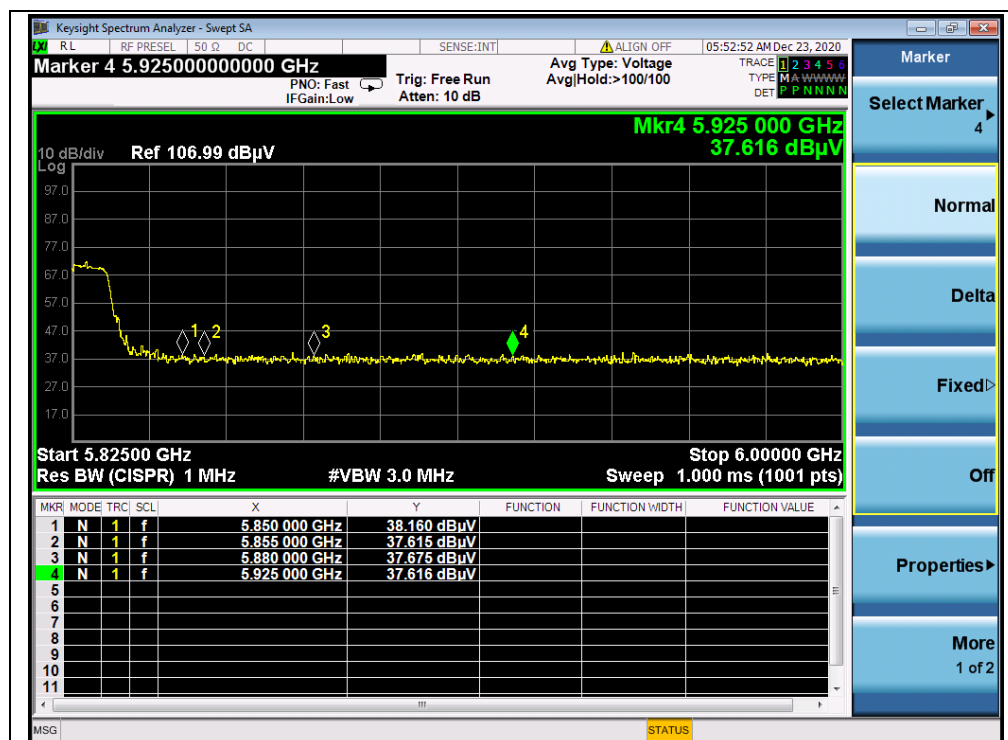

(PEAK, Channel 165, 802.11a)




802.11n (HT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5150.00	PK	48.25	-16.92	32.20	63.53	74	PASS
38	5150.00	AV	35.01	-16.92	32.20	50.29	54	PASS
48	5366.06	PK	38.00	-16.92	32.20	53.28	74	PASS
48	5360.34	AV	26.81	-16.92	32.20	42.09	54	PASS
151	5689.64	PK	38.58	-16.23	32.20	54.55	97.56	PASS
159	5855.00	PK	36.95	-16.23	32.20	52.92	110.83	PASS


B. Test Plot:

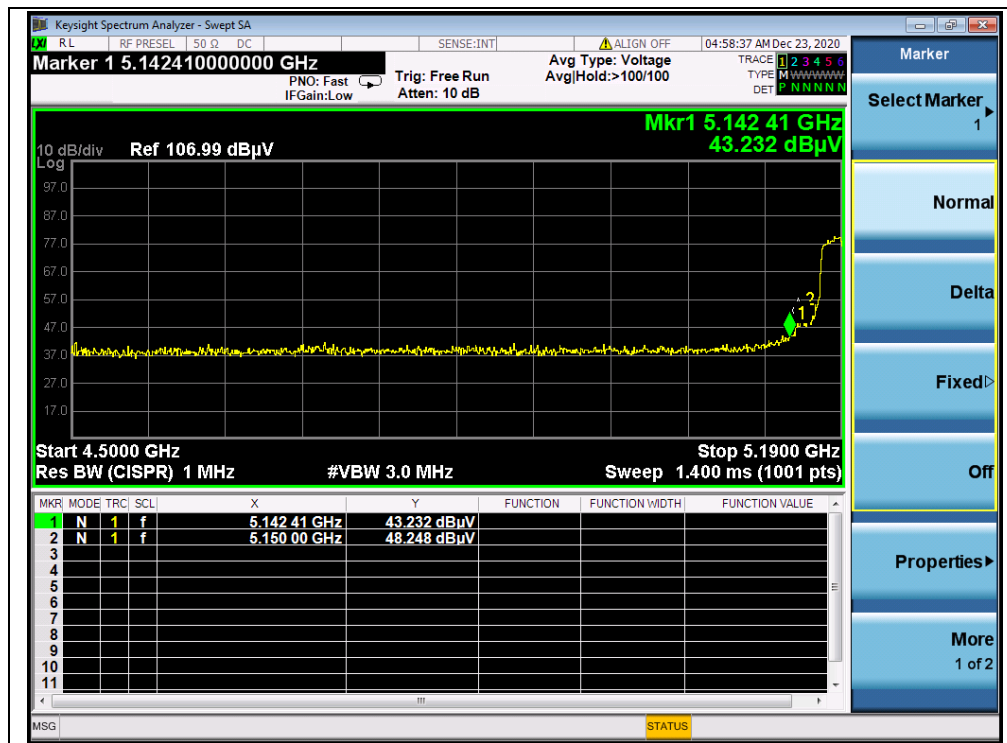

(PEAK, Channel 38, 802.11n (HT40))

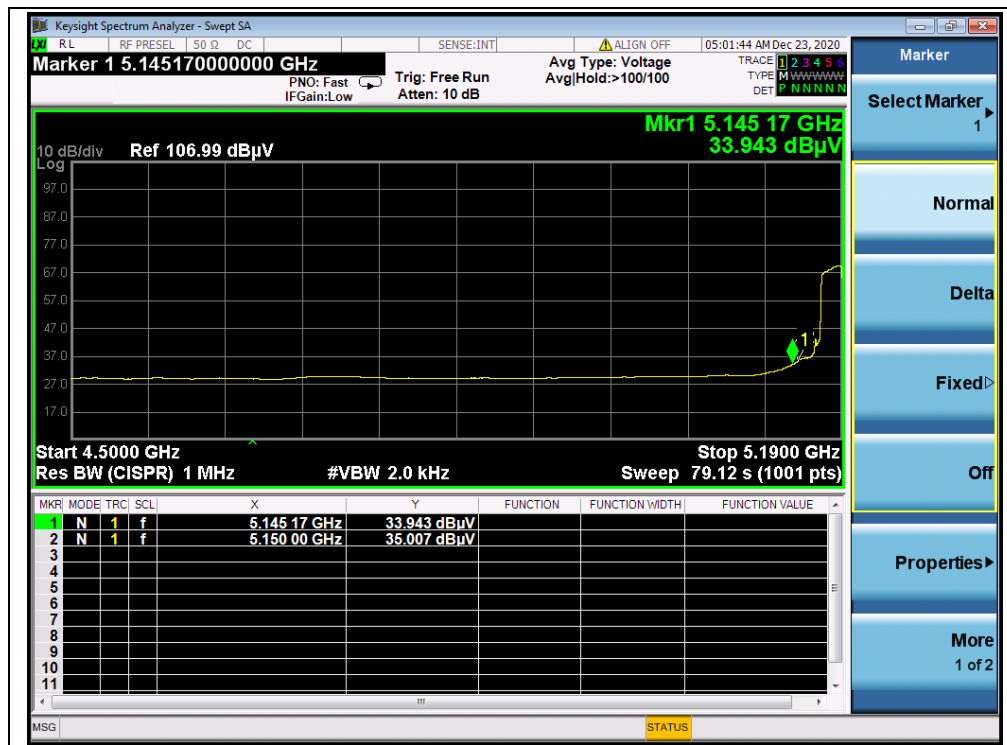


(AVERAGE, Channel 38, 802.11n (HT40))

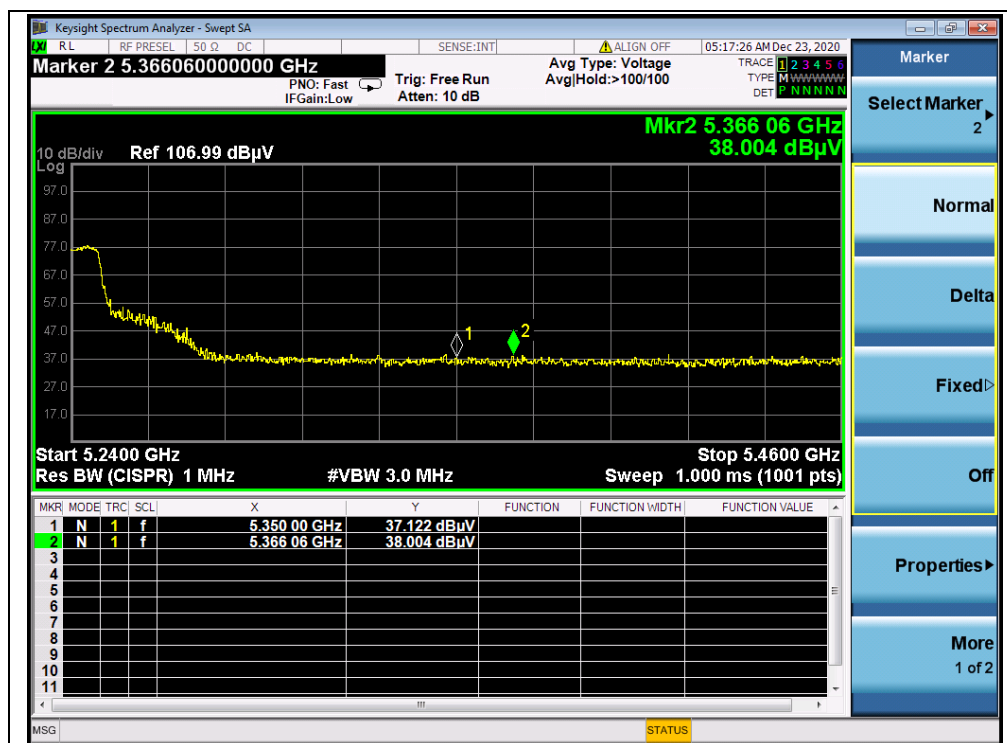


(PEAK, Channel 48, 802.11n (HT40))



(AVERAGE, Channel 48, 802.11n (HT40))

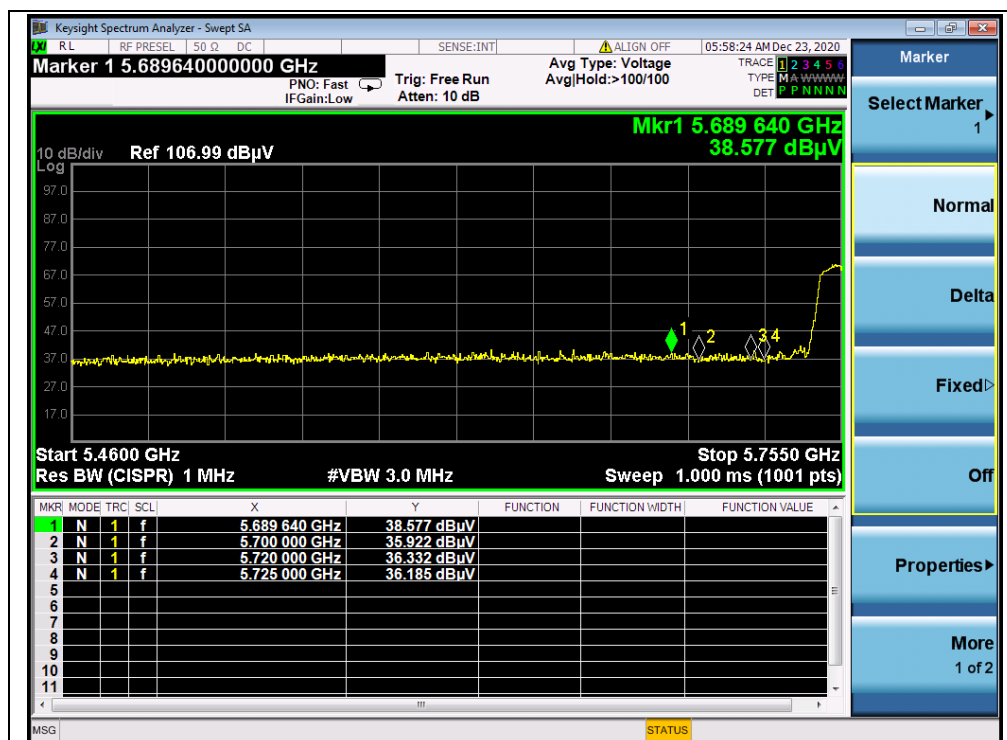

(PEAK, Channel 151, 802.11n (HT40))

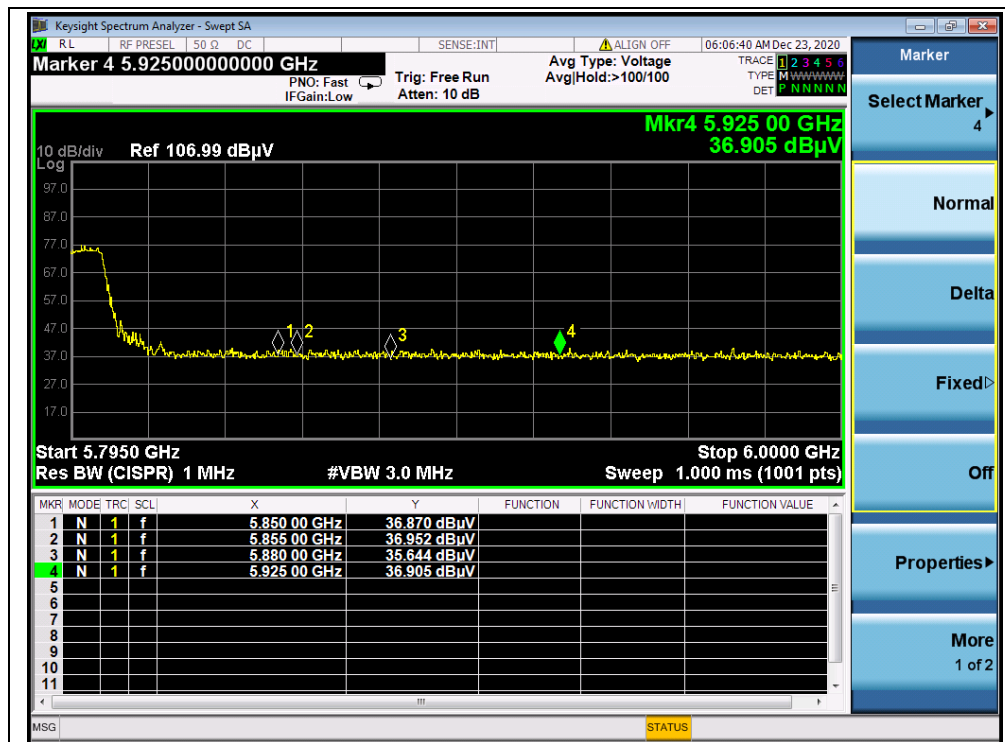

(PEAK, Channel 159, 802.11n (HT40))




802.11 ac (VHT80) Test mode


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
42	5153.40	PK	40.38	-16.92	32.20	55.66	74	PASS
42	5150.00	AV	29.53	-16.92	32.20	44.81	54	PASS
42	5363.00	PK	37.94	-16.92	32.20	53.22	74	PASS
42	5357.60	AV	26.73	-16.92	32.20	42.01	54	PASS
155	5697.00	PK	39.81	-16.23	32.20	55.78	103.01	PASS
155	5850.00	PK	38.37	-16.23	32.20	54.34	122.23	PASS


B.Test Plot:

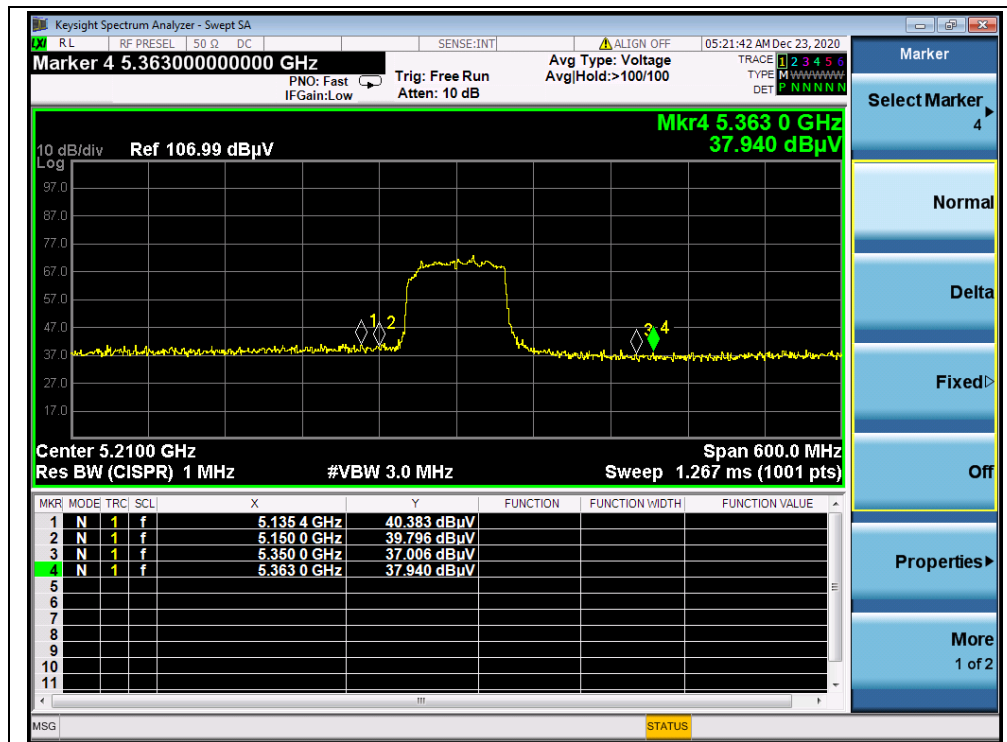


(Channel 42, PEAK, 802.11ac (VHT80))

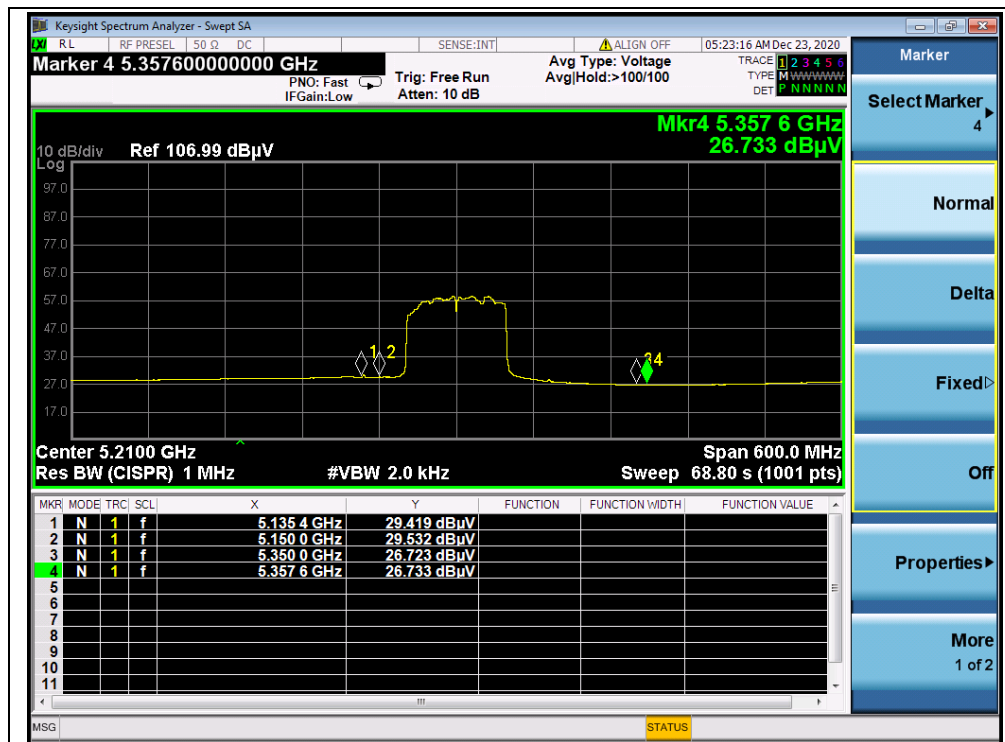

(Channel 42, AVG, 802.11ac (VHT80))

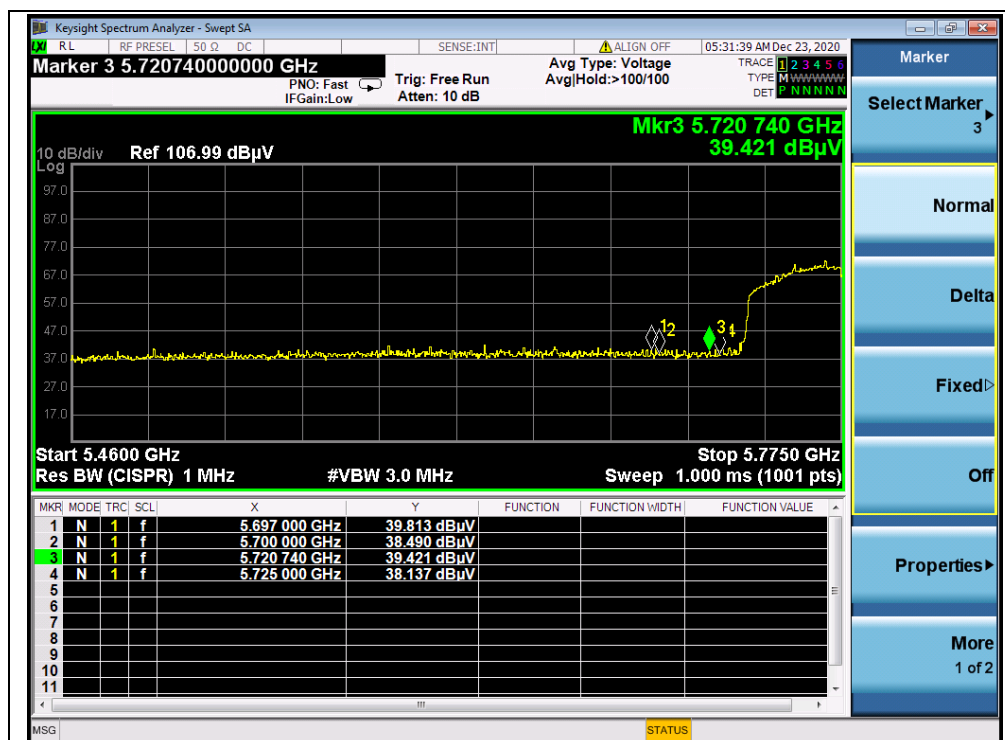

(Channel 155, PEAK, 802.11ac (VHT80))

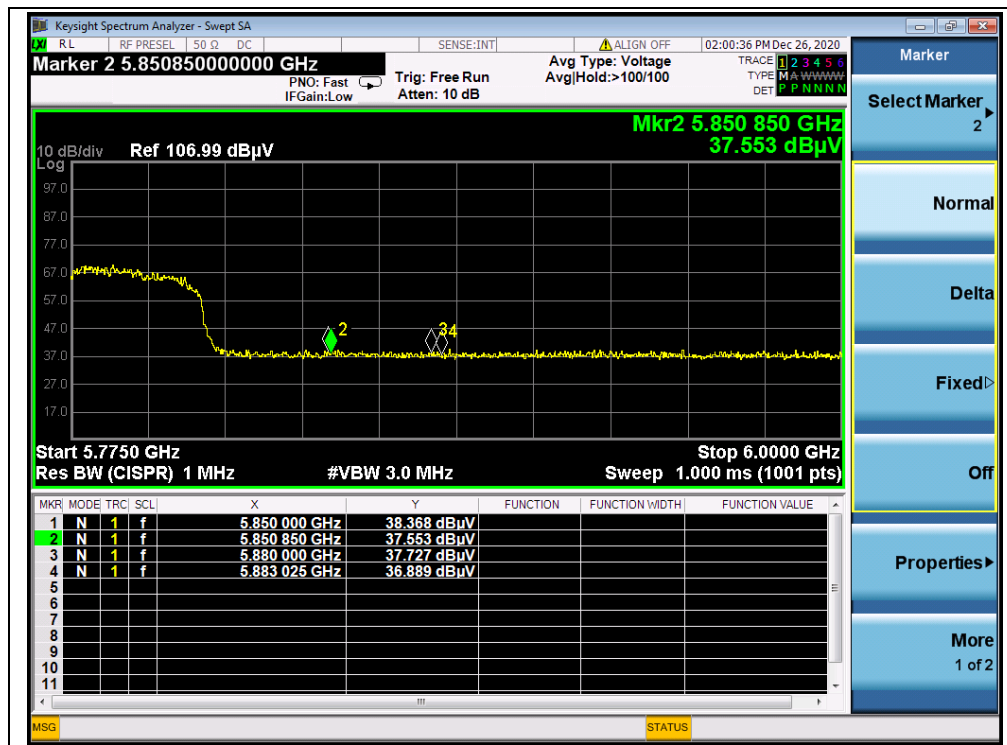

(Channel 155, PEAK, 802.11ac (VHT80))

2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

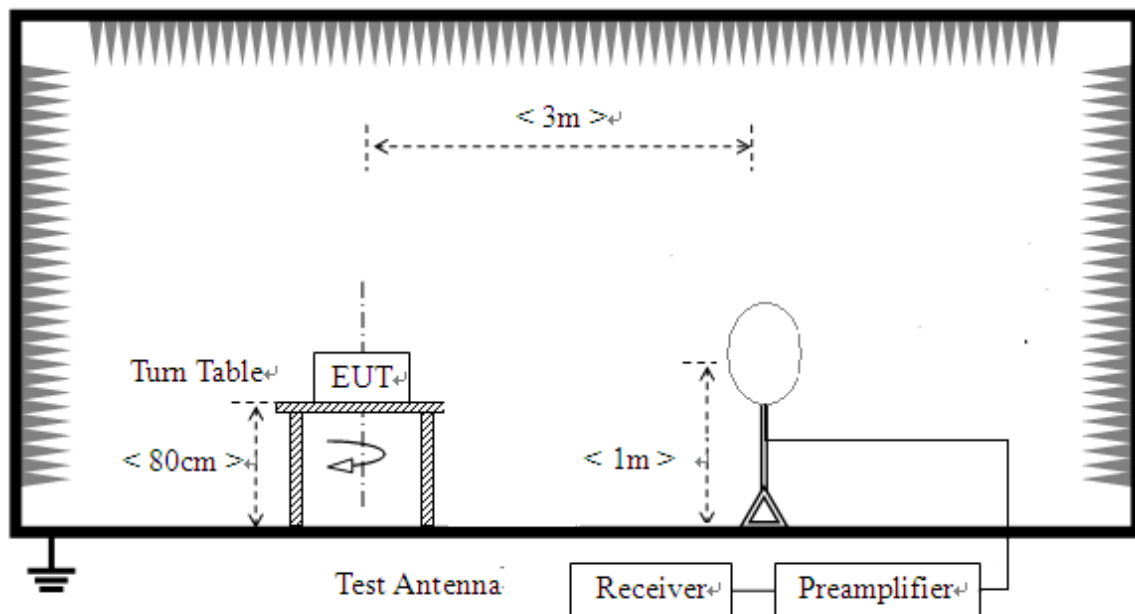

2) For radiated emissions from 30MHz to1GHz

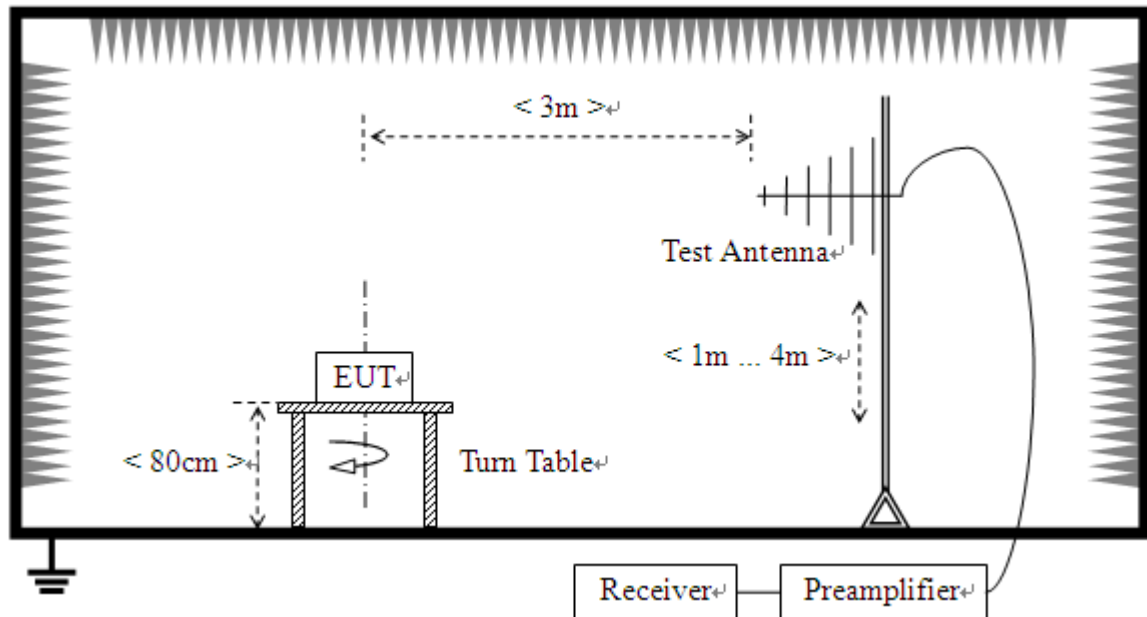

3) For radiated emissions above 1GHz

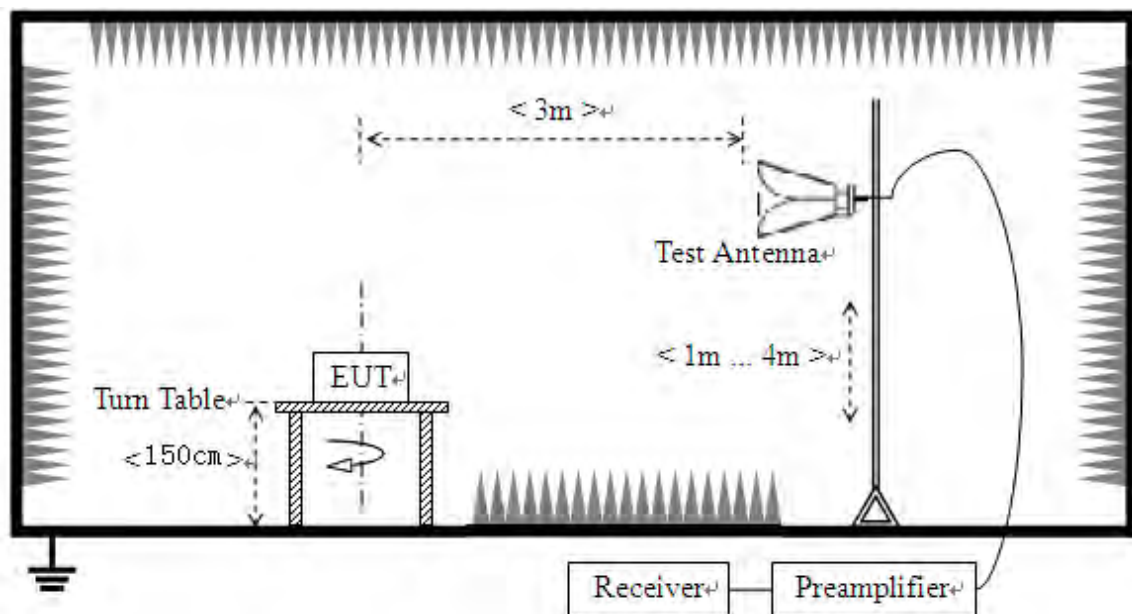

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.



For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.




802.11a Mode

Plot for Channel 36

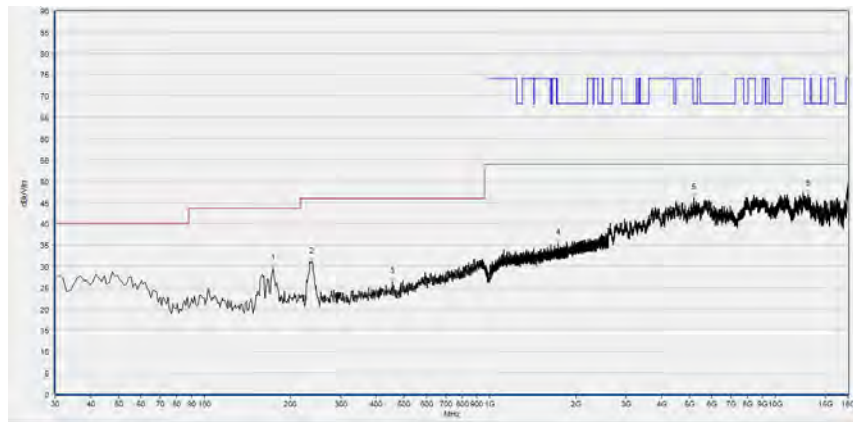

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
173.704	29.51	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
236.817	31.02	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
455.285	26.26	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1730.910	35.34	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5181.556	46.09	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13037.127	46.94	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

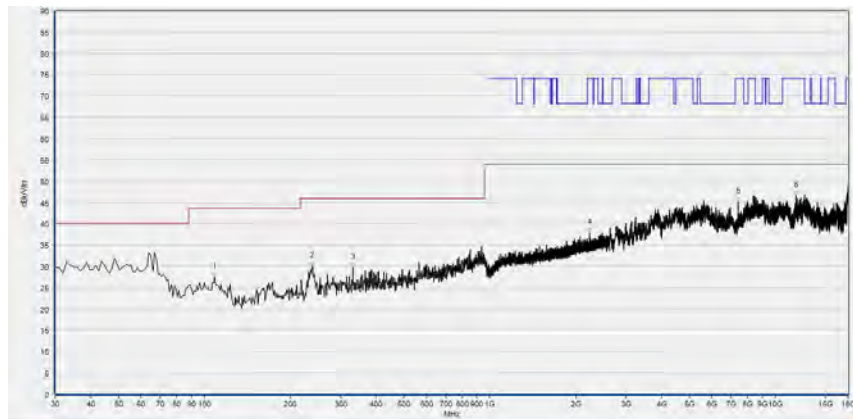


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.649	27.51	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
238.759	29.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
331.001	29.62	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2230.277	37.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7418.084	45.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11835.687	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 44

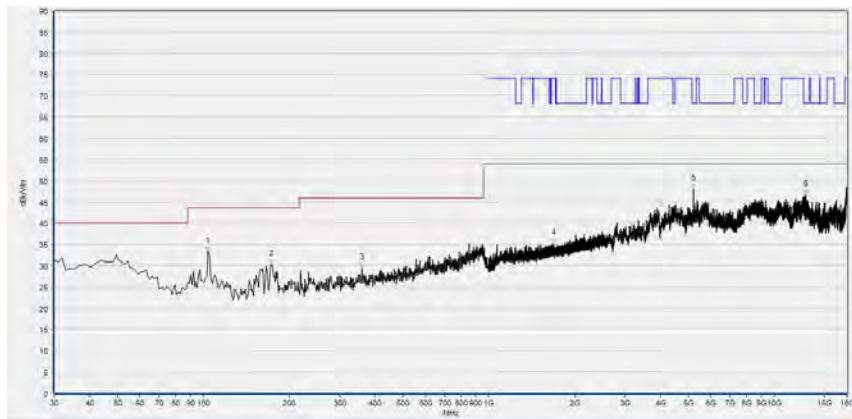

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.794	33.30	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
172.733	30.39	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
359.159	29.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1680.227	35.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5218.524	48.08	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12913.903	46.74	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

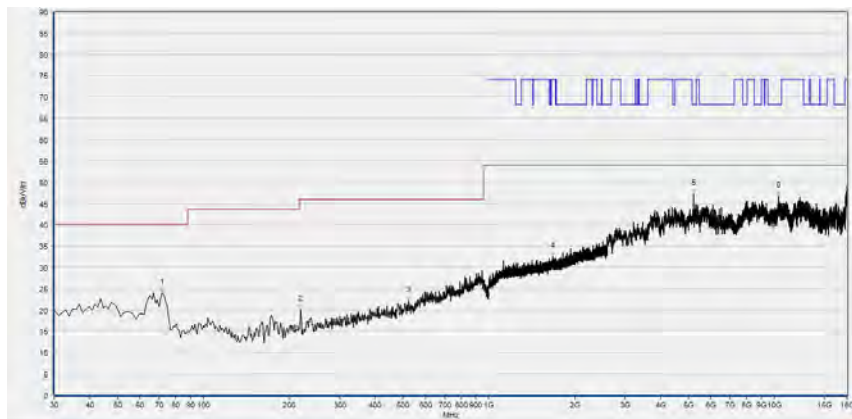

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.752	23.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
219.339	20.13	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
524.224	22.19	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1673.291	32.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5221.604	47.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10363.153	46.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 48

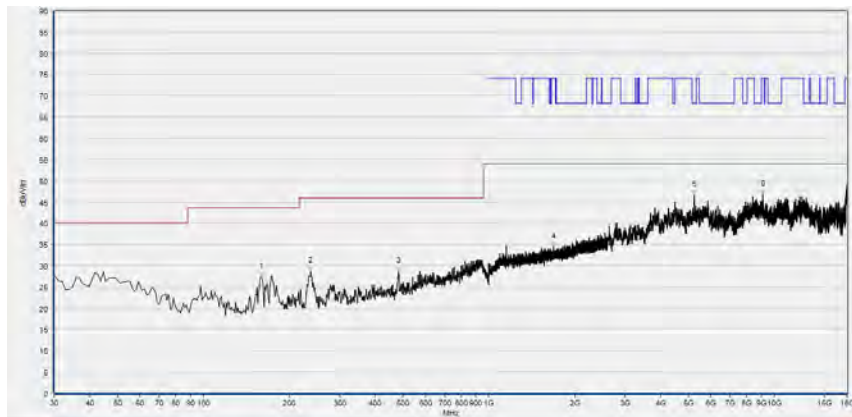

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.139	27.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
237.788	28.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
483.443	28.64	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1689.830	34.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5243.169	46.52	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9137.067	46.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

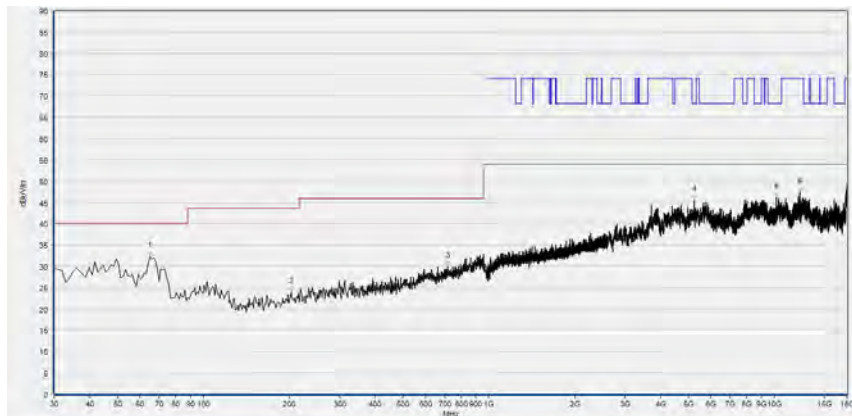


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
64.955	32.34	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
203.804	23.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
717.447	30.06	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
5233.927	45.55	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10169.074	46.25	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12310.102	47.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 149

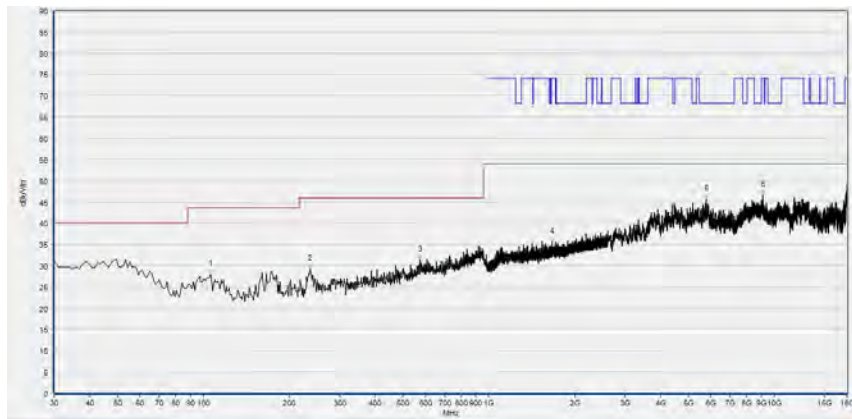

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.736	28.01	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
235.846	29.09	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
572.773	31.31	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1667.422	35.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5769.954	45.51	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9103.181	46.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

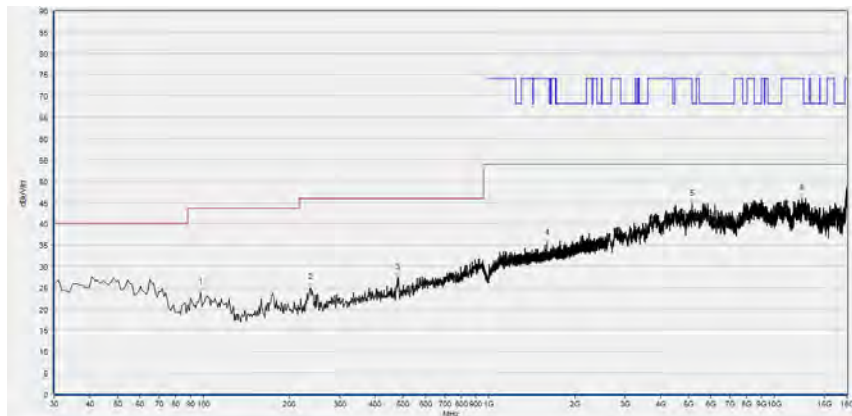

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.968	23.78	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
237.788	24.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
479.560	27.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1603.401	35.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5153.831	44.65	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12504.181	45.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

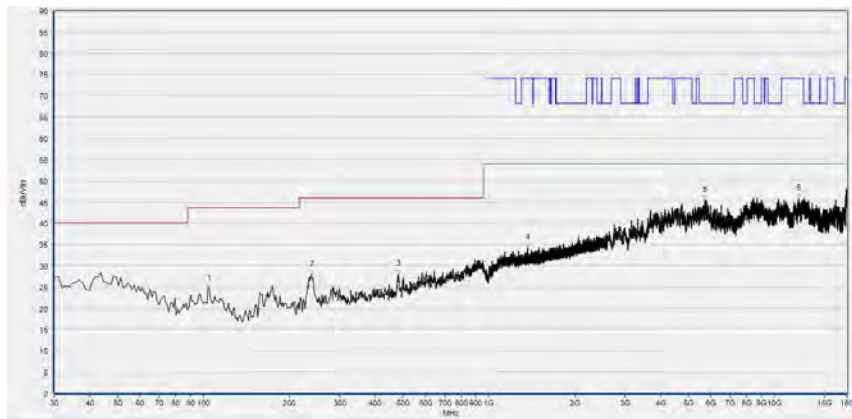

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.765	24.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
239.730	27.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.502	28.05	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1372.391	34.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5726.825	45.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12143.749	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

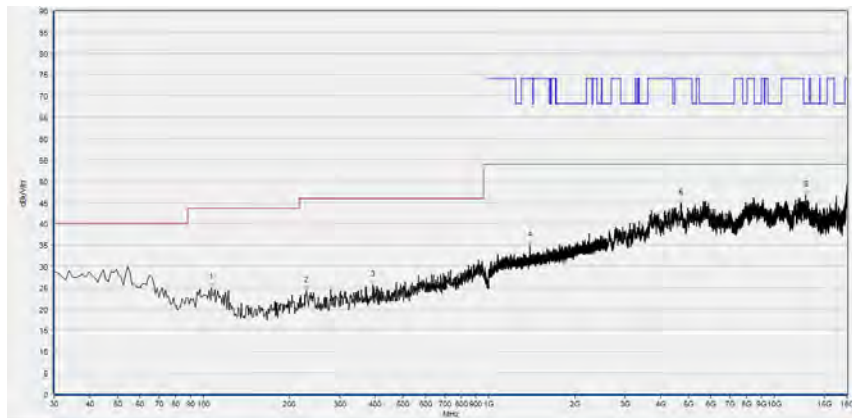

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.707	25.04	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
230.020	24.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
393.143	25.62	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1393.731	34.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4713.303	44.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12907.742	46.71	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 165

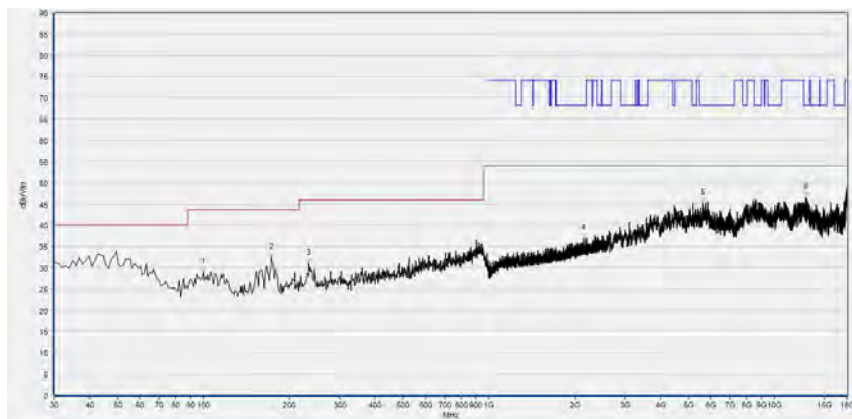

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.910	28.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
172.733	32.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
233.904	31.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2143.314	36.79	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5625.165	45.18	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12895.419	46.53	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

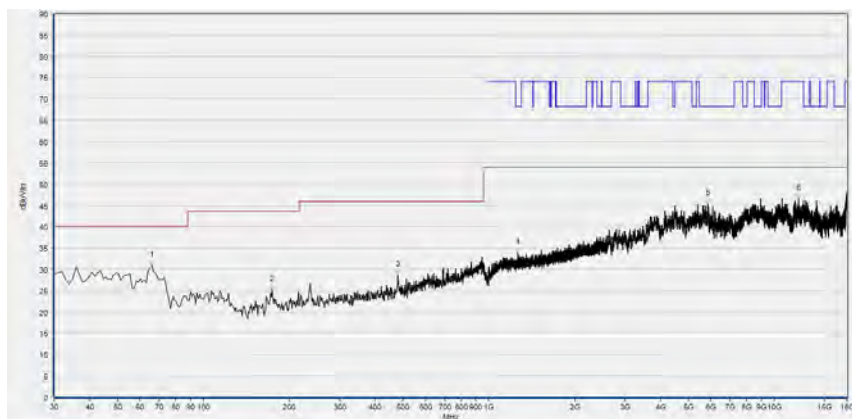


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
65.926	30.83	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
173.704	25.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
479.560	28.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1266.756	33.81	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5856.211	45.34	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12146.829	46.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

Plot for Channel 38

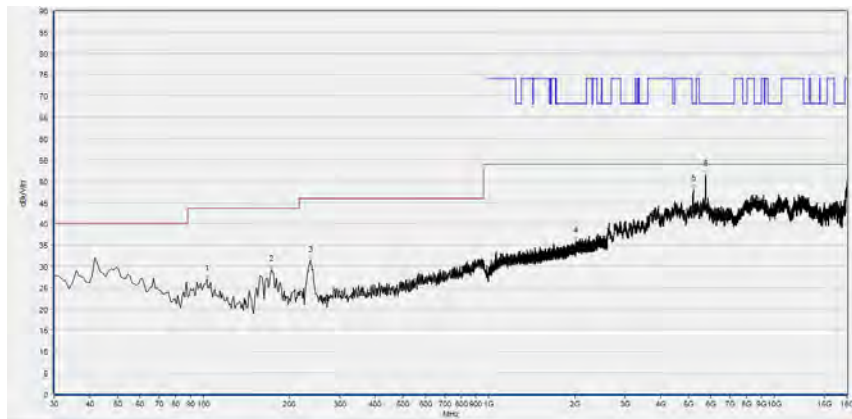

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.823	27.00	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
172.733	29.16	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
236.817	31.36	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2012.071	35.84	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5203.121	48.04	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5753.800	47.28	N/A	34.26	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

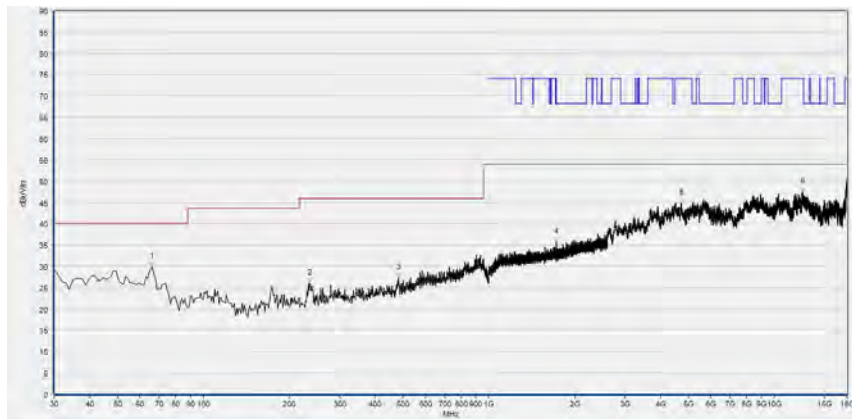

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
65.926	29.82	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
235.846	25.99	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
481.502	27.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1725.042	35.72	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4719.464	44.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12590.438	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 46

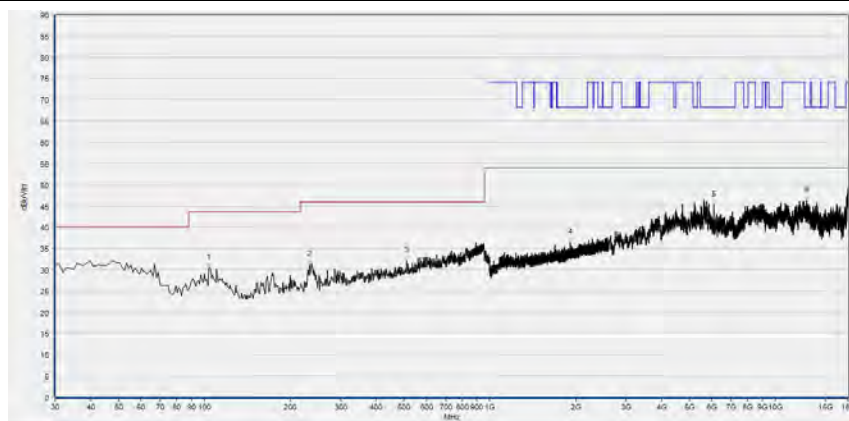

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.794	30.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
233.904	31.23	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
510.631	32.08	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1916.039	36.34	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
6090.338	45.30	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12901.580	46.30	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

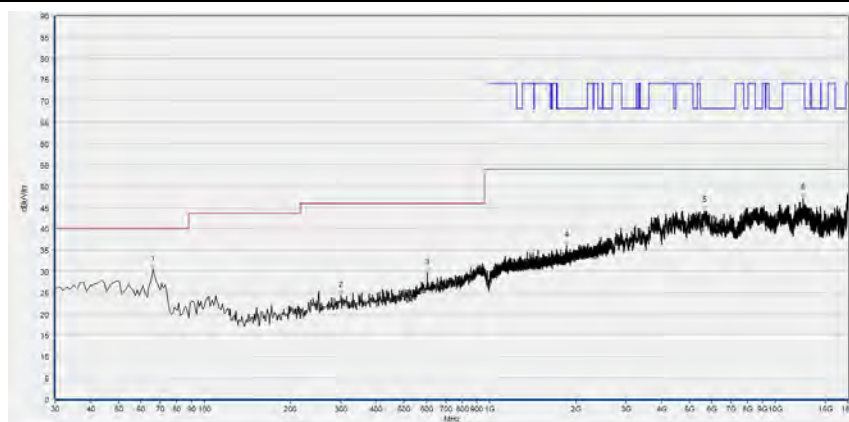


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
65.926	30.43	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
300.901	24.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
603.844	29.71	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1853.618	36.04	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5637.487	44.30	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12516.503	47.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 151

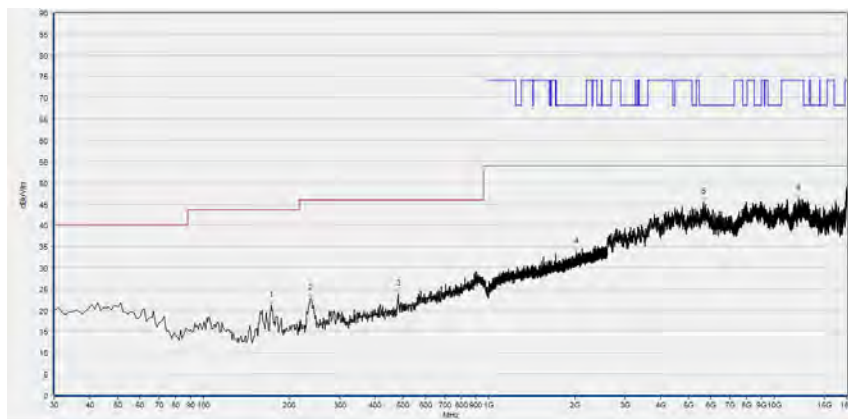

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
172.733	21.16	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
236.817	22.75	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.502	23.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2020.607	33.62	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5659.052	45.44	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12165.313	46.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

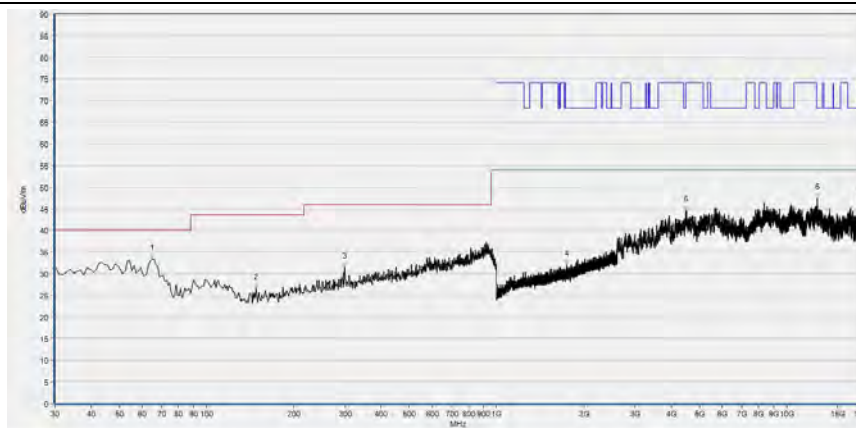


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
64.955	33.40	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
148.458	26.63	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
298.959	31.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1744.248	32.05	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4485.337	44.57	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12738.308	47.48	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 159

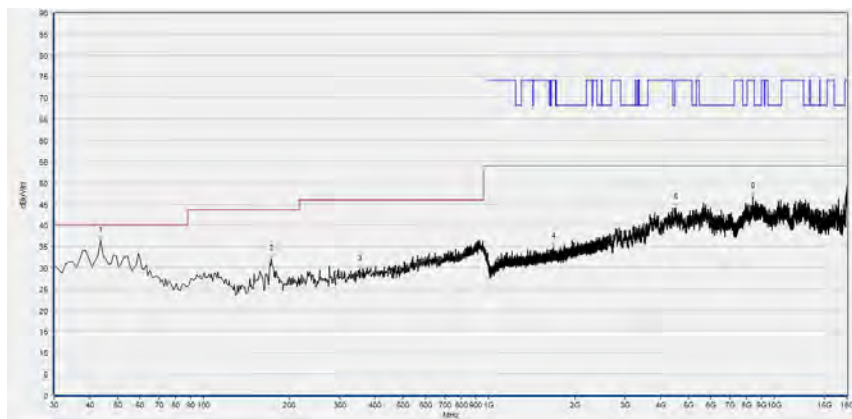

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.594	36.30	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
172.733	32.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
353.333	29.72	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1687.162	34.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4525.385	44.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8410.042	46.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

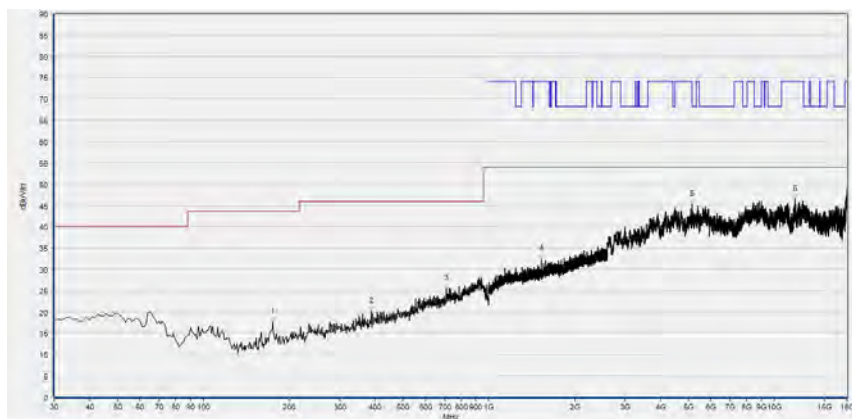


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
174.675	17.52	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
387.317	20.15	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
710.651	25.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1529.243	32.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5156.911	45.21	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11820.284	46.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT80) Mode

Plot for Channel 42

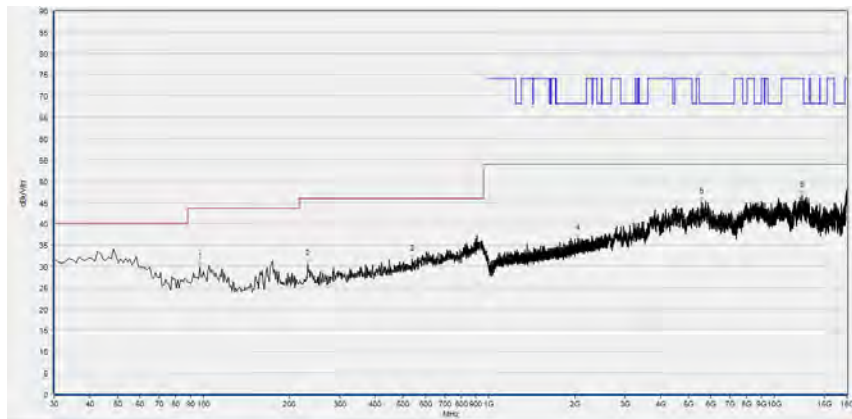

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.997	29.84	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
231.962	30.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
538.789	31.61	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2050.483	36.57	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5560.472	45.01	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12513.423	46.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

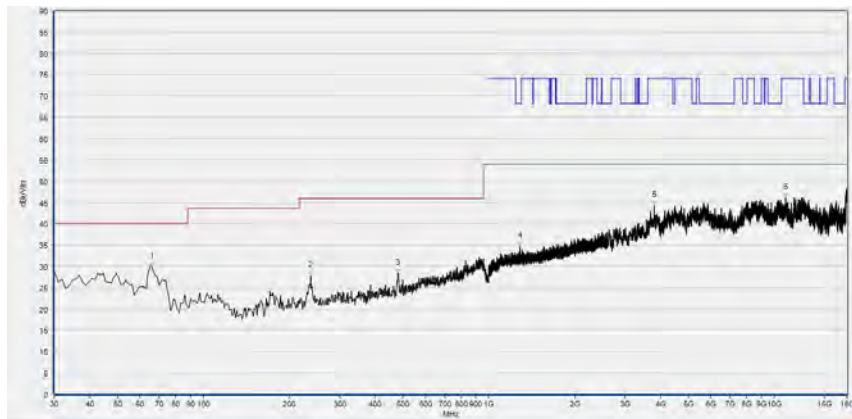

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
65.926	29.82	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
237.788	27.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
479.560	28.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1288.630	34.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3804.521	44.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10991.598	46.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 155

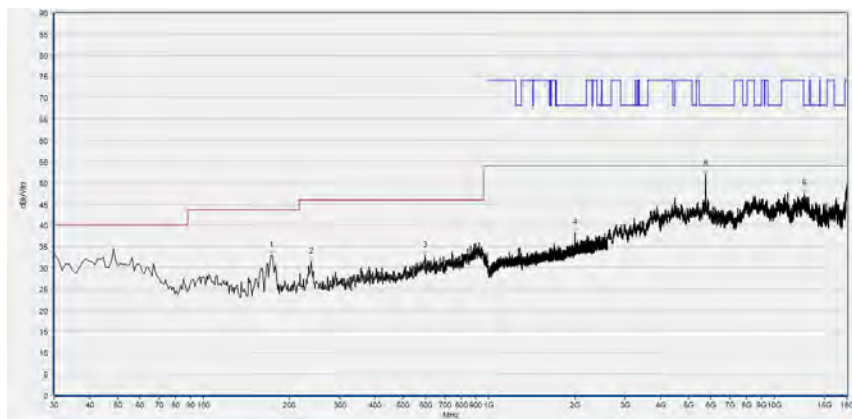

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
172.733	32.83	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
238.759	31.42	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
598.018	32.92	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1999.800	38.15	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5745.309	51.94	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12729.066	47.41	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

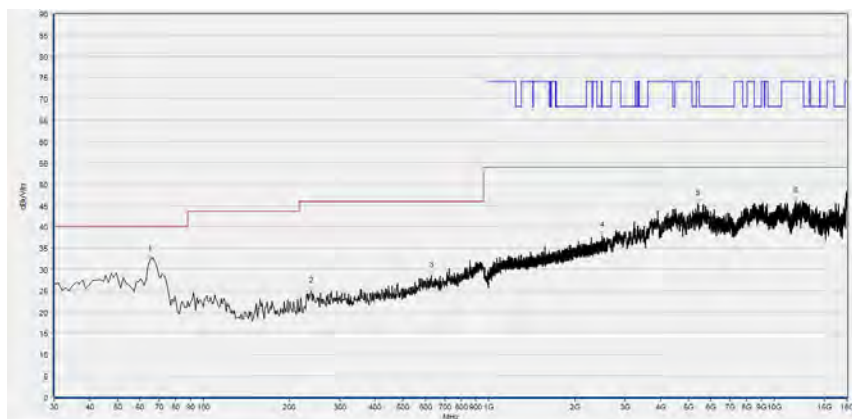

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
64.955	32.20	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
238.759	24.80	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
629.089	28.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2493.831	37.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5397.199	45.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11897.299	45.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	N/A	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	12108015	DTL-003S101	YOMA	2020.01.08	2021.01.07

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L4 002	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5150-5350	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5470-5725	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5725-5850	Wainwright	2020.07.21	2021.07.20



REPORT No.: SZ20100035W04

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____