

# TEST REPORT

**Shenzhen Chainway Information APPLICANT** 

Technology Co.,Ltd.

PRODUCT NAME : Mobile Data Terminal

MODEL NAME : C72

**BRAND NAME** : CHAINWAY

FCC ID : 2AC6AC72

STANDARD(S) : 47 CFR Part 15 Subpart E

**TEST DATE** : 2018-05-04 to 2018-05-16

**ISSUE DATE** : 2018-05-17

Tested by:

Su Hang (Test Engineer)

Approved by:

Andy Yeh (Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn





## **DIRECTORY**

1. Technical Information······	- 4
1.1. Applicant and Manufacturer Information	- 4
1.2. Companion Equipment(Master) Description	- 4
1.3. Equipment Under Test (EUT) Description	- 4
1.4. The channel number and frequency of EUT······	- 5
1.5. Test Standards and Results	- 6
1.6. Environmental Conditions	- 6
2. 47 CFR Part 15C Requirements······	. 7
2.1. Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	. 7
Annex A The waveform of the radar	18
Annex B Test Uncertainty	21
Annex C Testing Laboratory Information······	22



Change History			
Issue Date		Reason for change	
1.0 2018-05-17		First edition	





## 1. Technical Information

Note: Provide by applicant.

### 1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co.,Ltd.
Applicant Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District
	67, Bao'an, Shenzhen
Manufacturer:	Shenzhen Chainway Information Technology Co.,Ltd.
Manufacturer Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District
	67, Bao'an, Shenzhen

## 1.2. Companion Equipment(Master) Description

Product Name:	Router
Manufacturer:	Cisco
FCC ID:	LDK102091
Serial No:	FGL1848X9S5
Antenna Gain:	2.1 dBi

## 1.3. Equipment Under Test (EUT) Description

Product Name:	Mobile Data Terminal		
Serial No:	(N/A, marked #1 by test site)		
Hardware Version:	C70SE_MB_V11		
Software Version:	C72A_MT6735_V1.1-AM_GIT938ee72_20171205		
Modulation Type: OFDM			
<b>Modulation Mode:</b> 802.11a, 802.11n(HT20), 802.11n(HT40)			
Operating Frequency Range:	5.180 GHz- 5.240 GHz; 5.260 GHz -5.320 GHz ;		
Operating Frequency Range.	5.500 GHz -5.720 GHz ; 5.745GHz- 5.805GHz		
Channel Number:	Refer to 1.3		
Antenna Type:	PIFA Antenna		
Antenna Gain:	0.58 dBi		

**Note 1:** The DFS section for U-NII band is applicable to this report, the other test items are documented in a separate report.





**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.4. The channel number and frequency of EUT

Frequency Rang	ge: 5150-5250M	Hz		
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20141-	36	5180	40	5200
20MHz	44	5220	48	5240
40MHz	38	5190	46	5230
Frequency Ranç	ge: 5250-5350M	Hz		
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
201411-	52	5260	56	5280
20MHz	60	5300	64	5320
40MHz	54	5270	62	5310
Frequency Rang	ge: 5470-5725M	Hz		
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
	100	5500	105	5520
	108	5540	112	5560
20MHz	116	5580	120	5600
ZUIVIMZ	124	5620	128	5640
	132	5660	136	5680
	140	5700		
	102	5510	110	5550
40MHz	118	5590	126	5630
	134	5670		
Frequency Rang	ge: 5725-5805M	Hz		
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
	149	5745	153	5765
20MHz	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795

Note 1: The black bold channels were selected for test.



#### 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.407(h)	TPC and DFS	May 09&16, 2018	Su Hang	PASS

**Note1:** The DFS section for U-NII band is applicable to this report, the other test items are documented in a separate report.

**Note2:** These RF tests were performed according to the method of measurements prescribed in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

#### 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



## 2.47 CFR Part 15C Requirements

# 2.1. Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)

#### 2.1.1. Requirement

According to FCC section 15.407(h), (1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is -64 dBm. For devices that operate with less than 200 mW e.i.r.p. and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is -62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.1

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.2

Tables 1 and 2 shown below summarize the information contained in sections 5.1.1 and 5.1.2.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

	Operational Mode			
Requirement	Master	Client Without Radar	Client With Radar	
		Detection	Detection	
Non-Occupancy Period	Yes	Not required	Yes	
DFS Detection Threshold	Yes	Not required	Yes	
Channel Availability Check Time	Yes	Not required	Not required	
U-NII Detection Bandwidth	Yes	Not required	Yes	





Table 2: Applicability of DFS requirements during normal operation

Doguiroment	Operational Mode		
Requirement	Master	Client Without Radar Detection	
DFS Detection Threshold	Yes	Not required	
Channel Closing Transmission Time	Yes	Yes	
Channel Move Time	Yes	Yes	
U-NII Detection Bandwidth	Yes	Not required	

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel	Test using widest BW mode	Test using the widest BW
Closing Transmission Time	available	mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

The operational behavior and individual DFS requirements that are associated with these modes are as follows:

#### **Master Devices**

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 5350 MHz and 5470 5725 MHz bands. DFS is not required in the 5150 5250 MHz or 5725 5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.





- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period. 3
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

#### Client Devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

#### **DFS Detection Thresholds**

Table 3 below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)	
EIRP ≥ 200 milliwatt	-64 dBm	
EIRP < 200 milliwatt and	-62 dBm	
power spectral density < 10 dBm/MHz	-62 dBIII	
EIRP < 200 milliwatt that do not meet the power spectral	-64 dBm	
density requirement	-04 UDIII	

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.





#### Response Requirements

Table 4 provides the response requirements for Master and Client Devices incorporating DFS.

**Table 4: DFS Response Requirement Values** 

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
	See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds
	over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power
	bandwidth. See Note 3.

**Note 1:** Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.


**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

#### 2.1.2. Test Description

According to Section 7.2 of KDB 905462 D02 V01R01

1. Setup for Master with injection at the Master

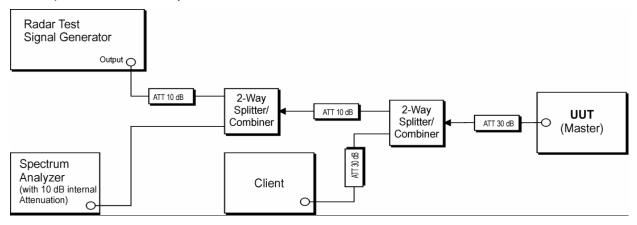


(Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master)






#### 2. Setup for Client with injection at the Master

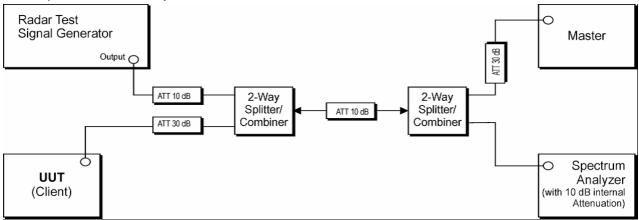

(Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master)

#### 3. Setup for Client with injection at the Client

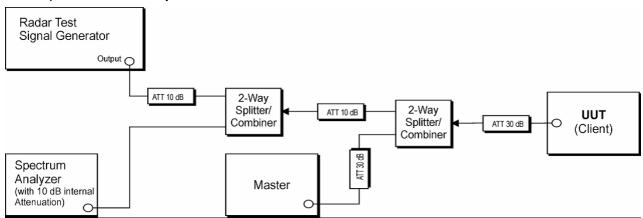

(Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Client)






#### 2.1.3. Test Result

#### a. Test sequence and Channel loading between Master and Client

Test Channel	Frequency(MHz)	Payload
62	5310	40.13%



#### (Test sequence)

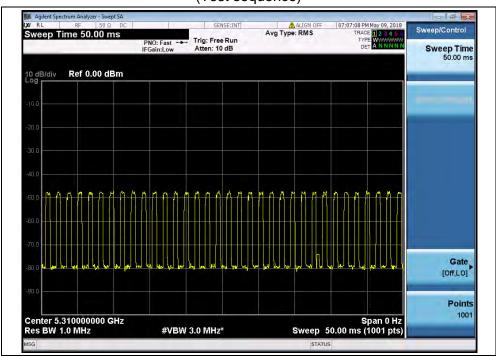

(Payload)





#### b. Radar Test Waveforms are injected into the Master:



#### c. EUT is a Client Device Without Radar Detection :

Channel &	Doguiroment	Operational Mode	Test	Limit	Vordiet
Bandwidth	Requirement	Client Without	Result	LIIIII	Verdict
		Radar Detection			
902 11 p/UT20\	Channel Move Time	Yes	0.68s	<10s	Pass
802.11 n(HT20)	Channel Closing	Vaa	0.005s	<1s	Pass
5300MHz	Transmission Time	Yes			
902 11 p/UT20)	Channel Move Time	Yes	0.60s	<10s	Pass
802.11 n(HT20) 5500MHz	Channel Closing	Yes	0.003s	<1s	Pass
3300WIF12	Transmission Time	162			
902 11 p/UT40)	Channel Move Time	Yes	0.69s	<10s	Pass
802.11 n(HT40) 5310MHz	Channel Closing	Yes	0.004s	<1s	Door
33 TOWITZ	Transmission Time	162	0.0045	<b>~15</b>	Pass
902 11 p/UT40)	Channel Move Time	Yes	0.68s	<10s	Pass
802.11 n(HT40) 5670MHz	Channel Closing	Voc	0.000-	<1s	Desa
307 UIVITZ	5670MHz Yes Transmission Time	0.003s	<u></u>	Pass	









#### **Test Plots**

**Note:** To denotes the start time of the Radar single transmitted, T1 denotes the end time of the Radar single transmit end. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of the Channel Move Time, the time of T3 from T1 is less than 12s.

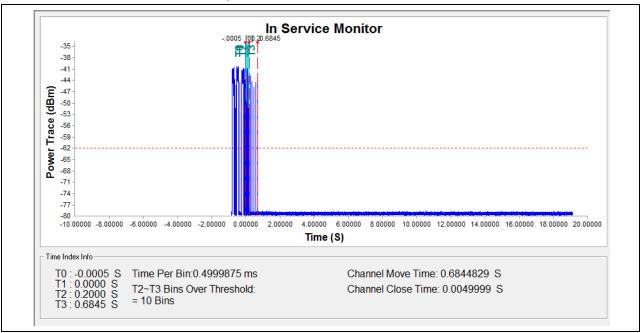


(5300MHz, 802.11n (HT20))

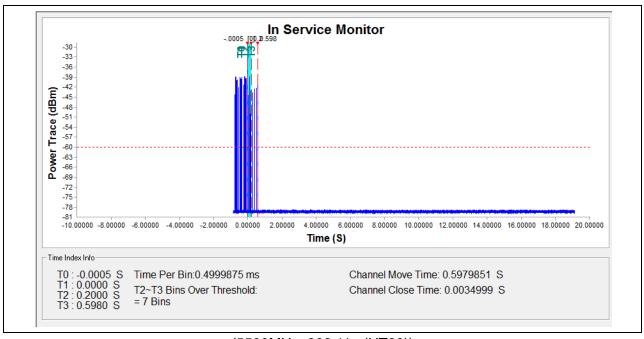


(5500MHz, 802.11n (HT20))





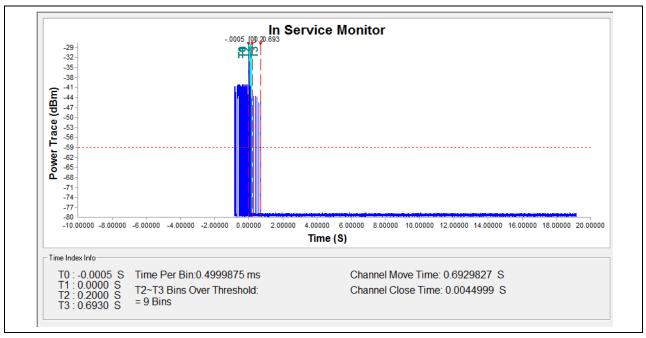

(5310MHz, 802.11n (HT40))

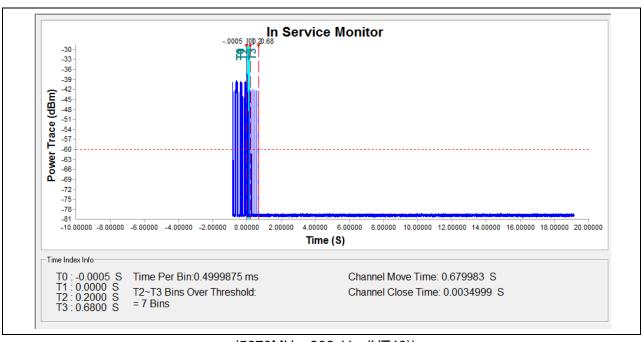

(5670MHz, 802.11n (HT40))







#### d. Time per bin

Channel	Frequency (MHz)	Time Per Bin (ms)
60	5300	0.5
100	5500	0.5
62	5310	0.5
134	5670	0.5

#### **Test Plots**

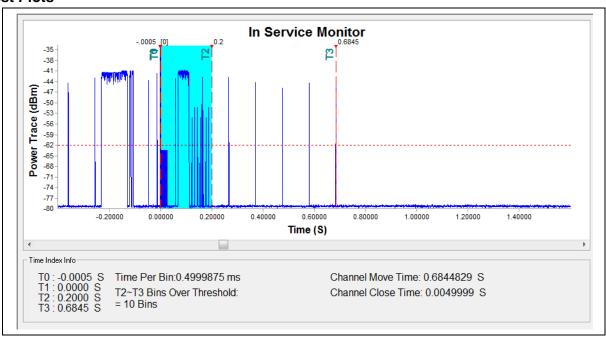


#### (5300MHz, 802.11n (HT20))

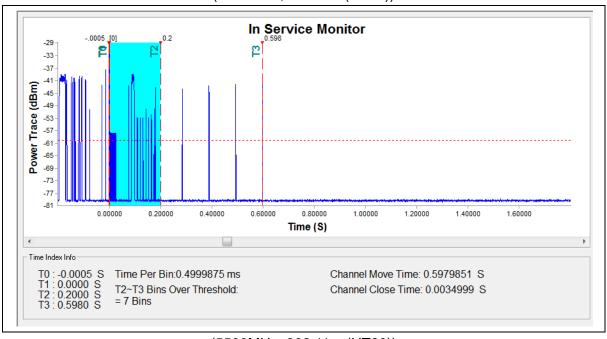


(5500MHz, 802.11 n (HT20))





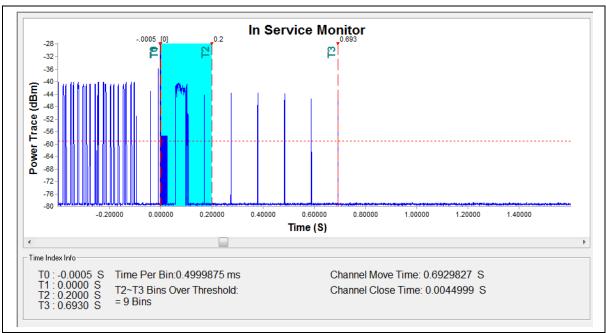


(5310MHz, 802.11n (HT40))

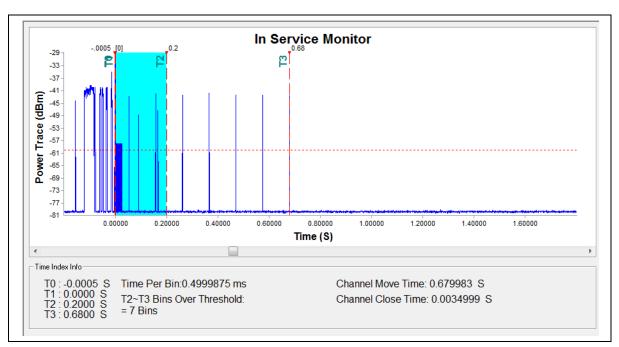

(5670MHz, 802.11n (HT40))








## Annex A The waveform of the radar



(Type 0)

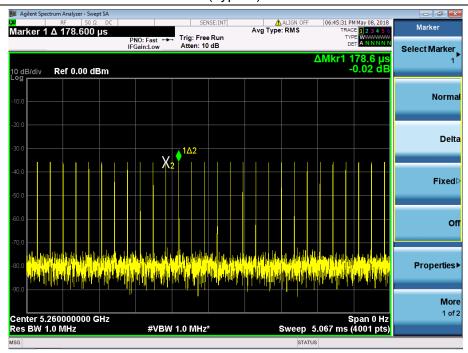


(Type 1)




Tel: 86-755-36698555

Http://www.morlab.cn



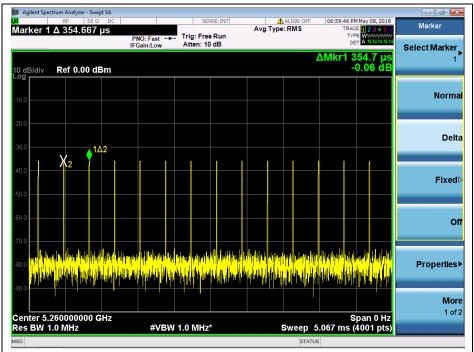

#### (Type 2)

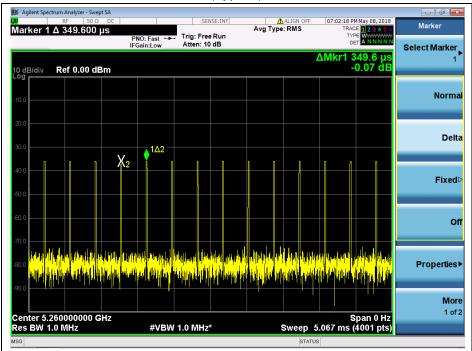


(Type 3)




Tel: 86-755-36698555

Http://www.morlab.cn



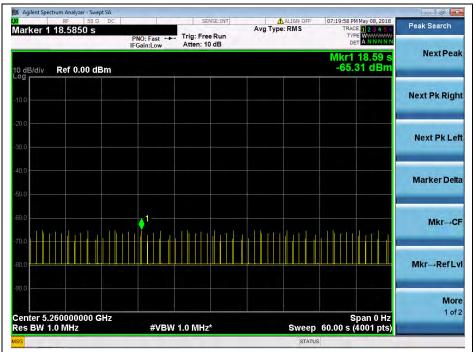

#### (Type 4)

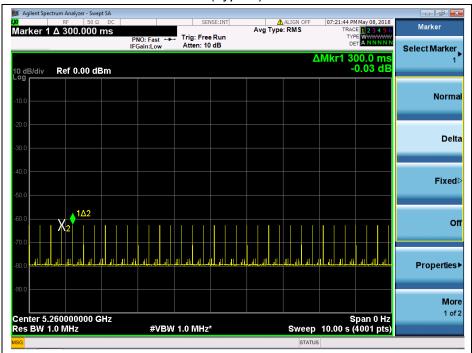

(Type 5)





## **Annex B Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Bandwidth	±5%
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Tel: 86-755-36698555

Http://www.morlab.cn



# **Annex C Testing Laboratory Information**

#### 1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.	
Department:	Morlab Laboratory	
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong	
Responsible Test Lab Manager:	Province, P. R. China  Mr. Su Feng	
Telephone:	+86 755 36698555	
Facsimile:	+86 755 36698525	

#### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.





#### 4. Test Equipments Utilized

#### **4.1 Conducted Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due	
Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23	
Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23	
Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23	
EXA Signal	MV52470020	NOOAOA	A cilo ot	2047 42 02	2010 12 02	
Analzyer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02	
MXG Vector Signal	Angilont	N5182B	MY53050961	2017.05.24	2018.05.23	
Generator	Angilent	Anglient	N3102D	02B W1155050901	2017.05.24	2016.05.23
RF cable	CD04	DE04	Morlob	NI/A	NI/A	
(30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A	
Coaxial cable	CB02	RF02	Morlab	N/A	N/A	
CMA connector	CNIO1	DEO2	HUBER-	NI/A	NI/A	
SMA connector	CN01	RF03	SUHNER	N/A	N/A	

**4.2Auxiliary Test Equipment** 

<b>Equipment Name</b>	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

END OF REPORT _	
-----------------	--