




Plot 11:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 2
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.417
ConvF	1.99
Relative permittivity	35.99
Conductivity (S/m)	4.64

Maximum location: X=-38.00, Y=64.00 ; SAR Peak: 2.57 W/kg

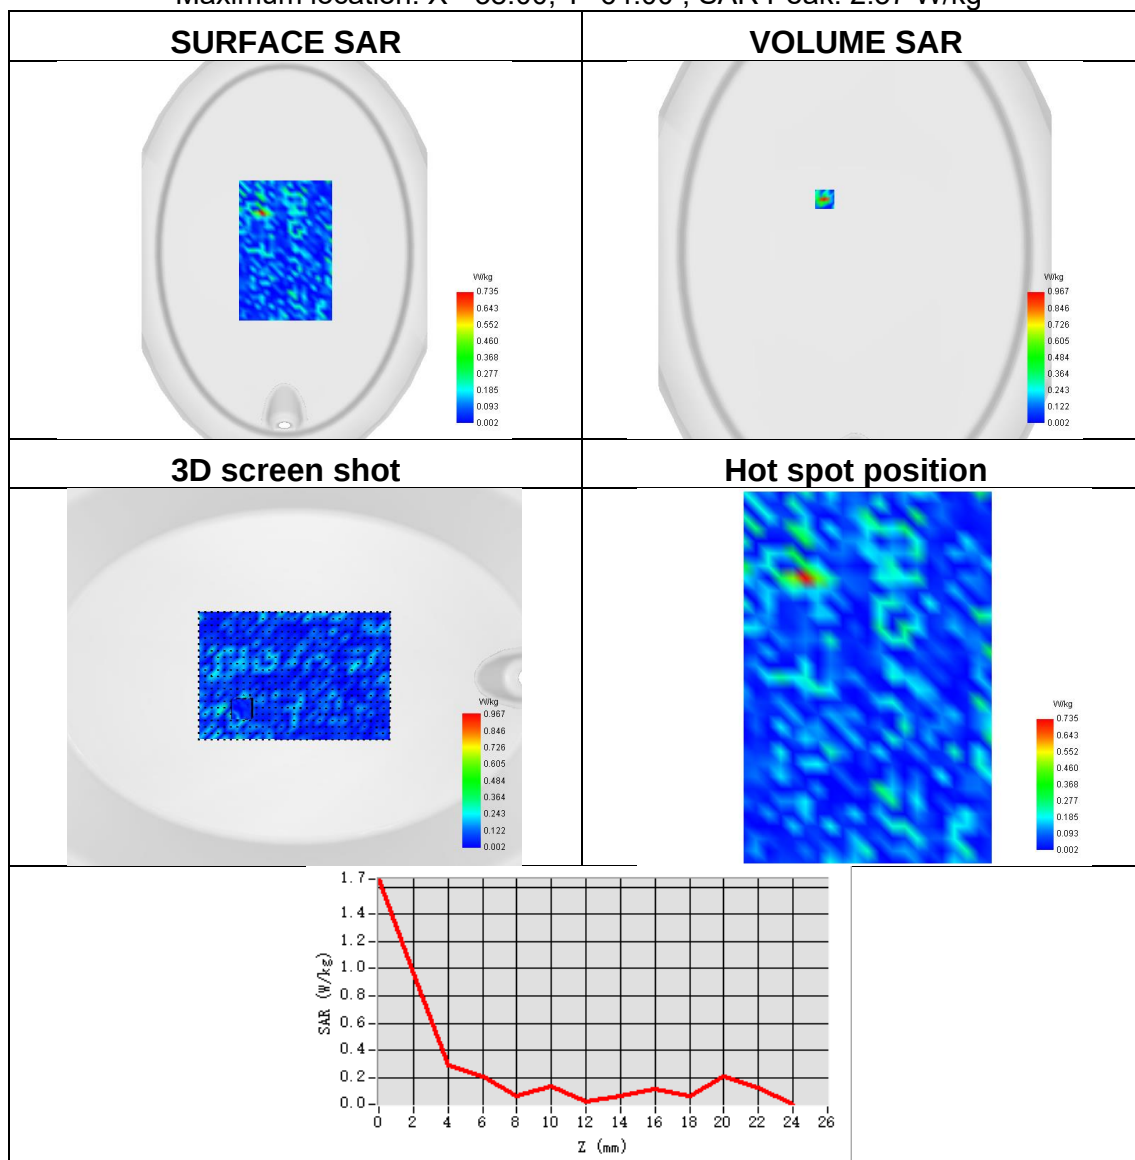




Plot 12:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11n
Frequency	5190
SAR 10g (W/Kg)	0.077
SAR 1g (W/Kg)	0.114
ConvF	1.99
Relative permittivity	35.99
Conductivity (S/m)	4.64

Maximum location: X=-16.00, Y=17.00 ; SAR Peak: 0.79 W/kg

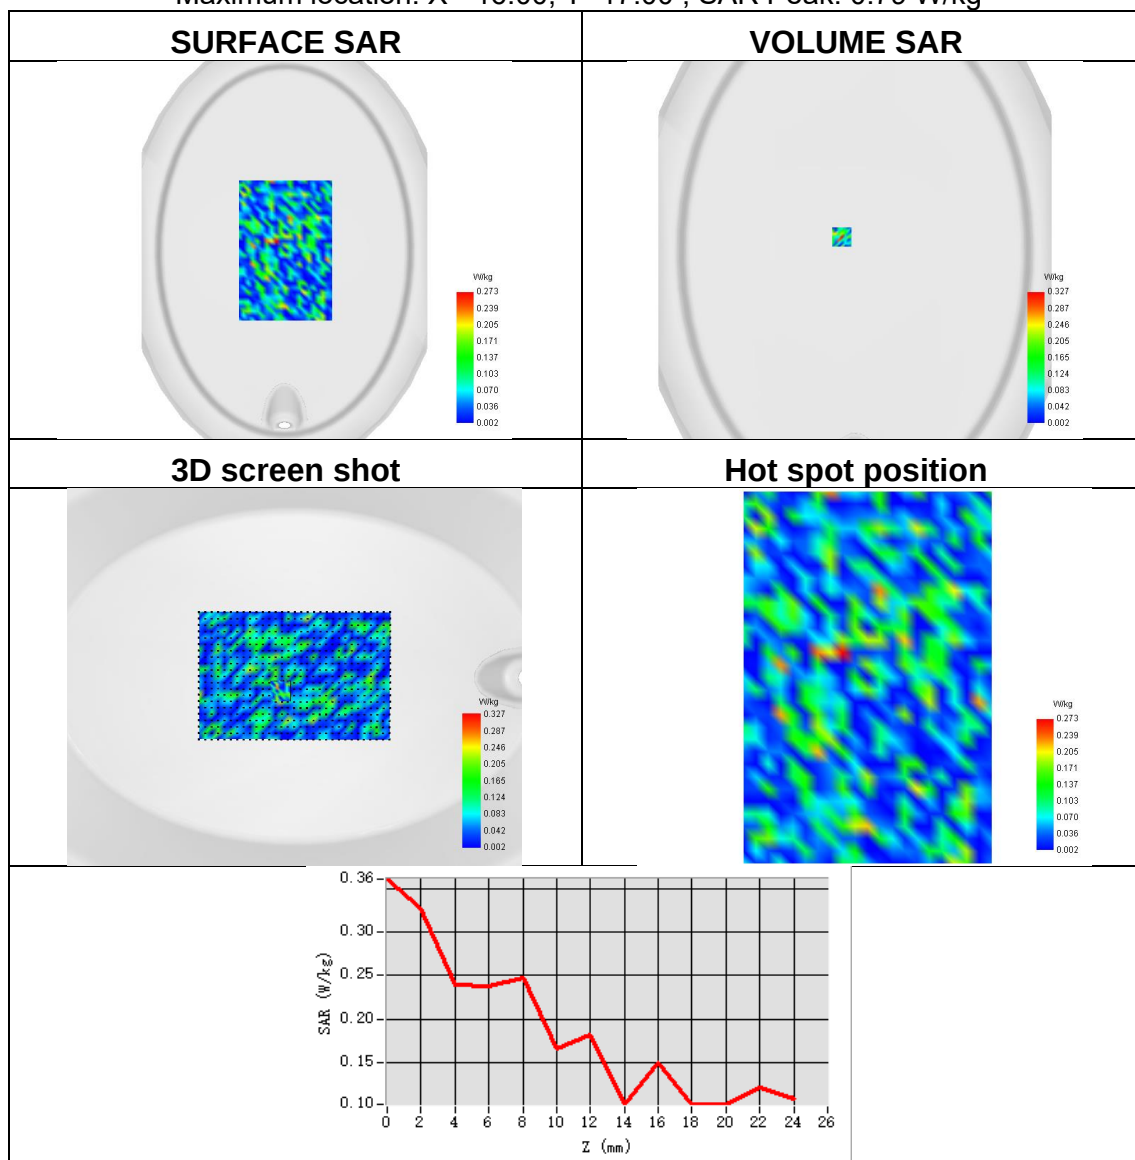




Plot 13:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11n
Frequency	5190
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.047
ConvF	1.99
Relative permittivity	35.99
Conductivity (S/m)	4.64

Maximum location: X=50.00, Y=64.00 ; SAR Peak: 0.72 W/kg

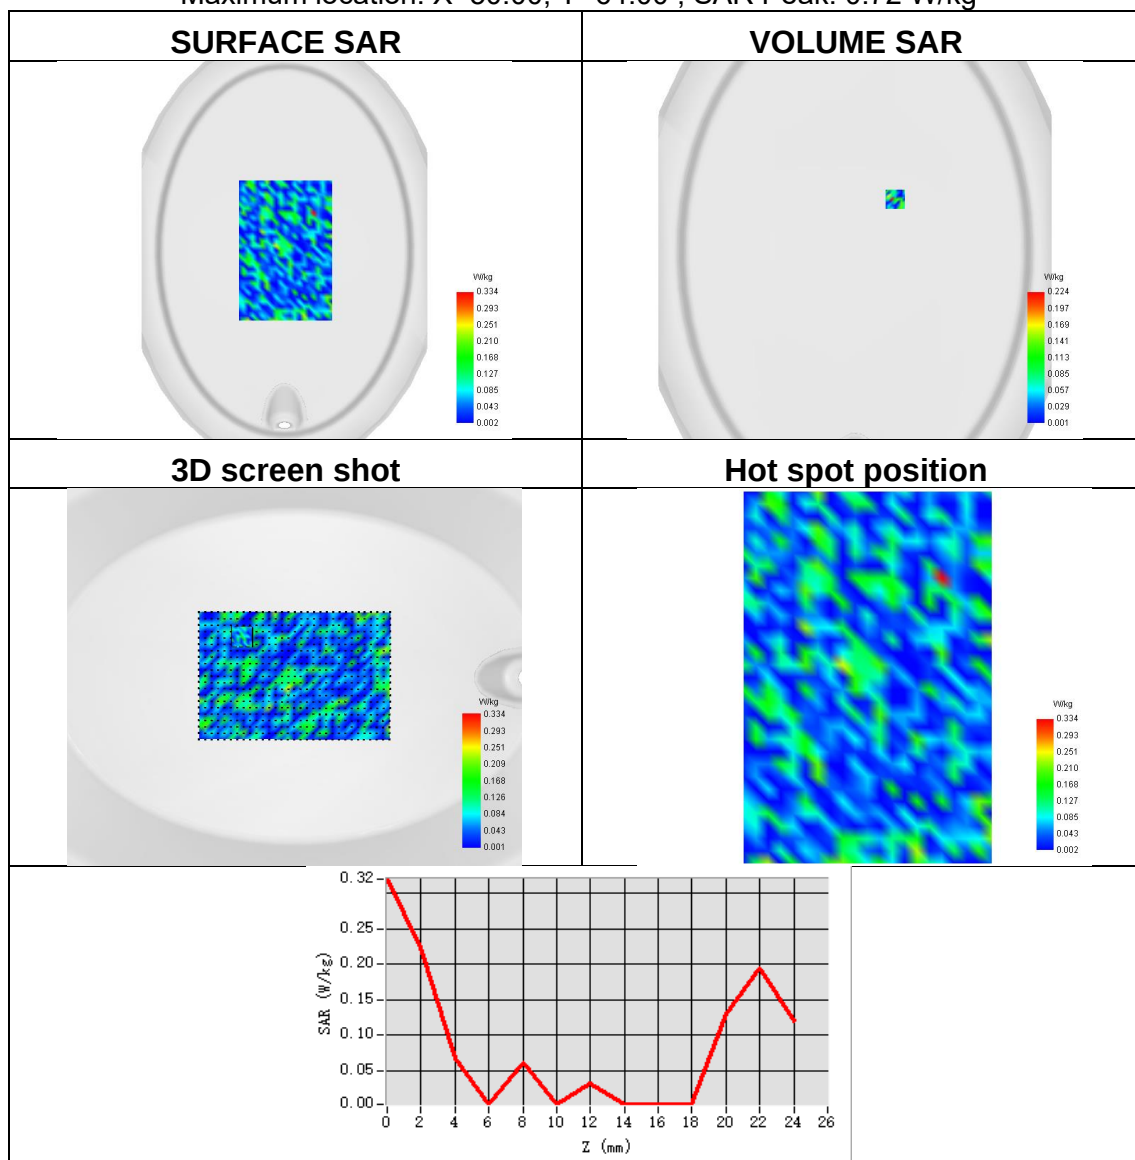




Plot 14:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a ANT 1
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.248
ConvF	1.87
Relative permittivity	36.34
Conductivity (S/m)	4.88

Maximum location: X=-30.00, Y=-57.00 ; SAR Peak: 0.97 W/kg

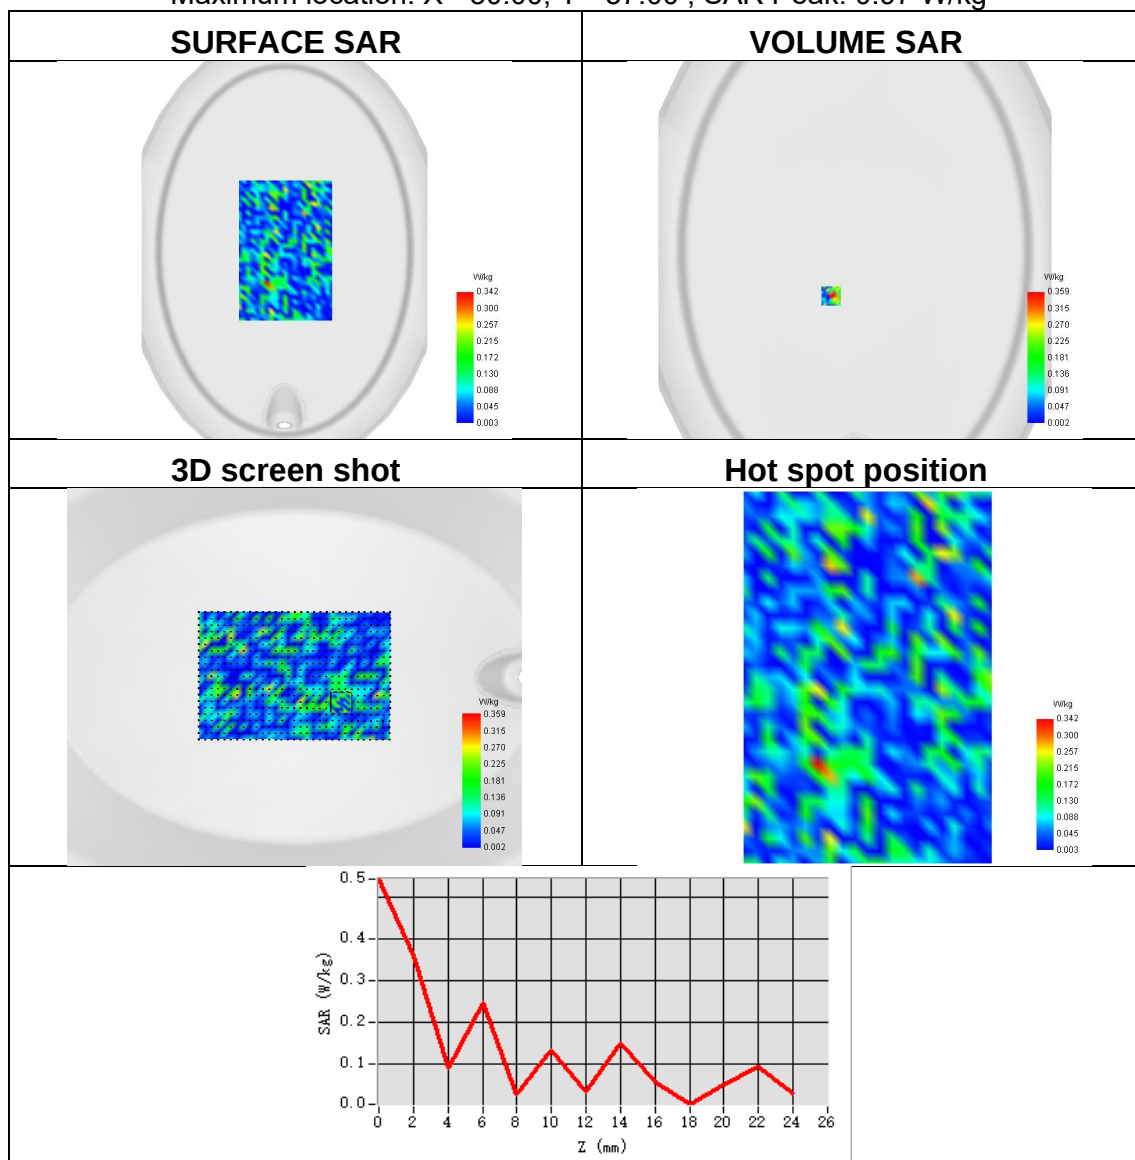




Plot 15:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a ANT 2
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.322
ConvF	1.87
Relative permittivity	36.34
Conductivity (S/m)	4.88

Maximum location: X=-30.00, Y=23.00 ; SAR Peak: 1.82 W/kg

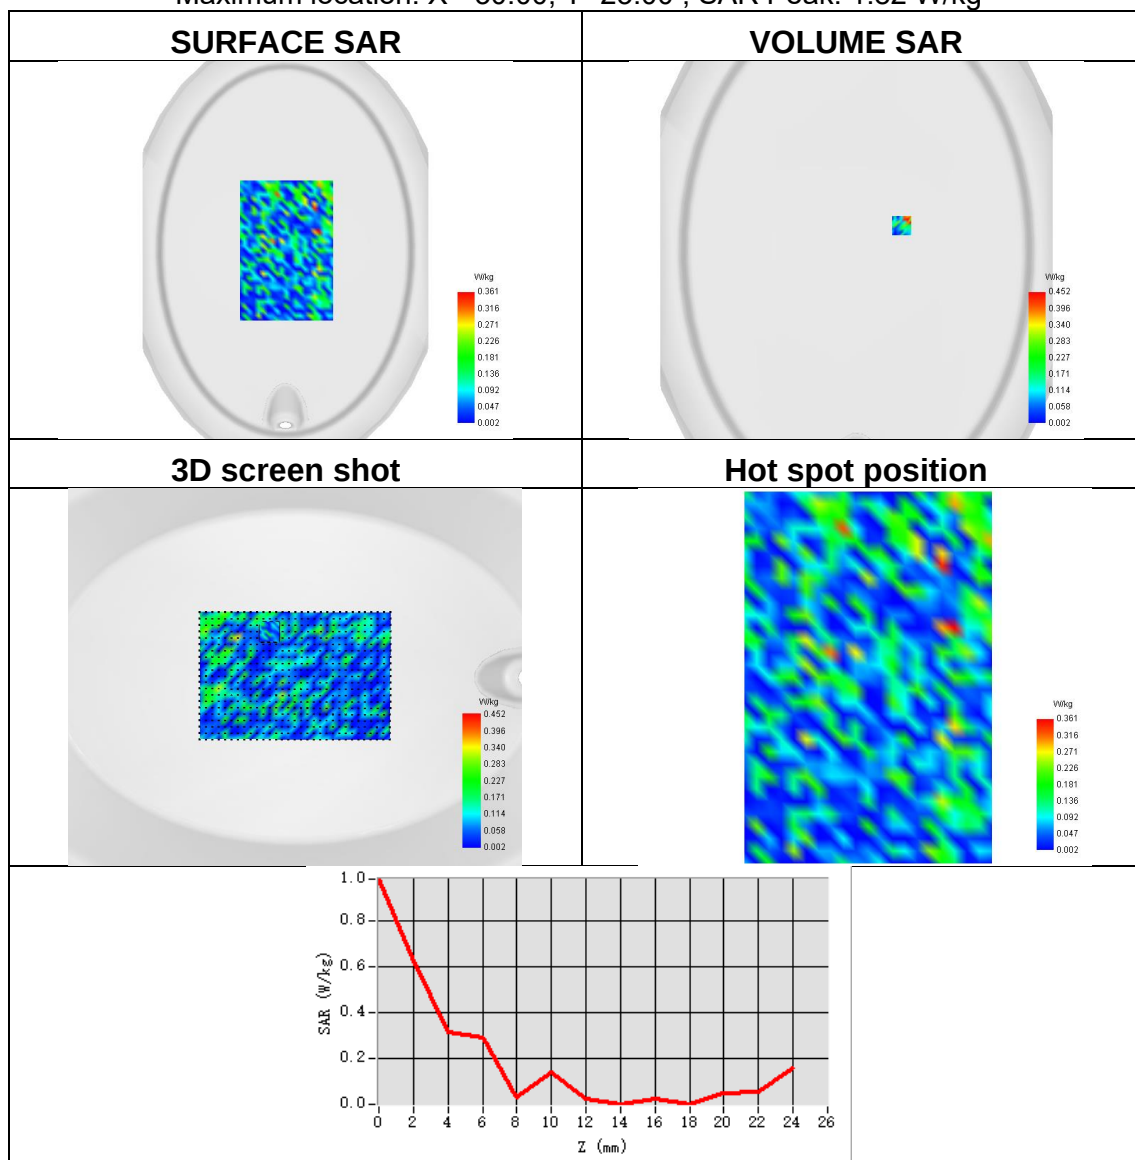




Plot 16:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2 MIMO 1
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.140
ConvF	1.87
Relative permittivity	36.34
Conductivity (S/m)	4.88

Maximum location: X=-30.00, Y=8.00 ; SAR Peak: 1.09 W/kg

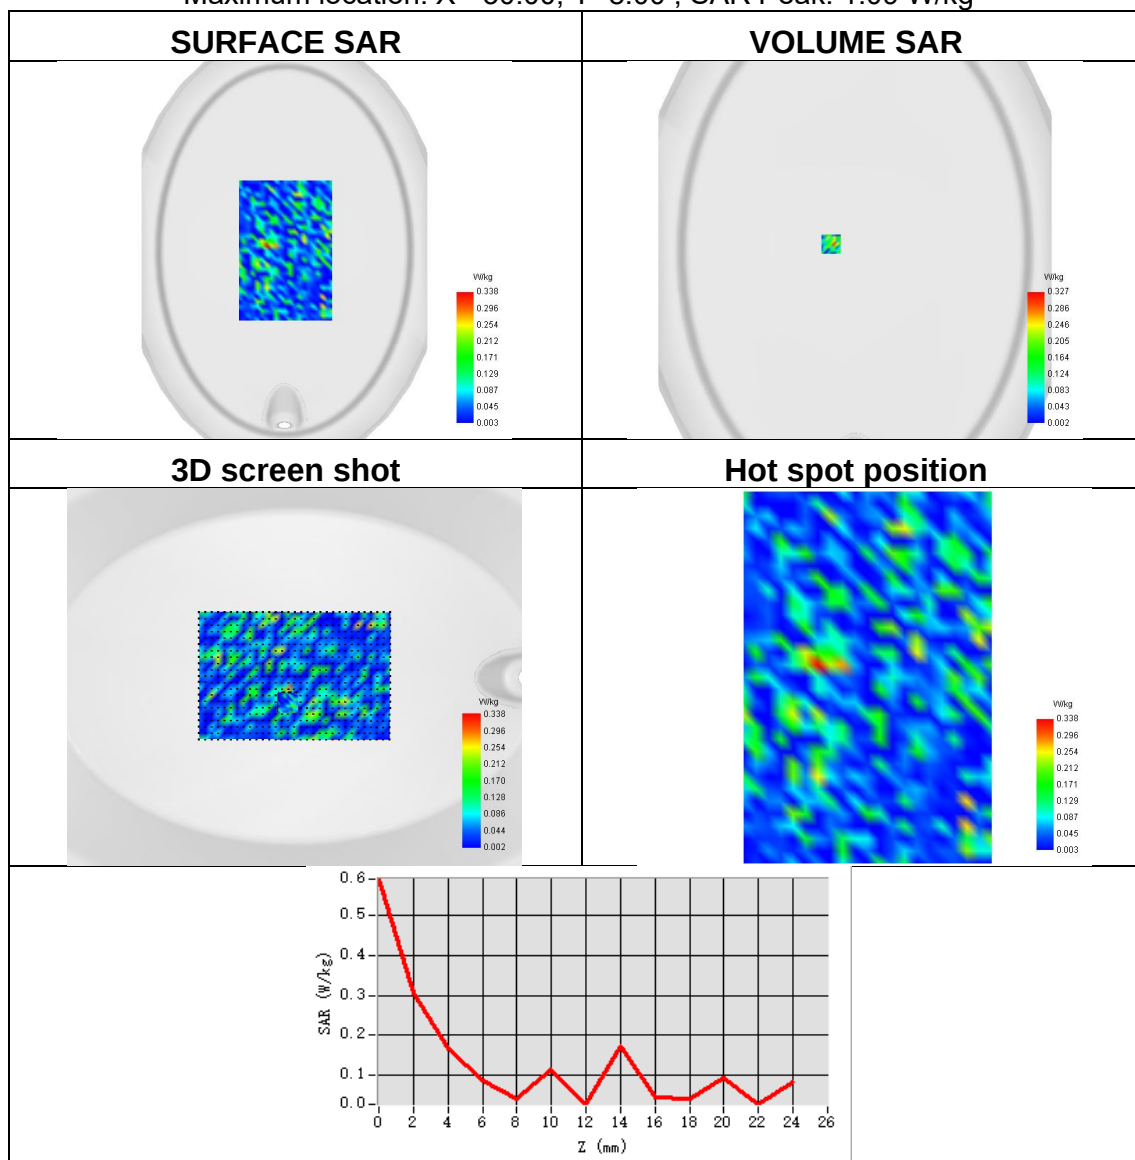




Plot 17:

Test Date	2025-04-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2 MIMO 2
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.056
SAR 1g (W/Kg)	0.166
ConvF	1.87
Relative permittivity	36.34
Conductivity (S/m)	4.88

Maximum location: X=-30.00, Y=7.00 ; SAR Peak: 1.01 W/kg

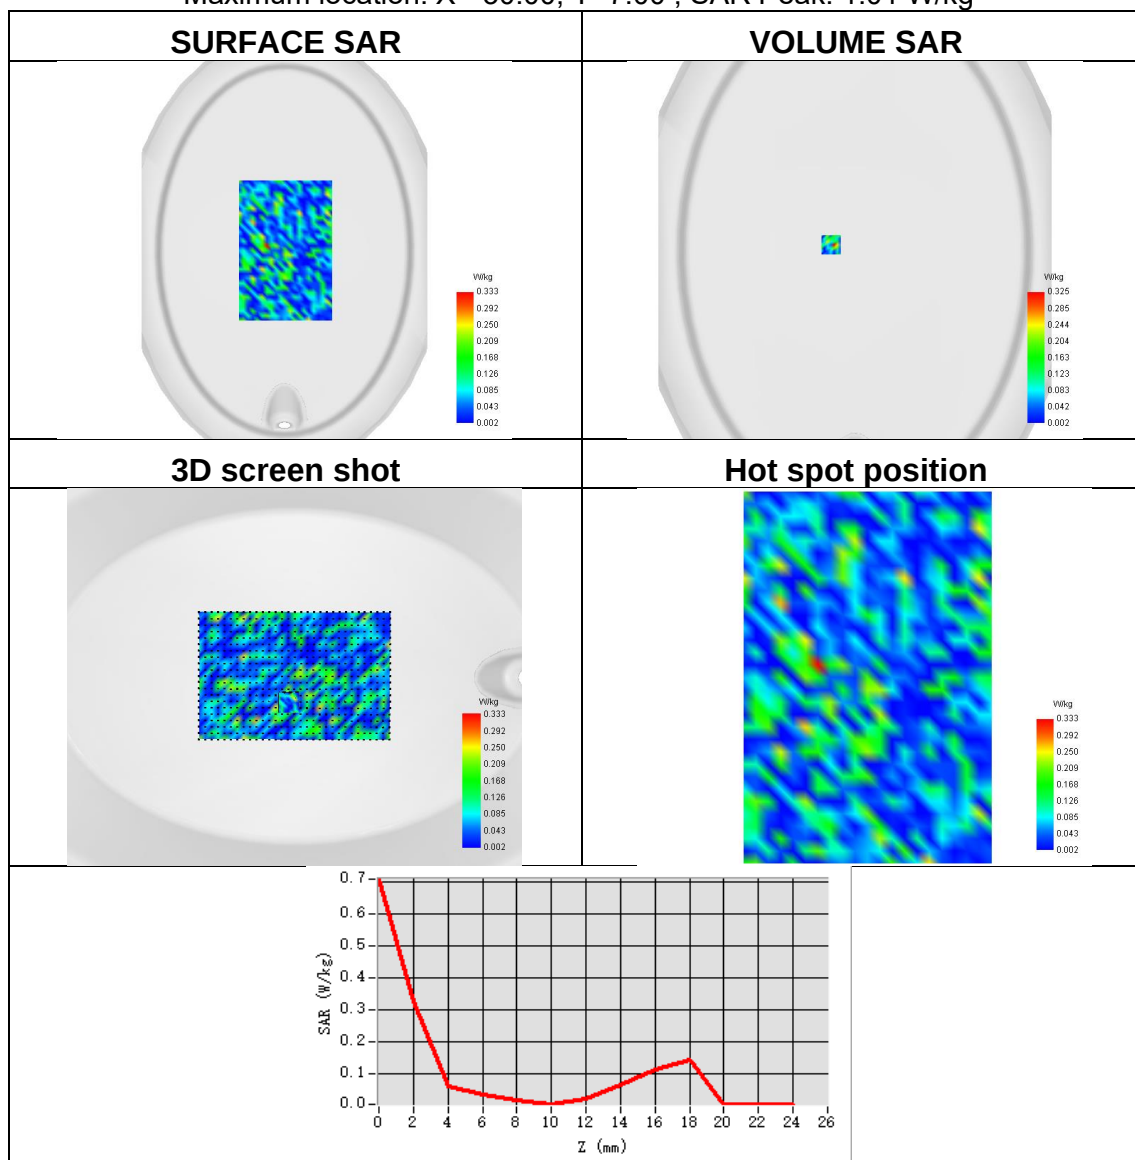




Plot 18:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 1
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.086
SAR 1g (W/Kg)	0.199
ConvF	1.87
Relative permittivity	36.49
Conductivity (S/m)	5.11

Maximum location: X=35.00, Y=79.00 ; SAR Peak: 1.40 W/kg

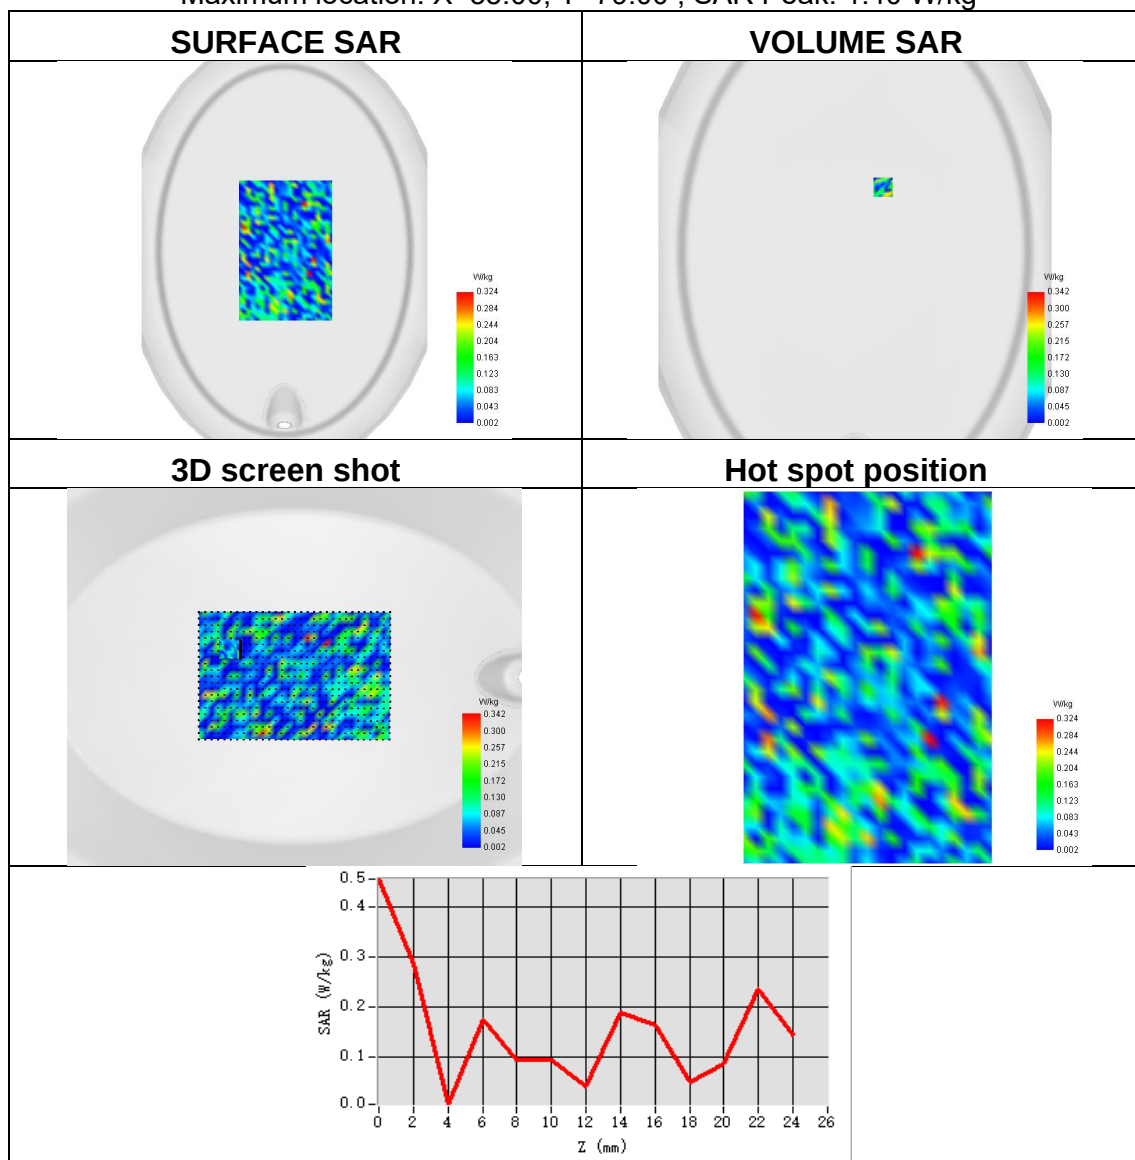




Plot 19:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 2
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.265
ConvF	1.87
Relative permittivity	36.49
Conductivity (S/m)	5.11

Maximum location: X=-16.00, Y=49.00 ; SAR Peak: 1.59 W/kg

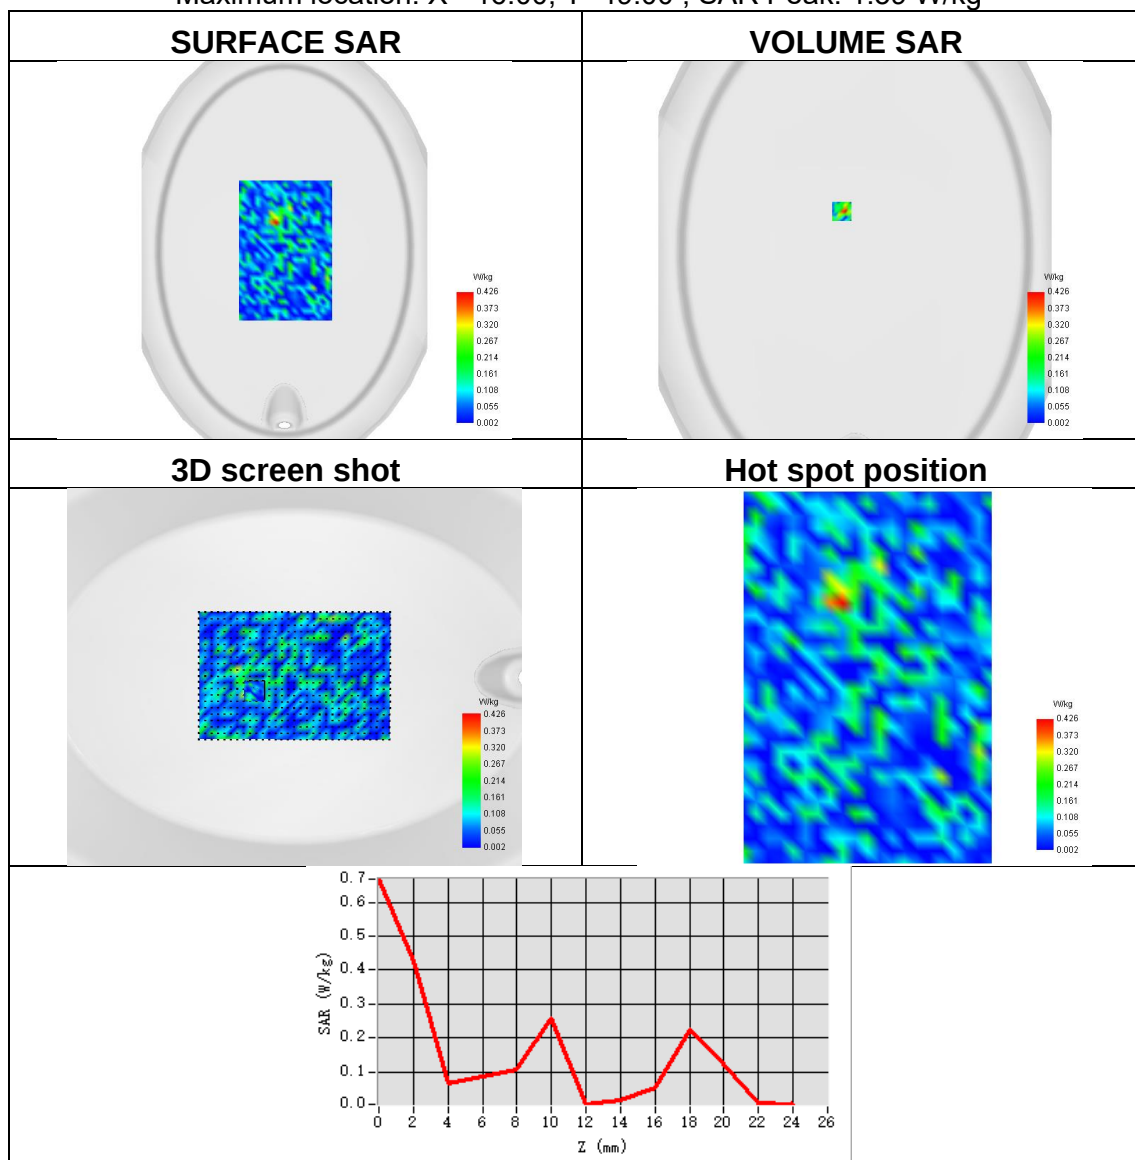




Plot 20:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 1
Signal	IEEE 802.11n
Frequency	5670
SAR 10g (W/Kg)	0.040
SAR 1g (W/Kg)	0.077
ConvF	1.87
Relative permittivity	36.49
Conductivity (S/m)	5.11

Maximum location: X=-62.00, Y=-16.00 ; SAR Peak: 0.61 W/kg

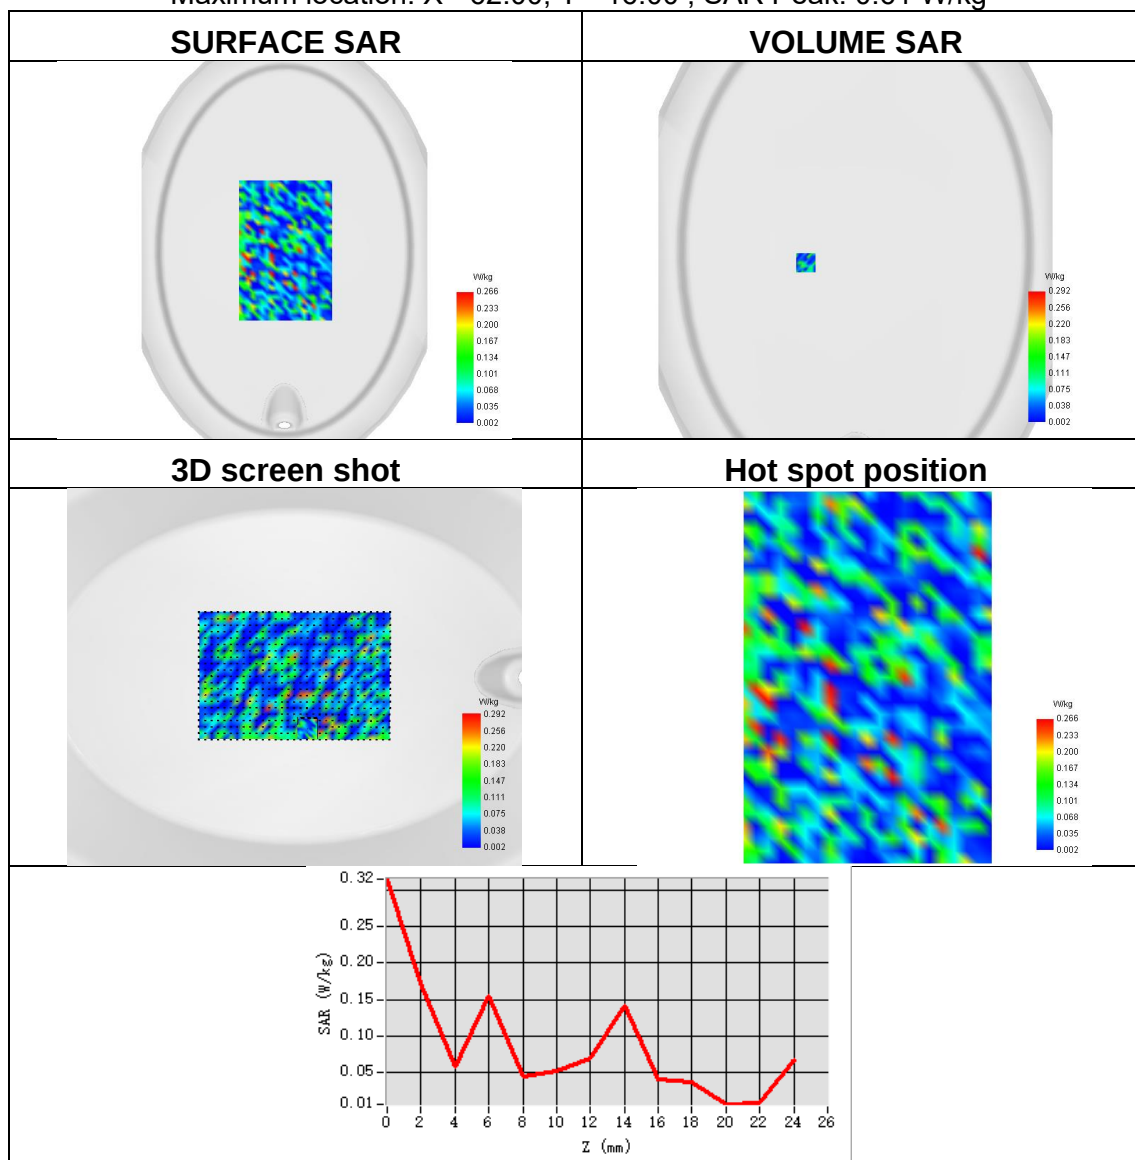




Plot 21:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 2
Signal	IEEE 802.11n
Frequency	5670
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.177
ConvF	1.87
Relative permittivity	36.49
Conductivity (S/m)	5.11

Maximum location: X=10.00, Y=111.00 ; SAR Peak: 1.09 W/kg

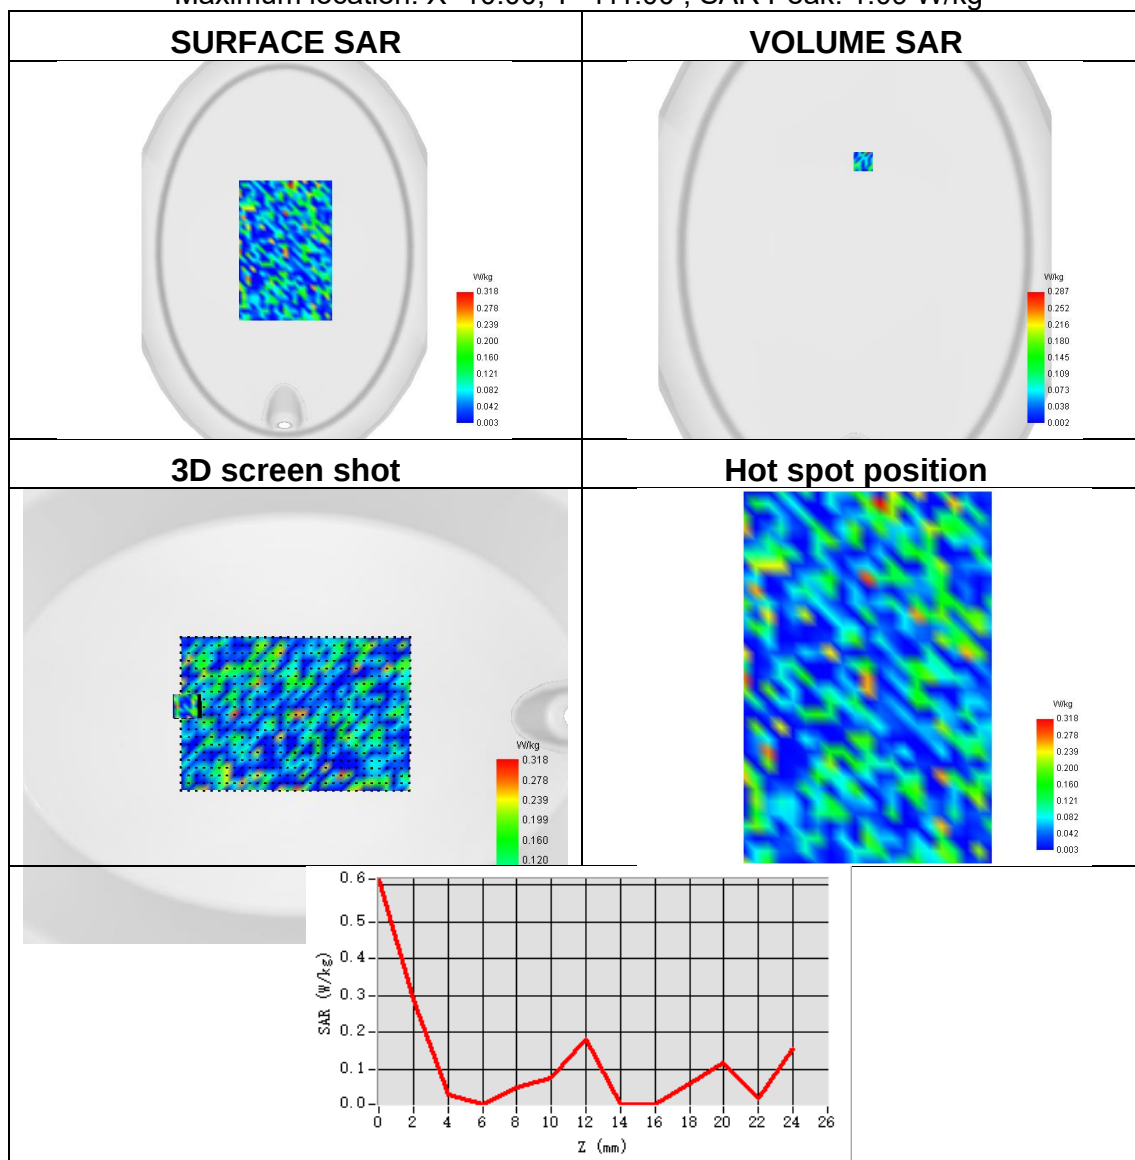




Plot 22:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5825
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.122
ConvF	1.70
Relative permittivity	36.34
Conductivity (S/m)	5.31

Maximum location: X=-54.00, Y=-65.00 ; SAR Peak: 1.19 W/kg

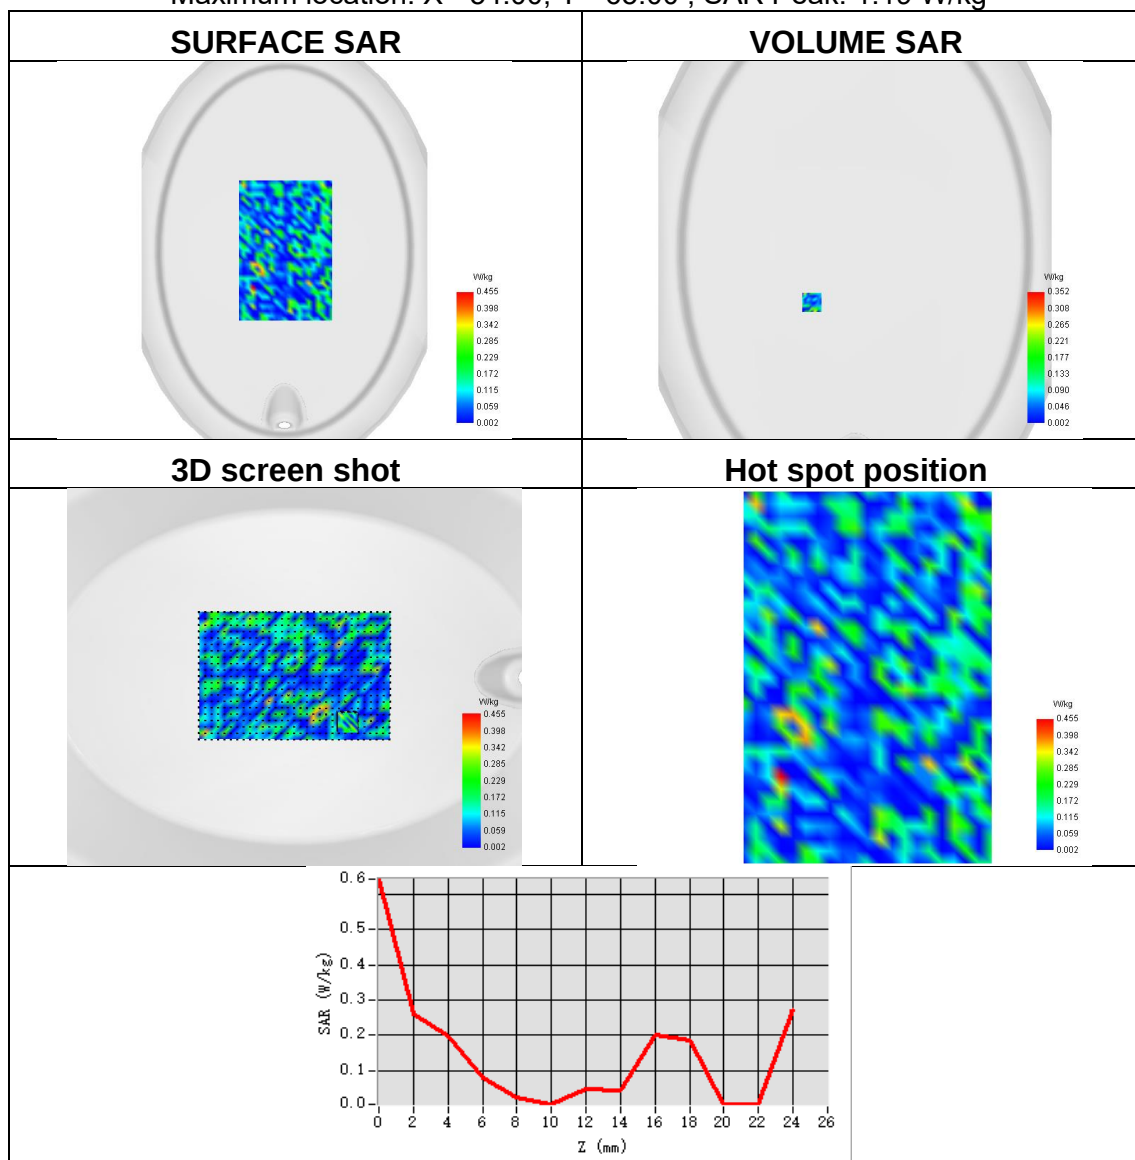




Plot 23:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 2
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.227
ConvF	1.70
Relative permittivity	36.34
Conductivity (S/m)	5.31

Maximum location: X=-23.00, Y=23.00 ; SAR Peak: 1.60 W/kg

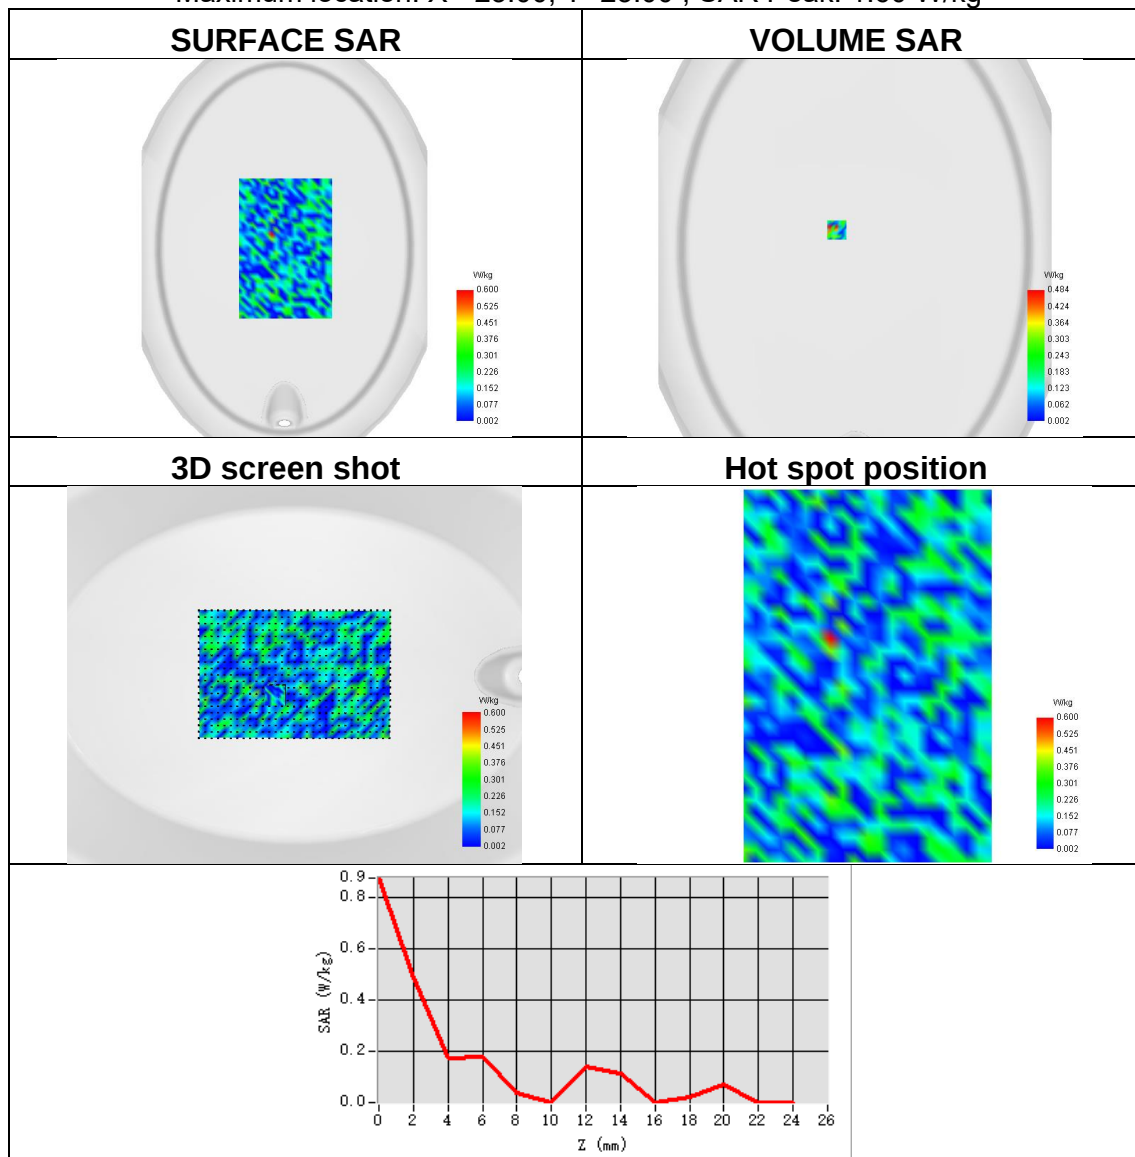




Plot 24:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5785
SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.063
ConvF	1.70
Relative permittivity	36.34
Conductivity (S/m)	5.31

Maximum location: X=26.00, Y=23.00 ; SAR Peak: 0.97 W/kg

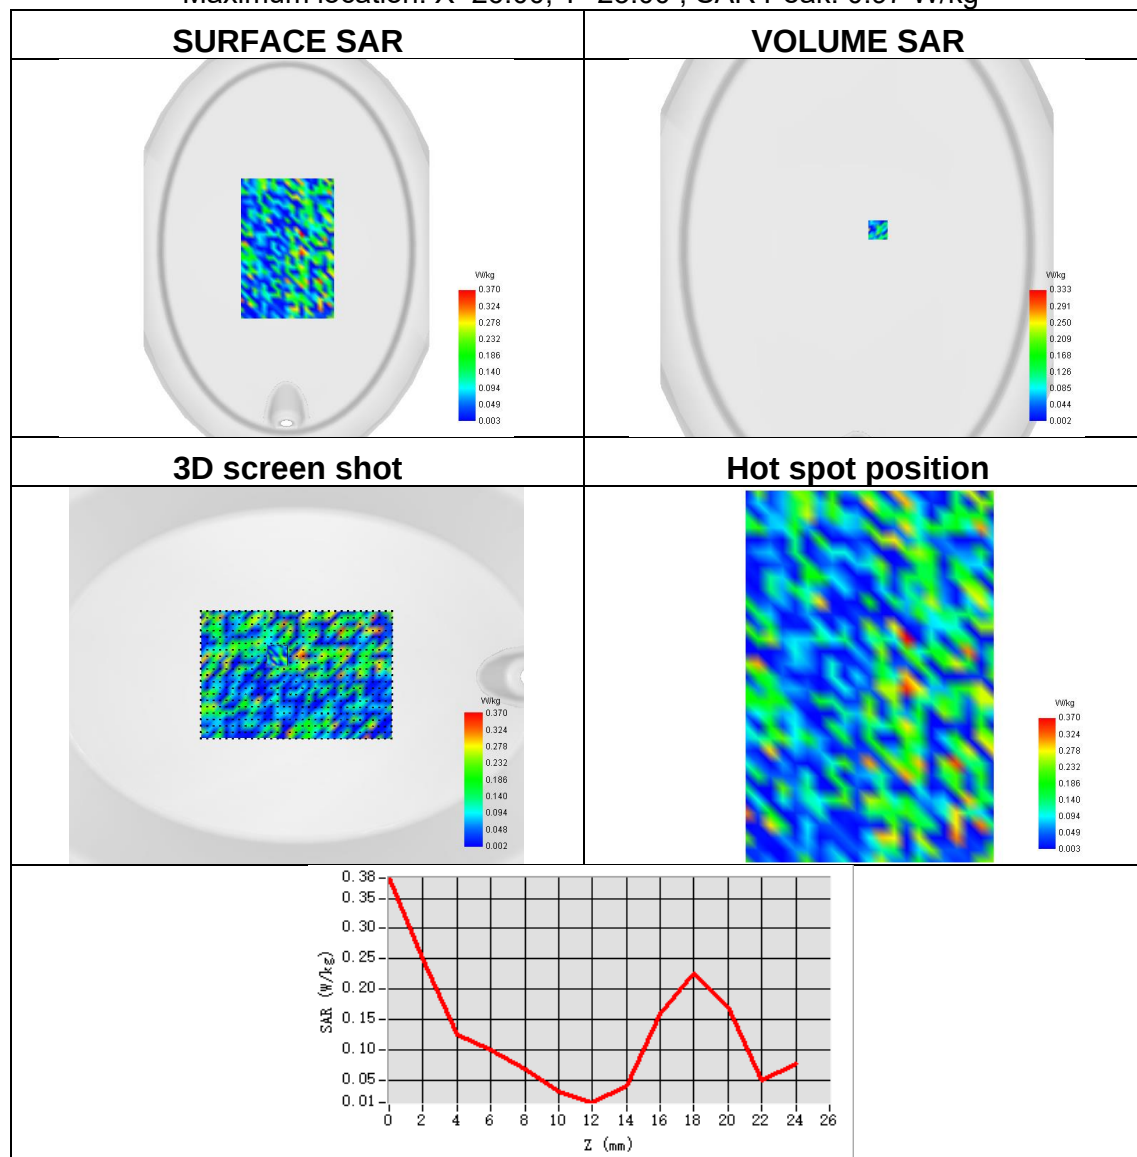




Plot 25:

Test Date	2025-04-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11b
Frequency	5785
SAR 10g (W/Kg)	0.069
SAR 1g (W/Kg)	0.165
ConvF	1.70
Relative permittivity	36.34
Conductivity (S/m)	5.31

Maximum location: X=-23.00, Y=-97.00 ; SAR Peak: 1.43 W/kg

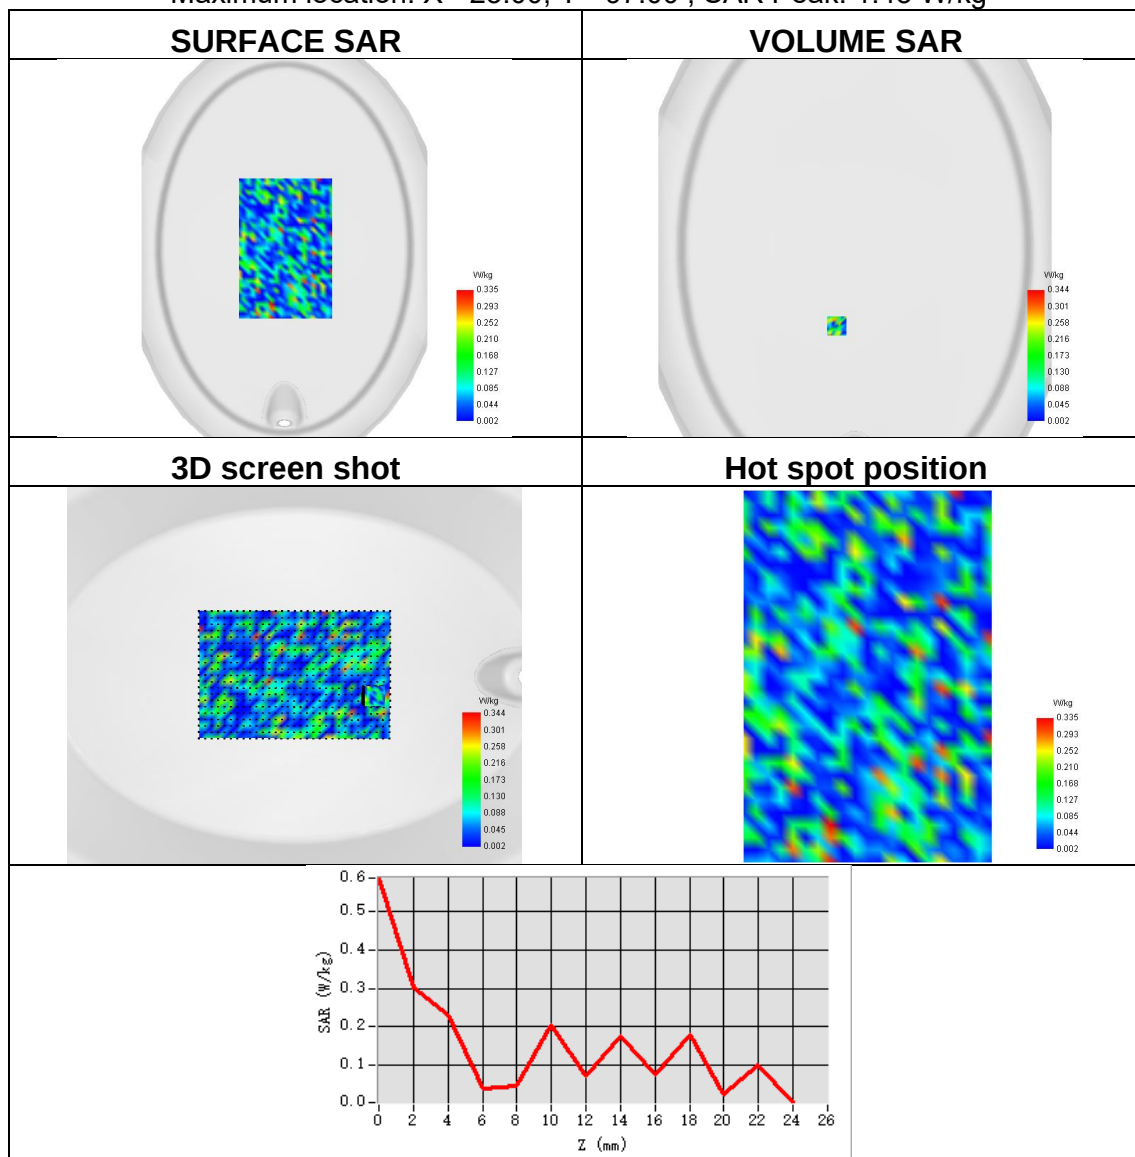




Plot 26:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.349
SAR 1g (W/Kg)	0.677
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=-21.00, Y=2.00 ; SAR Peak: 1.22 W/kg

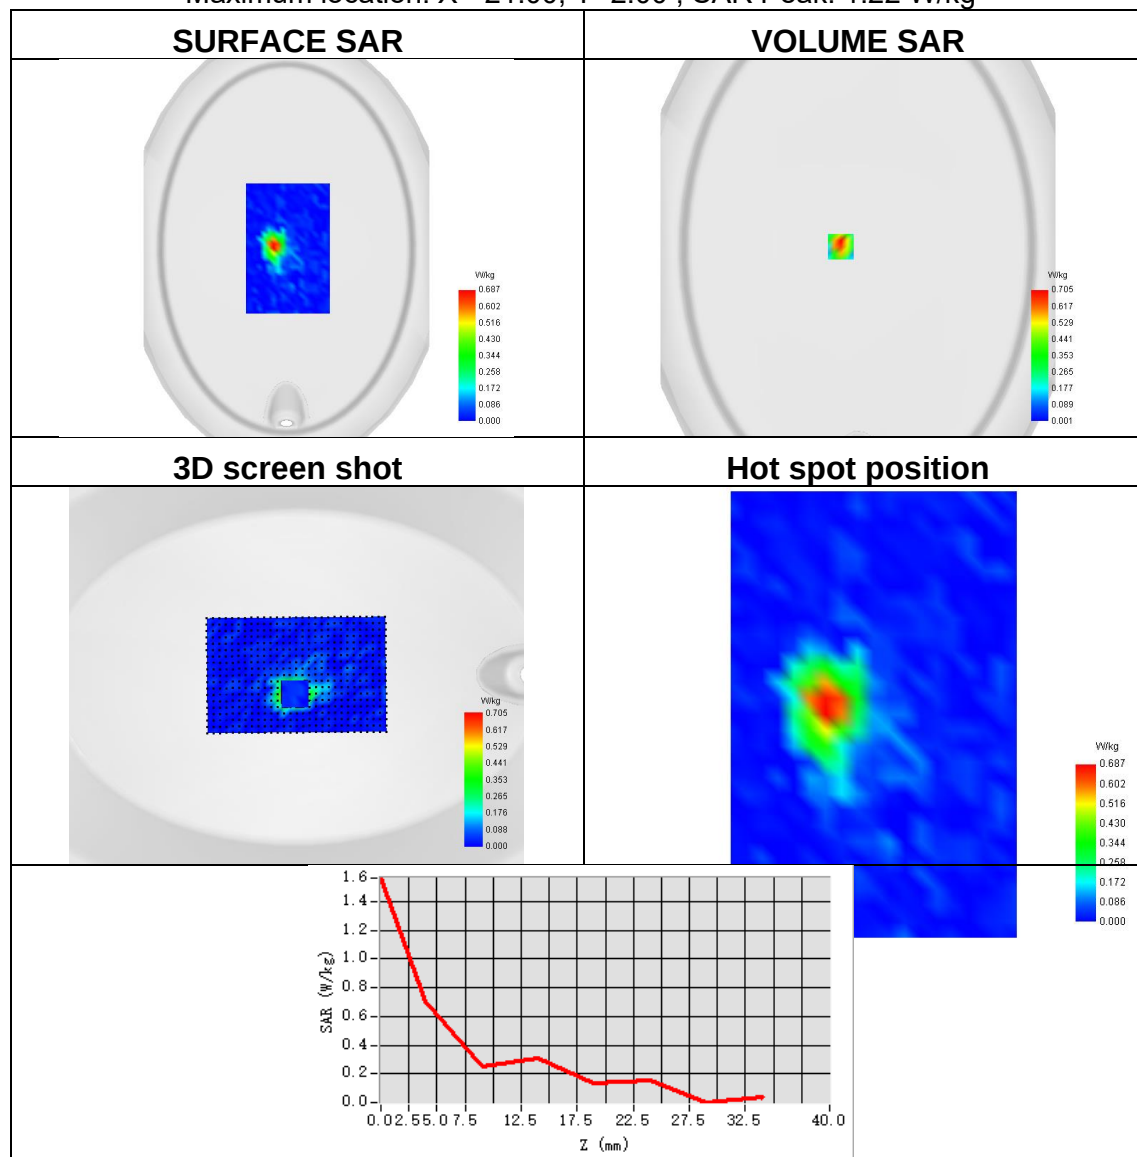




Plot 27:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.356
SAR 1g (W/Kg)	0.703
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=-47.00, Y=46.00 ; SAR Peak: 1.20 W/kg

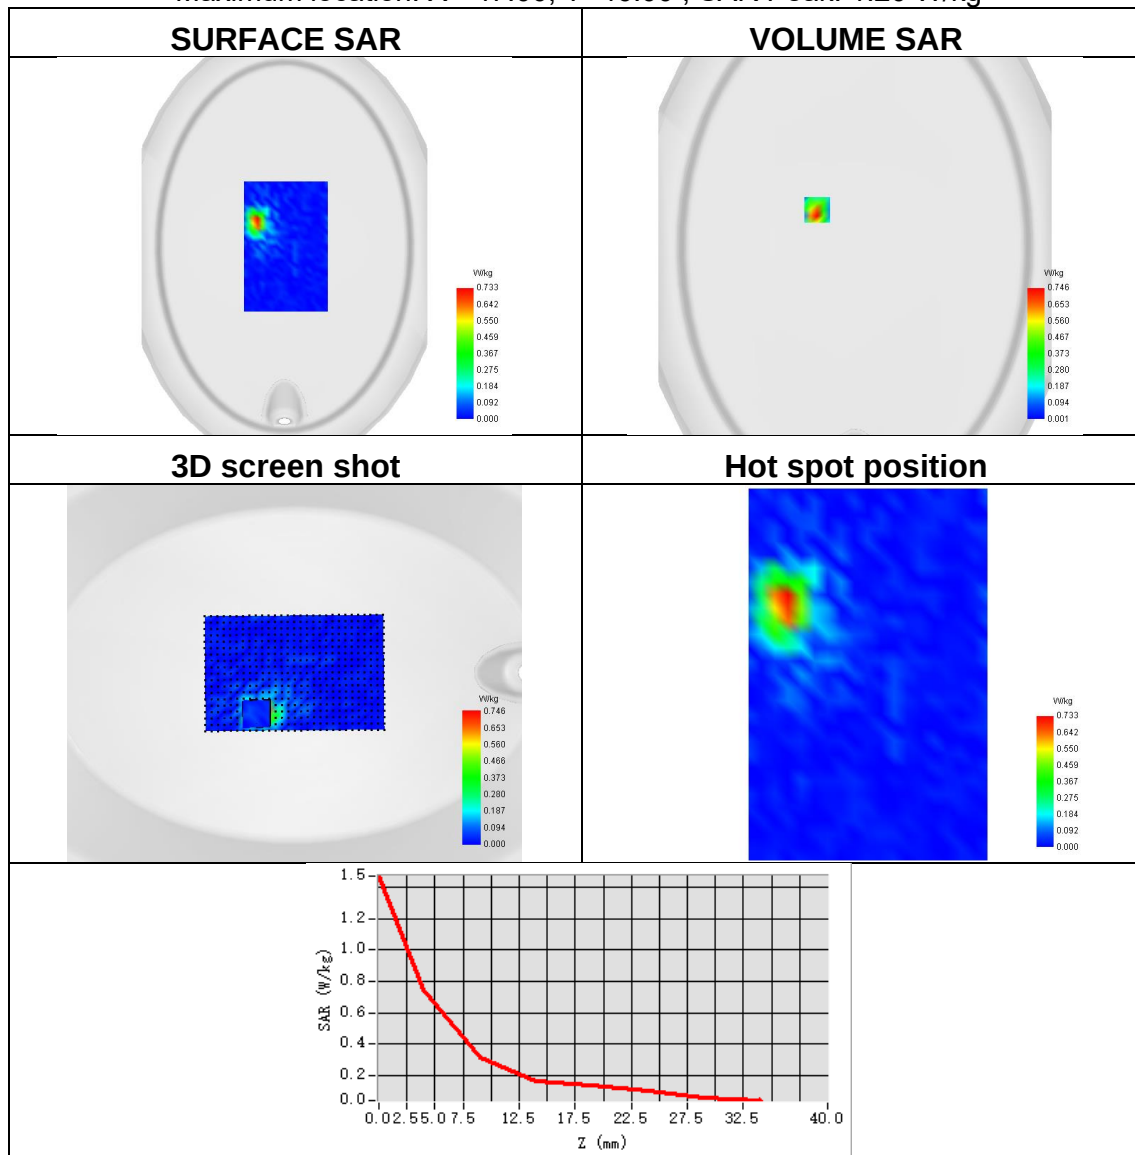




Plot 28:

Test Date	2025-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.336
SAR 1g (W/Kg)	0.638
ConvF	1.72
Relative permittivity	41.32
Conductivity (S/m)	0.92

Maximum location: X=-37.00, Y=8.00 ; SAR Peak: 1.11 W/kg

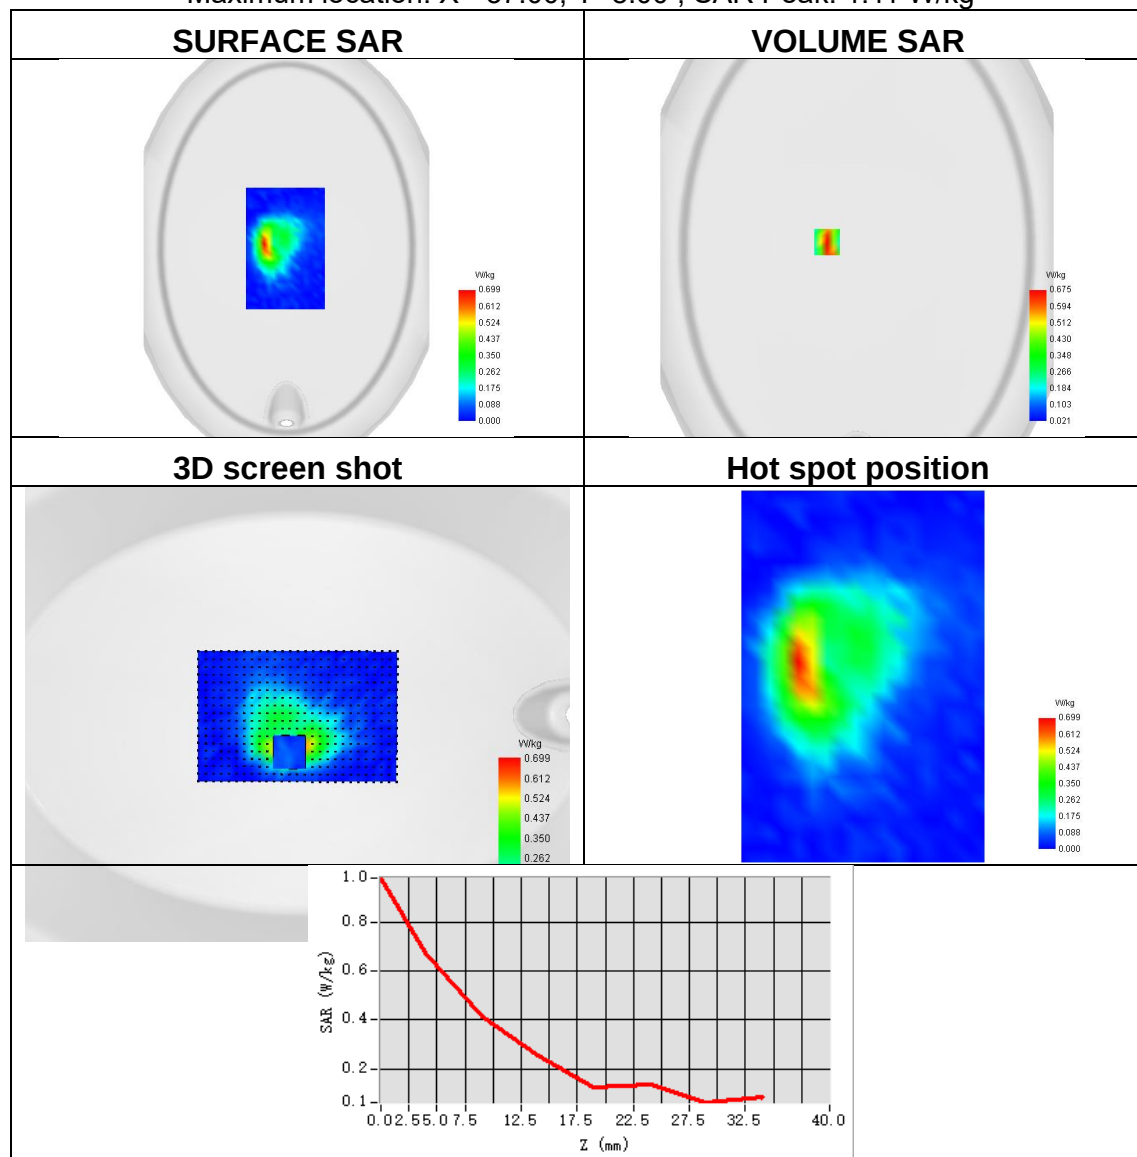




Plot 29:

Test Date	2025-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.613
ConvF	2.33
Relative permittivity	39.70
Conductivity (S/m)	1.77

Maximum location: X=-38.00, Y=-1.00 ; SAR Peak: 1.67 W/kg

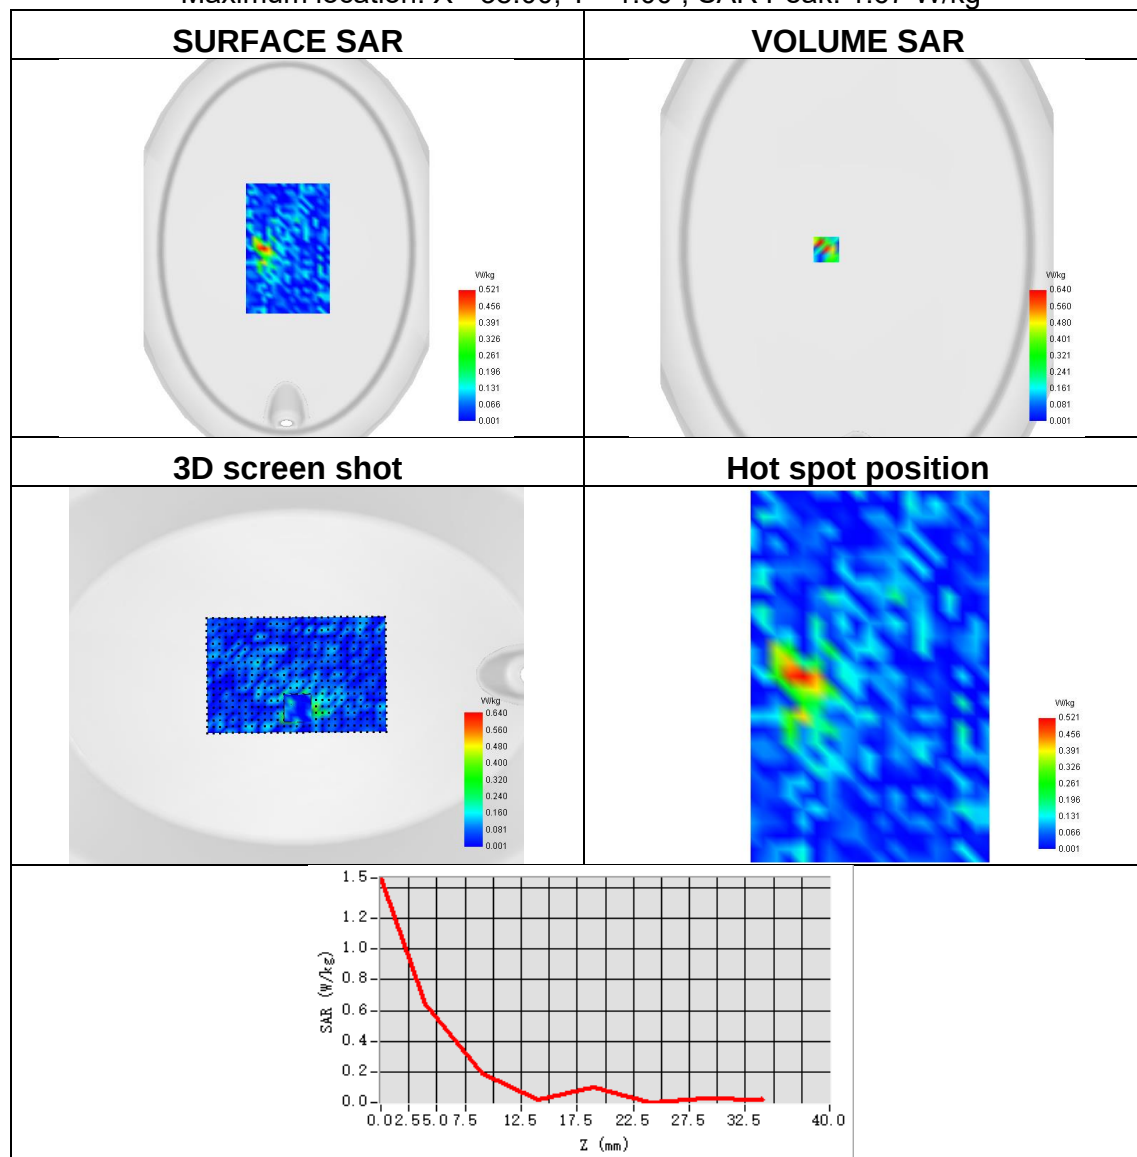




Plot 30:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.410
SAR 1g (W/Kg)	0.778
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-30.00, Y=8.00 ; SAR Peak: 1.29 W/kg

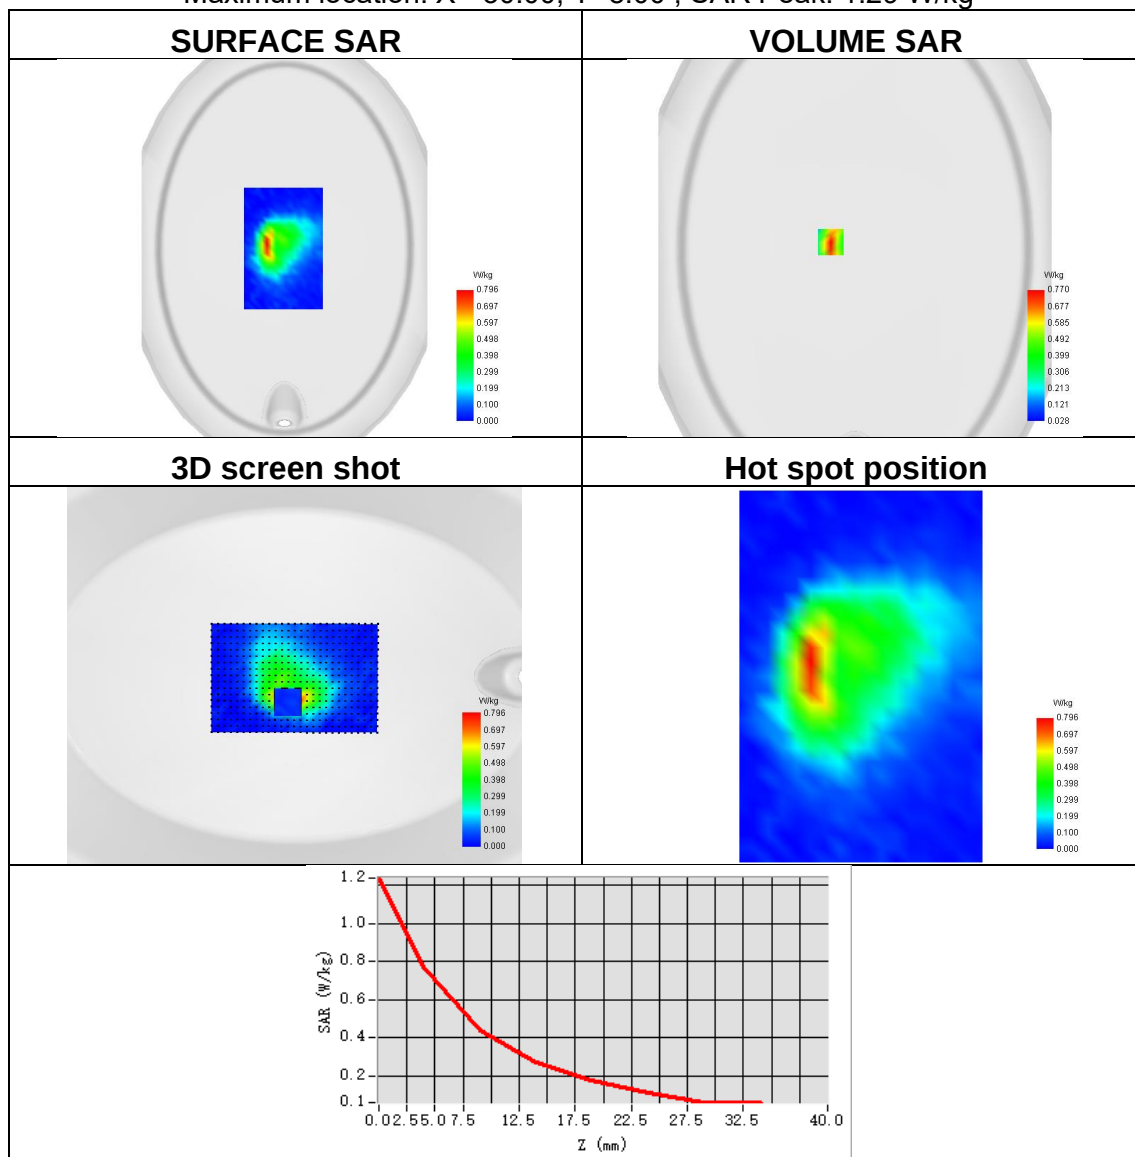




Plot 31:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.267
SAR 1g (W/Kg)	0.521
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-31.00, Y=2.00 ; SAR Peak: 0.87 W/kg

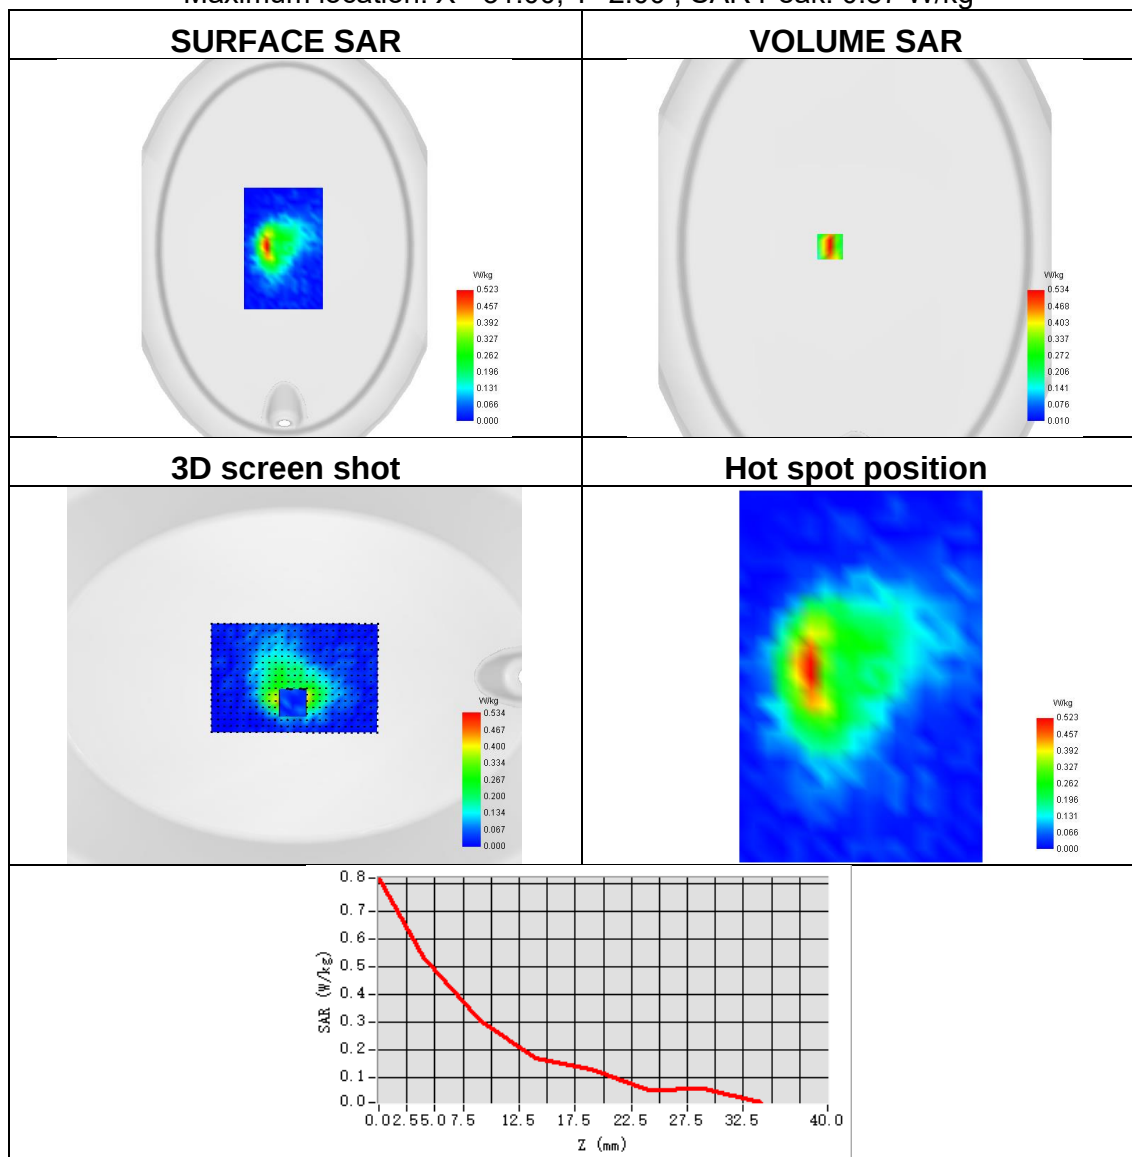




Plot 32:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.414
SAR 1g (W/Kg)	0.781
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-37.00, Y=7.00 ; SAR Peak: 1.24 W/kg

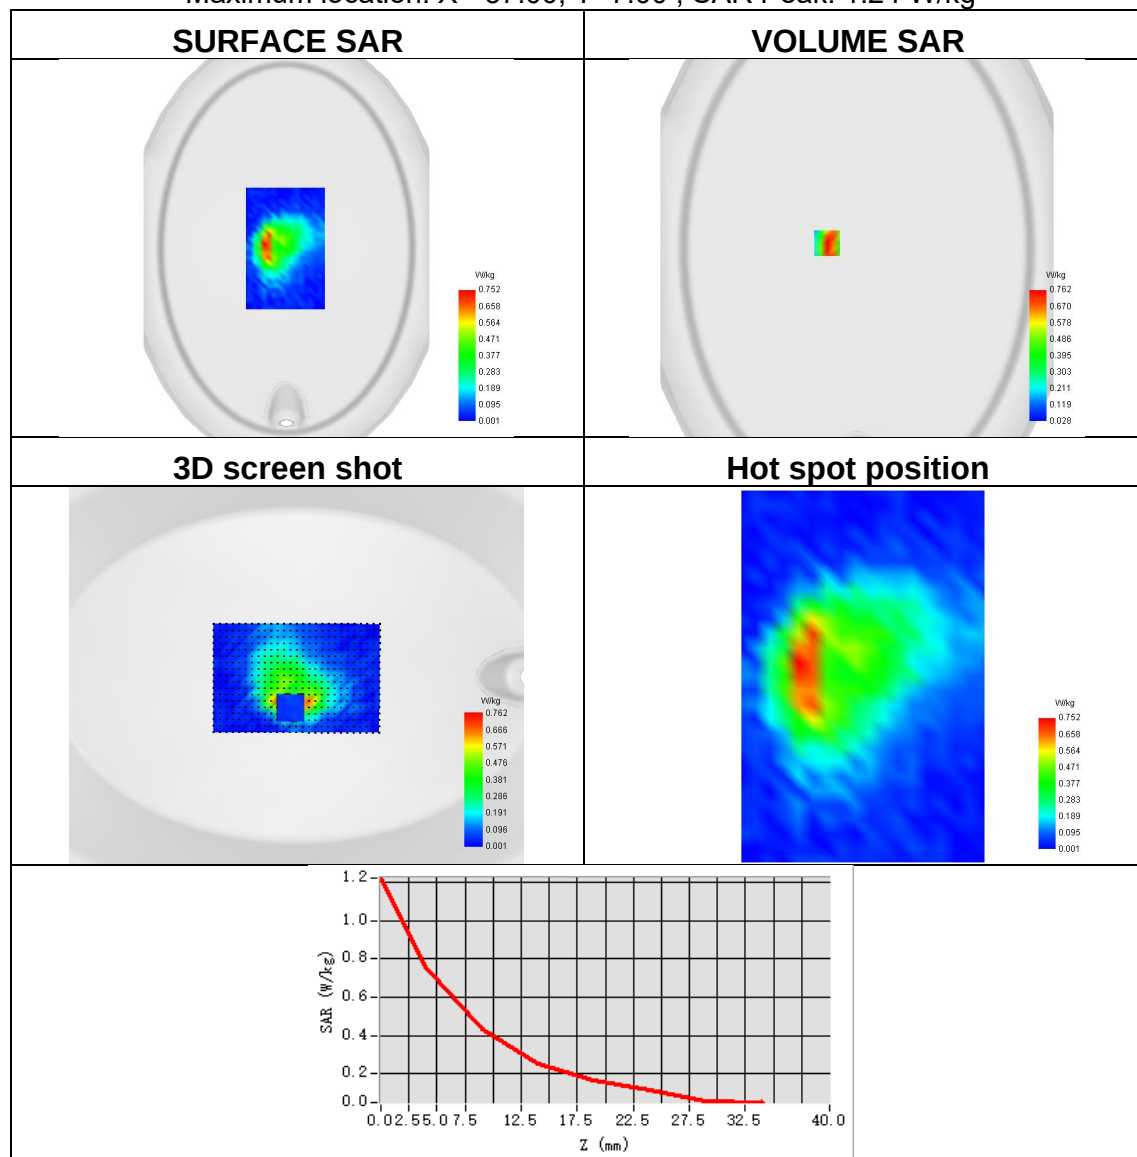




Plot 33:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.400
SAR 1g (W/Kg)	0.793
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=-30.00, Y=-1.00 ; SAR Peak: 1.44 W/kg

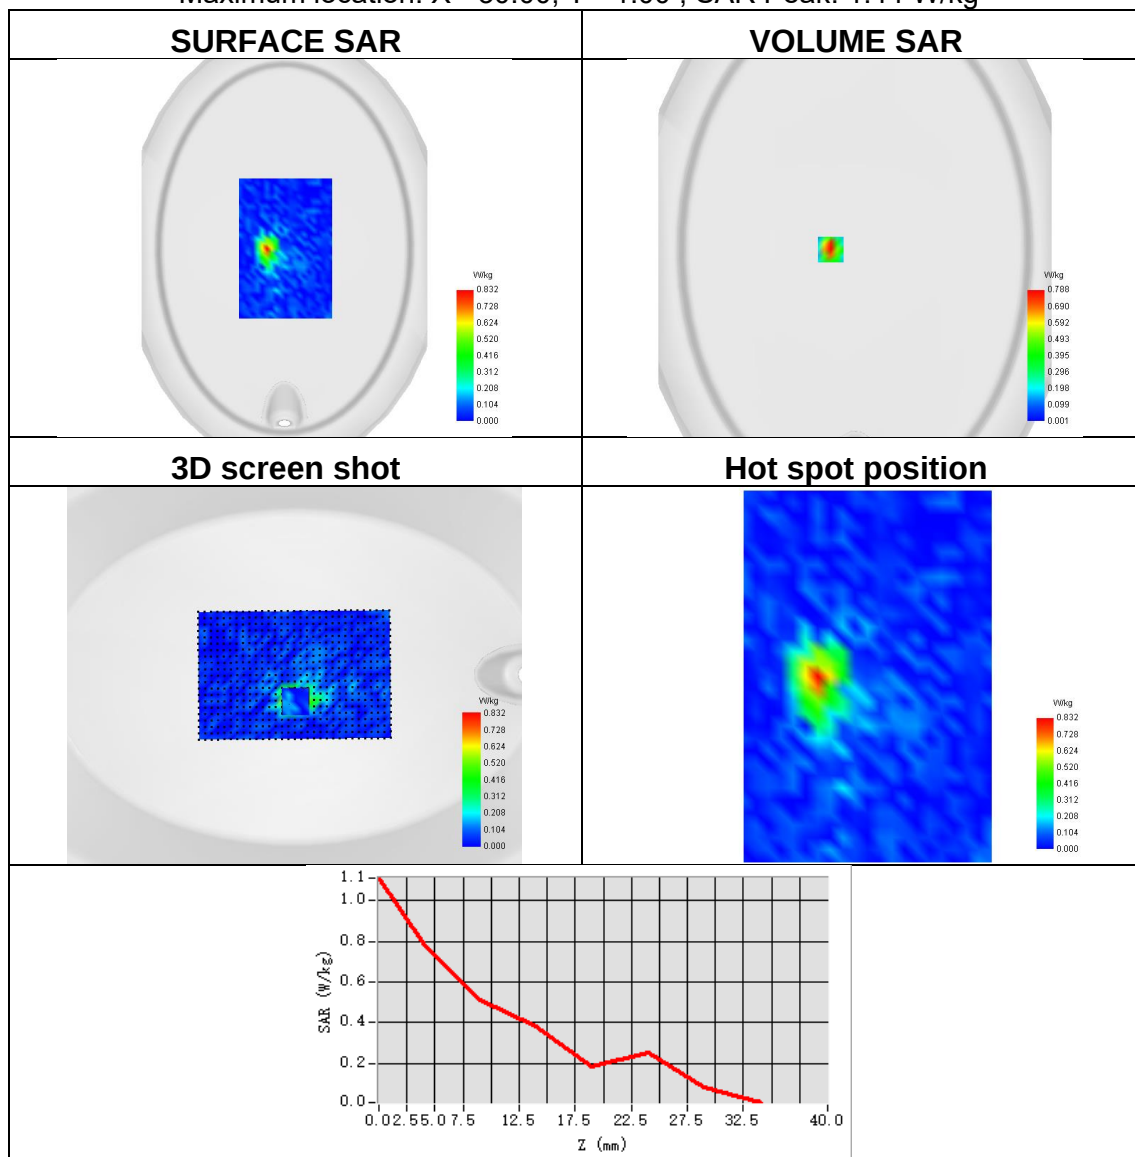




Plot 34:

Test Date	2025-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	0.341
SAR 1g (W/Kg)	0.639
ConvF	1.72
Relative permittivity	41.32
Conductivity (S/m)	0.92

Maximum location: X=-39.00, Y=6.00 ; SAR Peak: 1.14 W/kg

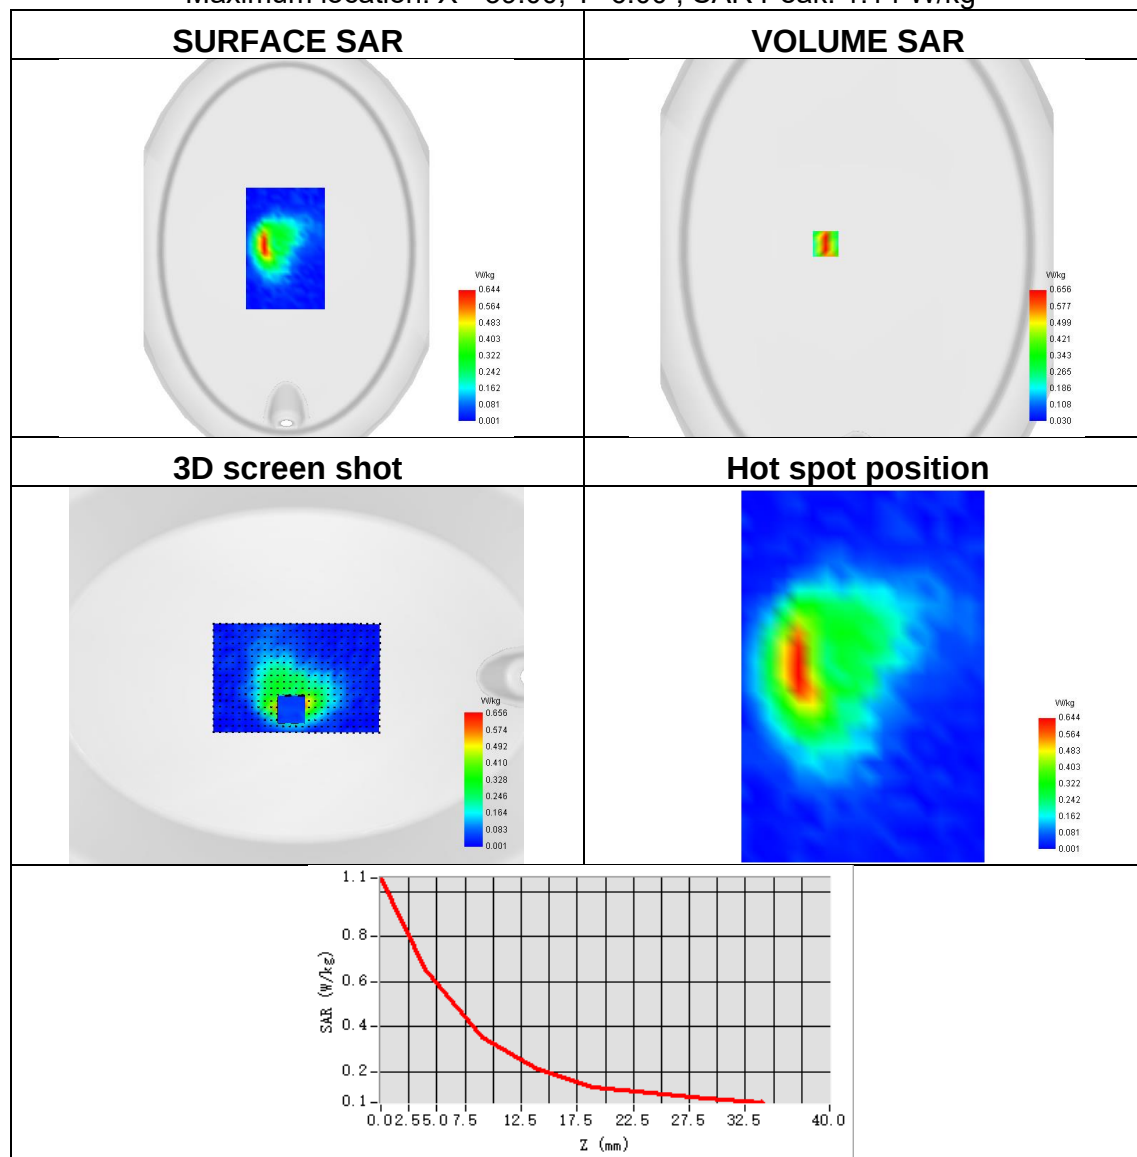




Plot 35:

Test Date	2025-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2595
SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.569
ConvF	2.37
Relative permittivity	39.63
Conductivity (S/m)	1.97

Maximum location: X=27.00, Y=80.00 ; SAR Peak: 1.22 W/kg

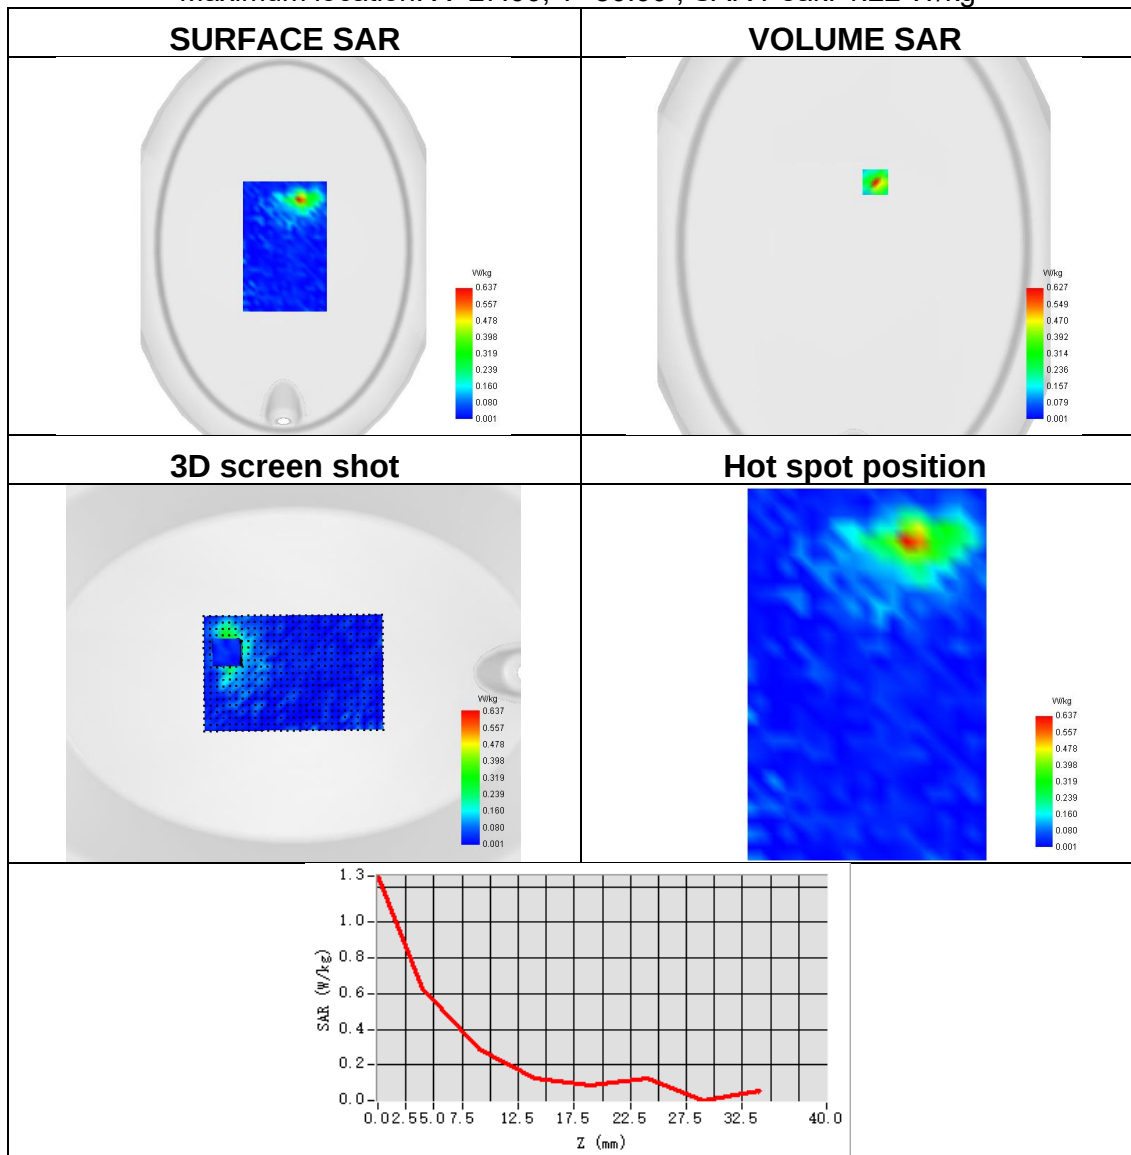




Plot 36:

Test Date	2025-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.517
ConvF	2.37
Relative permittivity	39.63
Conductivity (S/m)	1.97

Maximum location: X=18.00, Y=31.00 ; SAR Peak: 1.22 W/kg

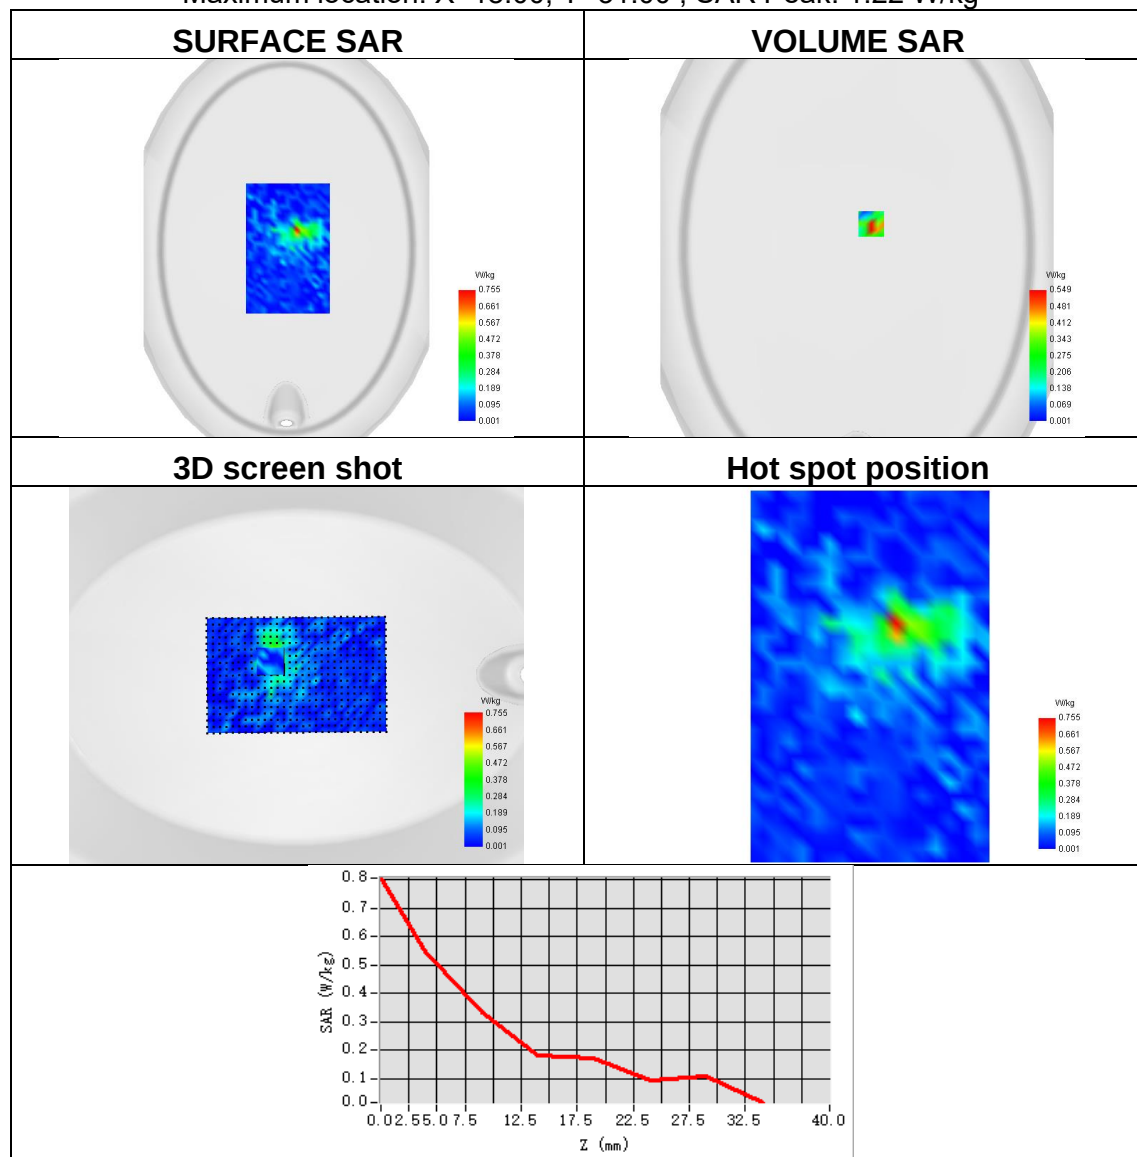




Plot 37:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.381
SAR 1g (W/Kg)	0.742
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=-47.00, Y=-15.00 ; SAR Peak: 1.32 W/kg

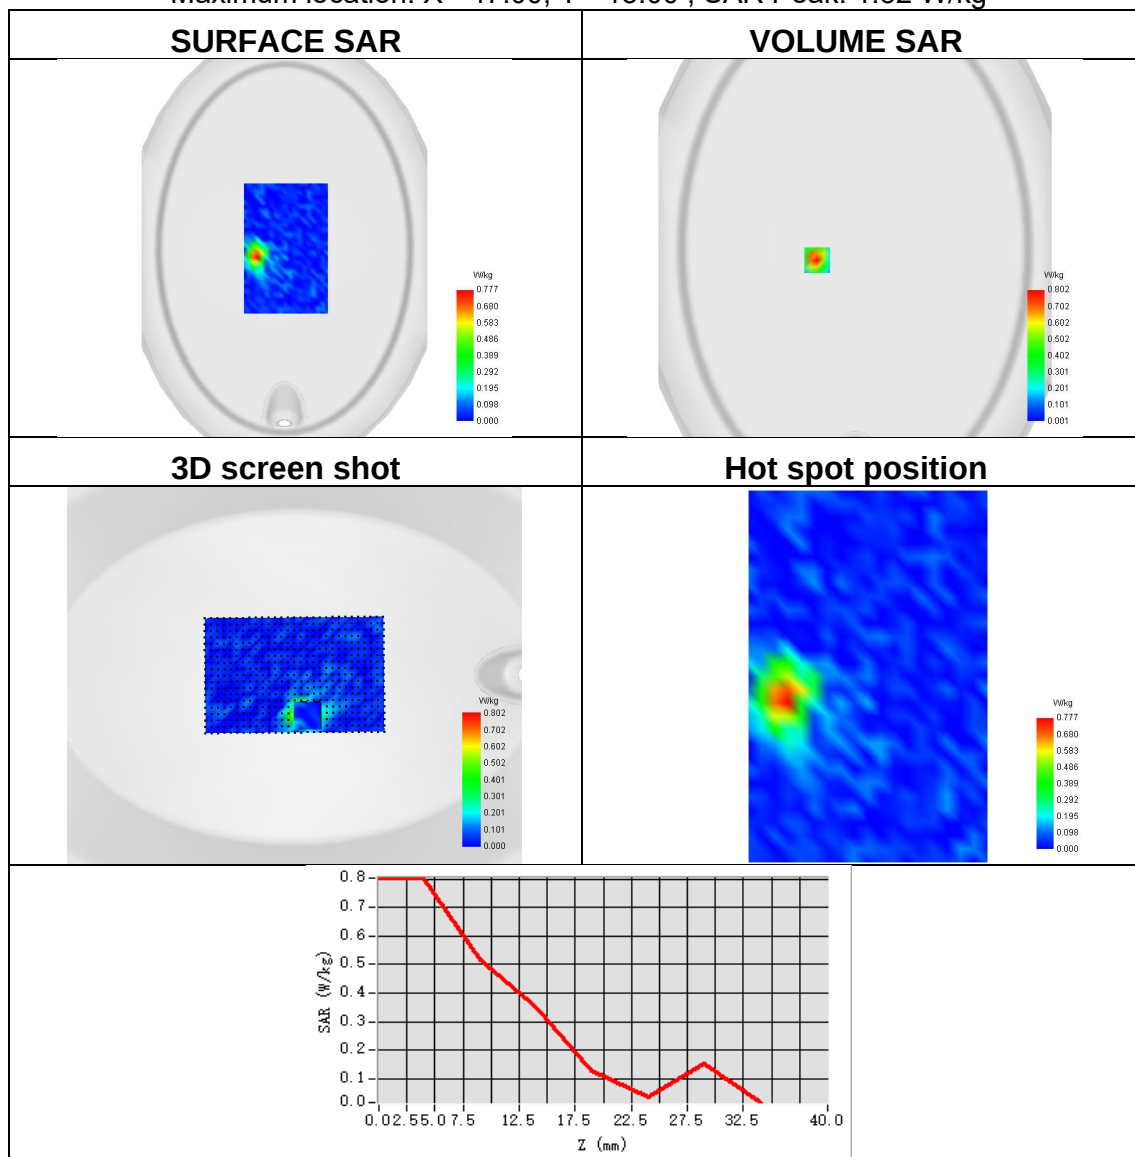




Plot 38:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 71
Signal	LTE FDD
Frequency	673
SAR 10g (W/Kg)	0.351
SAR 1g (W/Kg)	0.672
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-23.00, Y=15.00 ; SAR Peak: 1.08 W/kg

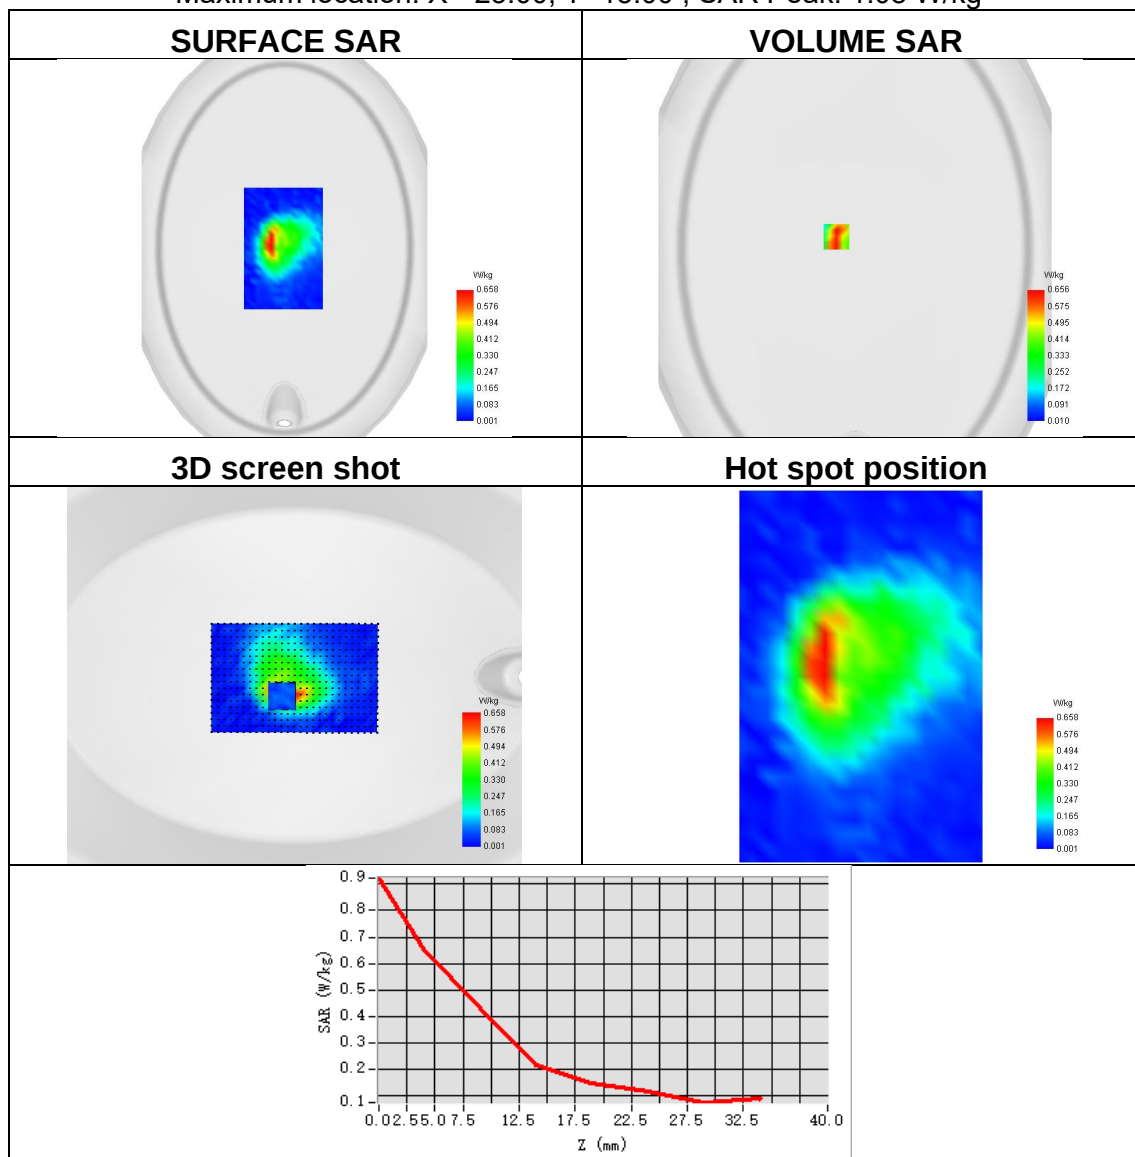




Plot 39:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.260
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=6.00, Y=47.00 ; SAR Peak: 0.50 W/kg

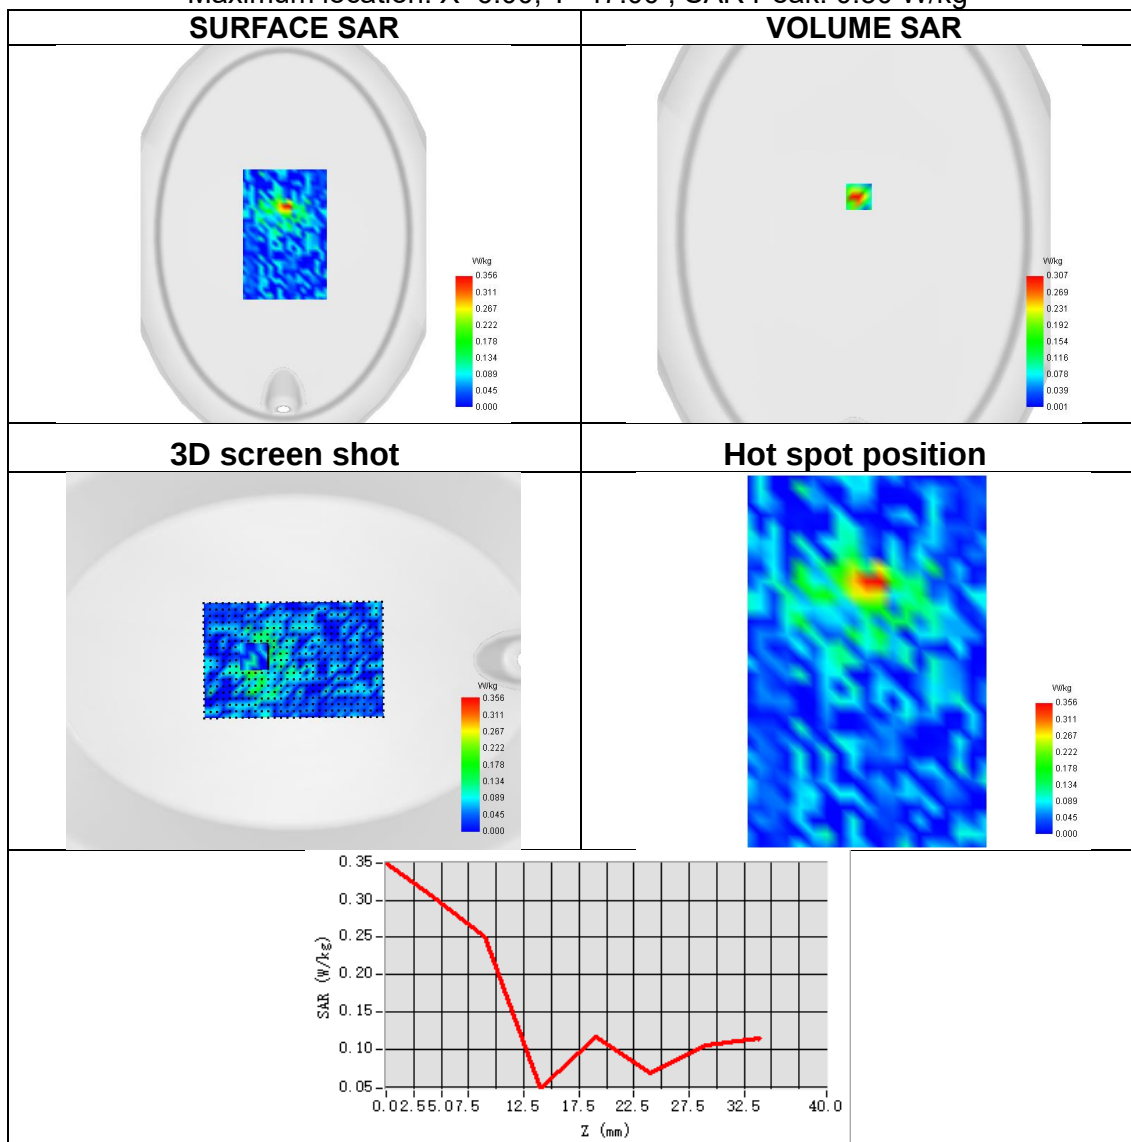




Plot 40:

Test Date	2025-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.310
SAR 1g (W/Kg)	0.579
ConvF	1.72
Relative permittivity	41.32
Conductivity (S/m)	0.92

Maximum location: X=-14.00, Y=8.00 ; SAR Peak: 1.07 W/kg

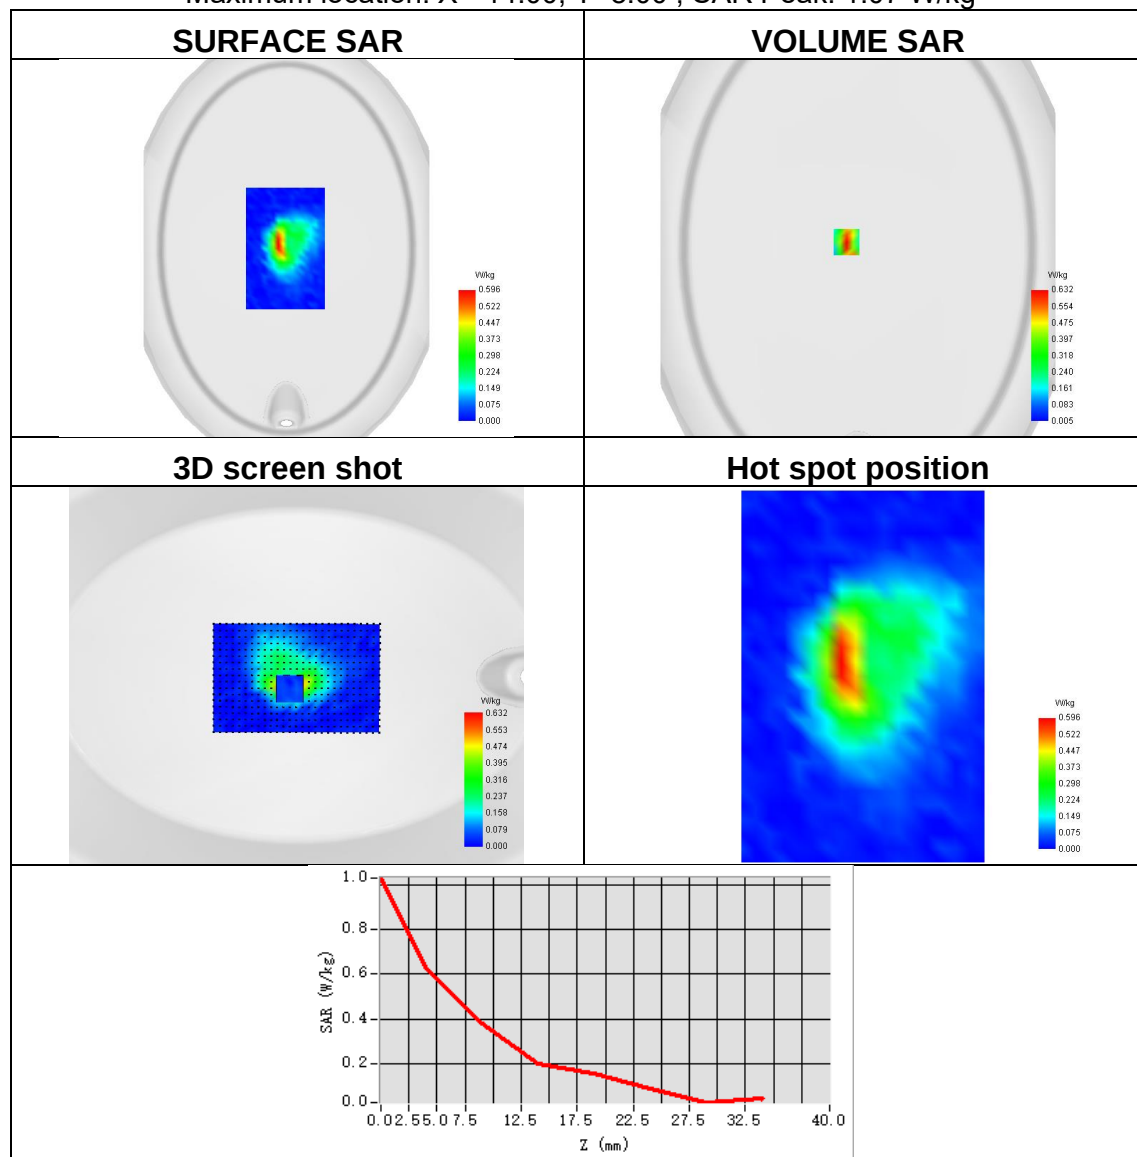




Plot 41:

Test Date	2025-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.310
SAR 1g (W/Kg)	0.672
ConvF	2.33
Relative permittivity	39.70
Conductivity (S/m)	1.77

Maximum location: X=18.00, Y=56.00 ; SAR Peak: 1.41 W/kg

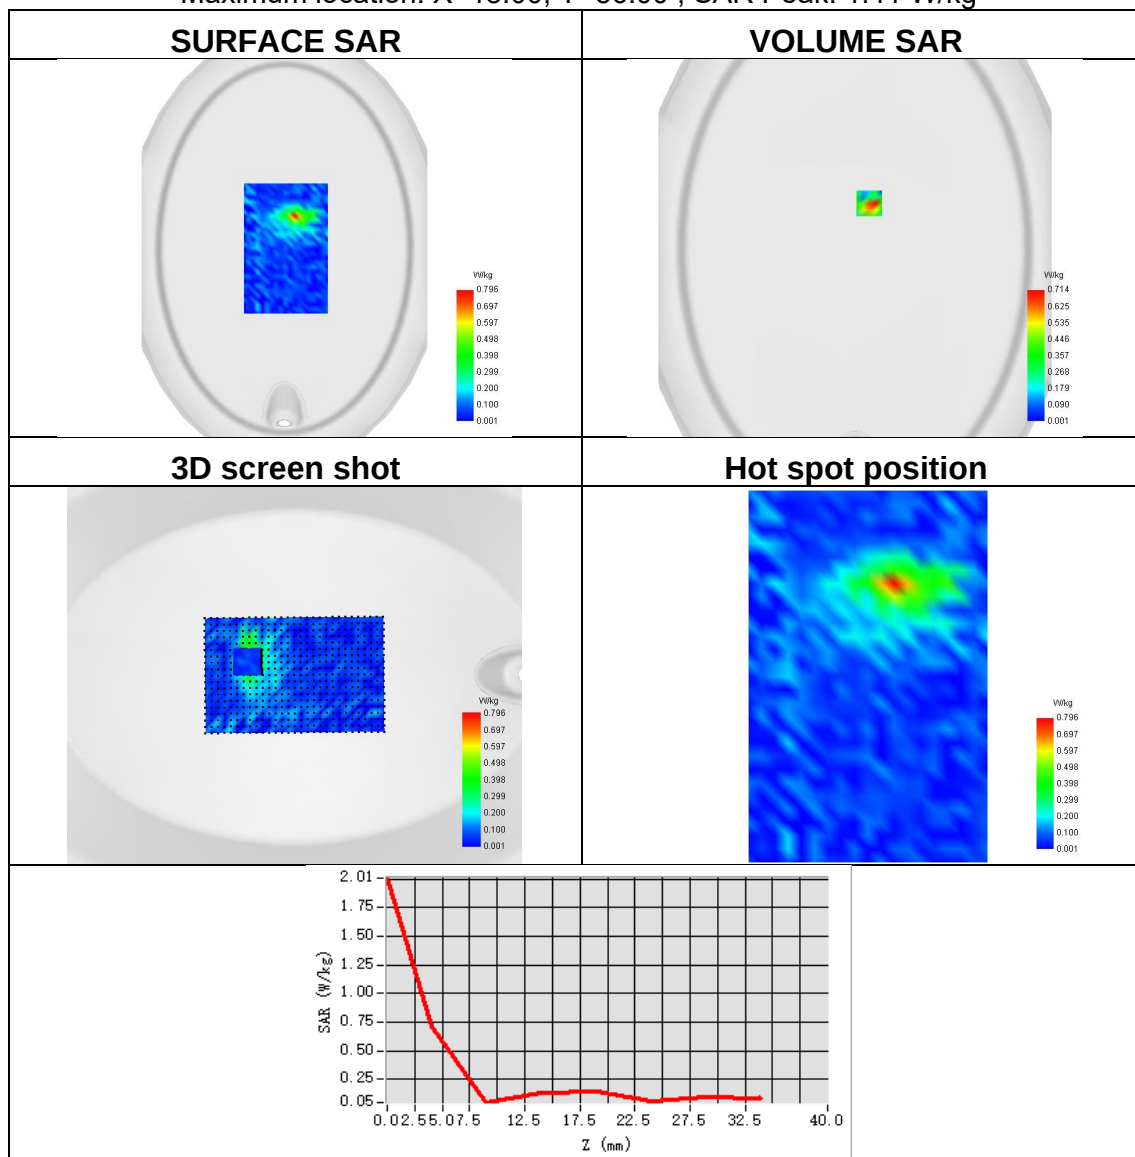




Plot 42:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 12
Signal	NR FDD
Frequency	708.5
SAR 10g (W/Kg)	0.351
SAR 1g (W/Kg)	0.660
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-22.00, Y=1.00 ; SAR Peak: 1.08 W/kg

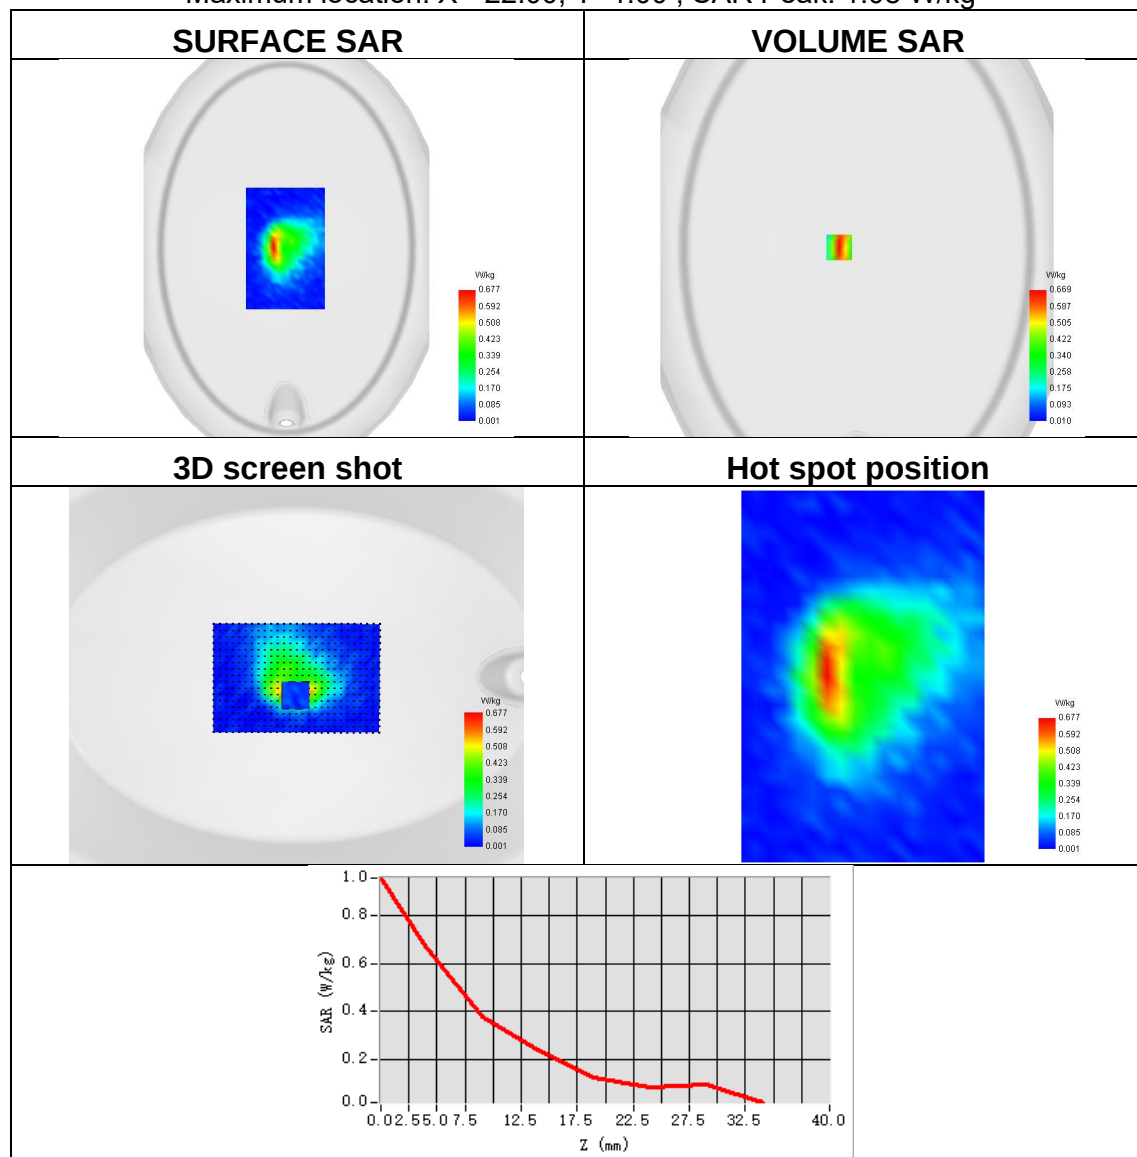




Plot 43:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 13
Signal	NR FDD
Frequency	782
SAR 10g (W/Kg)	0.193
SAR 1g (W/Kg)	0.387
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-30.00, Y=9.00 ; SAR Peak: 0.67 W/kg

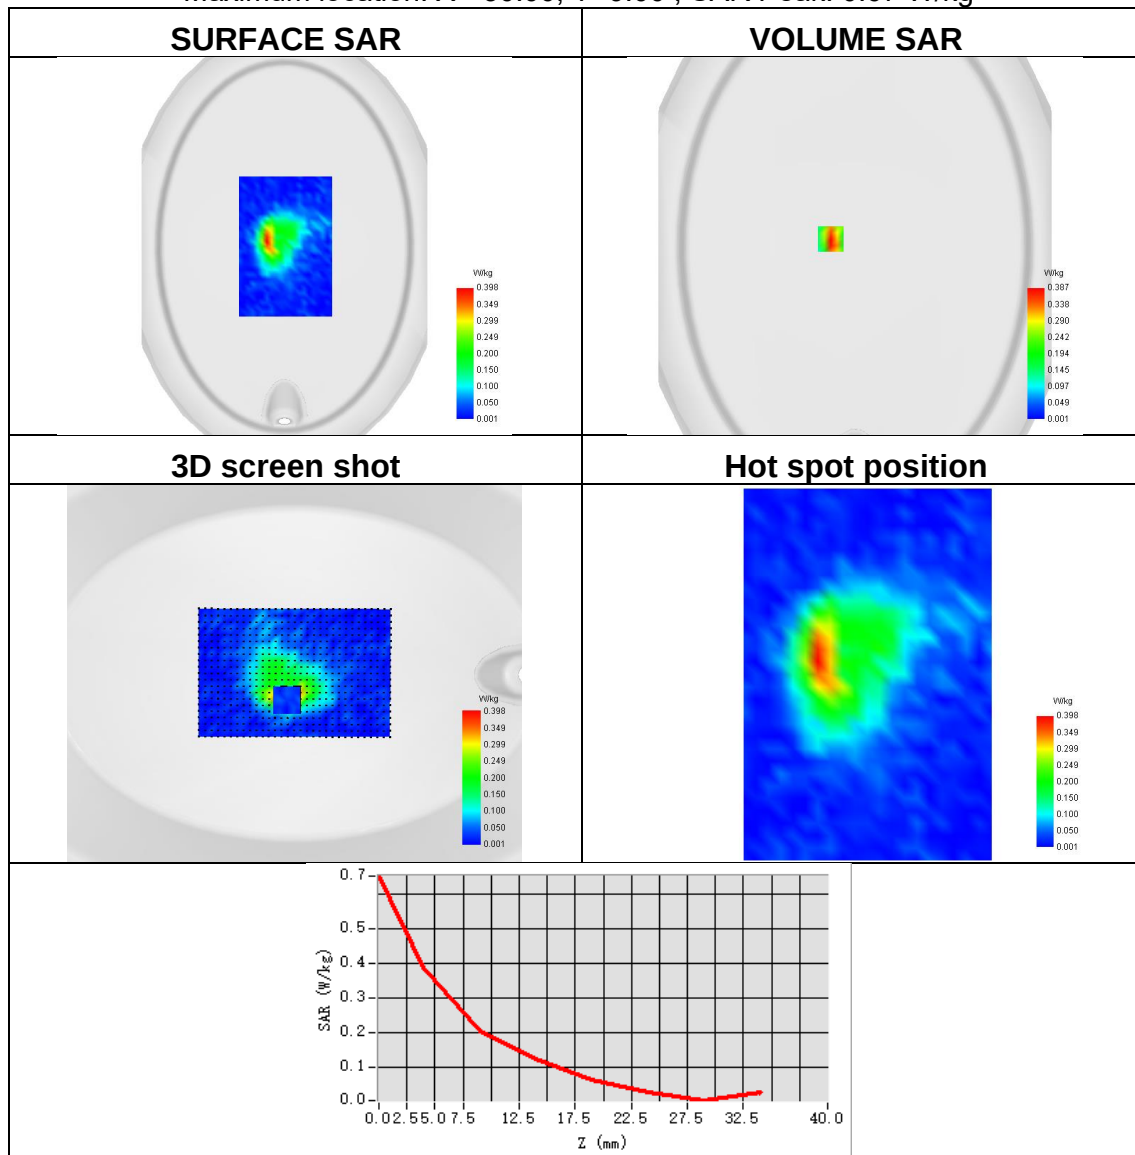




Plot 44:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 25
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.176
SAR 1g (W/Kg)	0.431
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=2.00, Y=71.00 ; SAR Peak: 0.90 W/kg

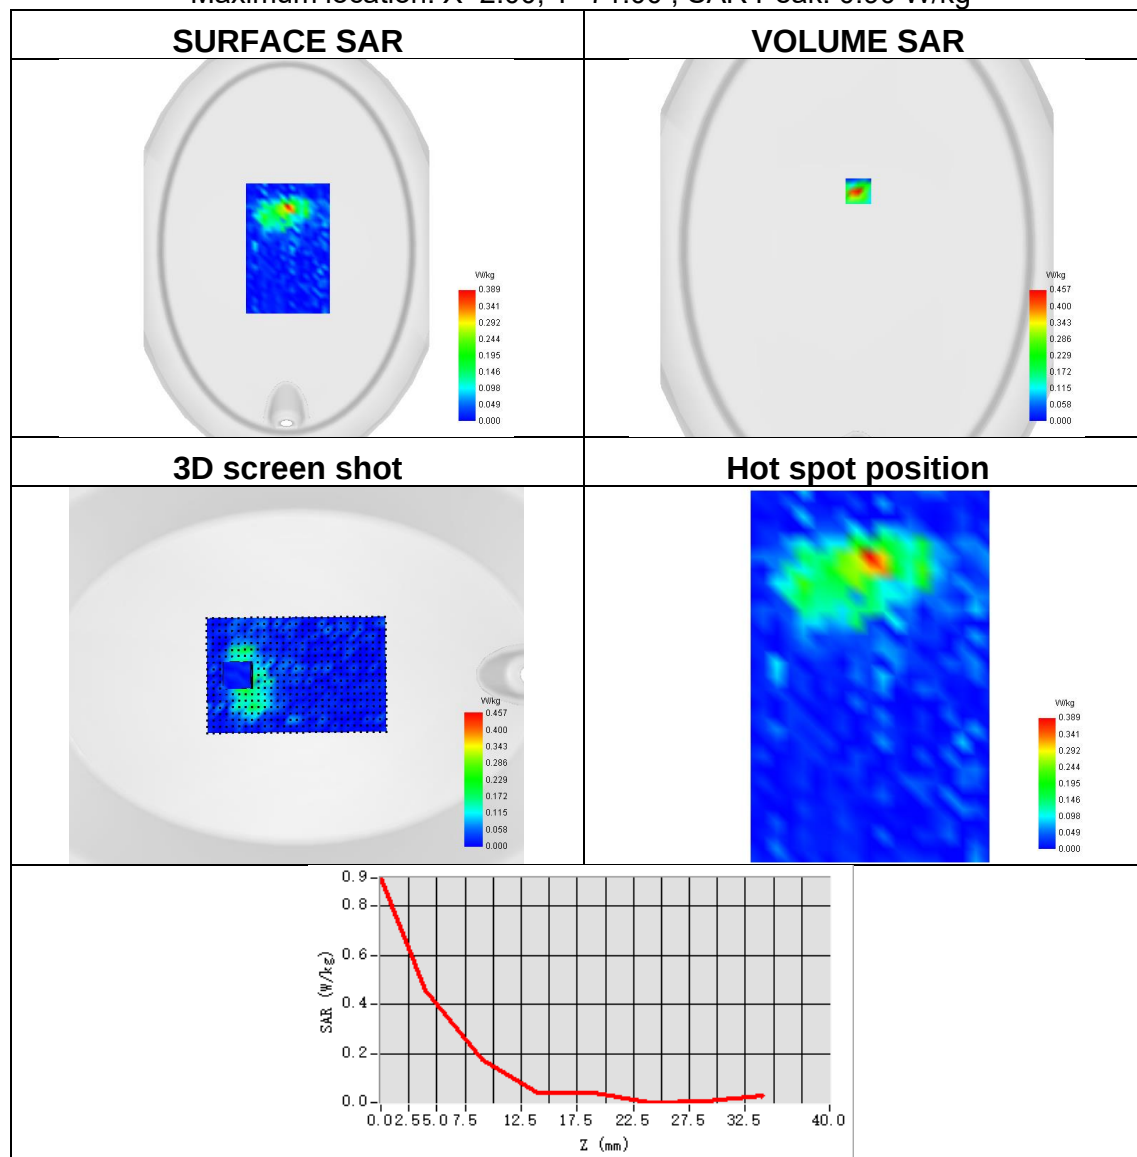




Plot 45:

Test Date	2025-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 26
Signal	NR FDD
Frequency	831.5
SAR 10g (W/Kg)	0.349
SAR 1g (W/Kg)	0.650
ConvF	1.72
Relative permittivity	41.32
Conductivity (S/m)	0.92

Maximum location: X=-22.00, Y=8.00 ; SAR Peak: 1.12 W/kg

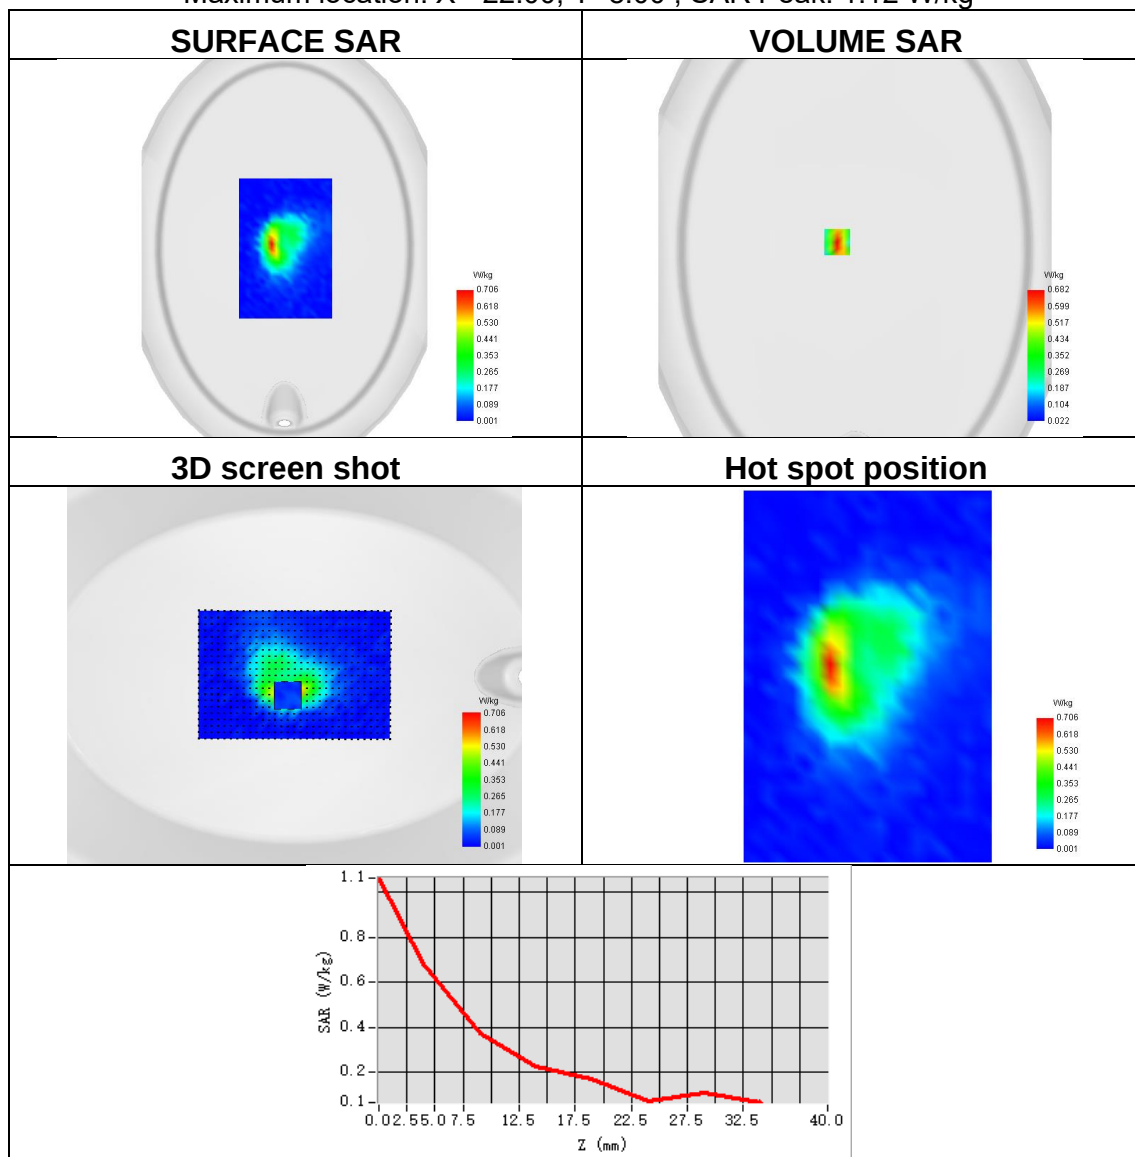




Plot 46:

Test Date	2025-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.150
SAR 1g (W/Kg)	0.401
ConvF	2.37
Relative permittivity	39.63
Conductivity (S/m)	1.97

Maximum location: X=18.00, Y=72.00 ; SAR Peak: 0.92 W/kg

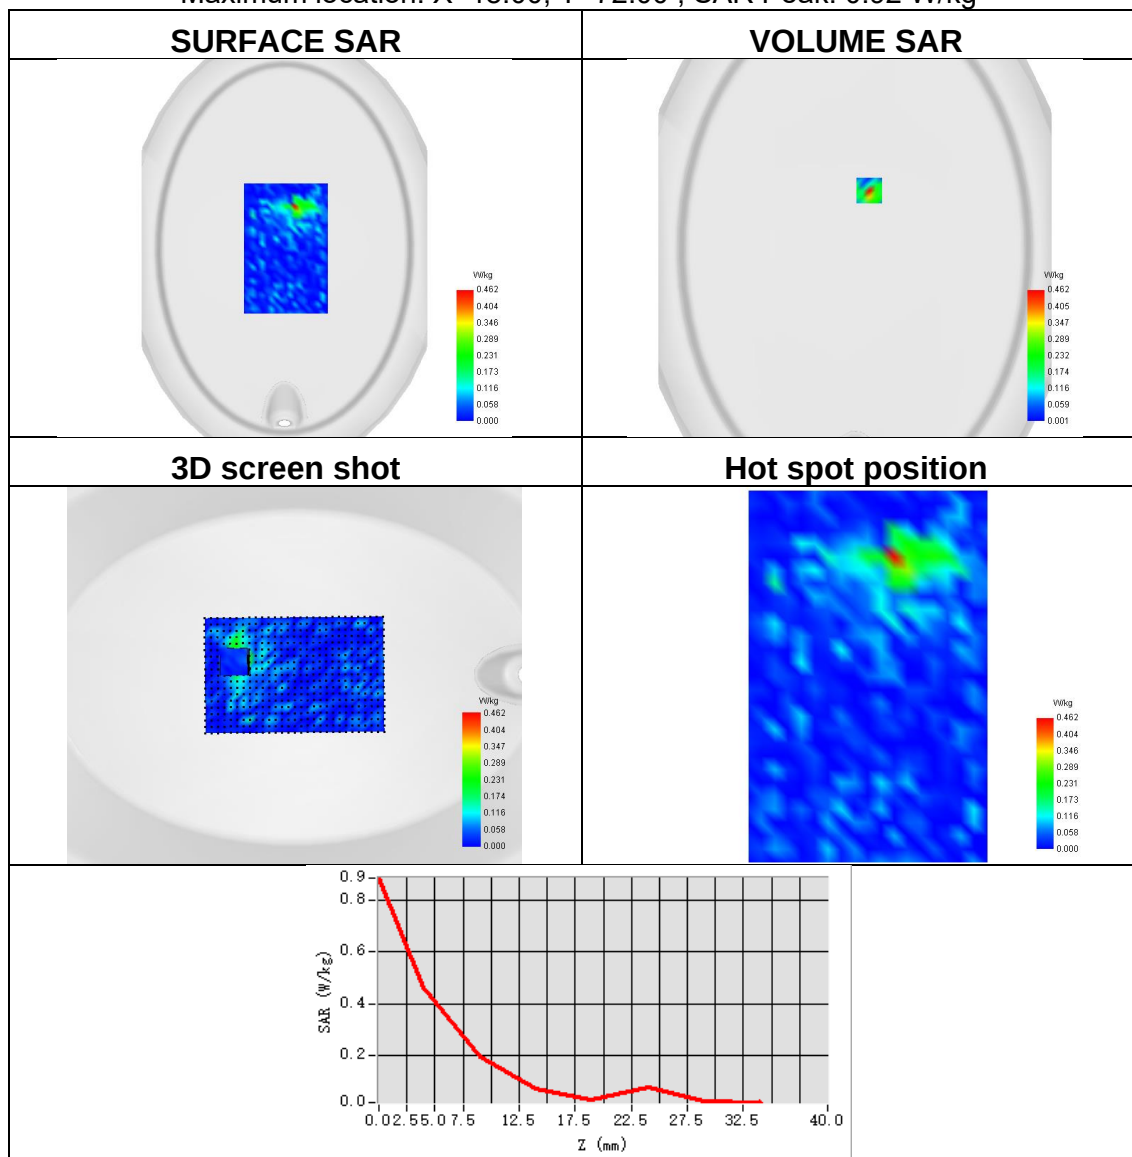




Plot 47:

Test Date	2025-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.123
SAR 1g (W/Kg)	0.335
ConvF	2.37
Relative permittivity	39.63
Conductivity (S/m)	1.97

Maximum location: X=13.00, Y=-11.00 ; SAR Peak: 0.44 W/kg

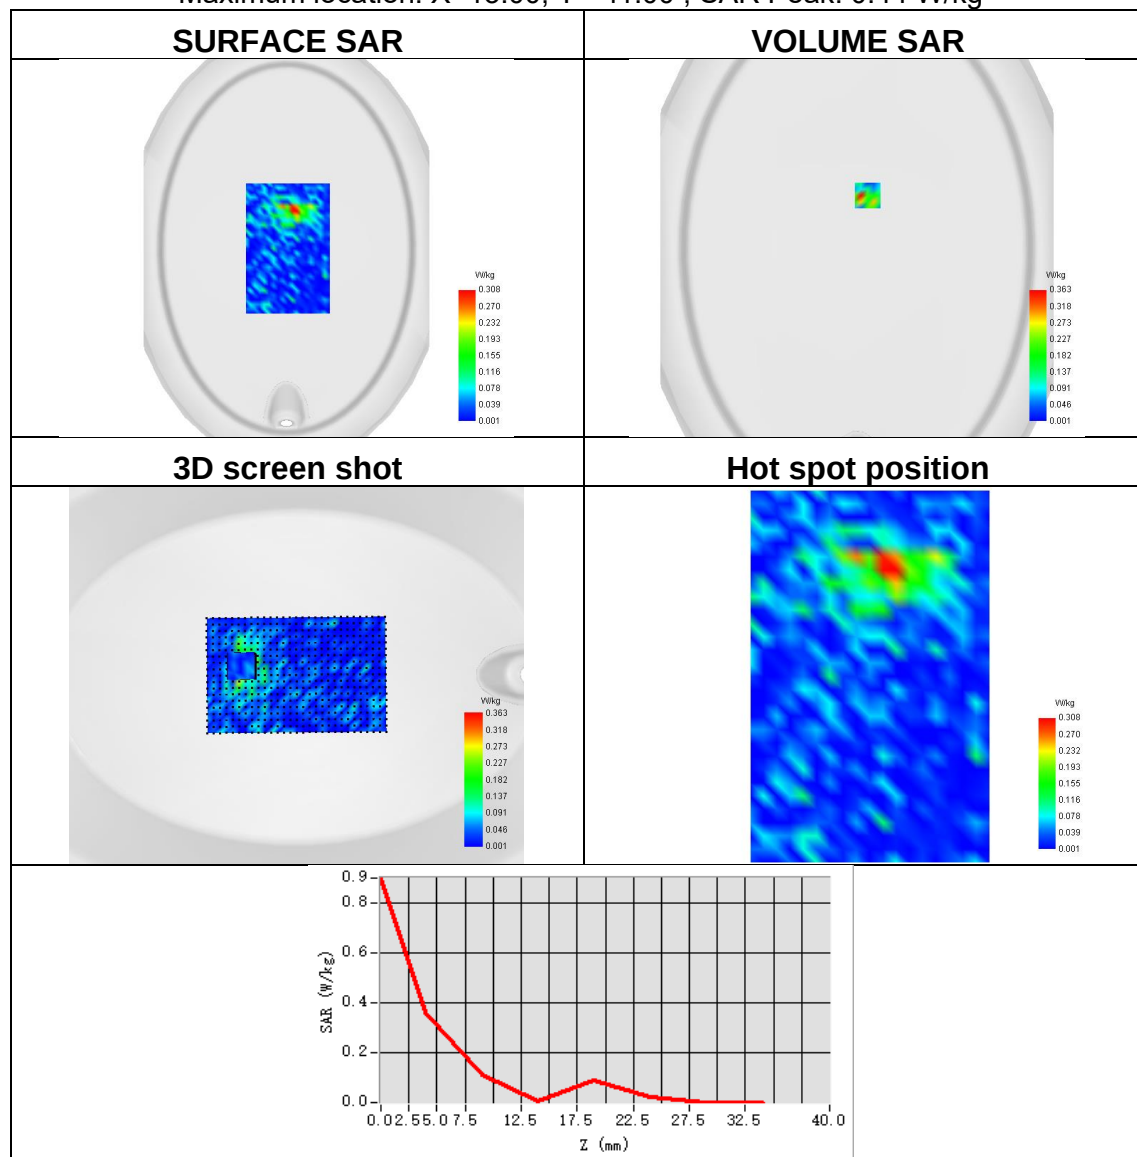




Plot 48:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 66
Signal	NR FDD
Frequency	1760
SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.422
ConvF	1.92
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=10.00, Y=88.00 ; SAR Peak: 0.87 W/kg

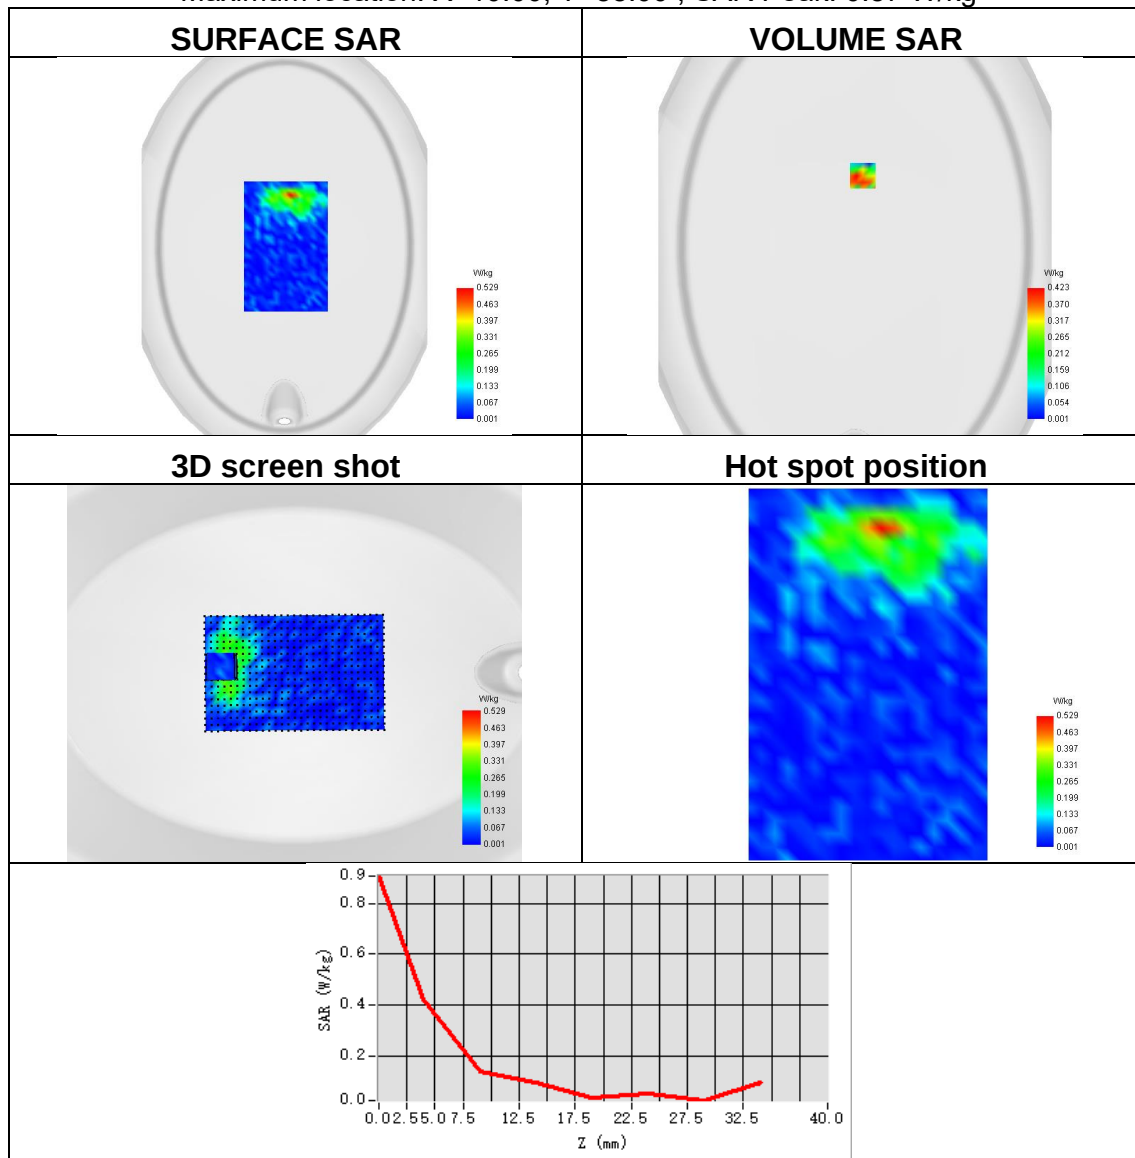




Plot 49:

Test Date	2025-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 71
Signal	NR FDD
Frequency	673
SAR 10g (W/Kg)	0.246
SAR 1g (W/Kg)	0.590
ConvF	1.67
Relative permittivity	42.15
Conductivity (S/m)	0.88

Maximum location: X=-52.00, Y=-15.00 ; SAR Peak: 1.08 W/kg

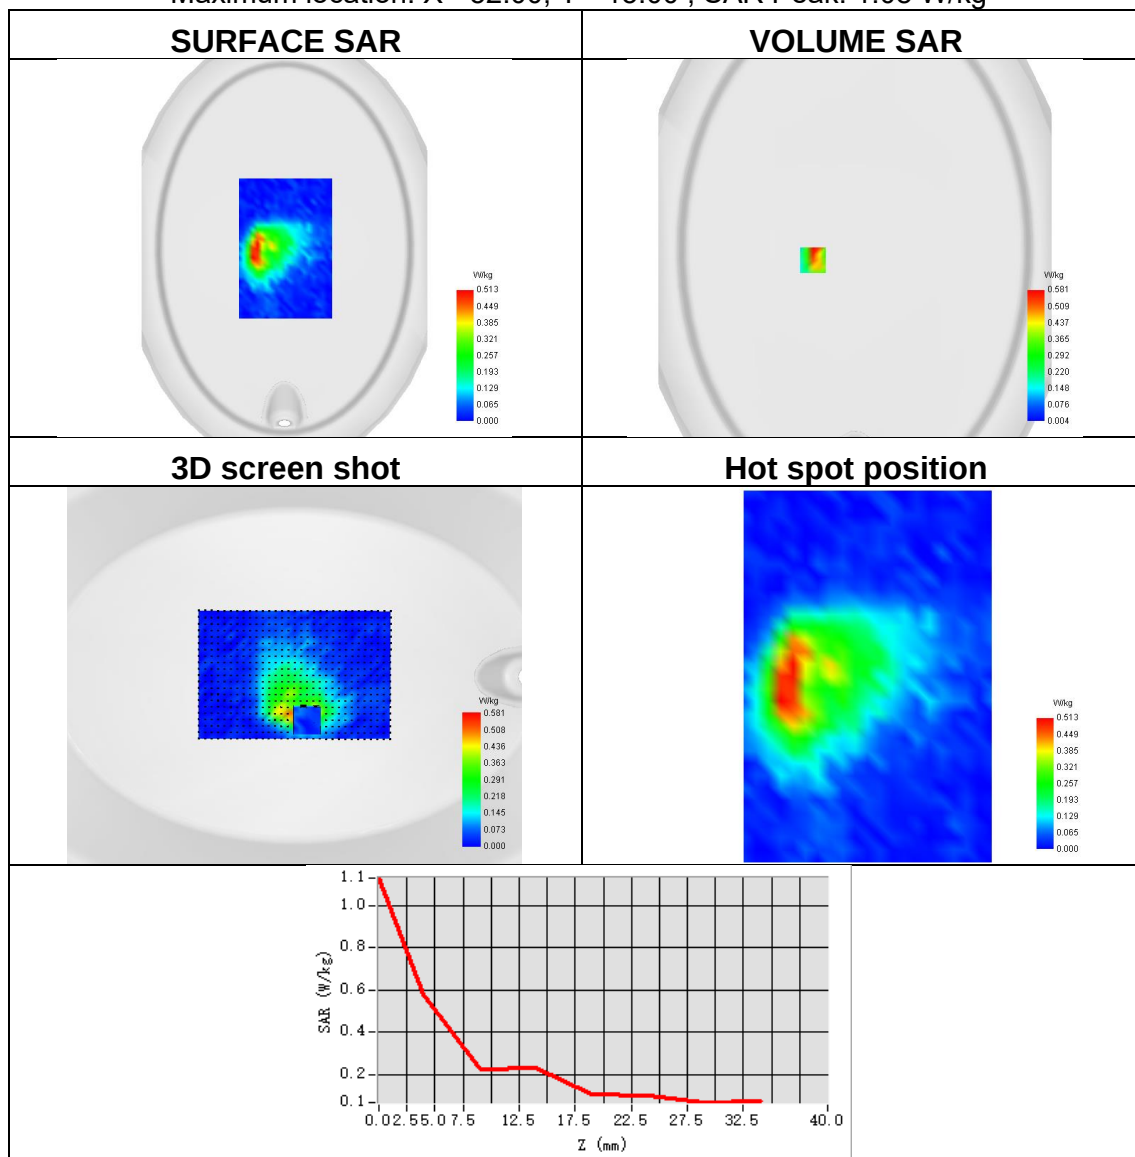




Plot 50:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.457
ConvF	1.81
Relative permittivity	38.14
Conductivity (S/m)	3.10

Maximum location: X=58.00, Y=64.00 ; SAR Peak: 1.37 W/kg

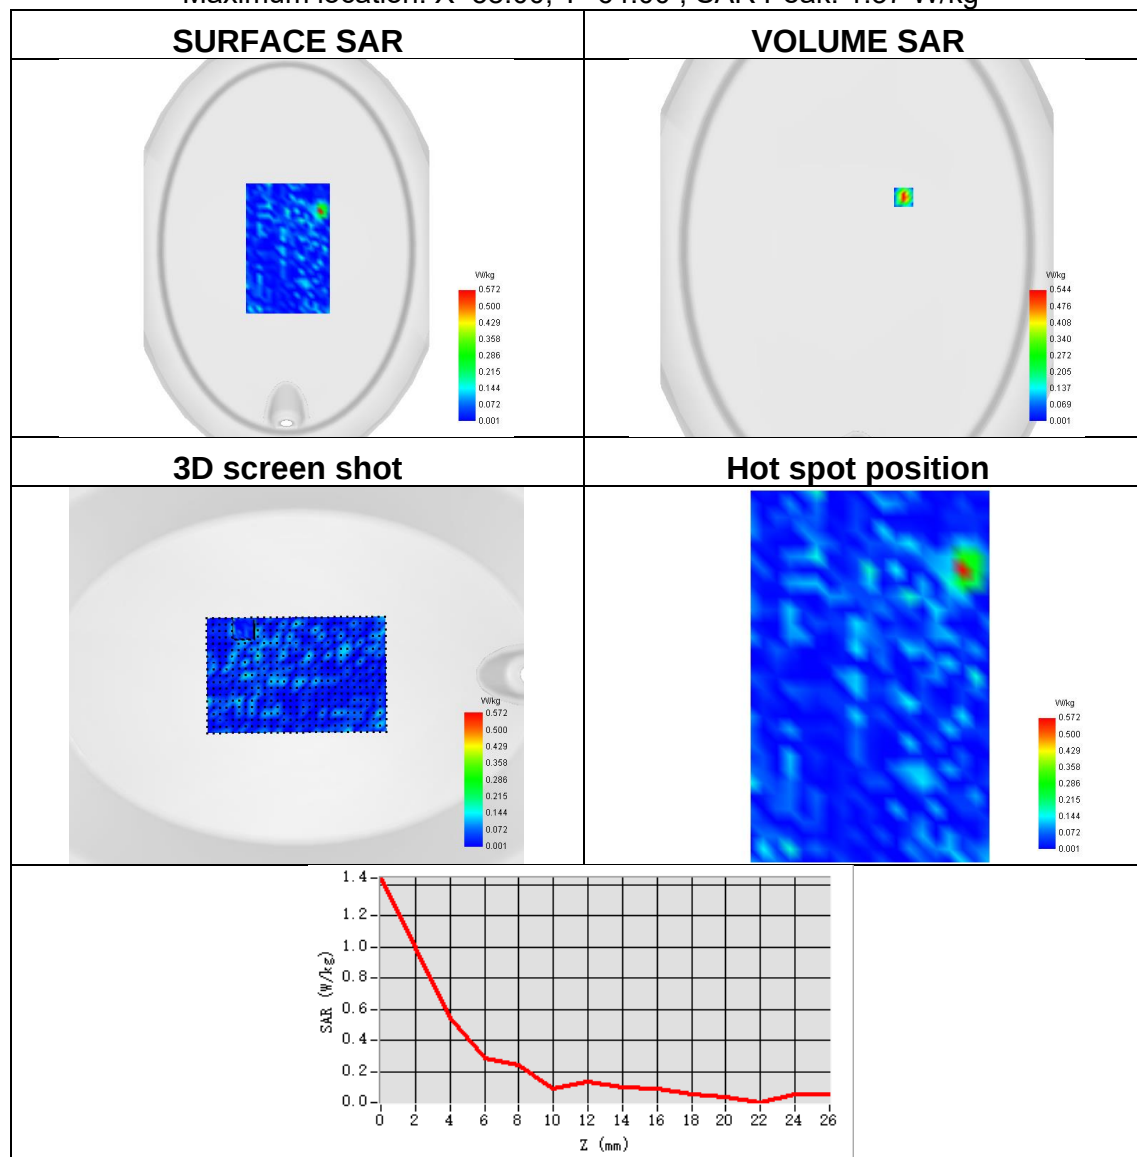




Plot 51:

Test Date	2025-04-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.245
SAR 1g (W/Kg)	0.570
ConvF	1.81
Relative permittivity	38.14
Conductivity (S/m)	3.10

Maximum location: X=34.00, Y=37.00 ; SAR Peak: 2.74 W/kg

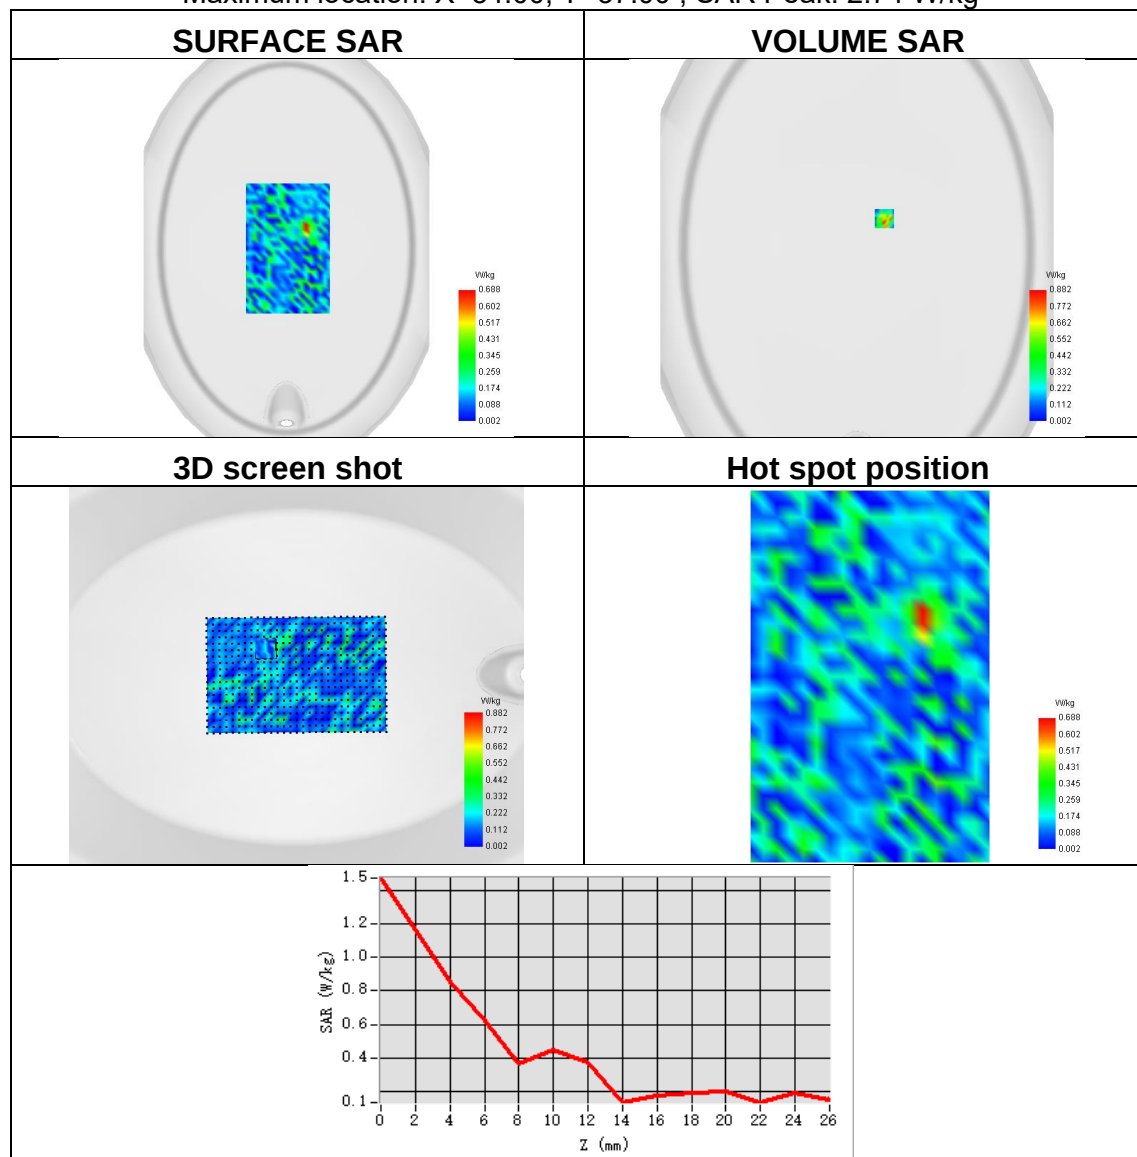



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※