



RF TEST REPORT

Report No.: SET2021-16819

Product Name: Fixed Android UHF Reader

Model No.: URA4

FCC ID: 2AC6AURA4

Applicant: Shenzhen Chainway Information Technology Co., Ltd.

Address: 9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China.

Dates of Testing: 02/04/2021 - 12/14/2021

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District Shenzhen, Guangdong 518055, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 36 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approval. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Test Report

Product Name.....: Fixed Android UHF Reader

Brand Name.....: CHAINWAY

Trade Name.....: CHAINWAY

Applicant.....: Shenzhen Chainway Information Technology Co., Ltd.

Applicant Address.....: 9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China.

Manufacturer.....: Shenzhen Chainway Information Technology Co., Ltd.

Manufacturer Address.....: 9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China.

Test Standards.....: 47 CFR Part 15 Subpart C

ANSI C63.10:2013

Test Result.....: PASS

Tested by



2021.12.17

Sun, Test Engineer


Reviewed by



2021.12.17

Chris You, Senior Engineer

Approved by



2021.12.17

Shuangwen Zhang, Manager

Table of contents

RF TEST REPORT.....	1
TABLE OF CONTENTS.....	3
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Test Standards and Results.....	5
1.3. Description of Test Mode.....	6
1.4. Facilities and Accreditations.....	7
2. 47 CFR PART 15C REQUIREMENTS.....	8
2.1. Antenna requirement.....	8
2.2. Number of Hopping Frequency.....	9
2.3. Peak Output Power.....	11
2.4. 20dB Bandwidth.....	13
2.5. Carried Frequency Separation.....	15
2.6. Dwell time.....	18
2.7. Conducted Spurious Emissions.....	20
2.8. Conducted Band Edge.....	22
2.9. AC Power Line Conducted Emission.....	24
2.10. Radiated Band Edges and Spurious Emission.....	28
3. LIST OF MEASURING EQUIPMENT.....	35
4. UNCERTAINTY OF EVALUATION.....	36

Change History		
Issue	Date	Reason for change
1.0	2021.12.17	First edition

1. General Information

1.1. EUT Description

EUT Type	Fixed Android UHF Reader
Model No.	URA4
Frequency Range	902MHz~928MHz
Operating Range	902.75MHz~927.25MHz
Number of channel	50
Modulation Type	DSB-ASK
Antenna Type	Circular polarized directional Antenna
Maximum Antenna Gain	9dBi
Power Supply	DC 12V

Note: The device have 4 antenna Port, they can not transmit at the same time. We found that ANT1 is the worst case, we only provide the worst case data.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Radio Frequency Devices
2	ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Standard(s) Section	Description	Result
	FCC		
1	15.203	Antenna Requirement	PASS
2	15.247(a)(1)(i)	Number of Hopping Frequency	PASS
3	15.247(b)(2)	Peak Output Power	PASS
4	15.247(a)(1)(i)	20dB Bandwidth	PASS
5	15.247(a)(1)	Carrier Frequency Separation	PASS
6	15.247(a)(1)(i)	Time of Occupancy (Dwell time)	PASS
7	15.247(d)	Conducted Spurious Emission	PASS
8	15.247(d)	Conducted Band Edge	PASS
9	15.207	AC Power Line Conducted Emission	PASS
10	15.205 15.209 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v05r02.

1.3. Description of Test Mode

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	902.75	26	915.25
2	903.25	27	915.75
3	903.75	28	916.25
4	904.25	29	916.75
5	904.75	30	917.25
6	905.25	31	917.75
7	905.75	32	918.25
8	906.25	33	918.75
9	906.75	34	919.25
10	907.25	35	919.75
11	907.75	36	920.25
12	908.25	37	920.75
13	908.75	38	921.25
14	909.25	39	921.75
15	909.75	40	922.25
16	910.25	41	922.75
17	910.75	42	923.25
18	911.25	43	923.75
19	911.75	44	924.25
20	912.25	45	924.75
21	912.75	46	925.25
22	913.25	47	925.75
23	913.75	48	926.25
24	914.25	49	926.75
25	914.75	50	927.25

Note: Select channel 1, 26 and 50 as test channels

1.4. Facilities and Accreditations

1.4.1. Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CAB identifier: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun. 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna General Information:

No.	EUT	Ant. Type	Operating frequency range	Ant. Gain(dBi)
1	Fixed Android UHF Reader	Circular polarized directional Antenna	902.75-927.25MHz	ANT1: 9dBi

2.1.3. Result: comply

The EUT has four unique antenna connector (TNC-KF connector). Please refer to the EUT internal photos.

2.2. Number of Hopping Frequency


2.2.1. Limit of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

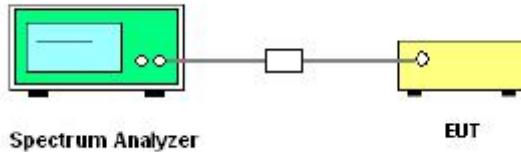


2.2.4. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 7.8.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; Set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. $VBW \geq RBW$, Trace = max hold Sweep=auto, Detector function=peak.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

2.2.5. Test Results of Number of Hopping Frequency

Frequency (MHz)	Measured Channel Numbers	Min. Limit	Verdict
902 - 928	50	50	PASS

2.2.6. Test Results (plots) of Number of Hopping Frequency

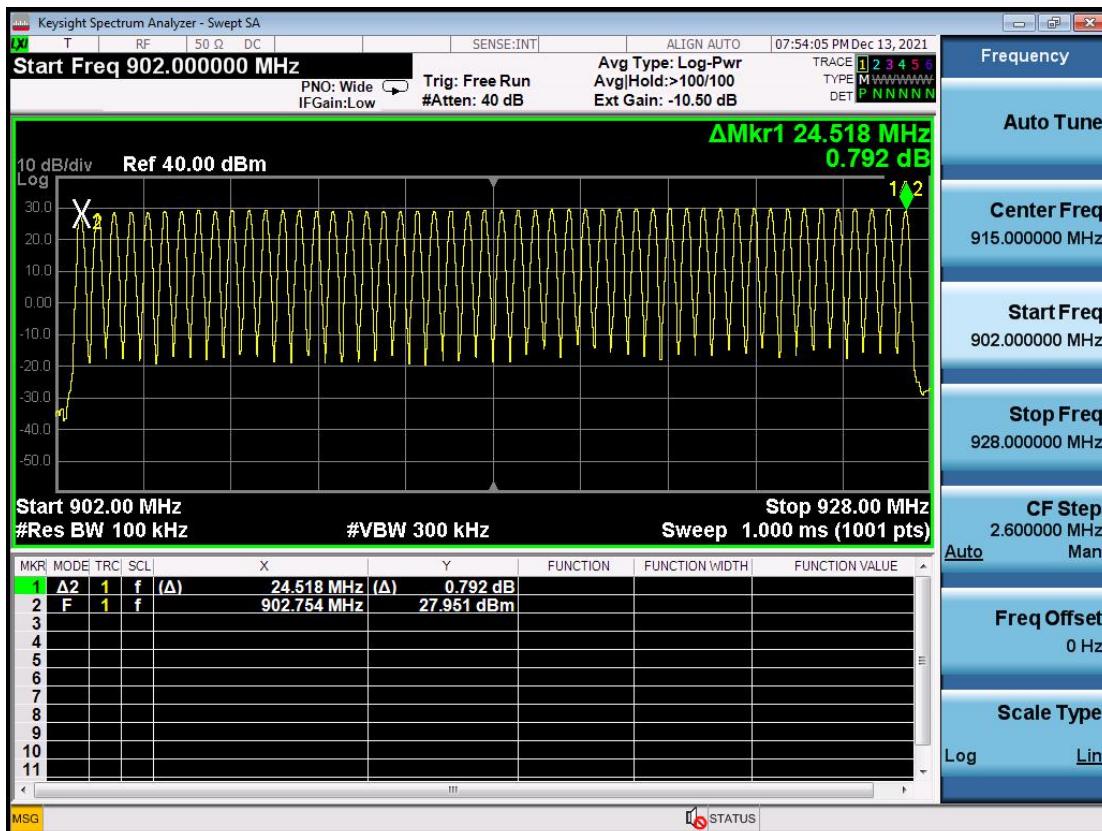

2.3. Peak Output Power


2.3.1. Limit of Peak Output Power

Section 15.247 (b)(2) For frequency hopping systems operating in the 902~928MHz band:1watt for systems employing at least 50 hopping channels.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

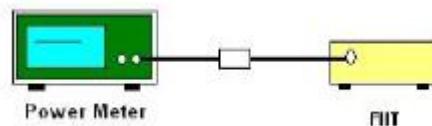

2.3.4. Test Procedures

1. The testing follows ANSI C63.10-2013 Clause 7.8.5
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.


2.3.5. Test Result of Output Power

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limit (dBm)	Verdict
1	902.75	22.919	27	PASS
26	915.25	24.095		PASS
50	927.25	24.863		PASS

Note:

According to KDB 558074 D01 v05r02, when the power limit shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2.3.6. Test Result (plots) of Output Power

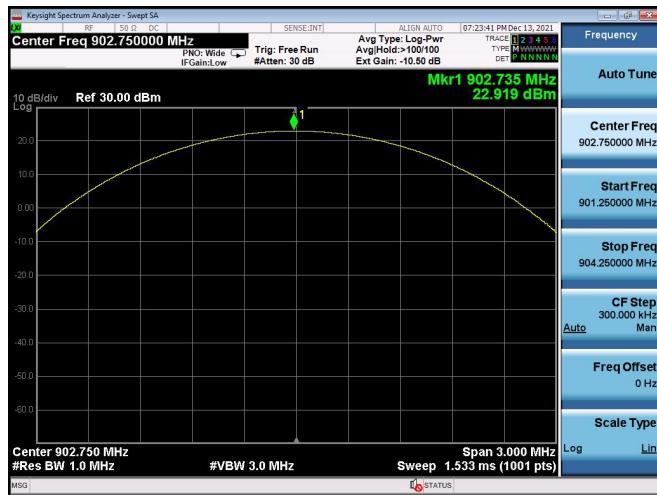

Low channel



Mid channel



High channel

2.4. 20dB Bandwidth


2.4.1. Definition

According to FCC §15.247(a)(1)(i), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 * \log_{10} 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

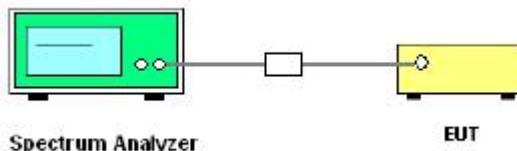

2.4.4. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 6.9.2
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 5 times the OBW, centered on a hopping channel;

RBW $\geq 1\%$ to 5% of the OBW; VBW shall be approximately three times RBW; Sweep = auto; Detector function = peak; Trace = max hold.

5. Measure and record the results in the test report.

2.4.5. Test Results of 20dB Bandwidth

Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Verdict
1	902.75	50.52	$\leq 250\text{ kHz}$	PASS
26	915.25	50.37		PASS
50	927.25	50.38		PASS

2.4.6. Test Results (plots) of Bandwidth



Low channel



Mid channel



High channel

2.5. Carried Frequency Separation


2.5.1. Limit of Carried Frequency Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

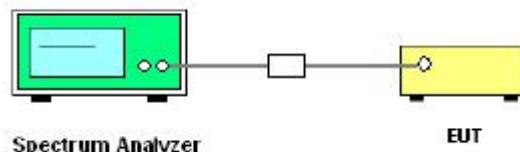

2.5.4. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 7.8.2.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Enable the EUT hopping function.

5. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels; RBW: Start with the RBW set to approximately 30% of the channel spacing;


$VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.

6. Measure and record the results in the test report.

2.5.5. Test Results of Carried Frequency Separation

Channel	Frequency (MHz)	Frequency Separation(kHz)	(20dB BW) Limits (kHz)	Verdict
1	902.75	500	50.52	PASS
26	915.25	500	50.37	PASS
50	927.25	500	50.38	PASS


2.5.6. Test Results (plots) of Carried Frequency Separation

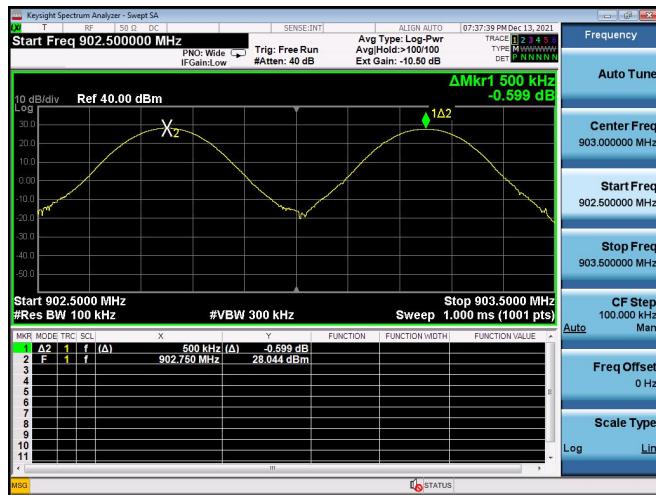

Low channel



Mid channel

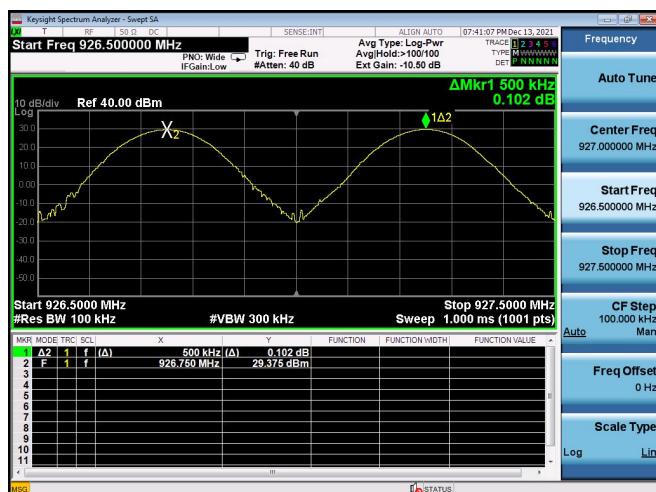

High channel

2.6. Dwell time


2.6.1. Limit of Dwell Time

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

2.6.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup

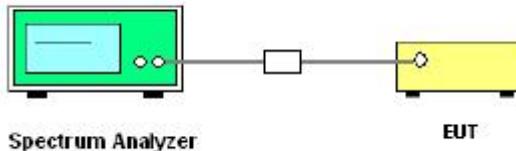

2.6.4. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

2.6.5. Test Results of Dwell Time

Frequency (MHz)	Pulse Time (ms)	20 second period (number)	Dwell Time (ms)	Limit (ms)	Verdict
915.25	20.45	1	20.45	400	PASS


Note:

Calculation Formula: Dwell time = Pulse Time * Hopping numbers

2.6.6. Test Results (plots) of Dwell Time



Mid channel 20s

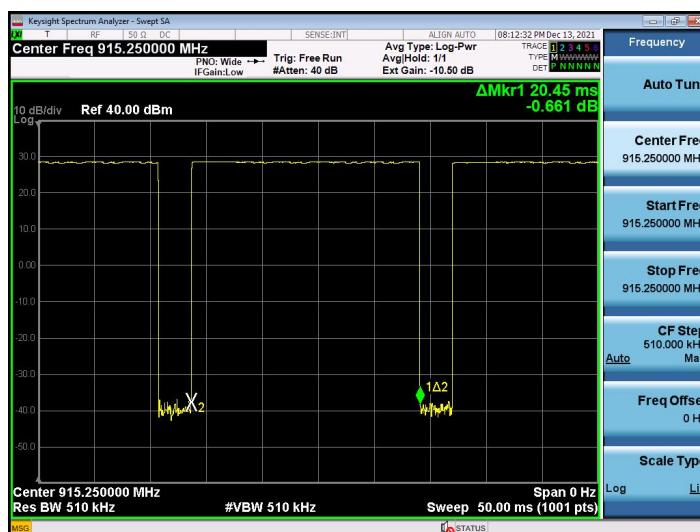

Mid channel 50ms

2.7. Conducted Spurious Emissions


2.7.1. Limit of Spurious Emission

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


2.7.3. Test Setup

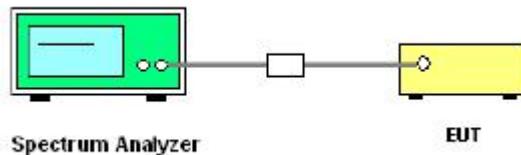


2.7.4. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


2.7.5. Test Results of Conducted Spurious Emissions

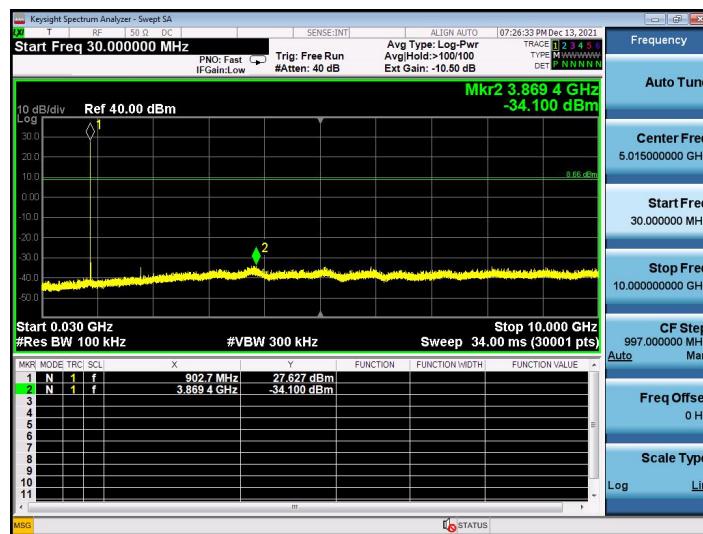

Low channel

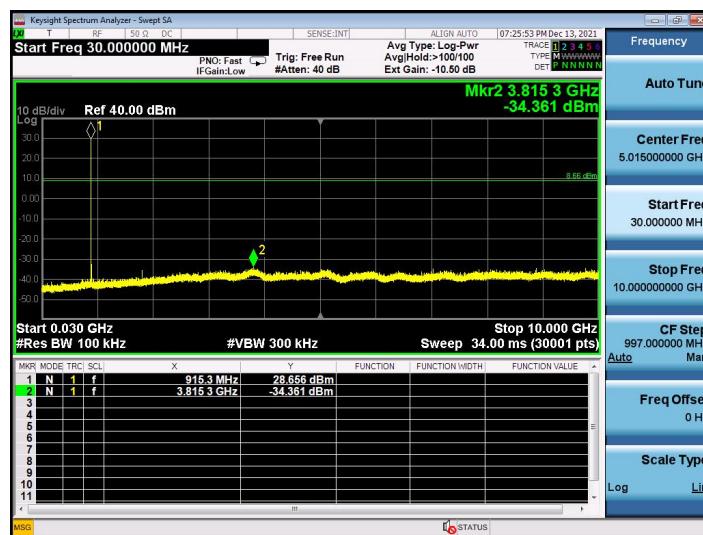

Mid channel

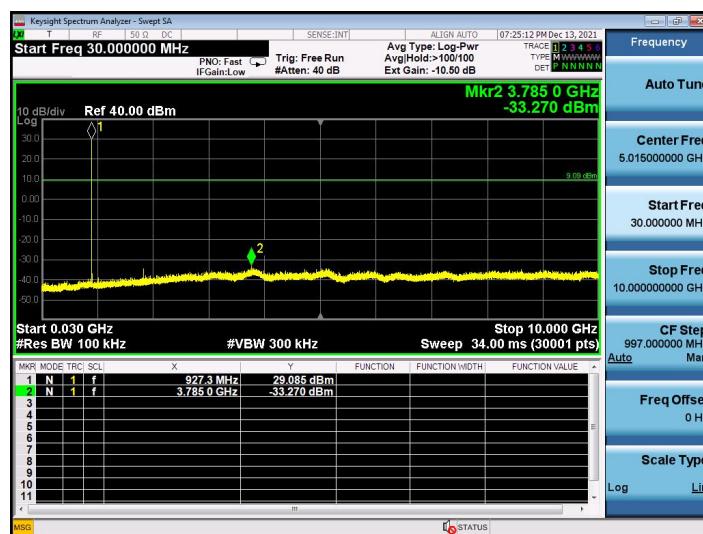

High channel

2.8. Conducted Band Edge


2.8.1. Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

2.8.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


2.8.3. Test Setup

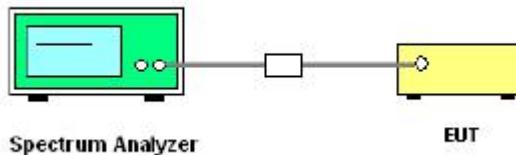


2.8.1. Test Procedure

1. The testing follows ANSI C63.10-2013 Clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=5MHz), VBW = 300kHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


2.8.2. Test Results of Conducted Band Edge

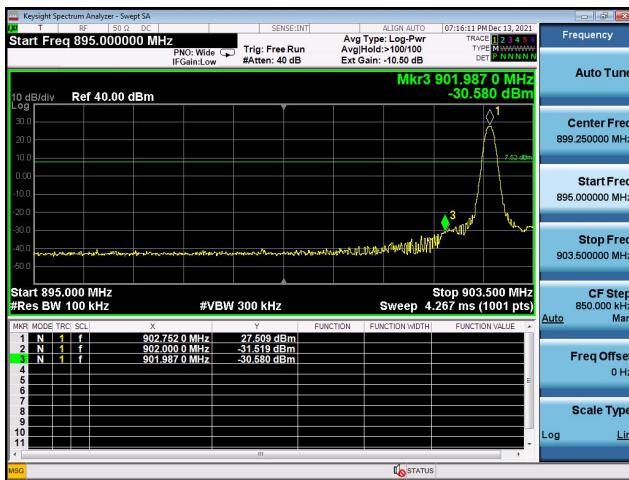

Low channel No-hopping mode

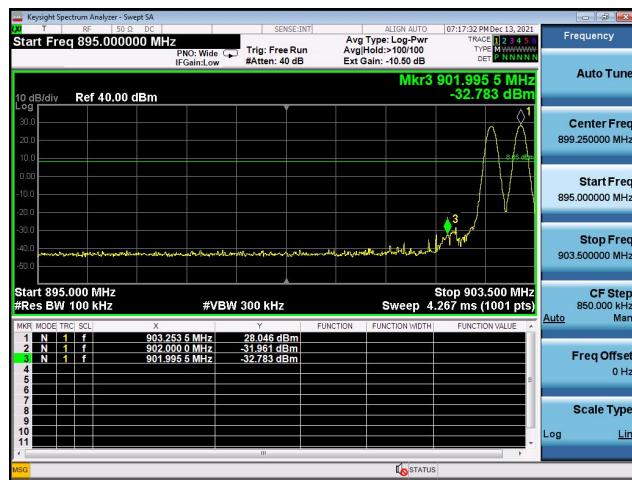

Low channel Hopping mode

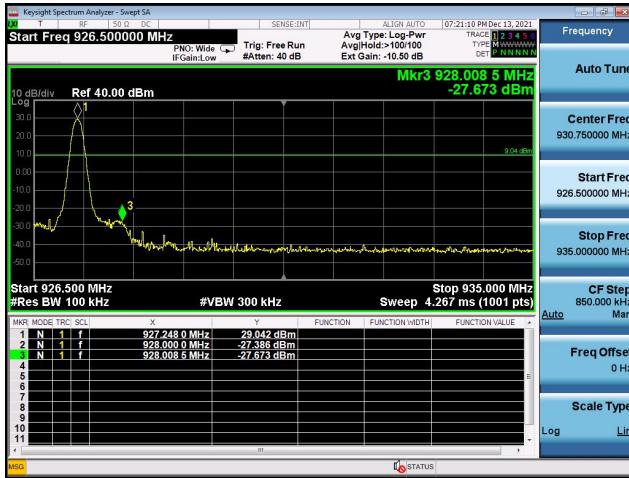

High channel No-hopping mode



High channel Hopping mode

2.9. AC Power Line Conducted Emission

2.9.1. Limit of AC Power Line Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

2.9.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


2.9.3. Test Setup

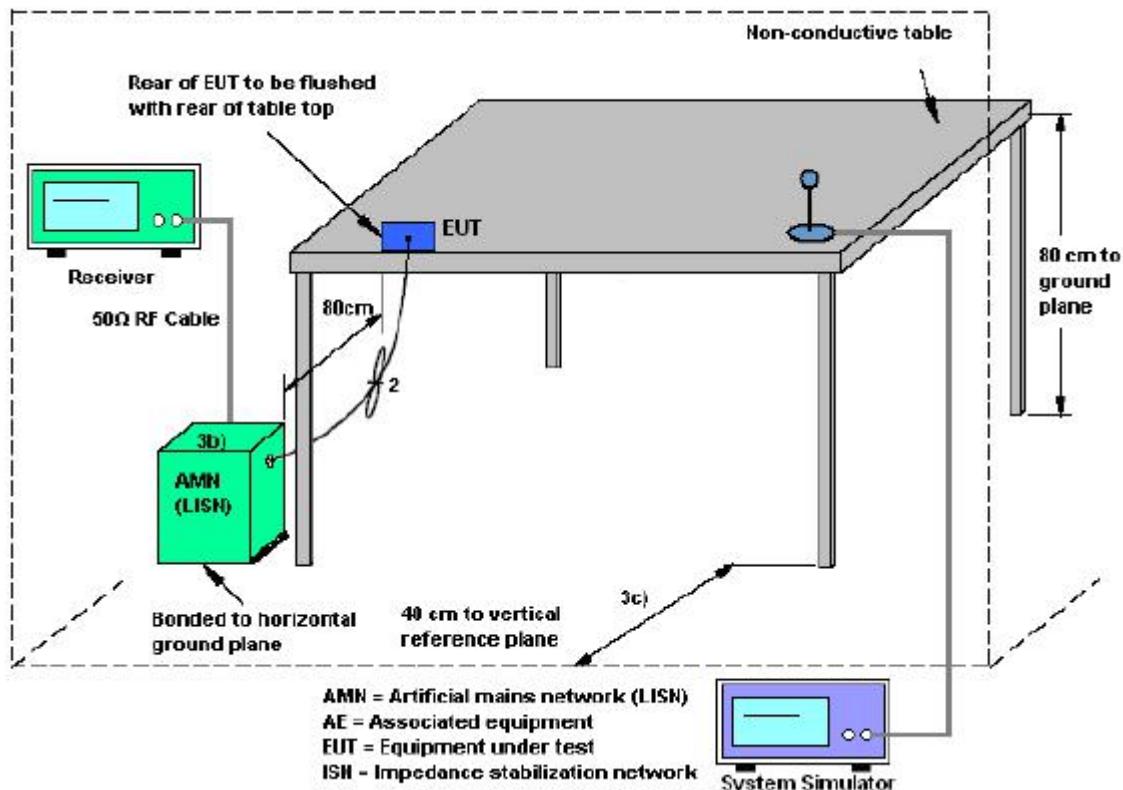

2.9.4. Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.9.3. Test Results of Conducted Emission

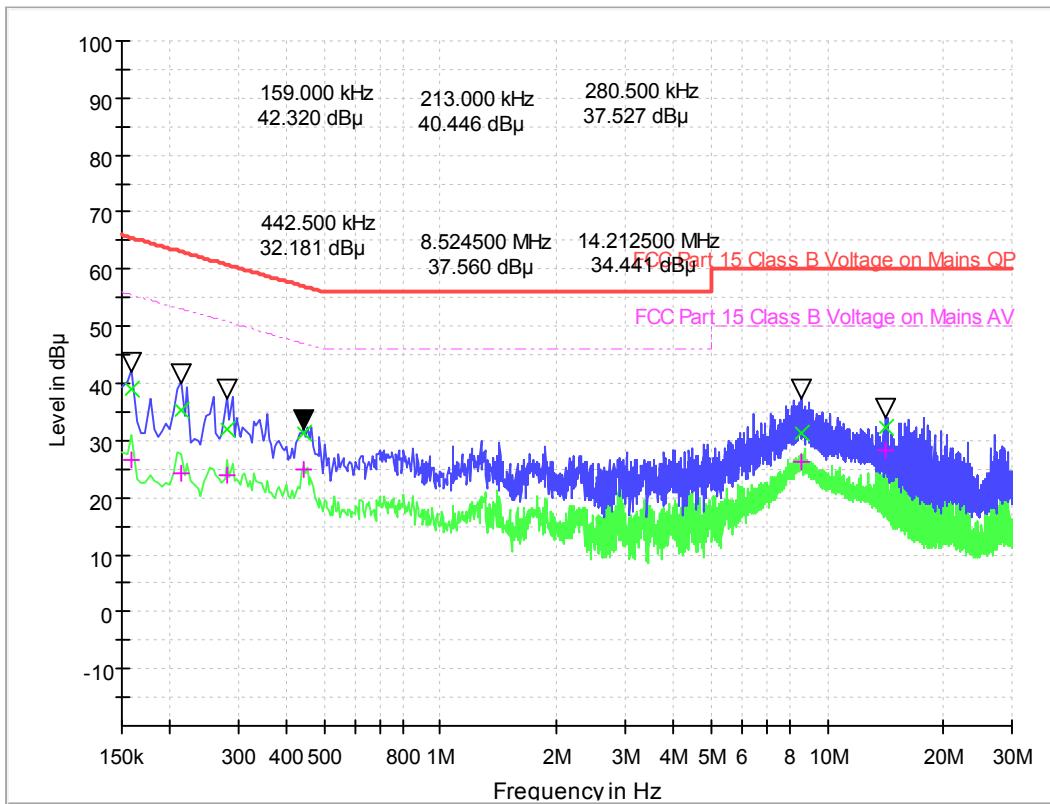

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss(dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.159000	38.92	26.43	0.2	10.2	26.60	65.5	29.09	55.5
0.213000	35.42	24.26	0.2	10.2	27.67	63.1	28.83	53.1
0.280500	31.79	23.77	0.2	10.2	29.01	60.8	27.03	50.8
0.442500	31.41	24.79	0.2	10.2	25.60	57.0	22.22	47.0
8.524500	31.13	26.09	0.5	10.5	28.87	60.0	23.91	50.0
14.212500	32.23	28.27	0.5	10.5	27.77	60.0	21.73	50.0

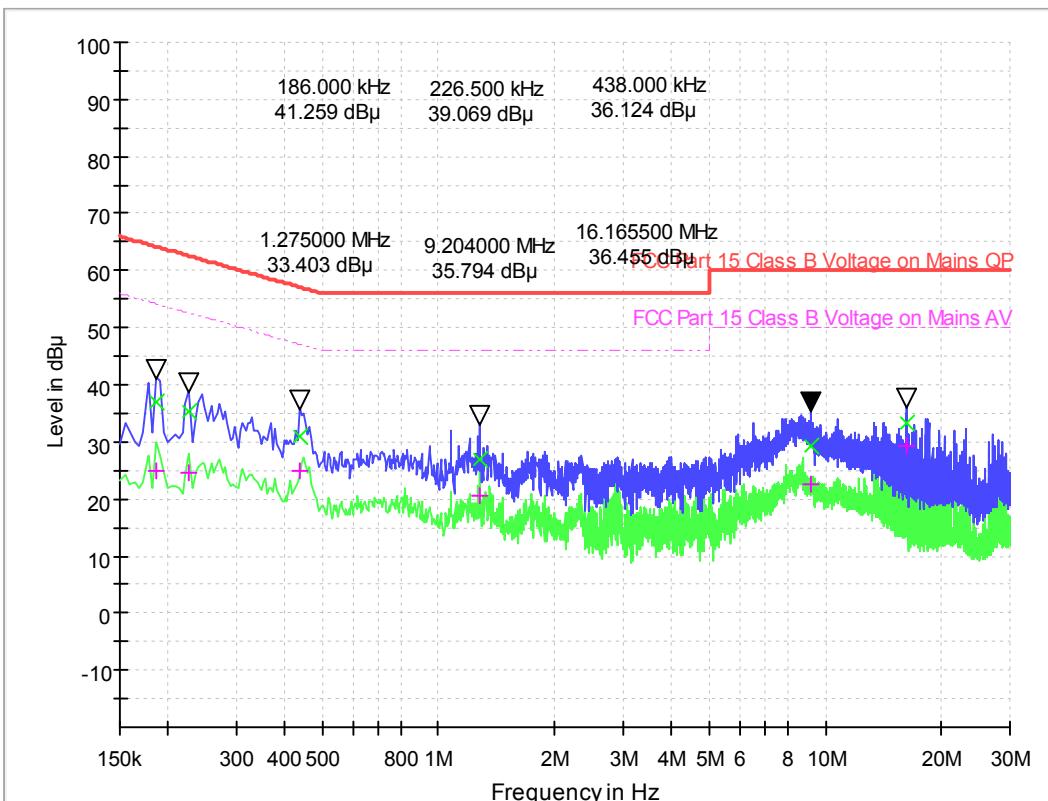

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss(dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.186000	36.98	25.01	0.2	10.2	27.23	64.2	29.20	54.2
0.226500	35.43	24.45	0.2	10.2	27.15	62.6	28.13	52.6
0.438000	31.04	25.08	0.2	10.2	26.06	57.1	22.02	47.1
1.275000	26.93	20.68	0.2	10.2	29.07	56.0	25.32	46.0
9.204000	29.21	22.43	0.5	10.5	30.79	60.0	27.57	50.0
16.165500	33.24	29.23	0.5	10.5	26.76	60.0	20.77	50.0

Test Result: PASS

2.10. Radiated Band Edges and Spurious Emission

2.10.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

2.10.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.10.3. Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

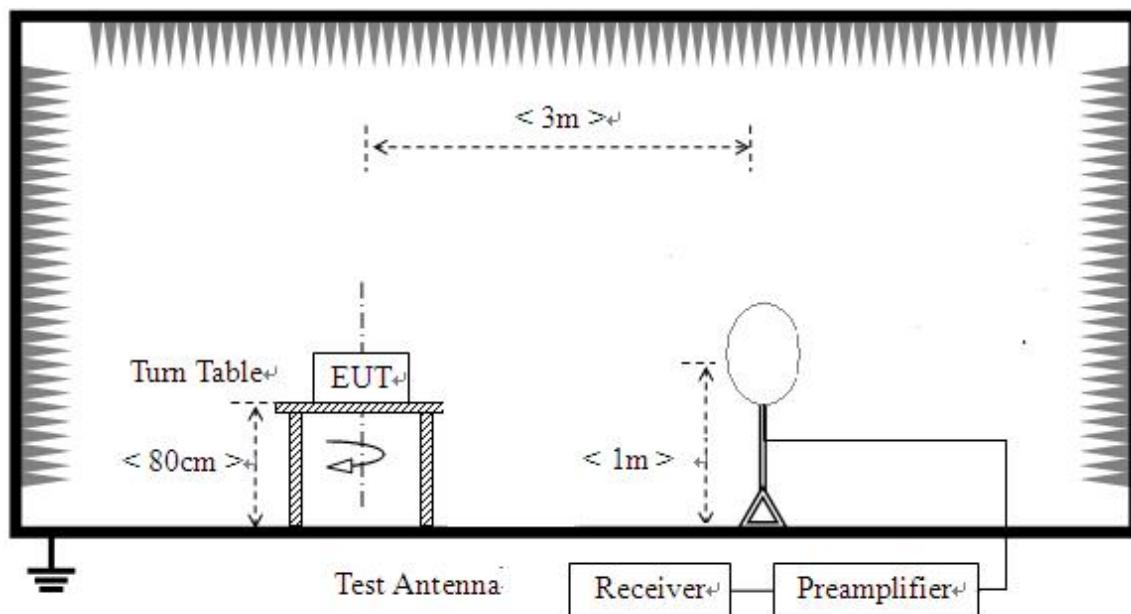

2) For radiated emissions from 30MHz to1GHz

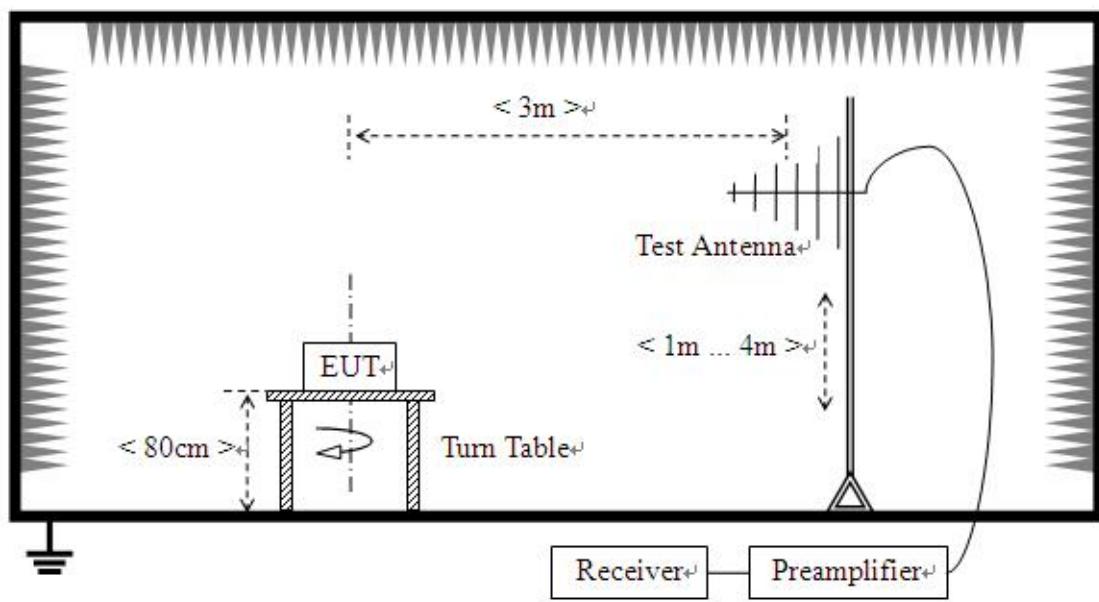

3) For radiated emissions above 1GHz

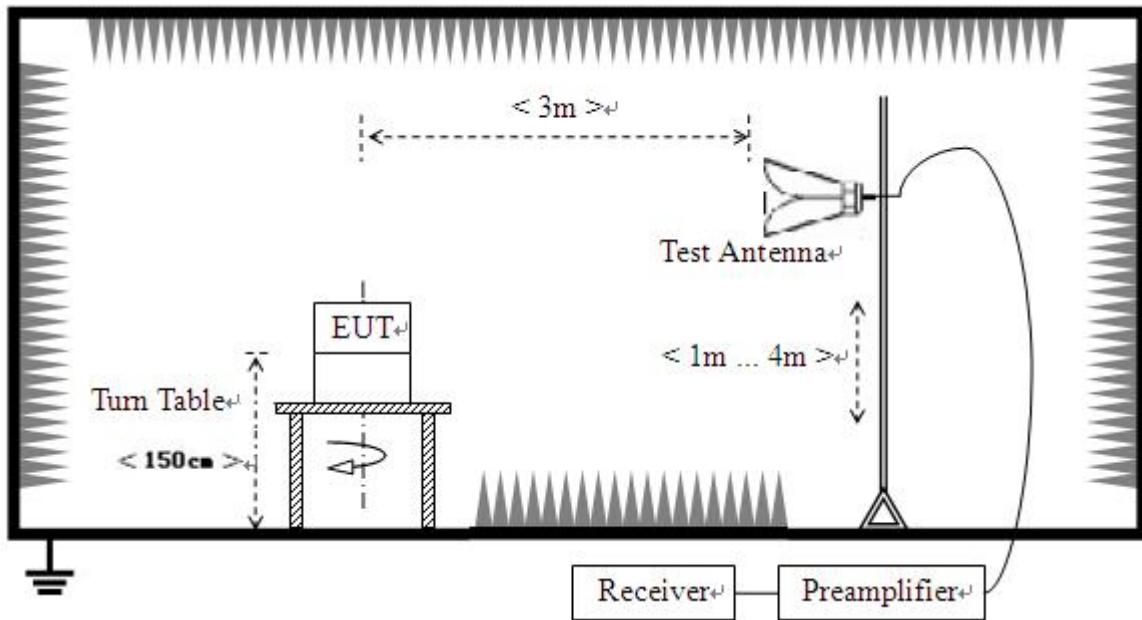

2.10.4. Test Procedure


1. The EUT was placed on a turntable with 0.8m below 1GHz 1.5m above 1GHz above the ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Device under transmit mode and filter the fundamental .

2.10.5. Test Results of Radiated Band Edge and Spurious Emission

For 9 KHz to 30MHz

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


For 30MHz to 1000MHz

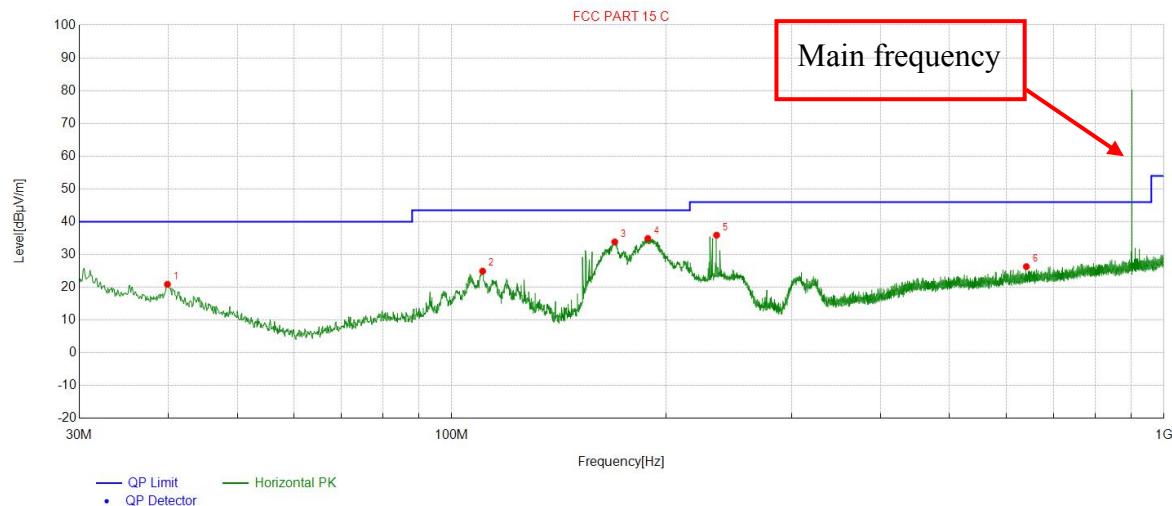

(30MHz to 1GHz, Antenna Horizontal)

Suspected List

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	39.895	20.91	15.19	40.00	19.09	PK	100	280	Horizontal
2	110.518	24.95	11.34	43.50	18.55	PK	100	70	Horizontal
3	169.40	33.85	10.38	43.50	9.65	PK	100	140	Horizontal
4	188.51	34.89	10.86	43.50	8.61	PK	100	210	Horizontal
5	235.46	35.91	11.95	46.00	10.09	PK	100	120	Horizontal
6	640.87	26.32	22.07	46.00	19.68	PK	100	230	Horizontal

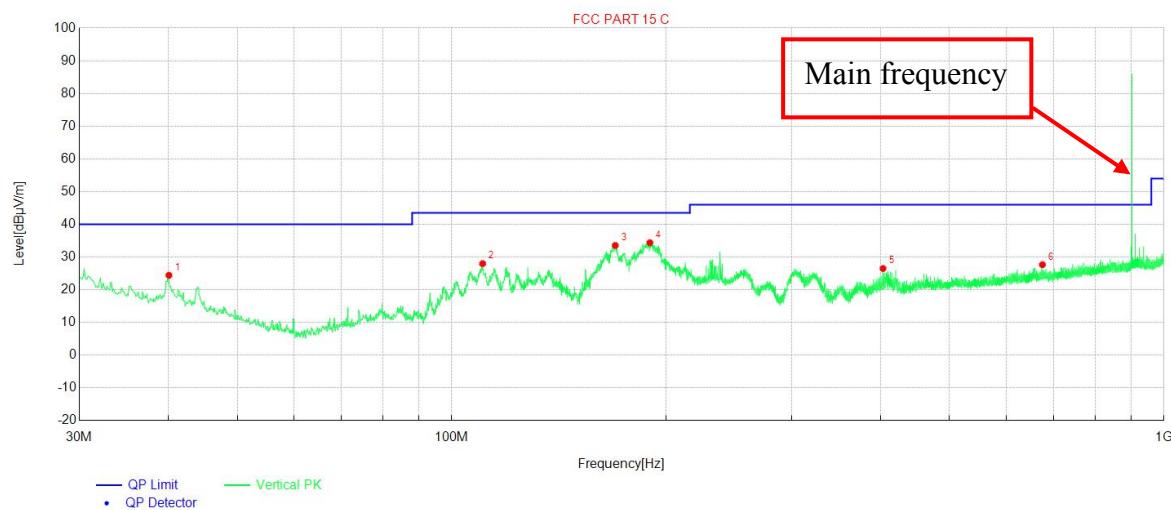

(30MHz to 1GHz, Antenna Vertical)

Suspected List									
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	40.089	24.43	15.11	40.00	15.57	PK	100	194	Vertical
2	110.518	27.99	11.34	43.50	15.51	PK	100	146	Vertical
3	169.69	33.53	10.40	43.50	9.97	PK	100	109	Vertical
4	189.77	34.38	10.81	43.50	9.12	PK	100	100	Vertical
5	403.19	26.49	17.35	46.00	19.51	PK	100	306	Vertical
6	675.01	27.66	22.74	46.00	18.34	PK	100	248	Vertical

Above 1GHz Data:

1CH_902.75MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
1805.50	49.83	74.00	-24.17	1.60	200	50.33	-0.50	Horizontal	Peak
1805.50	40.14	54.00	-13.86	1.60	200	40.64	-0.50	Horizontal	Average
2708.25	52.36	74.00	-21.64	1.60	200	48.56	3.80	Horizontal	Peak
2708.25	41.19	54.00	-12.81	1.60	200	37.39	3.80	Horizontal	Average
3611.00	54.15	74.00	-19.85	1.60	200	49.30	4.85	Horizontal	Peak
3611.00	44.04	54.00	-9.96	1.60	200	39.19	4.85	Horizontal	Average
1805.50	49.22	74.00	-24.78	1.70	180	49.72	-0.50	Vertical	Peak
1805.50	39.99	54.00	-14.01	1.70	180	40.49	-0.50	Vertical	Average
2708.25	51.93	74.00	-22.07	1.70	180	48.13	3.80	Vertical	Peak
2708.25	41.10	54.00	-12.90	1.70	180	37.30	3.80	Vertical	Average
3611.00	55.11	74.00	-18.89	1.70	180	50.26	4.85	Vertical	Peak
3611.00	54.17	54.00	0.17	1.70	180	49.32	4.85	Vertical	Average
26CH_915.25MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
1830.50	49.49	74.00	-24.51	1.60	200	49.99	-0.50	Horizontal	Peak
1830.50	40.43	54.00	-13.57	1.60	200	40.93	-0.50	Horizontal	Average
2745.75	52.10	74.00	-21.90	1.60	200	48.30	3.80	Horizontal	Peak
2745.75	40.91	54.00	-13.09	1.60	200	37.11	3.80	Horizontal	Average
3661.00	54.43	74.00	-19.57	1.60	200	49.58	4.85	Horizontal	Peak
3661.00	43.59	54.00	-10.41	1.60	200	38.74	4.85	Horizontal	Average
1830.50	48.95	74.00	-25.05	1.70	180	49.45	-0.50	Vertical	Peak
1830.50	39.52	54.00	-14.48	1.70	180	40.02	-0.50	Vertical	Average
2745.75	52.15	74.00	-21.85	1.70	180	48.35	3.80	Vertical	Peak
2745.75	41.54	54.00	-12.46	1.70	180	37.74	3.80	Vertical	Average
Remark: <ol style="list-style-type: none"> 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

50CH_927.25MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
1854.50	49.06	74.00	-24.94	1.60	200	49.56	-0.50	Horizontal	Peak
1854.50	40.23	54.00	-13.77	1.60	200	40.73	-0.50	Horizontal	Average
2781.75	52.49	74.00	-21.51	1.60	200	48.69	3.80	Horizontal	Peak
2781.75	40.75	54.00	-13.25	1.60	200	36.95	3.80	Horizontal	Average
3709.00	54.39	74.00	-19.61	1.60	200	49.54	4.85	Horizontal	Peak
3709.00	43.17	54.00	-10.83	1.60	200	38.32	4.85	Horizontal	Average
1854.50	49.10	74.00	-24.90	1.70	180	49.60	-0.50	Vertical	Peak
1854.50	39.69	54.00	-14.31	1.70	180	40.19	-0.50	Vertical	Average
2781.75	52.04	74.00	-21.96	1.70	180	48.24	3.80	Vertical	Peak
2781.75	41.48	54.00	-12.52	1.70	180	37.68	3.80	Vertical	Average
3709.00	54.44	74.00	-19.56	1.70	180	49.59	4.85	Vertical	Peak
3709.00	49.73	54.00	-4.27	1.70	180	44.88	4.85	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI TEST RECEIVER	KEYSIGHT	N9038A	A141202036	2021.04.26	2022.04.25
2	Power Meter	R&S	NRP-Z31	102872	2021.04.26	2022.04.25
3	TURNTABLE	ETS	2088	2149	N/A	N/A
4	ANTENNA MAST	ETS	2075	2346	N/A	N/A
5	EMI TEST Software	R&S	ESK1	N/A	N/A	N/A
6	Horn antenna (18GHz~26.5GHz)	AR	AT4003A	325306	2020.09.16	2022.09.15
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2021.01.26	2022.01.25
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2021.01.26	2022.01.25
9	High pass filter	Compliance Direction systems	BSU-6	34202	2021.11.09	2022.11.08
10	Horn Antenna	R&S	HF906	A0304225	2019.04.17	2022.04.16
11	Horn Antenna	R&S	ESIB7	A0501375	2020.06.24	2022.06.22
12	ULTRA-BROADBAND ANTENNA	SCHWARZBEC K	VULB9160	A0805560	2019.05.24	2022.05.23
13	Passive Loop Antenna	R&S	HFH2-Z2	100047	2019.04.26	2022.04.25
14	Temperature chamber	TABAI	PS-232	A8708054	2021.09.24	2022.09.23
15	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2021.04.26	2022.04.25
16	Power Supply	R&S	ESIB26	A0304218	2021.01.04	2022.01.03
17	LISN	ROHDE&SCH WARZ	ENV216	A140701847	2021.08.11	2022.08.10
18	Test software	ECIT	Eagle	V2.0	N/A	N/A

4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	2.8dB
-------------------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	3.91dB
-------------------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	4.5dB
-------------------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	4.9dB
-------------------------------------------------------------------------------	-------

** END OF REPORT **