



REPORT No.: SZ19100318W03

TEST REPORT

APPLICANT : Shenzhen Chainway Information
Technology Co.,Ltd.

PRODUCT NAME : Fixed Android UHF Reader

MODEL NAME : URA8

BRAND NAME : CHAINWAY

FCC ID : 2AC6AURA8

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2019-10-30

TEST DATE : 2019-12-12 to 2020-01-10

ISSUE DATE : 2020-01-14

Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15C Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of Test Signal	10
2.3. Maximum Peak and Average Conducted Output Power	14
2.4. Bandwidth	17
2.5. Conducted Spurious Emissions and Band Edge	26
2.6. Power Spectral Density (PSD)	39
2.7. Conducted Emission	48
2.8. Restricted Frequency Bands	52
2.9. Radiated Emission	65
Annex A Test Uncertainty	78
Annex B Testing Laboratory Information	82



REPORT No.: SZ19100318W03

Change History		
Version	Date	Reason for change
1.0	2020-01-14	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co.,Ltd.
Applicant Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen
Manufacturer:	Shenzhen Chainway Information Technology Co.,Ltd.
Manufacturer Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen

1.2. Equipment Under Test (EUT) Description

Product Name:	Fixed Android UHF Reader	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V12	
Software Version:	A8_20191010	
Equipment Type:	WLAN2.4G	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section1.3	
Operating Frequency Range:	802.11b/g/ n(HT20): 2.412GHz - 2.472GHz 802.11 n(HT40): 2.422GHz - 2.462GHz	
Antenna Type:	Fixed External Antenna	
Antenna Gain:	1.90dBi	
Accessory Information:	AC Adapter	
	Brand Name:	FULLPOWER
	Model No.:	CGSW65-120-5000II
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	12.00V $\pm$ 5.00A
	Rated Input:	100-240V $\sim$ 50,60Hz 1.50A

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11 n (HT40))	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n(HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n(HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	11	2462
	7	2442		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Dec 12, 2019	Wang Meng	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Dec 16, 2019	Wang Meng	PASS	No deviation
4	15.247(a)	Bandwidth	Dec 16, 2019	Wang Meng	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Dec 12, 2019	Wang Meng	PASS	No deviation
6	15.247(e)	Power Spectral Density (PSD)	Dec 12, 2019	Wang Meng	PASS	No deviation
7	15.207	Conducted Emission	Dec 31, 2019	Lin Jiayong	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Jan 10, 2020	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Jan 10, 2020	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12dB contains two parts that cable loss 2dB and Attenuator 10dB.



Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a external antenna coupled with RP-SMA connector. Please refer to the EUT internal photos.

2.2. Duty Cycle of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

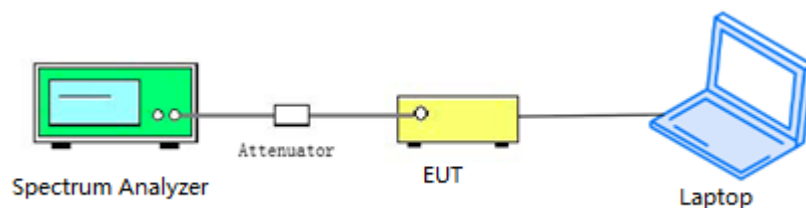

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
802.11b	97.51	0.11
802.11g	87.22	0.59
802.11n(HT20)	86.73	0.62
802.11n(HT40)	75.99	1.19


B. Test Plots

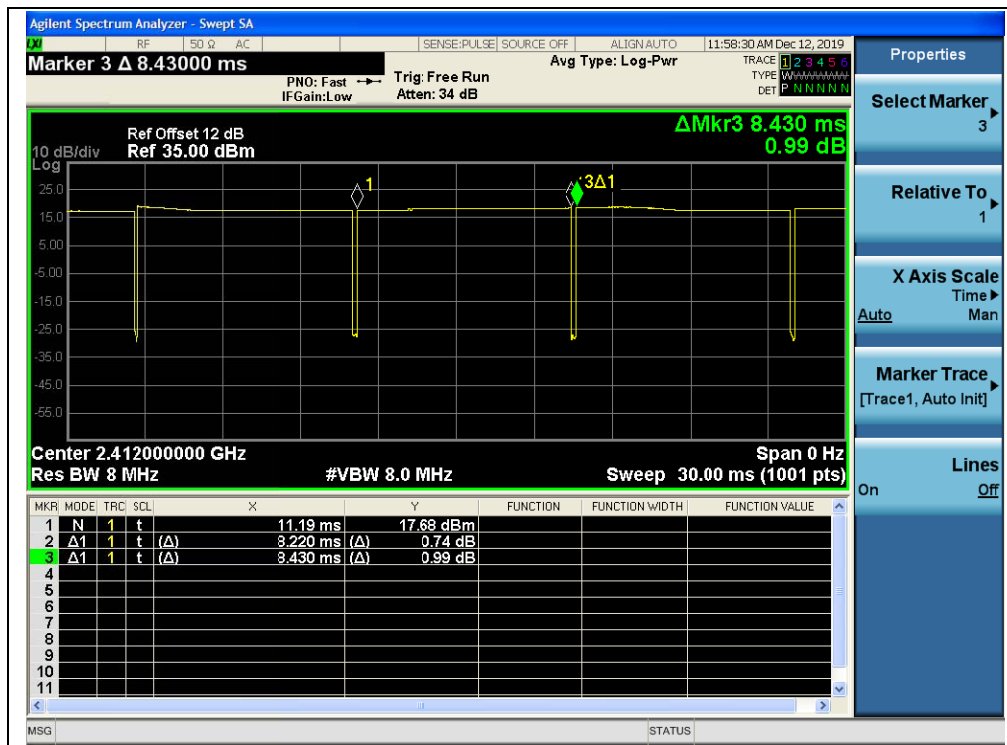


(Channel 1, 802.11b)

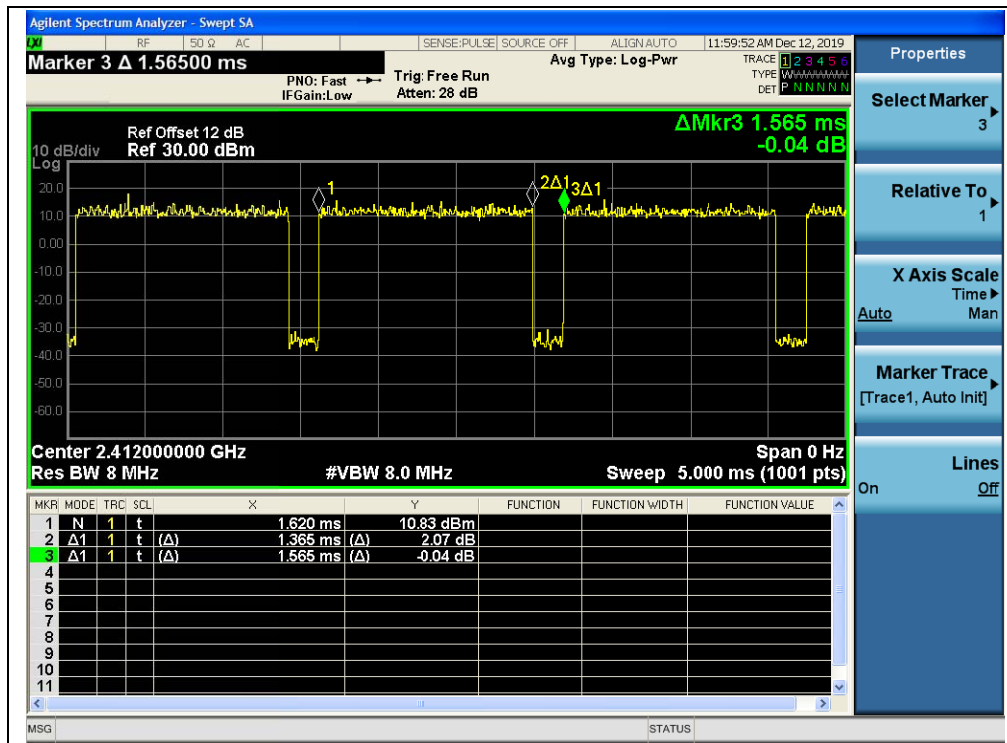

(Channel 1, 802.11g)

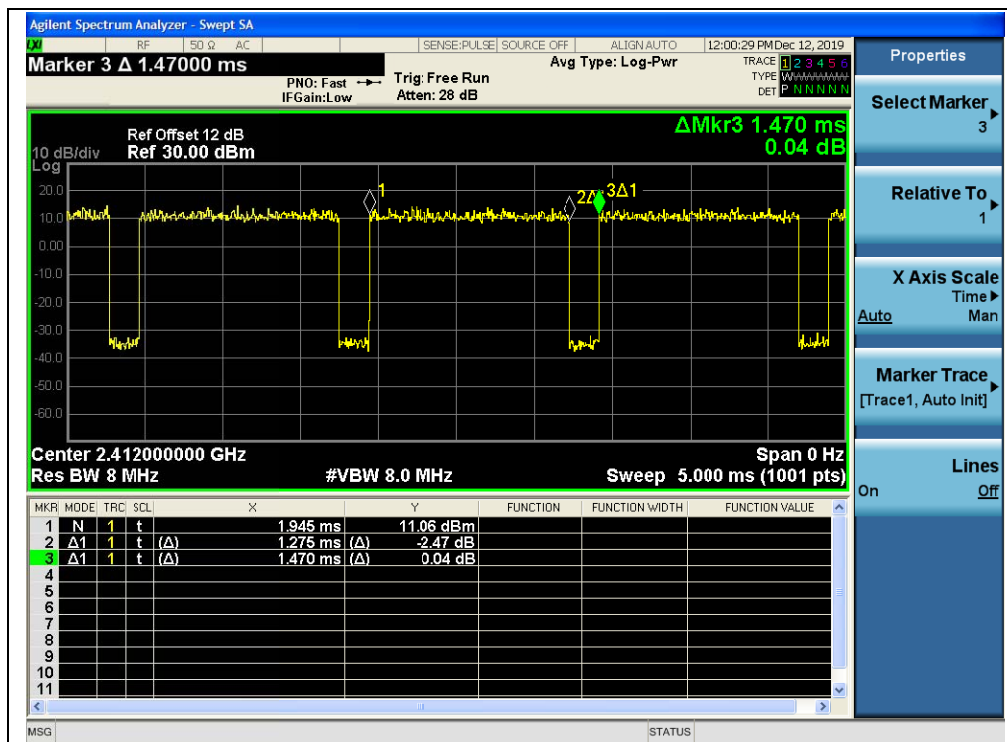

(Channel 1, 802.11 n (HT20))

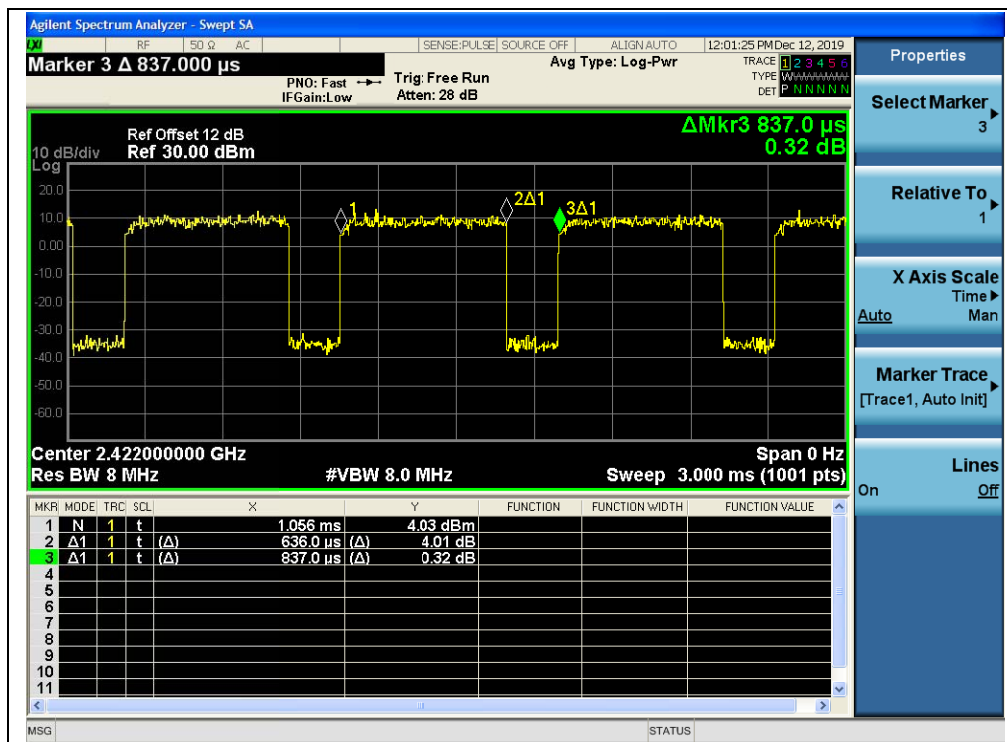

(Channel 3, 802.11 n (HT40))

2.3. Maximum Peak and Average Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

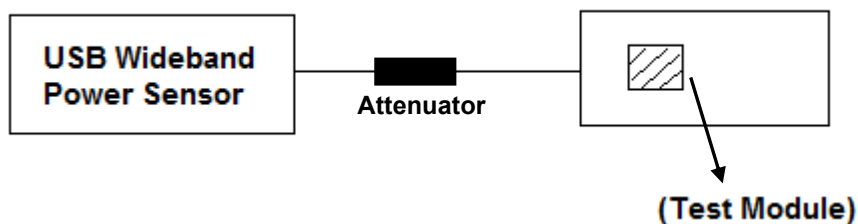

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.3.3. Test Result

Maximum Peak Conducted Output Power

802.11b Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.95	0.099	30	1	PASS
7	2442	18.96	0.079			PASS
13	2472	17.31	0.054			PASS

802.11g Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.33	0.136	30	1	PASS
7	2442	20.64	0.116			PASS
13	2472	18.87	0.077			PASS

802.11n (HT20) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.36	0.137	30	1	PASS
7	2442	20.65	0.116			PASS
13	2472	20.11	0.103			PASS

802.11n (HT40) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	21.53	0.142	30	1	PASS
7	2442	21.37	0.137			PASS
13	2462	20.02	0.100			PASS

**Maximum Average Conducted Output Power****802.11b Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	17.04	0.11	17.15	0.052	30	1	PASS
7	2442	16.13		16.24	0.042			PASS
13	2472	14.59		14.70	0.030			PASS

802.11g Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	11.01	0.59	11.60	0.014	30	1	PASS
7	2442	10.77		11.36	0.014			PASS
13	2472	9.15		9.74	0.009			PASS

802.11n (HT20) Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	11.08	0.62	11.70	0.015	30	1	PASS
7	2442	10.83		11.45	0.014			PASS
13	2472	9.89		10.51	0.011			PASS

802.11n (HT40) Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
3	2422	11.40	1.19	12.59	0.018	30	1	PASS
7	2442	11.45		12.64	0.018			PASS
11	2462	9.74		10.93	0.012			PASS


2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

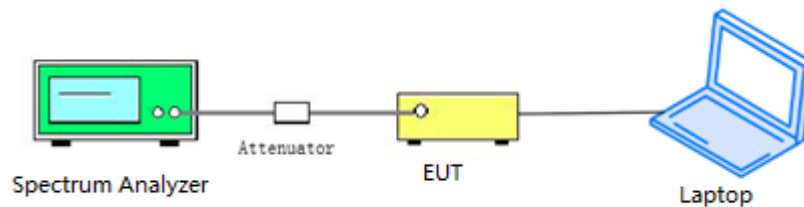

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.



2.4.4. Test Result

802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.08	≥500	PASS
7	2442	8.56	≥500	PASS
13	2472	8.04	≥500	PASS

B. Test Plots



(Channel 1, 802.11b)



(Channel 7, 802.11b)



(Channel 13, 802.11b)




802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.41	≥500	PASS
7	2442	16.11	≥500	PASS
13	2472	15.78	≥500	PASS


B. Test Plots:

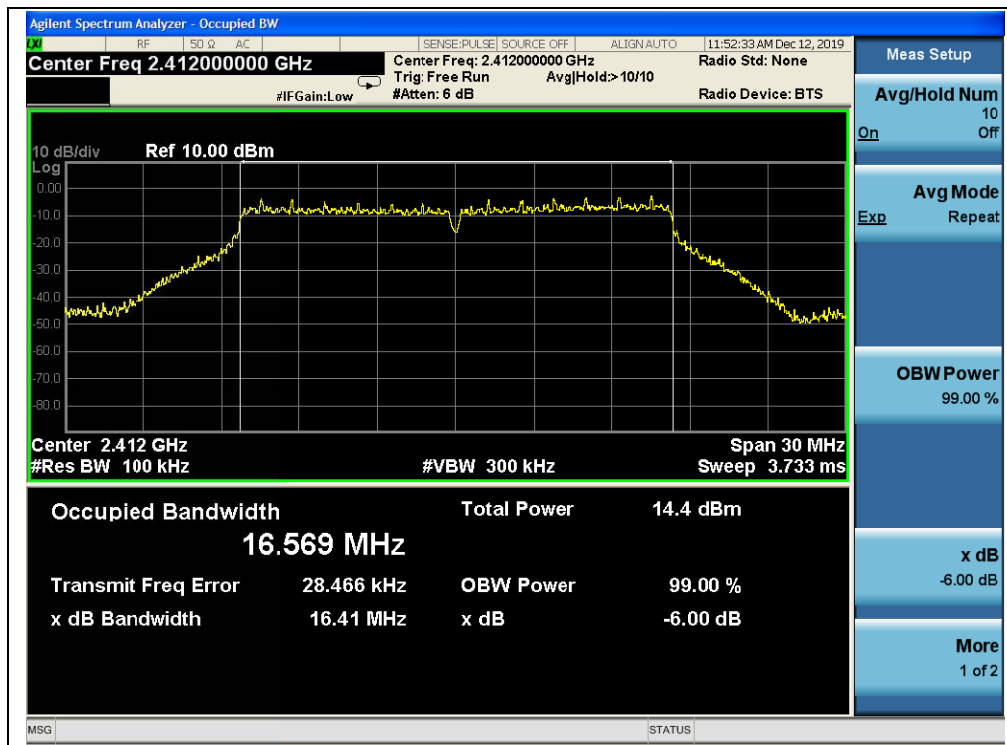

(Channel 1, 802.11g)

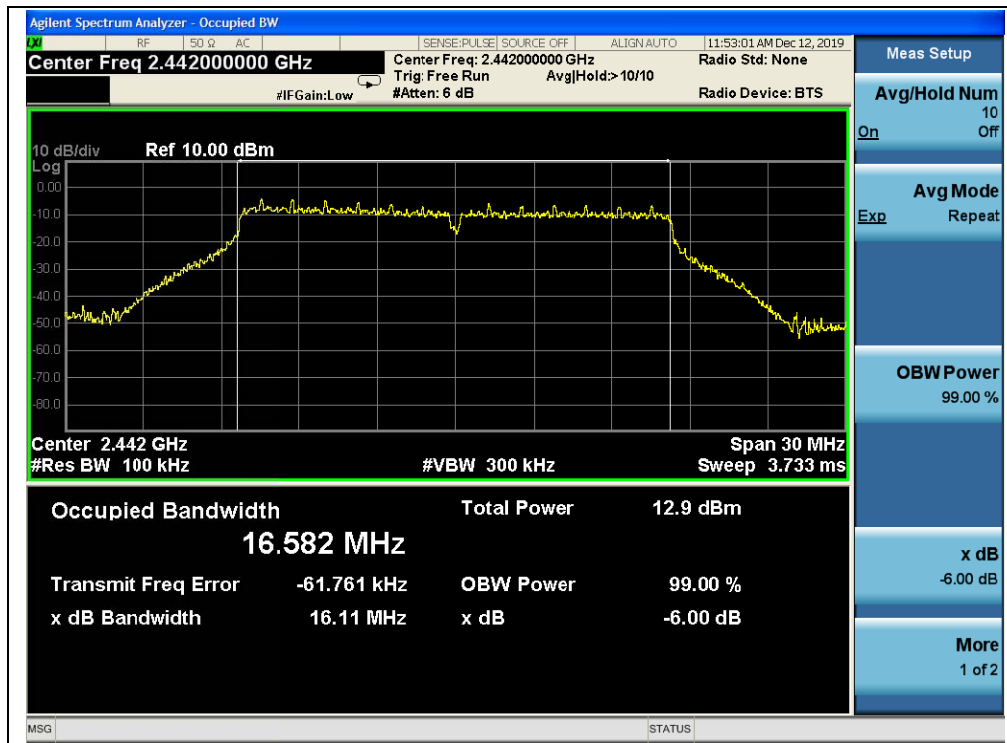

(Channel 7, 802.11g)

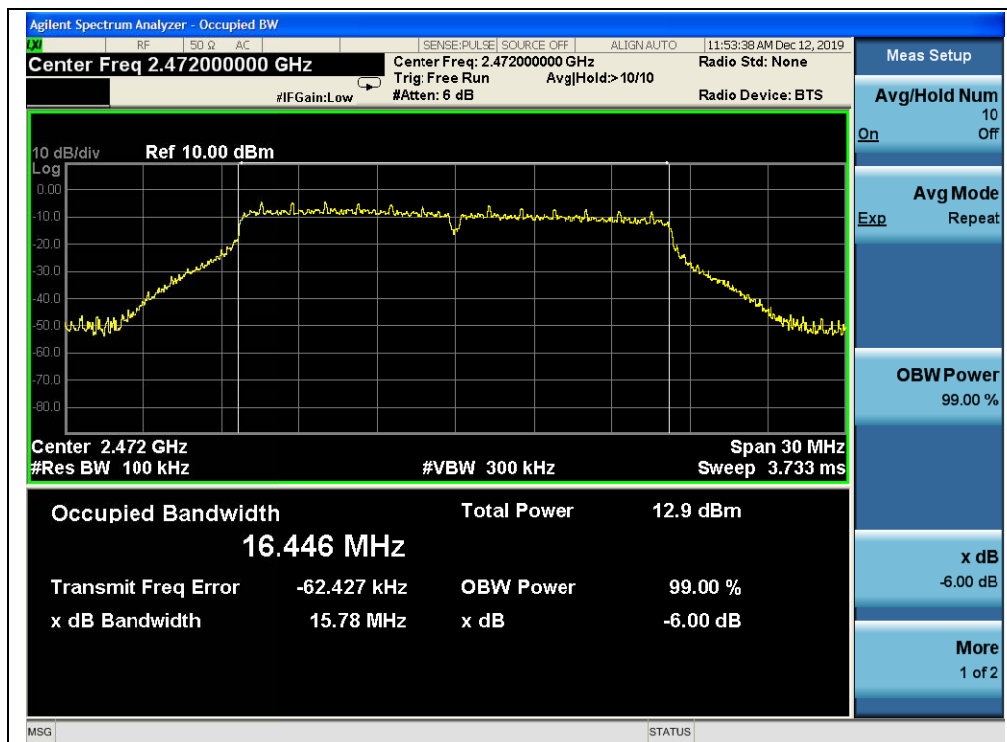

(Channel 13, 802.11g)




802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	17.62	≥500	PASS
7	2442	17.19	≥500	PASS
13	2472	16.38	≥500	PASS

B. Test Plots:

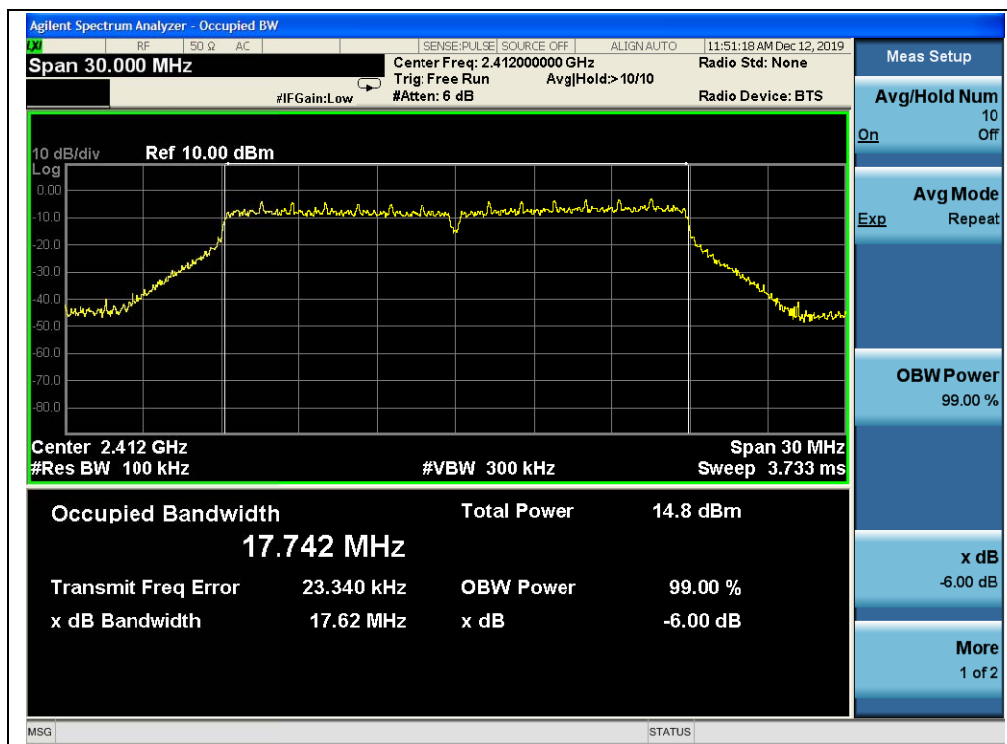

(Channel 1, 802.11n (HT20))

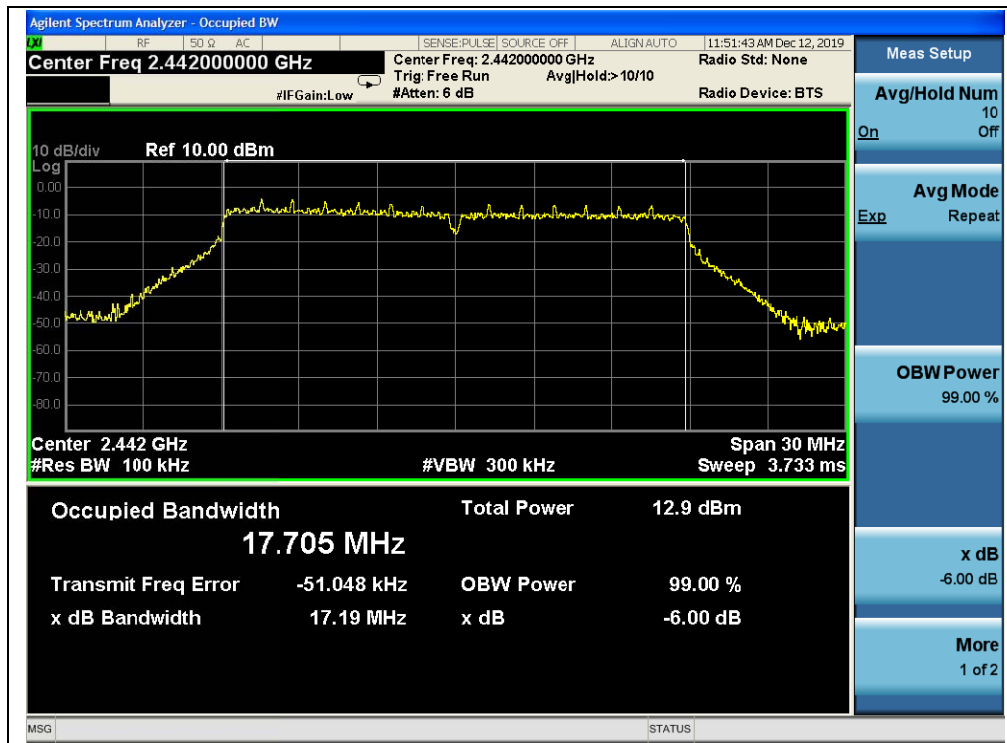

(Channel 7, 802.11n (HT20))



(Channel 13, 802.11n (HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.11	≥500	PASS
7	2442	35.70	≥500	PASS
11	2462	35.10	≥500	PASS

B. Test Plots:

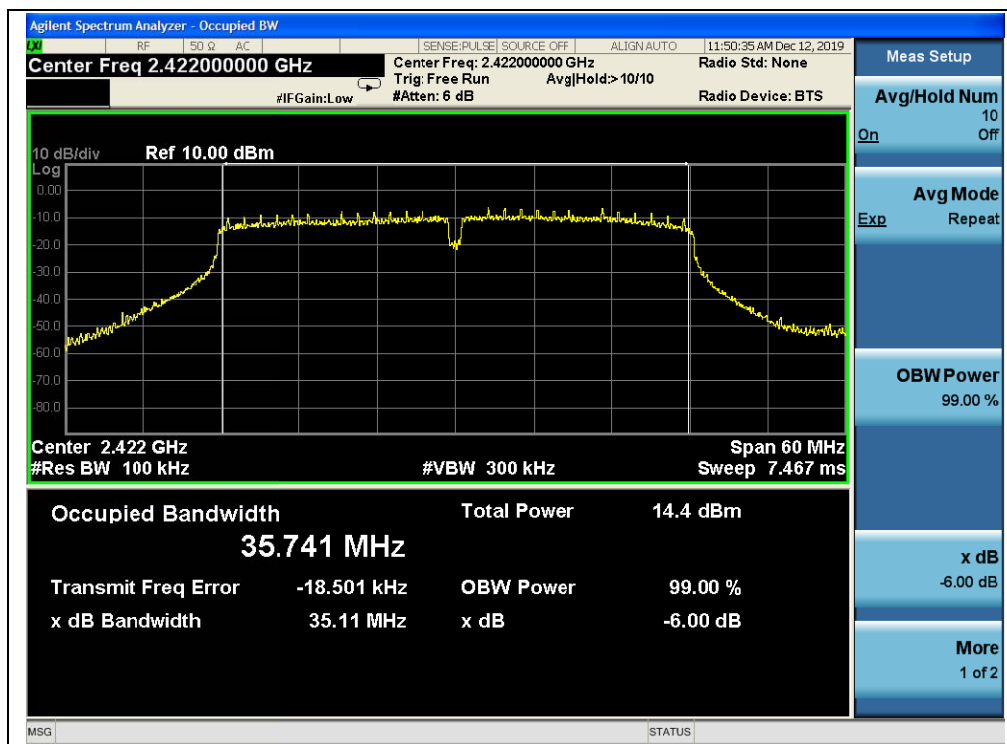

(Channel 3, 802.11n (HT40))

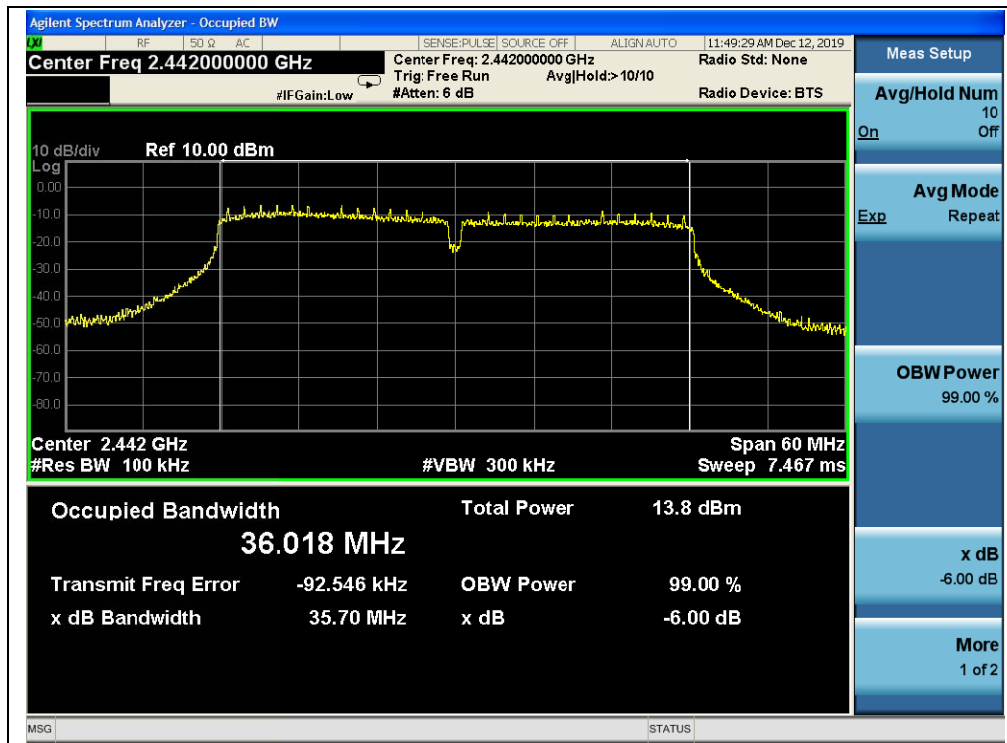

(Channel 7, 802.11n (HT40))



(Channel 11, 802.11n (HT40))


2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

Test Setup:

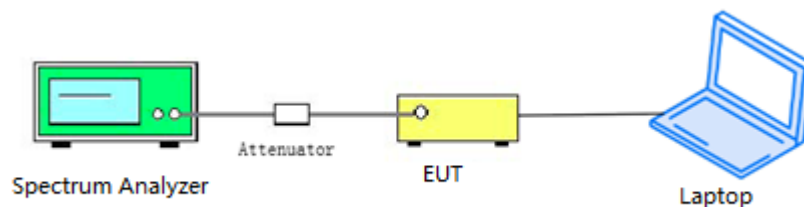

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.5.4. Test Result

802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.74	7.34	-12.66	PASS
7	2442	-48.58	7.06	-12.94	PASS
13	2472	-44.36	6.51	-13.49	PASS

B. Test Plots:

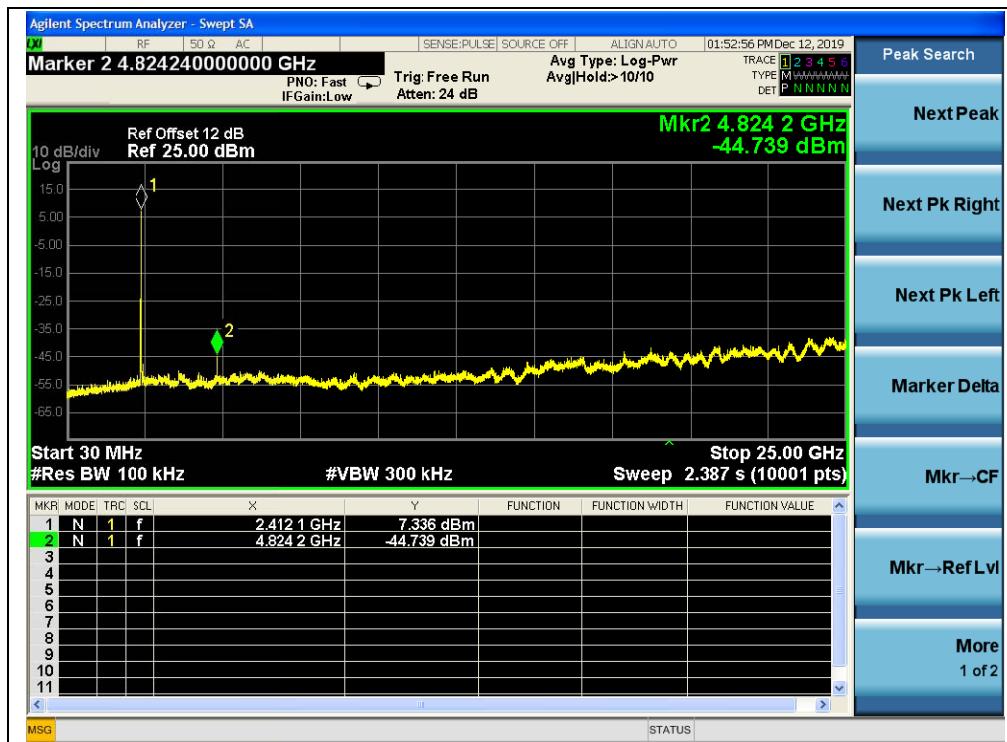

(Channel 1, 30MHz to 25GHz)

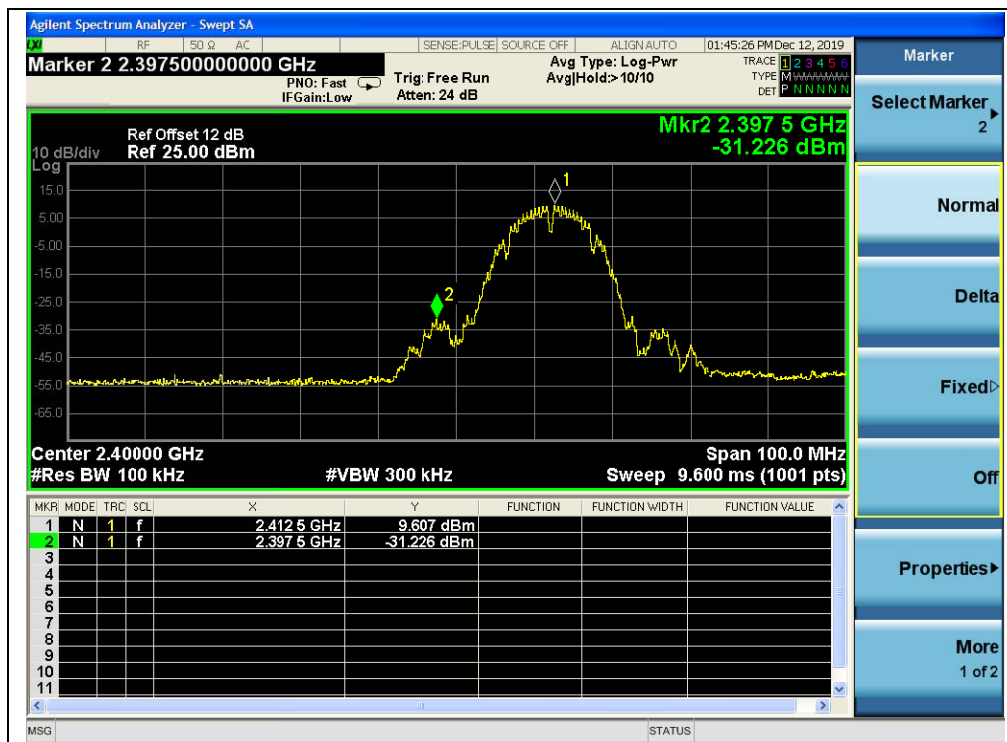


(Band Edge, Channel 1)



(Channel 7, 30MHz to 25GHz)



(Channel 13, 30MHz to 25GHz)

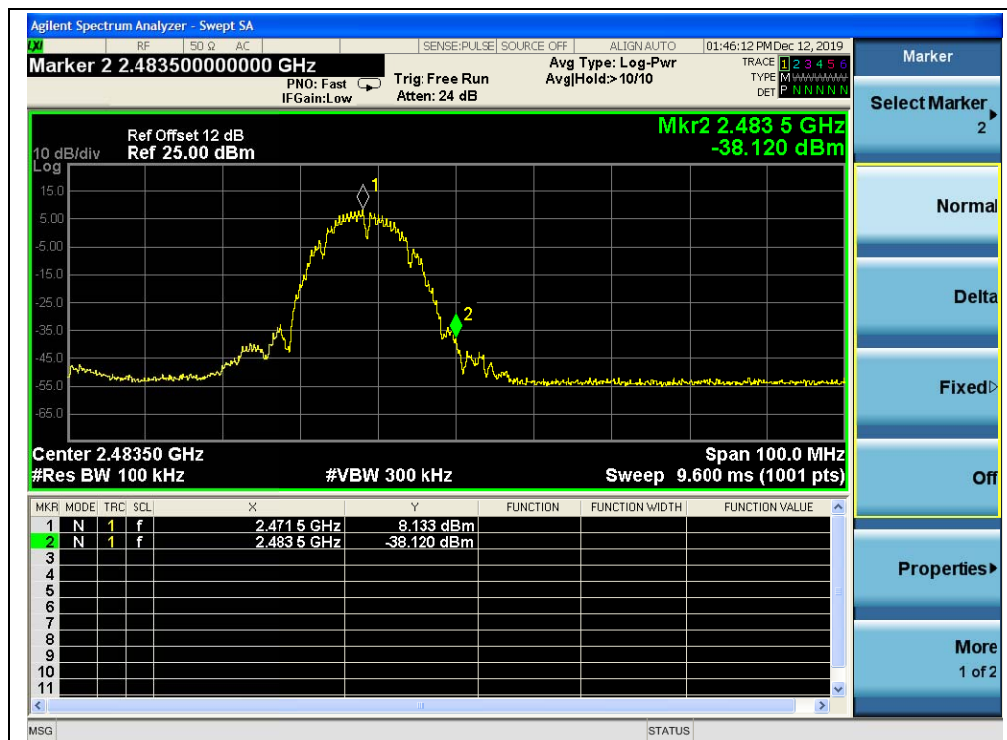

(Band Edge, Channel 13)



802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.42	1.12	-18.88	PASS
7	2442	-43.66	-1.15	-21.15	PASS
13	2472	-43.34	0.42	-19.58	PASS

B. Test Plots:



(Channel = 1, 30MHz to 25GHz)

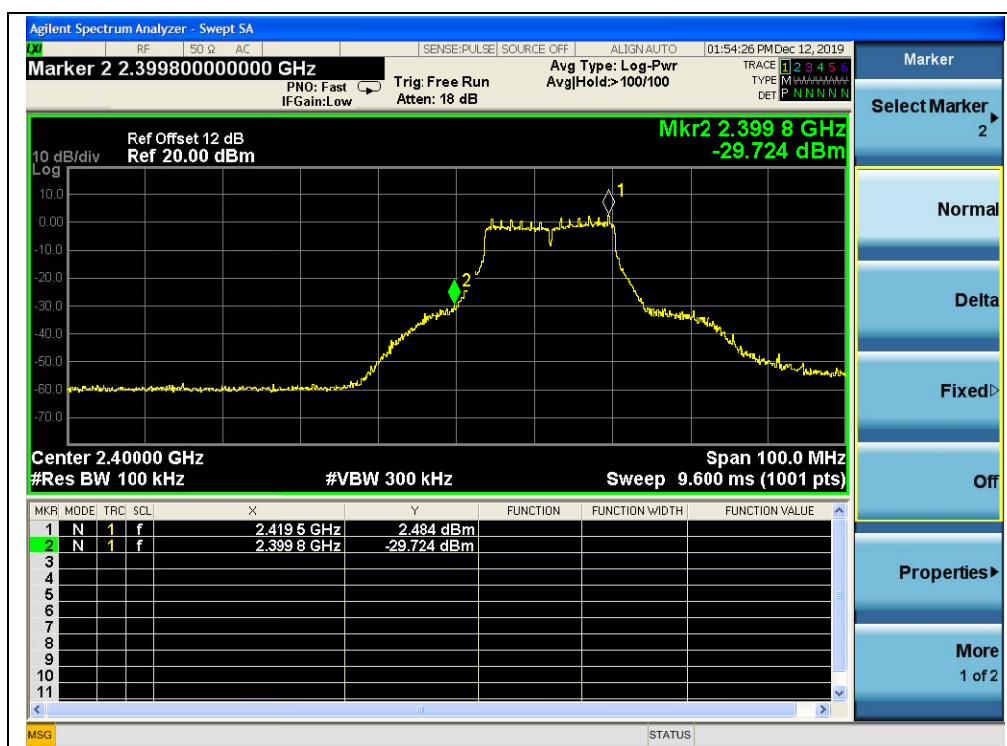


(Band Edge, Channel = 1)



(Channel = 7, 30MHz to 25GHz)



(Channel = 13, 30MHz to 25GHz)

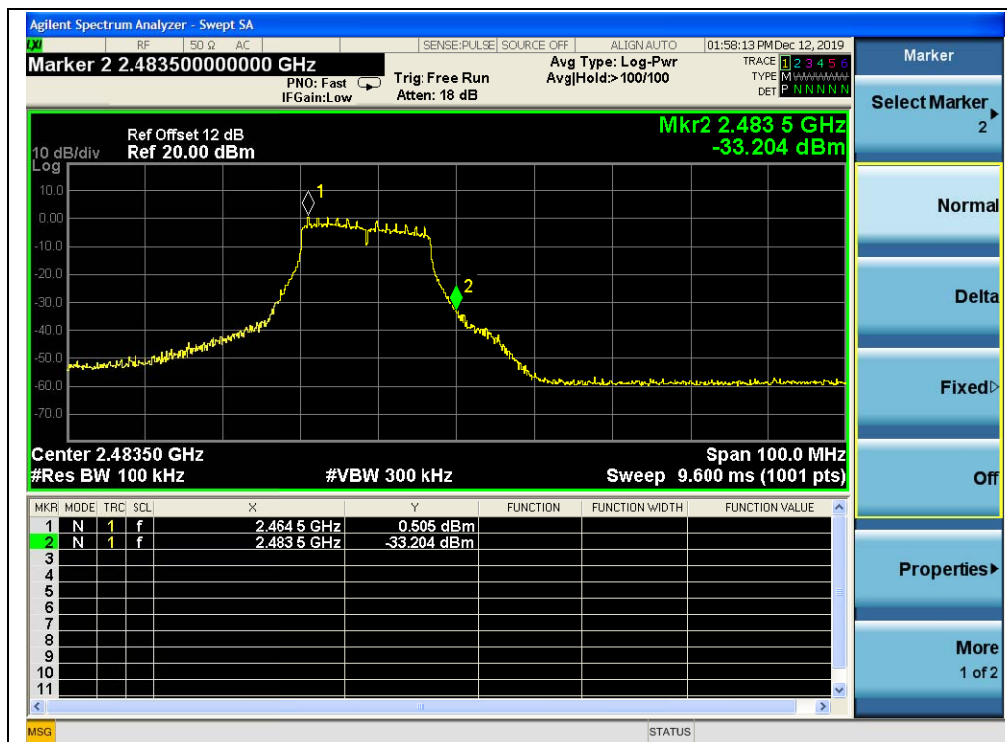

(Band Edge, Channel = 13)



802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.38	0.70	-19.30	PASS
7	2442	-42.59	-0.78	-20.78	PASS
13	2472	-44.46	-0.63	-20.63	PASS

B. Test Plots:




(Channel = 1, 30MHz to 25GHz)

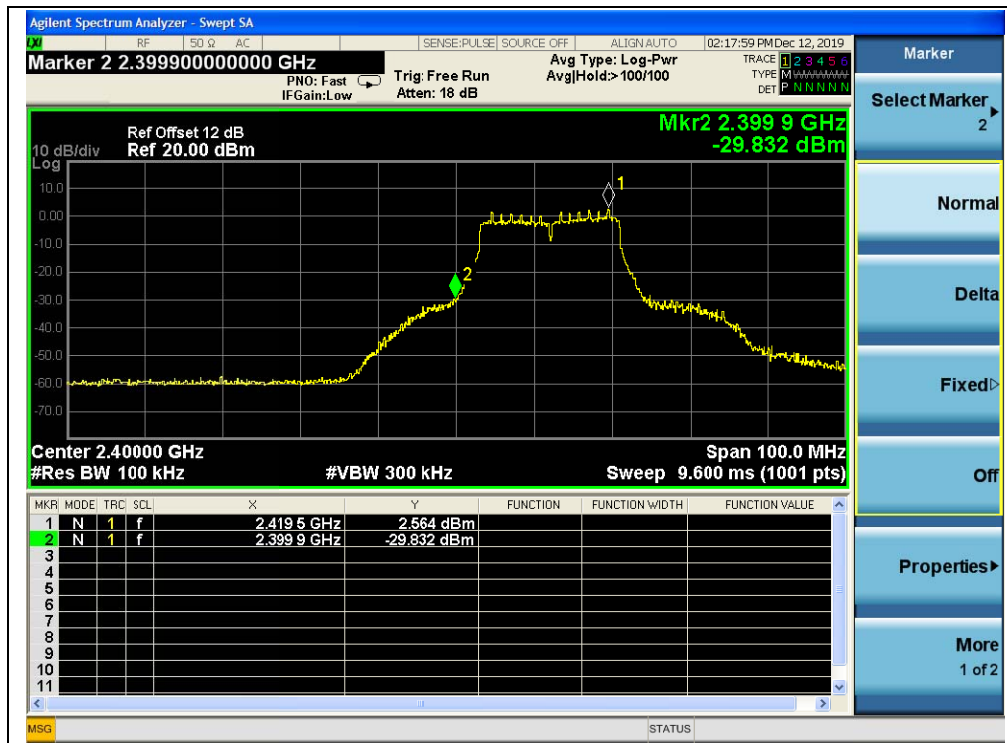


(Band Edge, Channel = 1)



(Channel = 7, 30MHz to 25GHz)

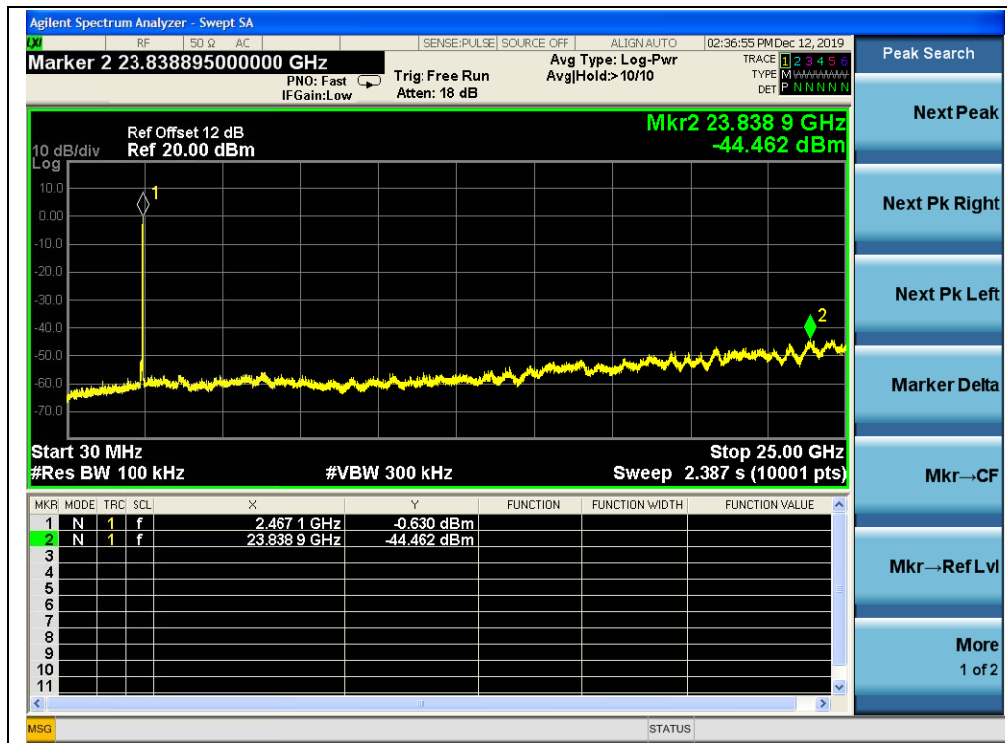

(Channel = 13, 30MHz to 25GHz)

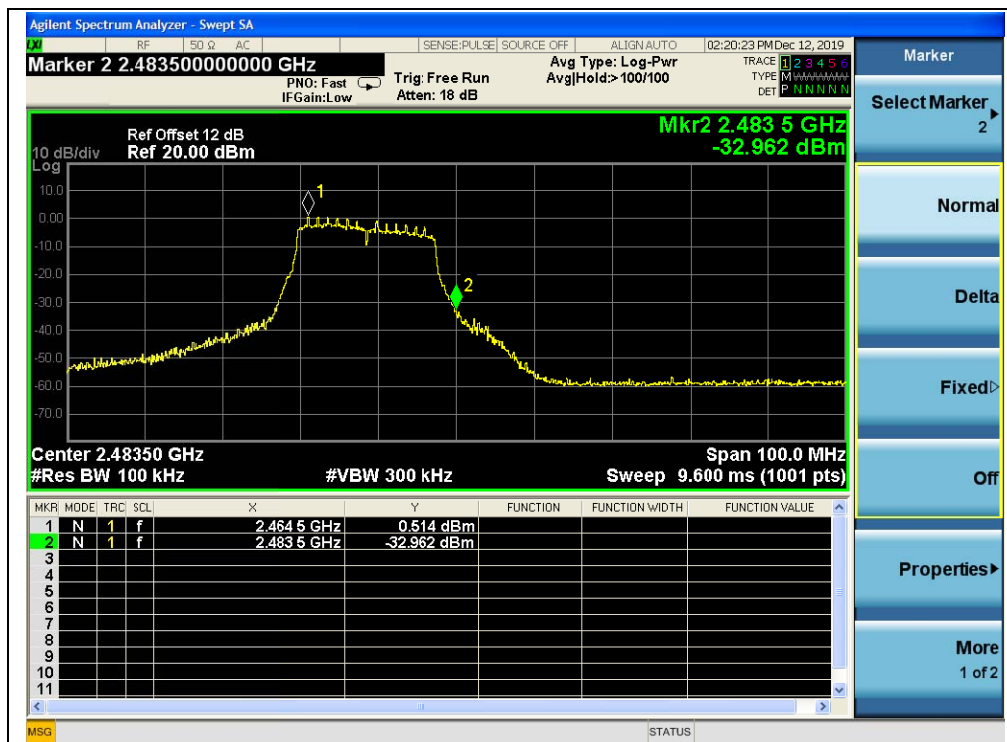

(Band Edge, Channel = 13)



802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-43.91	-1.01	-21.01	PASS
7	2442	-42.68	0.01	-19.99	PASS
11	2462	-43.19	-2.47	-22.47	PASS

B. Test Plots:



(Channel = 3, 30MHz to 25GHz)

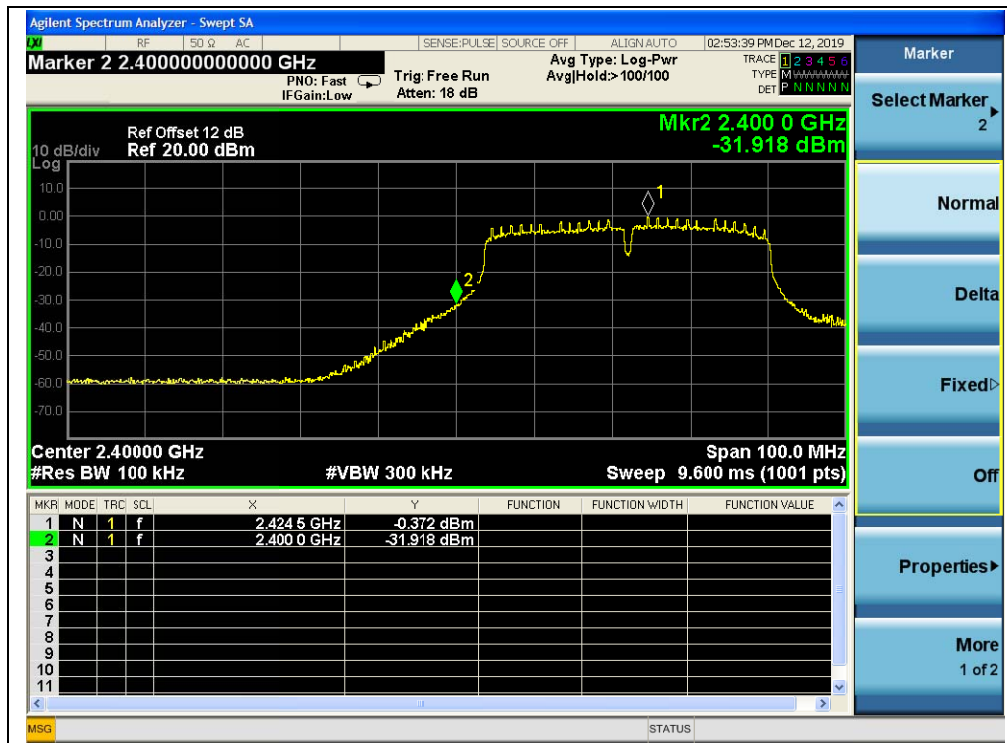


(Band Edge, Channel = 3)



(Channel = 7, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)

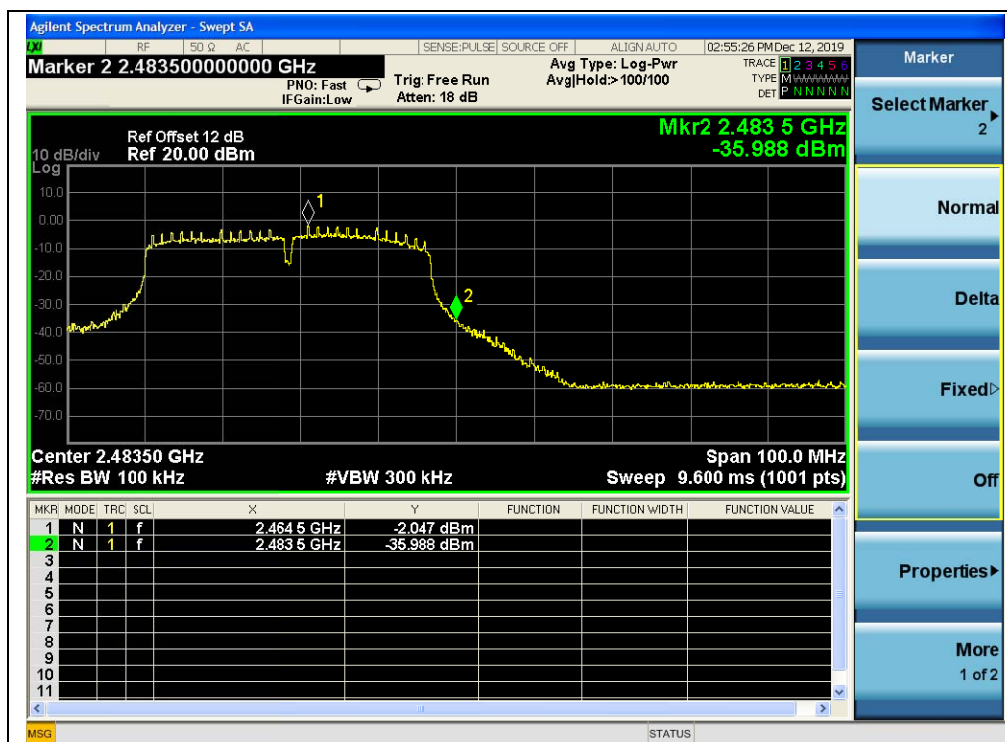

(Band Edge, Channel = 11)


2.6. Power Spectral Density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.6.2. Test Description

Test Setup:

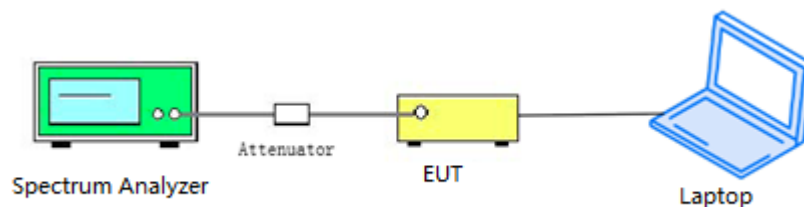

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.36	8	PASS
7	2442	-9.28	8	PASS
13	2472	-10.11	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)



(Channel = 7, 802.11b)



(Channel = 13, 802.11b)




802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-15.29	8	PASS
7	2442	-17.76	8	PASS
13	2472	-16.78	8	PASS


B. Test Plots:

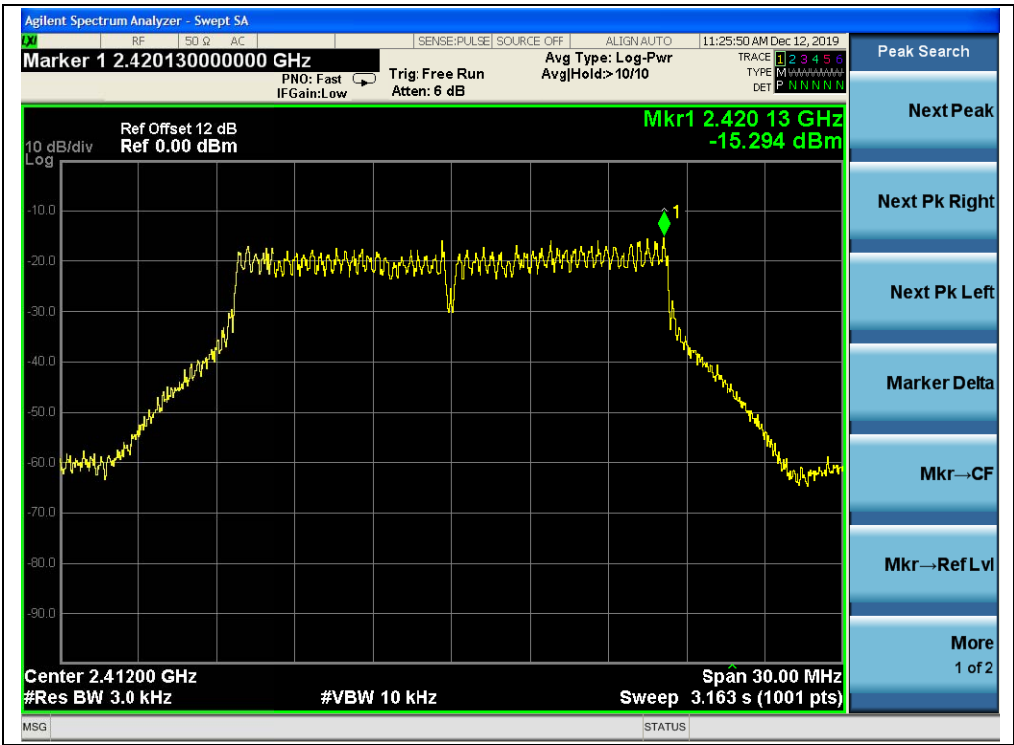

(Channel = 1, 802.11g)

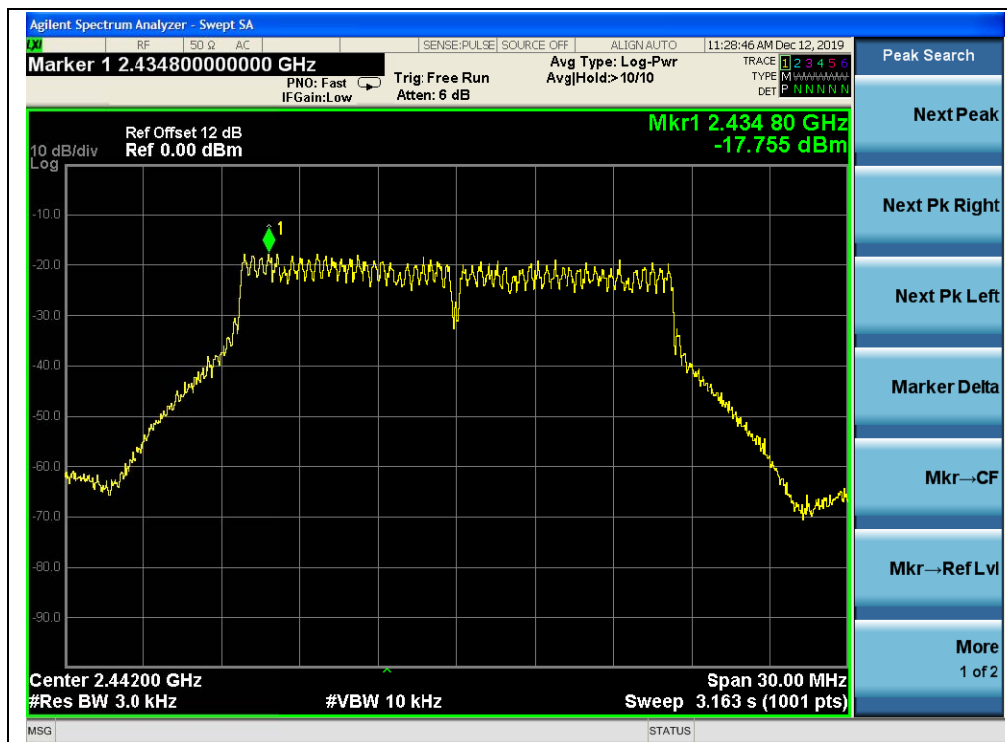

(Channel = 7, 802.11g)

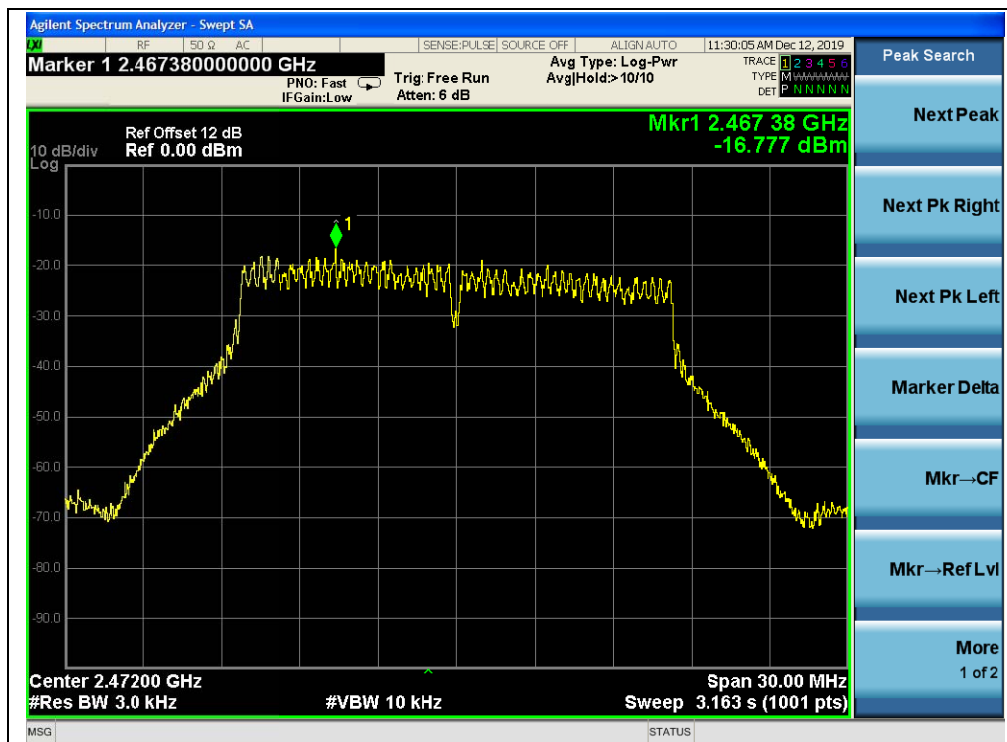

(Channel = 13, 802.11g)



A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.90	8	PASS
7	2442	-17.65	8	PASS
13	2472	-18.04	8	PASS

Agilent Spectrum Analyzer - Swept SA

Marker 1 2.419200000000 GHz

PNO: Fast IF Gain: Low Trig: Free Run Atten: 6 dB

Avg Type: Log-Pwr Avg Hold: >10/10

11:33:34 AM Dec 12, 2019

TRACE 1 2 3 4 5 6
TYPE M N N N N N
DET P N N N N N

Ref Offset 12 dB
Ref 0.00 dBm

10 dB/div
Log

Mkr1 2.419 20 GHz
-14.900 dBm

Center 2.41200 GHz
#Res BW 3.0 kHz

#VBW 10 kHz

Span 30.00 MHz
Sweep 3.163 s (1001 pts)

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF


Mkr→Ref Lvl

More
1 of 2

(Channel = 1, 802.11n(HT20))




(Channel = 7, 802.11n(HT20))

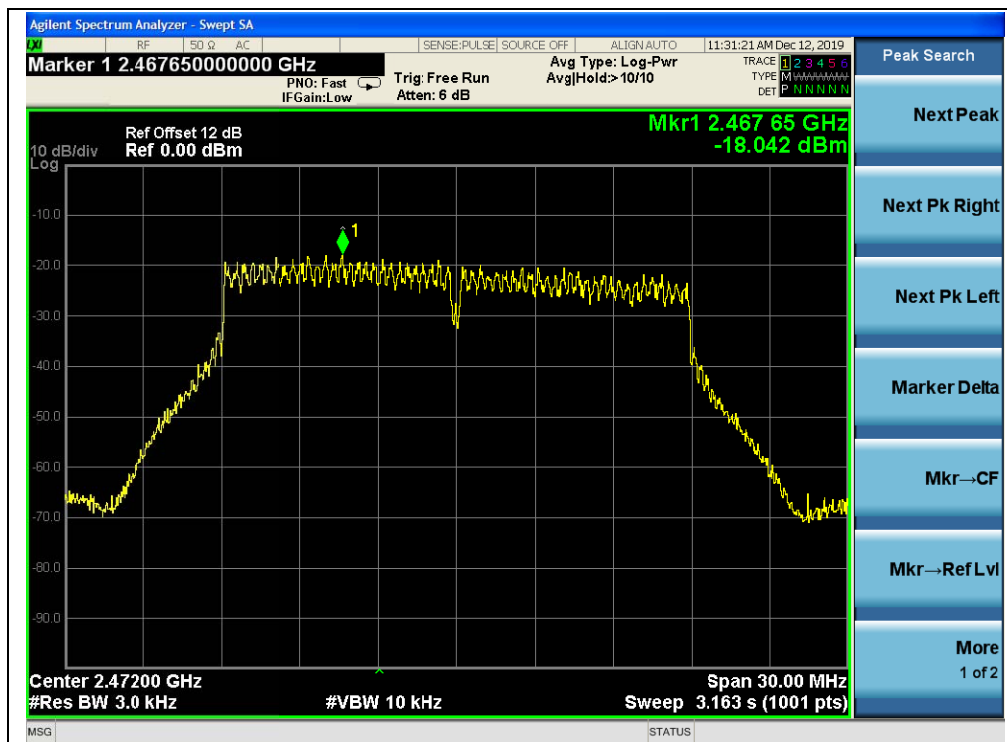


(Channel = 13, 802.11n(HT20))

**802.11n (HT40) Test mode****A. Test Verdict:**


Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-18.50	8	PASS
7	2442	-18.83	8	PASS
11	2462	-19.81	8	PASS

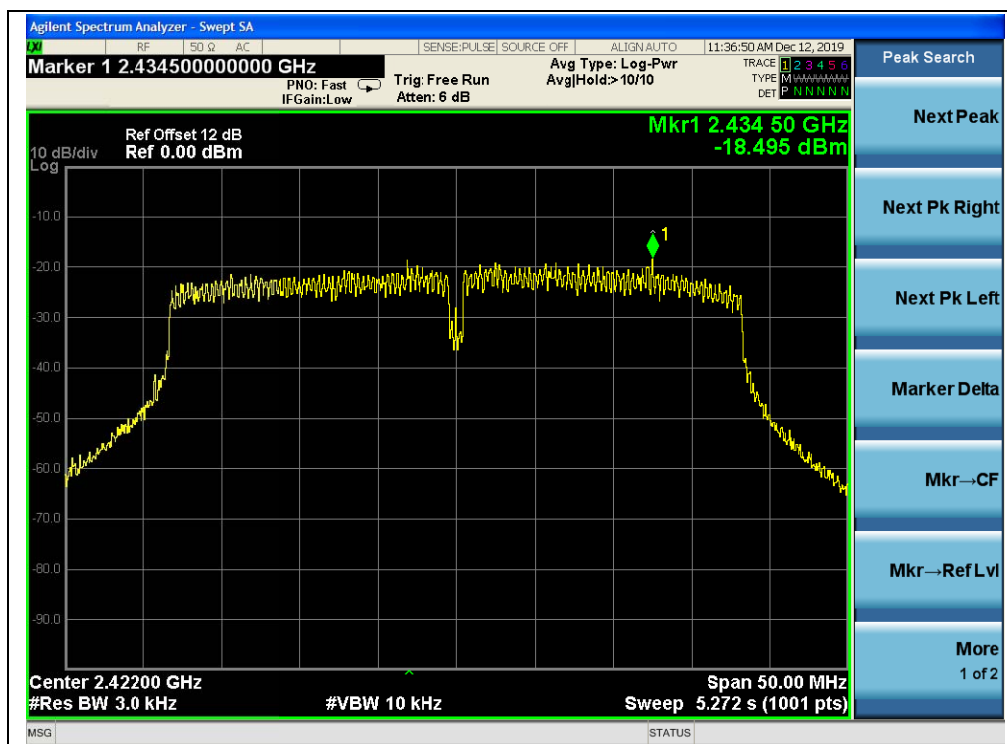B. Test Plots:

(Channel = 3, 802.11n(HT40))

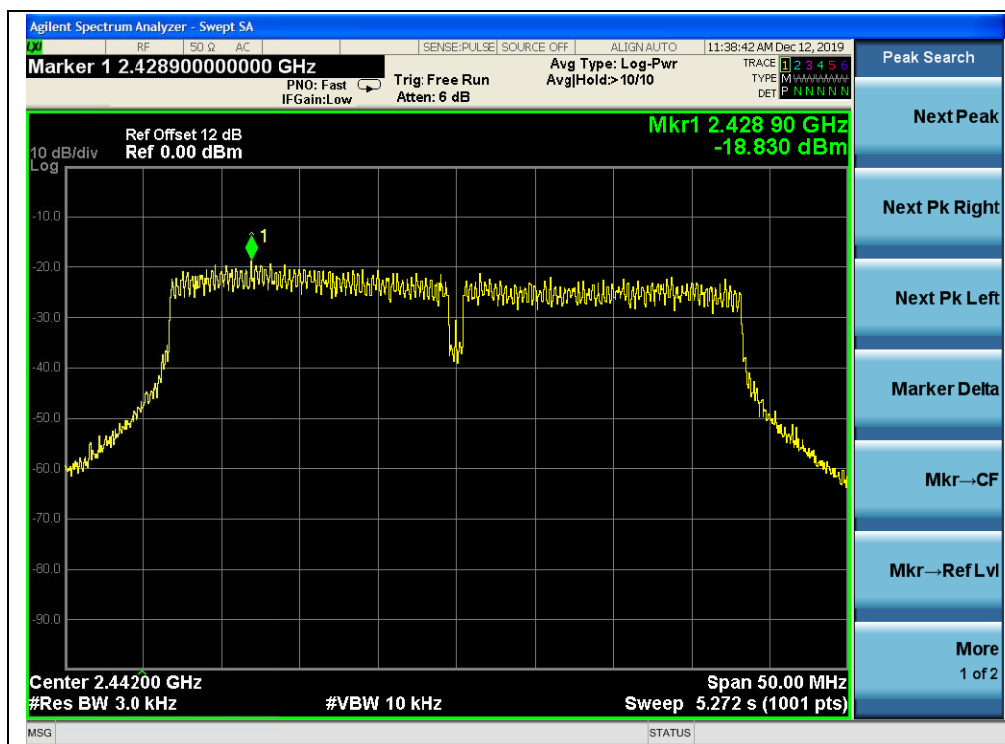

(Channel = 7, 802.11n(HT40))

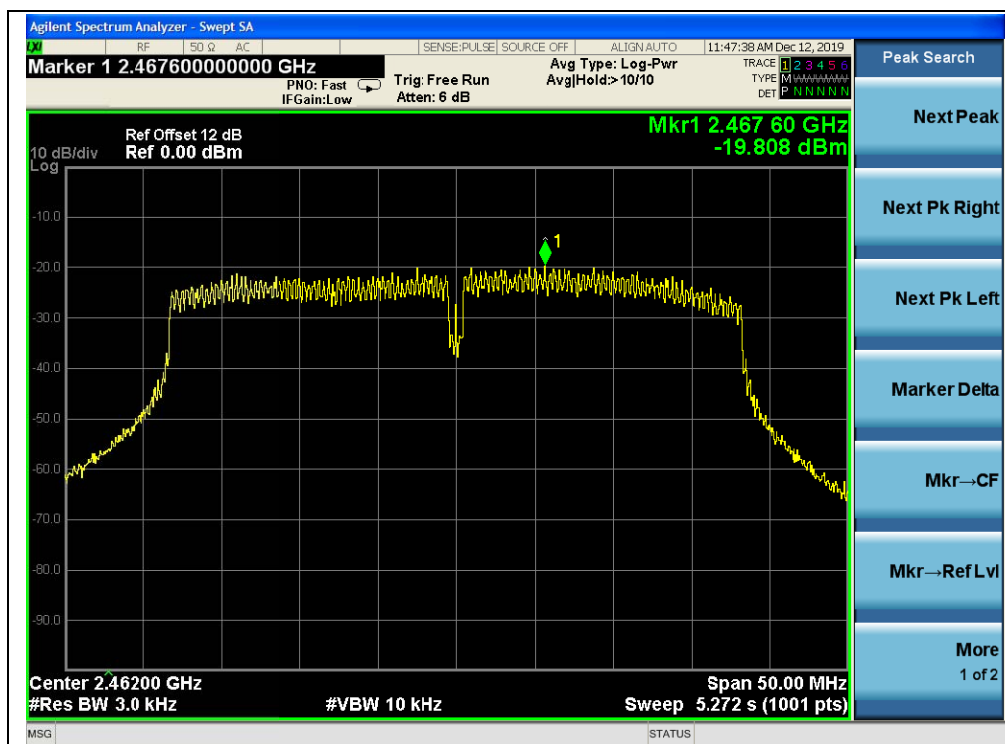

(Channel = 11, 802.11n(HT40))

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

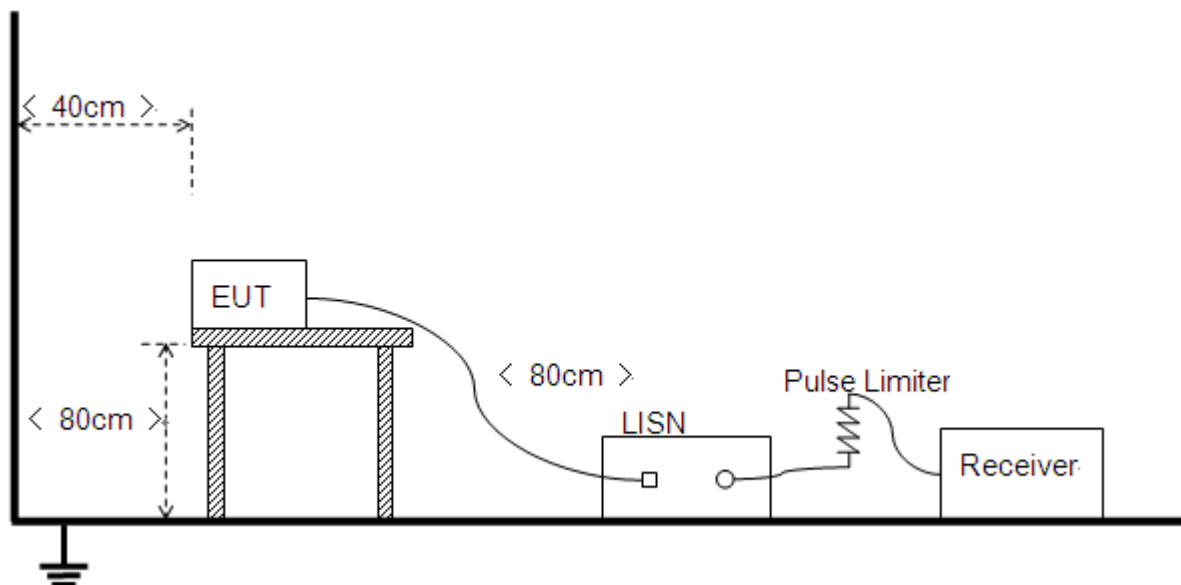

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + mouse+USB disk+ T-Flash+ HDMI Cable+Display+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

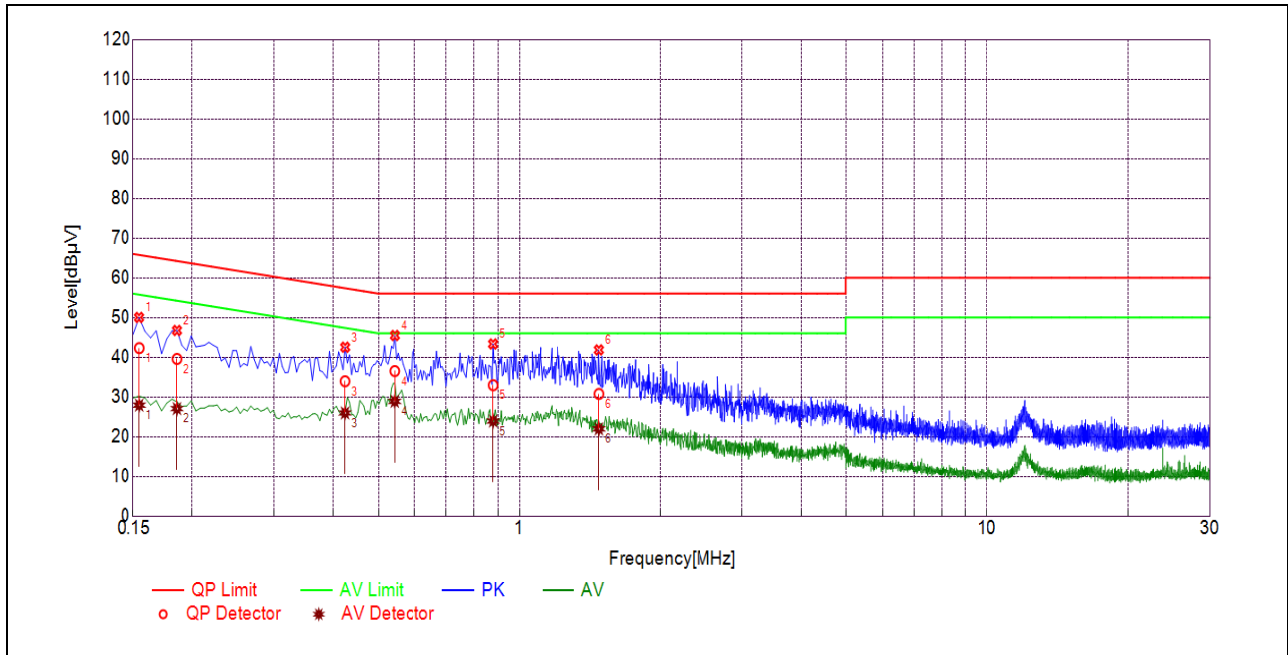

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1546	42.30	27.92	65.75	55.75	Line	PASS
2	0.1860	39.57	27.05	64.21	54.21		PASS
3	0.4241	33.94	25.96	57.37	47.37		PASS
4	0.5410	36.50	28.88	56.00	46.00		PASS
5	0.8793	32.95	23.93	56.00	46.00		PASS
6	1.4822	30.75	21.96	56.00	46.00		PASS

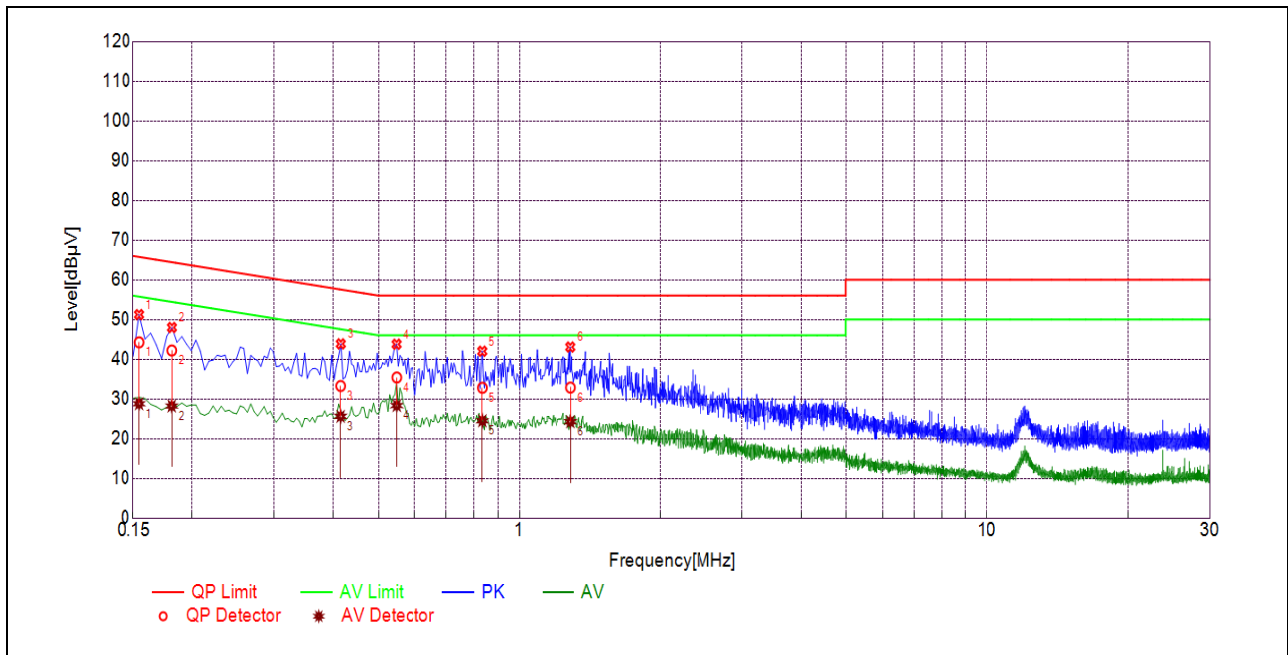

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	44.25	28.78	65.75	55.75	Neutral	PASS
2	0.1813	42.19	28.21	64.42	54.42		PASS
3	0.4151	33.25	25.60	57.54	47.54		PASS
4	0.5464	35.40	28.32	56.00	46.00		PASS
5	0.8343	32.81	24.49	56.00	46.00		PASS
6	1.2890	32.85	24.26	56.00	46.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

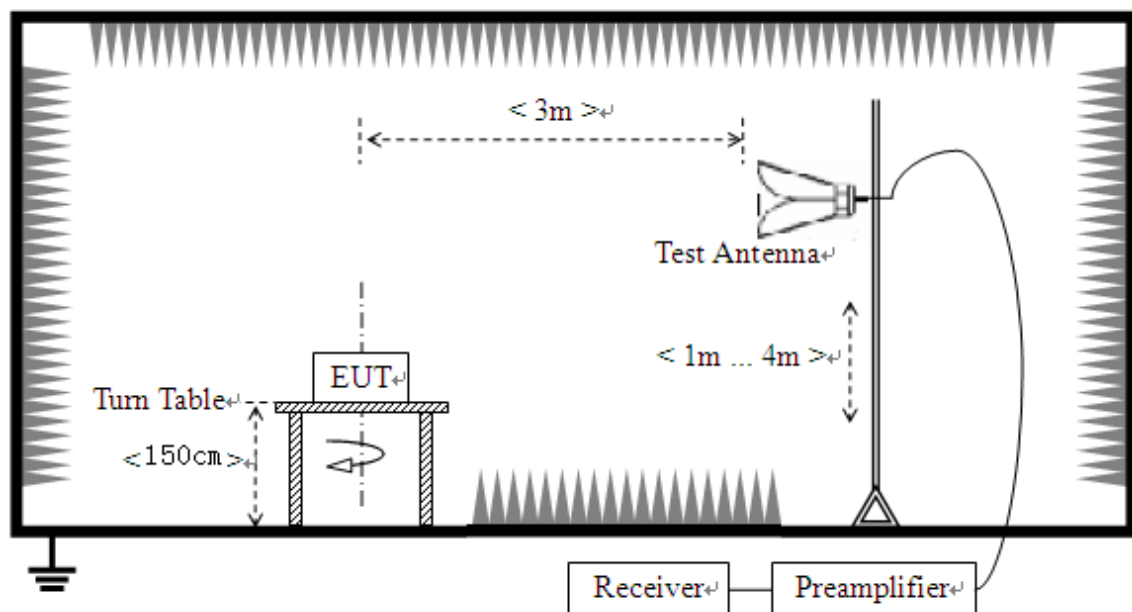

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2390.00	PK	45.73	-29.67	32.56	48.62	74	PASS
1	2384.90	AV	43.49	-29.67	32.56	46.38	54	PASS
13	2483.50	PK	51.79	-29.67	32.56	54.68	74	PASS
13	2483.50	AV	46.07	-29.67	32.56	48.96	54	PASS


B. Test Plots:

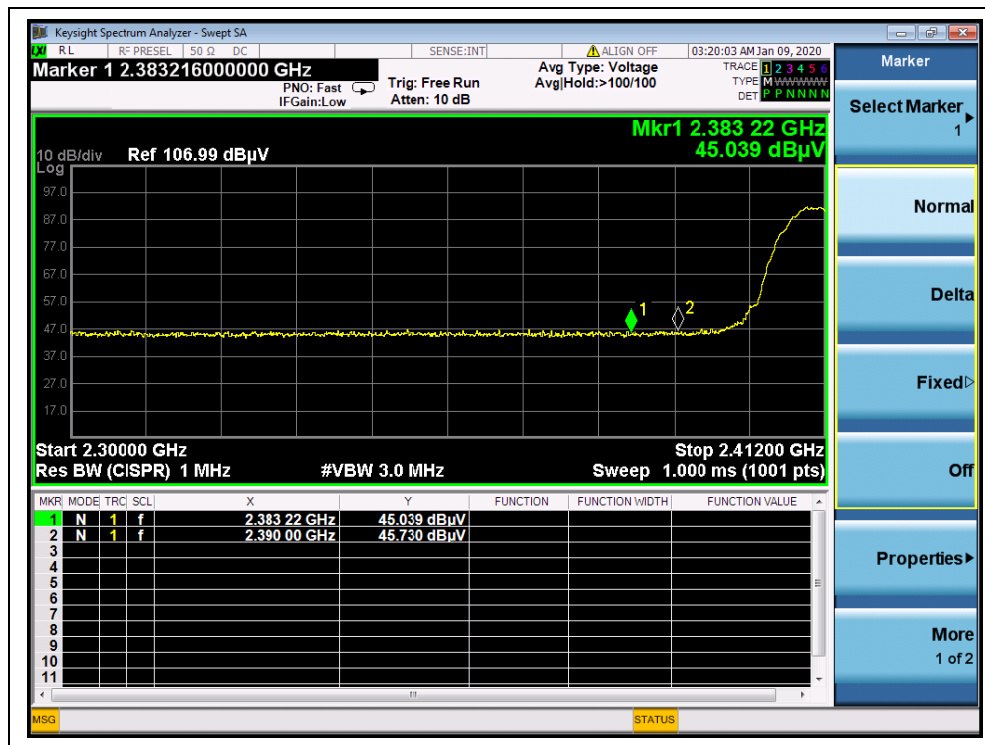


(PEAK, Channel = 1, 802.11b)

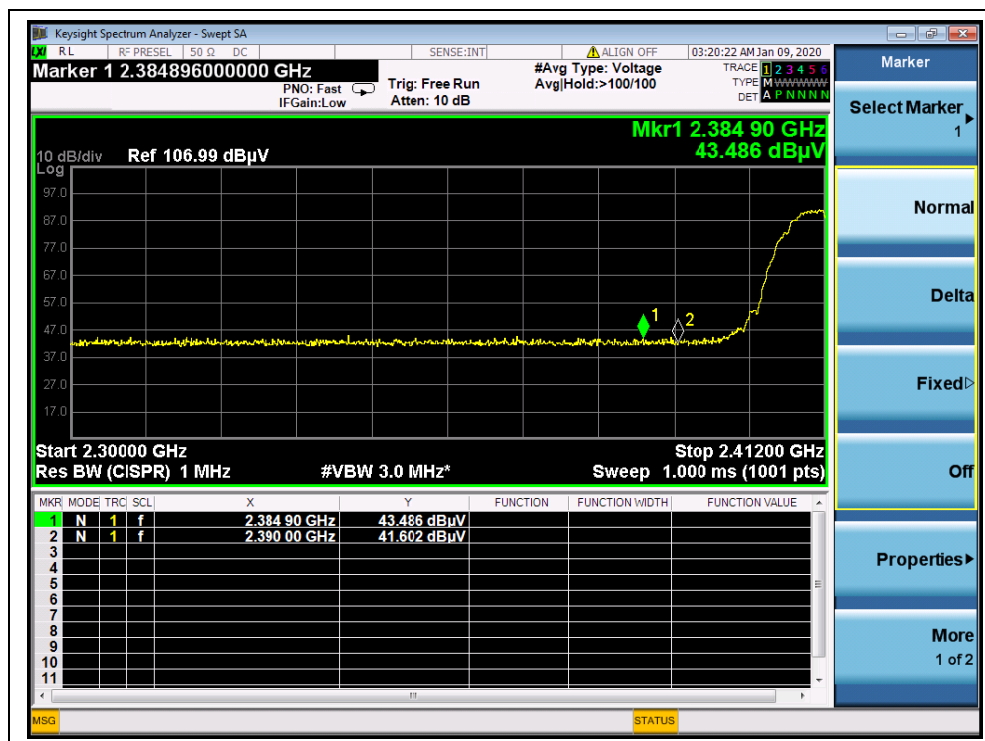

(AVG, Channel = 1, 802.11b)

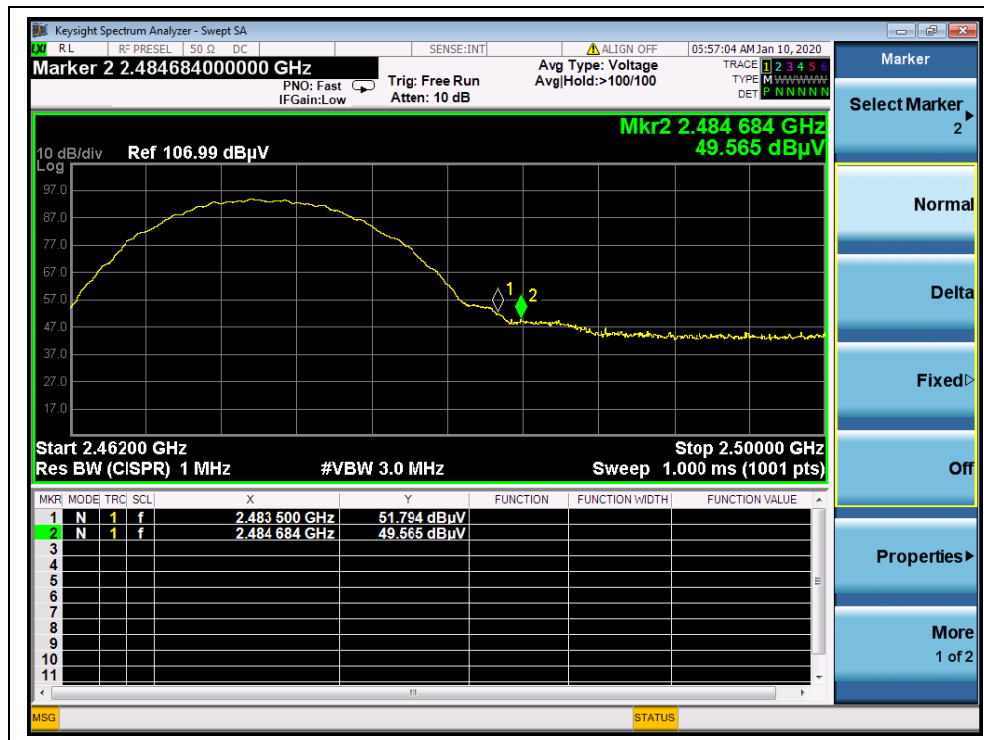

(PEAK, Channel = 13, 802.11b)

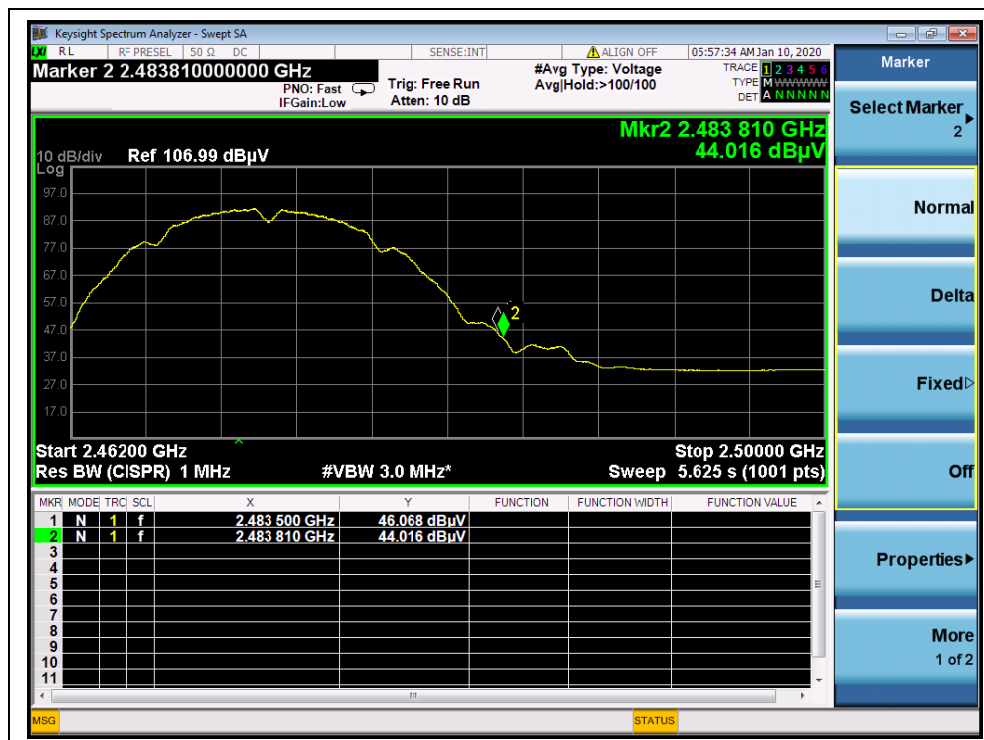

(AVG, Channel = 13, 802.11b)




802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2390.00	PK	57.84	-29.67	32.56	60.73	74	PASS
1	2388.37	AV	39.84	-29.67	32.56	42.73	54	PASS
13	2484.91	PK	65.31	-29.67	32.56	68.20	74	PASS
13	2483.50	AV	48.40	-29.67	32.56	51.29	54	PASS


B. Test Plots:

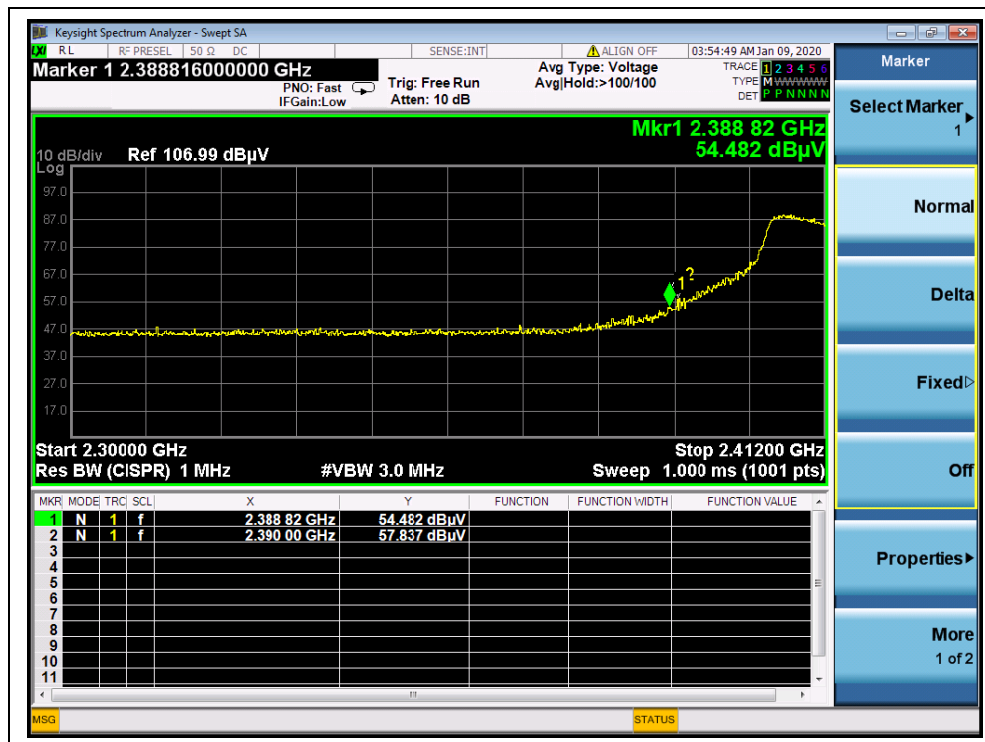


(PEAK, Channel = 1, 802.11g)

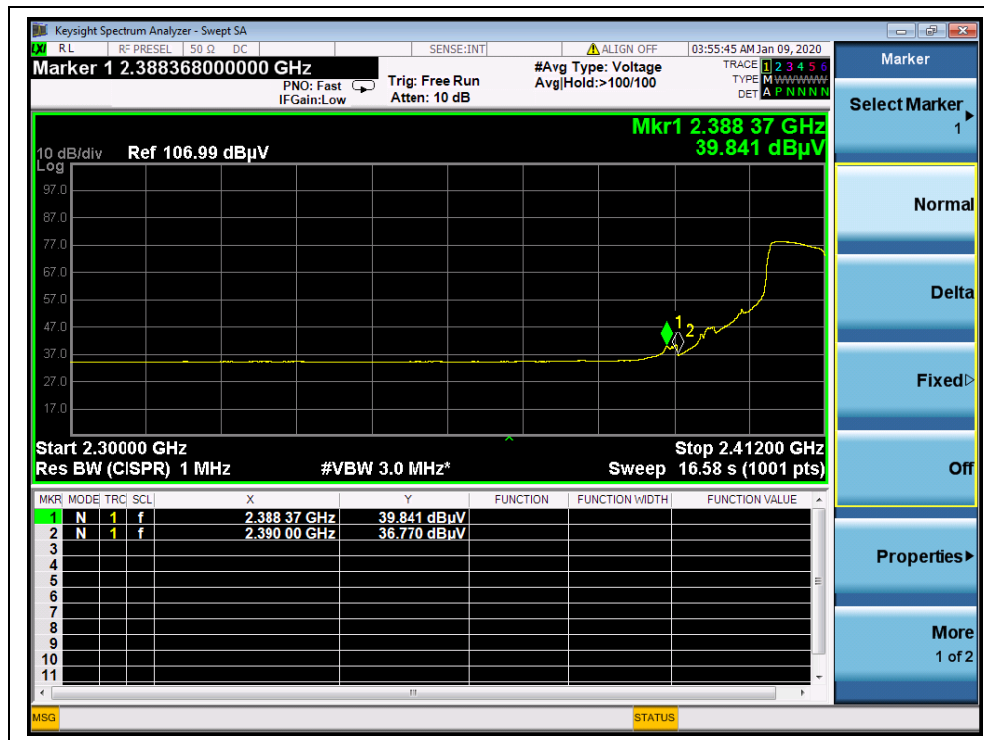

(AVG, Channel = 1, 802.11g)

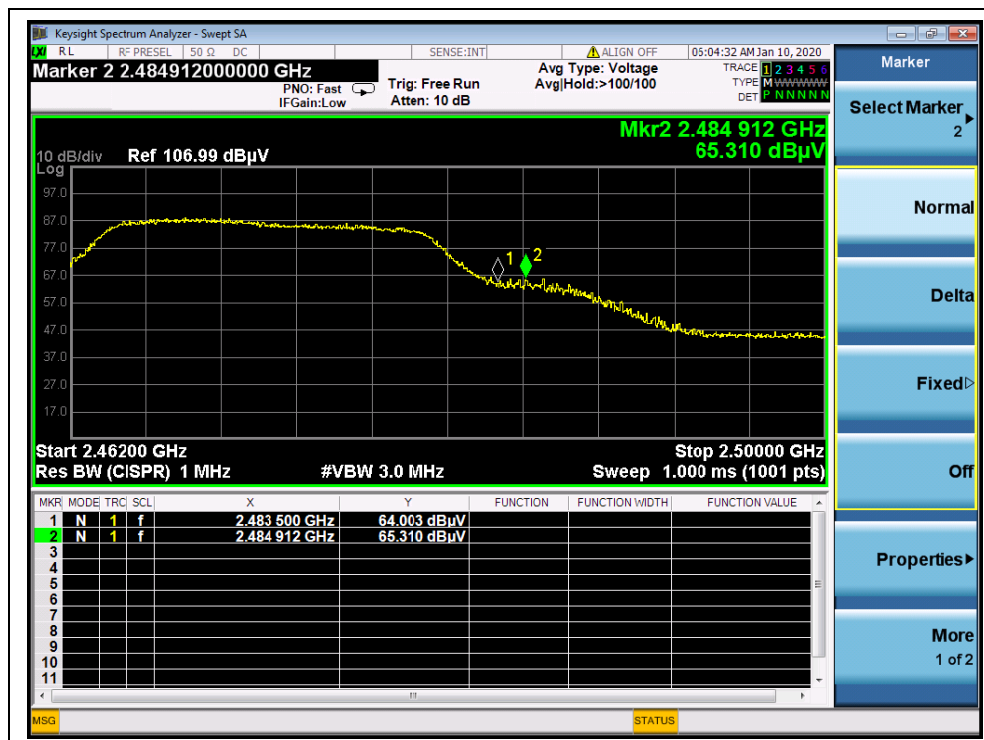

(PEAK, Channel = 13, 802.11g)

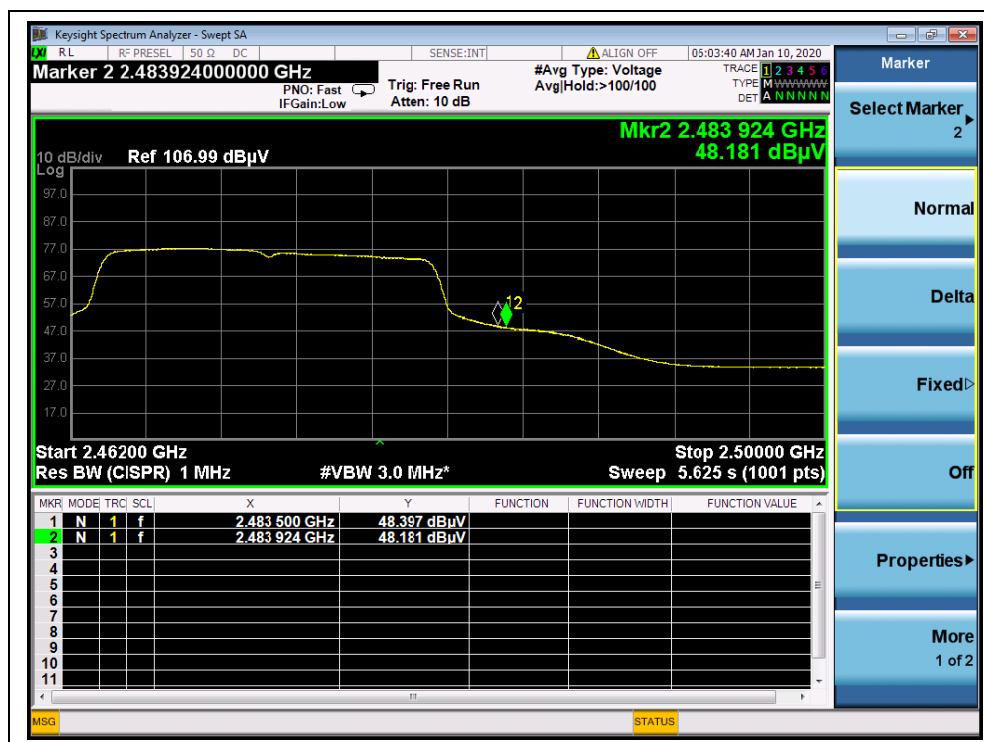

(AVG, Channel = 13, 802.11g)




802.11 n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2390.00	PK	66.60	-29.67	32.56	69.49	74	PASS
1	2390.00	AV	48.74	-29.67	32.56	51.63	54	PASS
13	2484.49	PK	64.08	-29.67	32.56	66.97	74	PASS
13	2483.50	AV	48.40	-29.67	32.56	51.29	54	PASS


B. Test Plots:

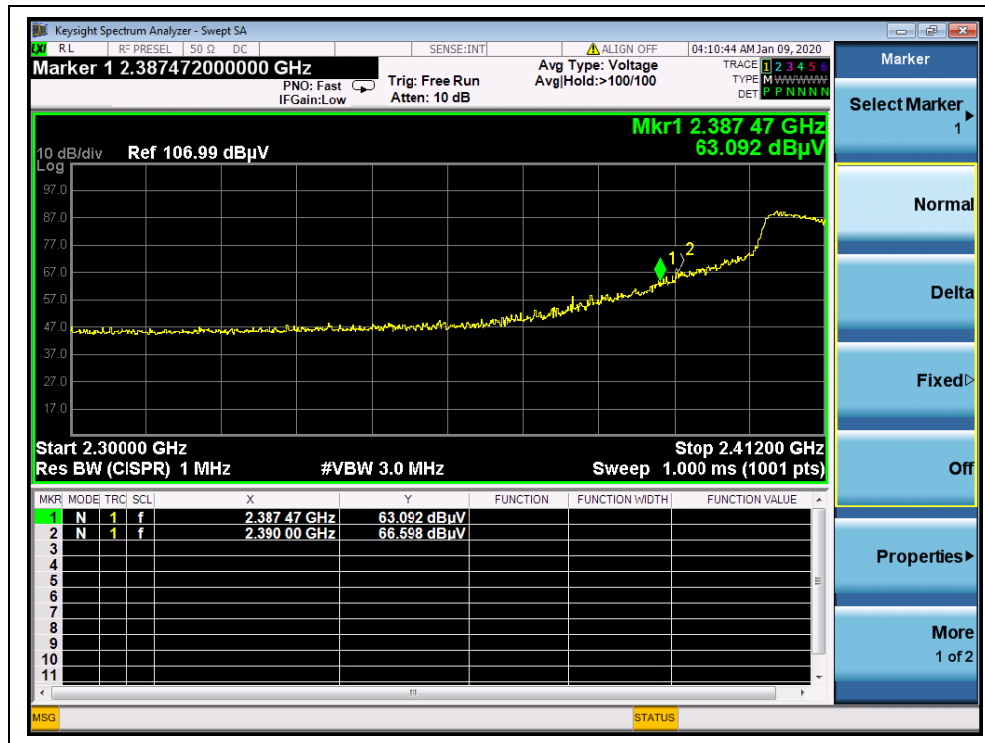


(PEAK, Channel = 1, 802.11n(HT20))

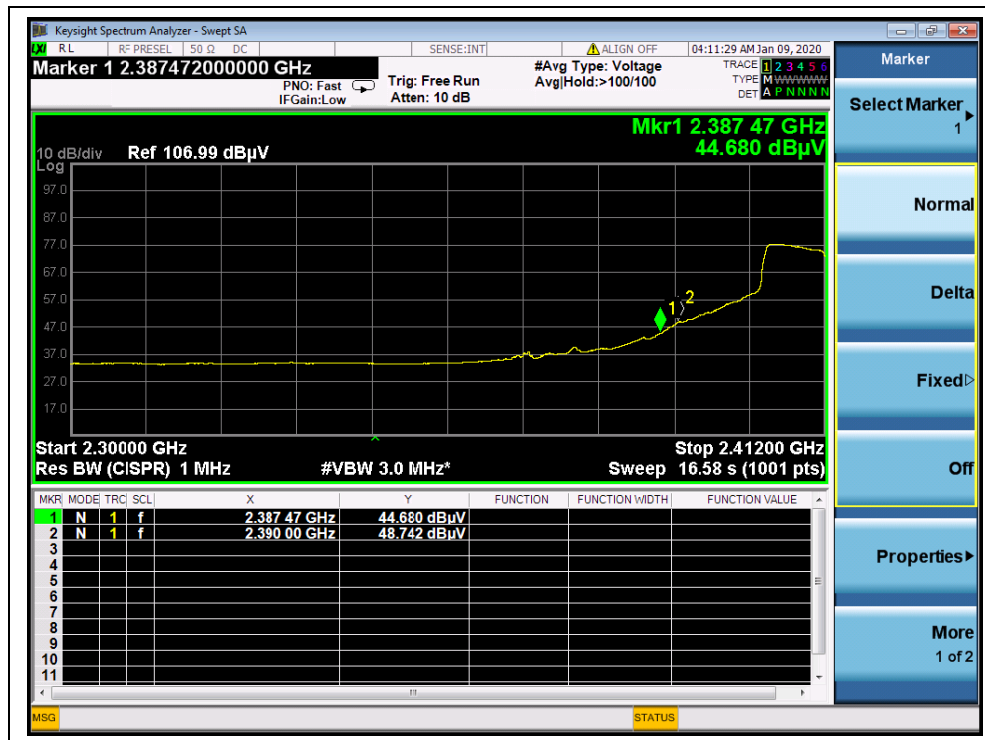

(AVG, Channel = 1, 802.11n(HT20))

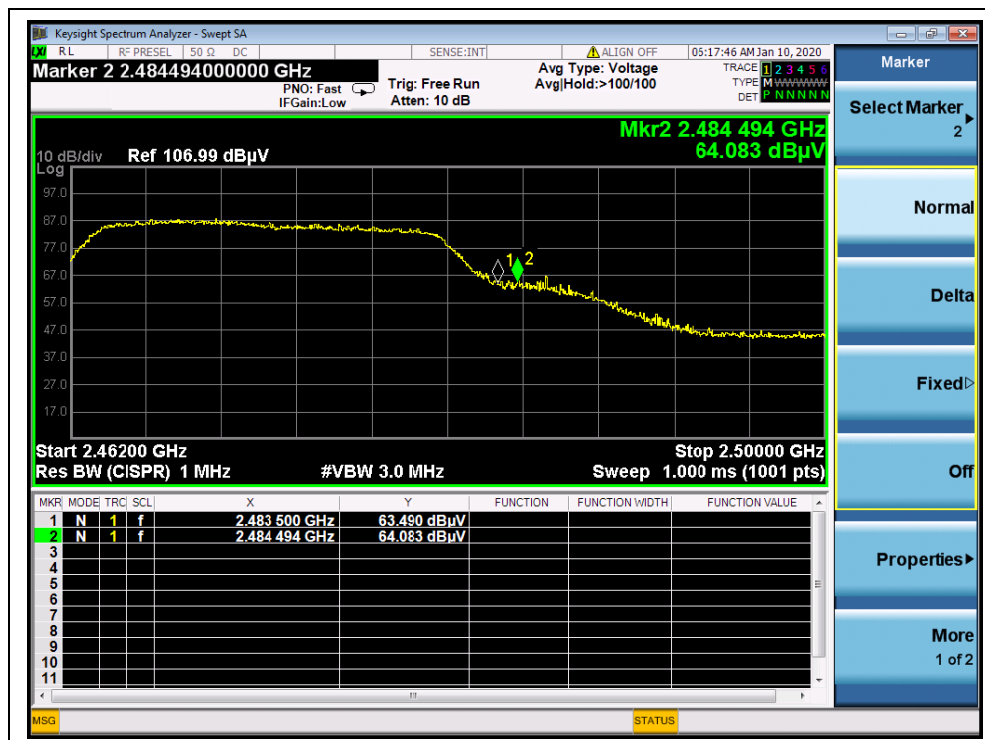

(PEAK, Channel = 13, 802.11n(HT20))

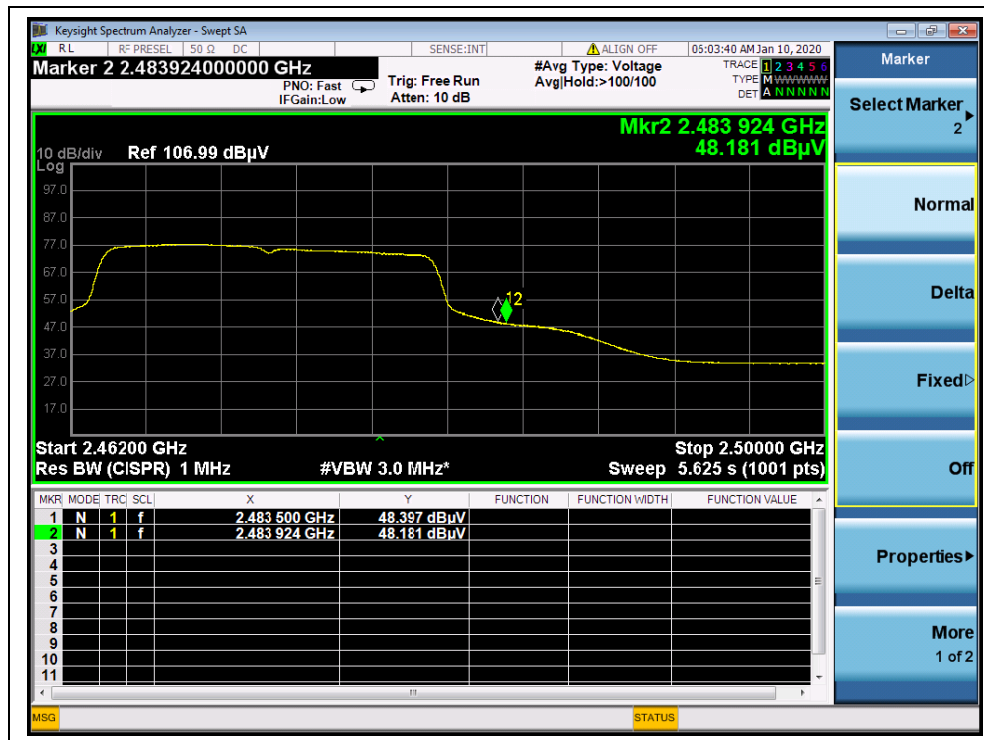

(AVG, Channel = 13, 802.11n(HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
3	2388.70	PK	62.09	-29.67	32.56	64.98	74	PASS
3	2390.00	AV	44.81	-29.67	32.56	47.70	54	PASS
11	2484.61	PK	63.27	-29.67	32.56	66.16	74	PASS
11	2483.50	AV	48.92	-29.67	32.56	51.81	54	PASS


B. Test Plots:

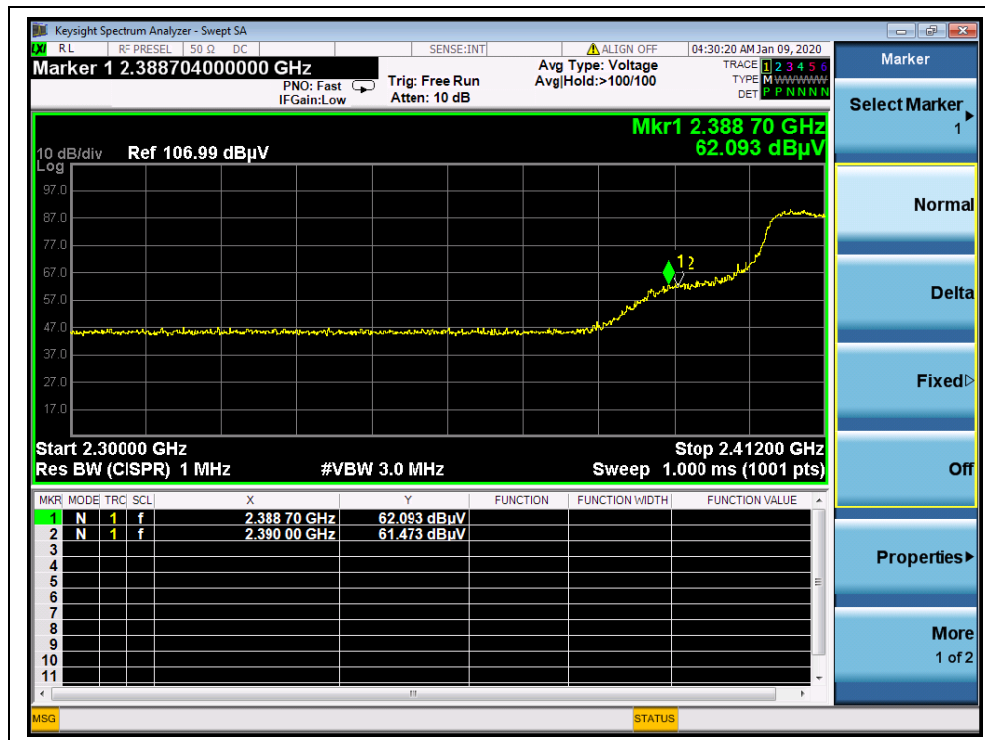


(PEAK, Channel = 3, 802.11n (HT40))

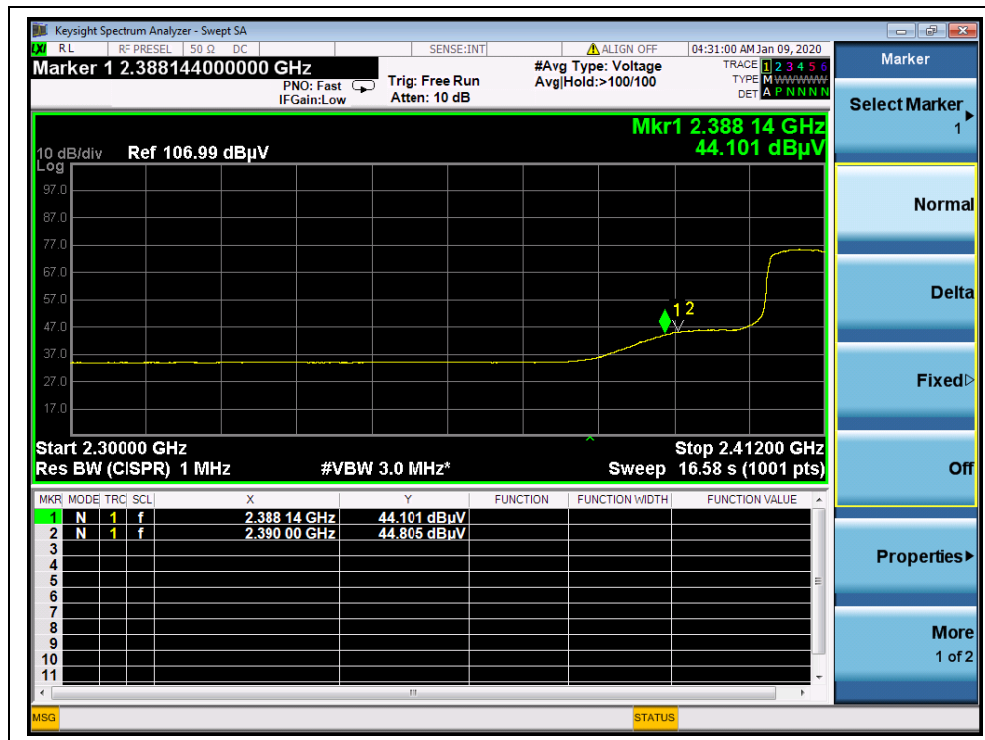

(AVG, Channel = 3, 802.11n (HT40))

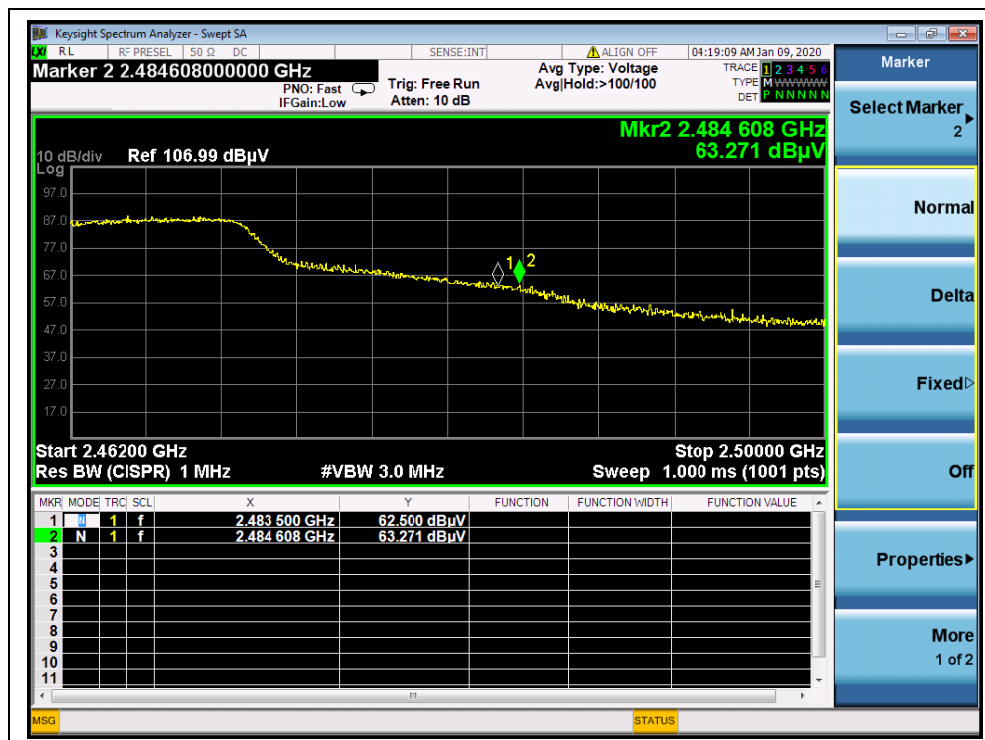

(PEAK, Channel = 11, 802.11n (HT40))

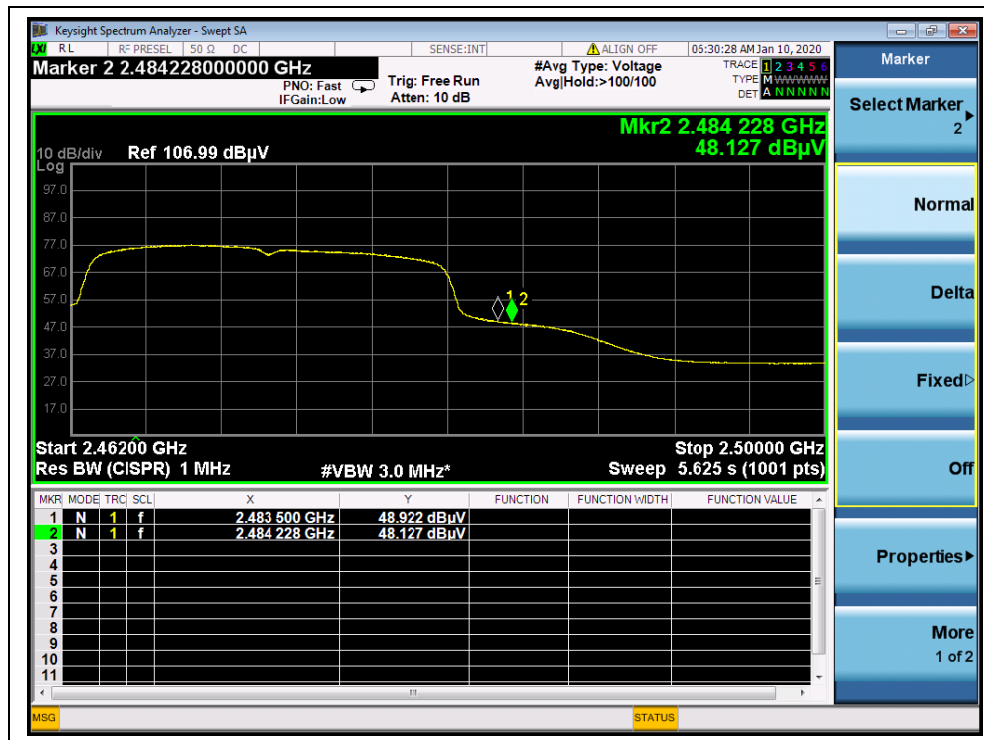

(AVG, Channel = 11, 802.11n(HT40))



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz



- 2) For radiated emissions from 30MHz to 1GHz

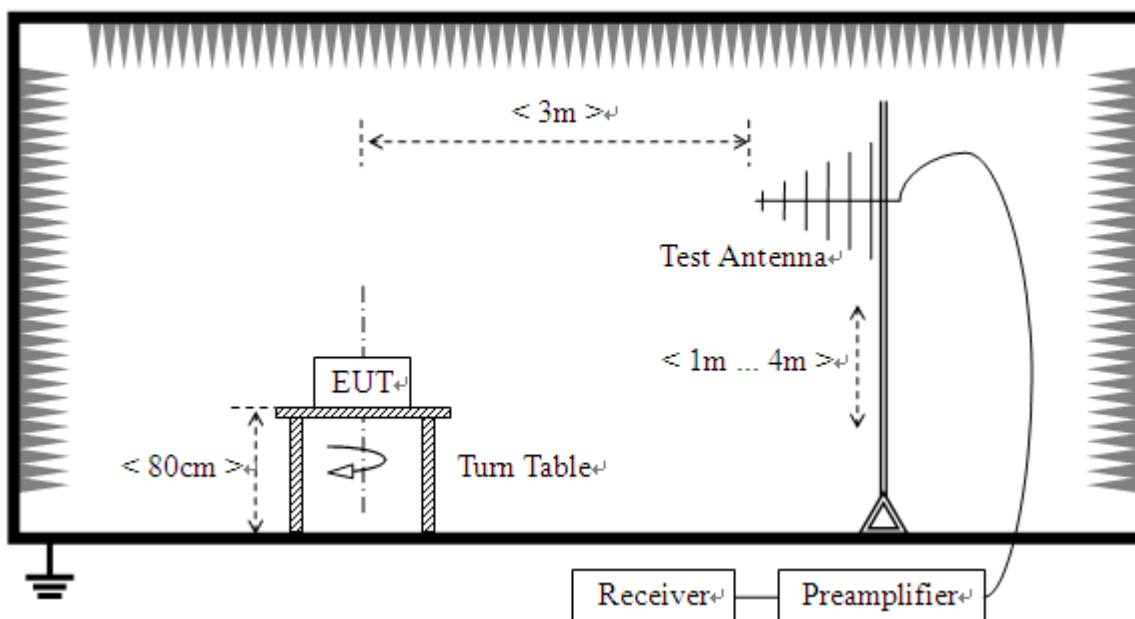

3) For radiated emissions above 1GHz

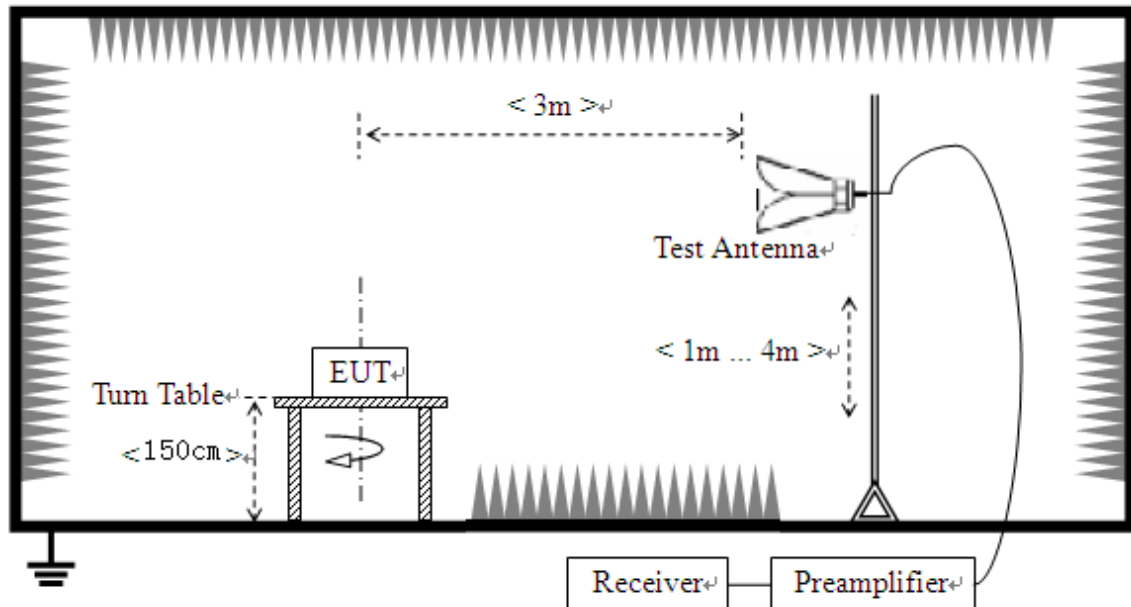

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Test mode**

Plots for Channel = 1

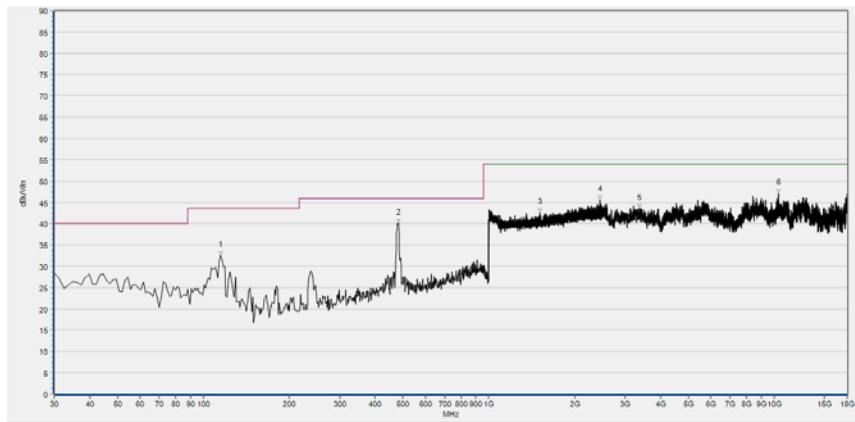

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
114.981	32.52	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
482.829	40.05	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1506.443	42.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2448.259	45.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3367.340	43.54	N/A	42.40	74.00	N/A	54.00	Horizontal	PASS
10337.807	47.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

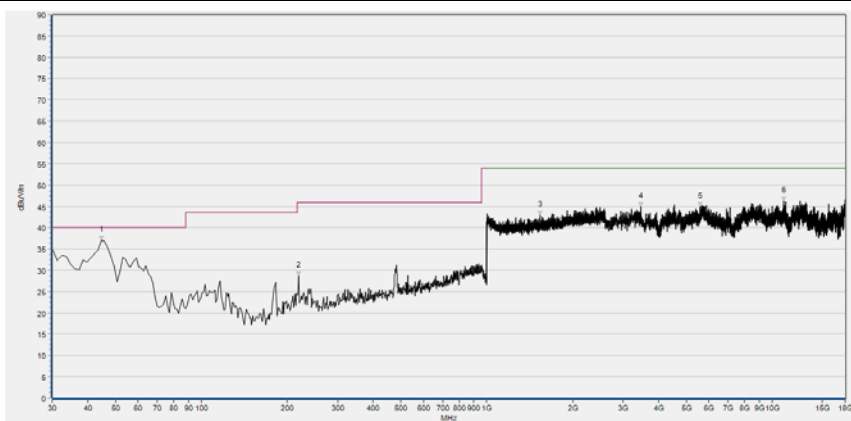


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	37.08	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
219.387	28.72	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1539.736	42.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3468.158	44.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5596.545	44.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10942.717	46.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 7

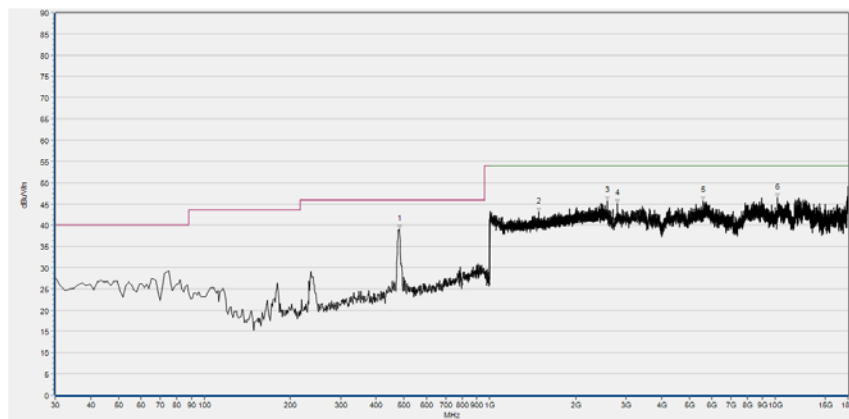

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
481.615	38.99	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1484.034	43.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2584.634	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2796.036	45.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5571.340	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10200.582	46.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

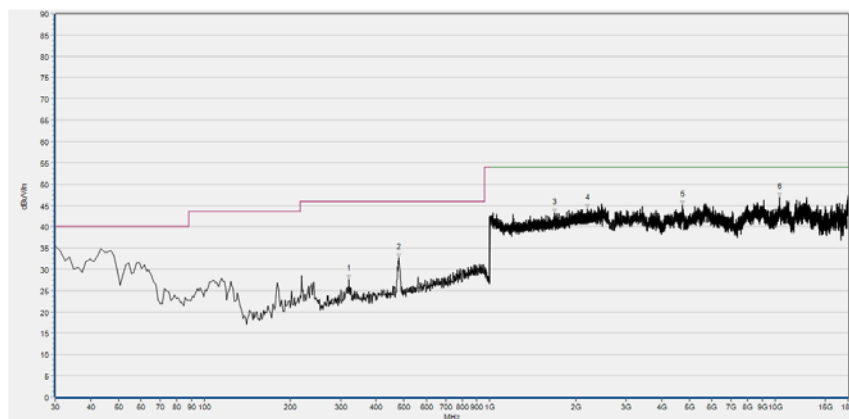


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
321.364	27.62	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
480.401	32.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1685.074	43.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2197.919	44.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4719.985	45.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10329.405	46.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plots for Channel = 13

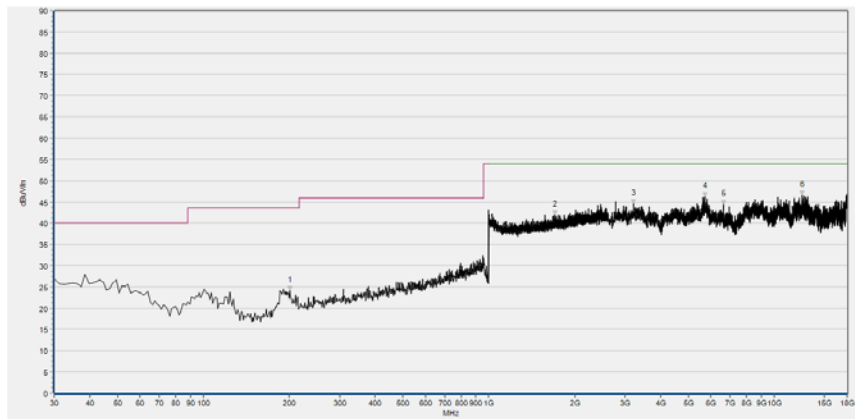

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
201.176	24.10	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1708.764	41.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3213.312	44.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5708.565	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6624.332	44.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12502.600	46.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

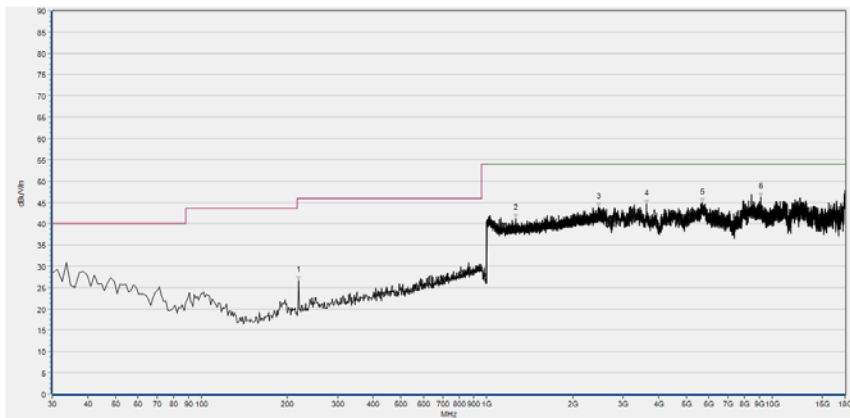


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	26.58	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1263.145	41.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2468.747	43.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3619.385	44.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5691.762	44.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9130.787	46.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11g Test mode**

Plot for Channel = 1

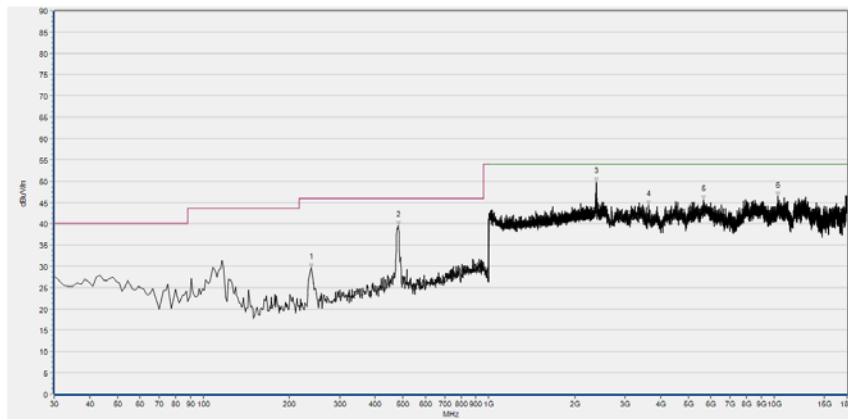

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
238.811	29.69	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.615	39.56	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2381.032	49.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3636.188	44.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5635.752	45.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10318.203	46.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

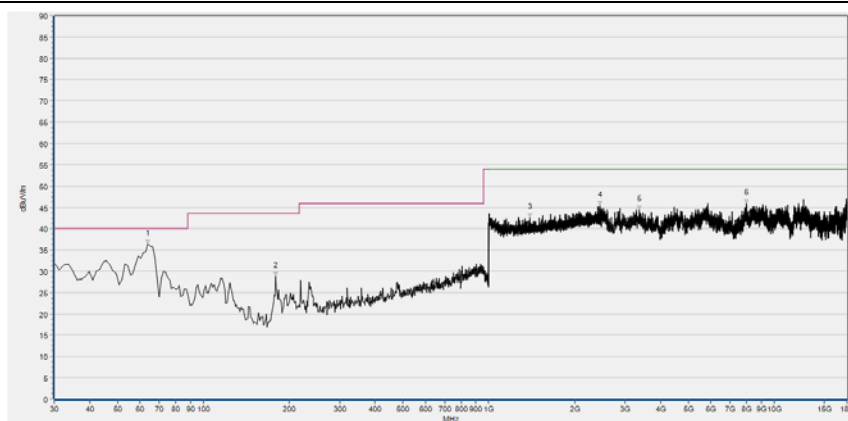


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
63.992	36.36	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
179.324	28.78	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1395.678	42.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2454.662	45.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3367.340	44.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7974.177	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 7

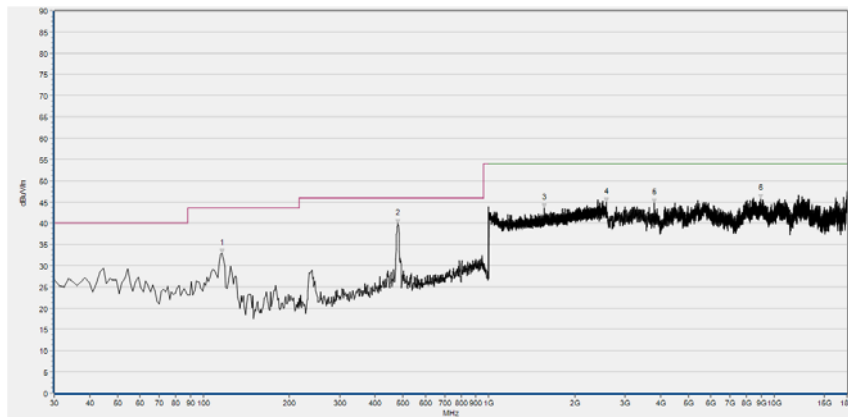

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.195	32.77	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
480.401	39.90	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1564.066	43.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2585.914	44.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3795.817	44.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8954.355	45.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

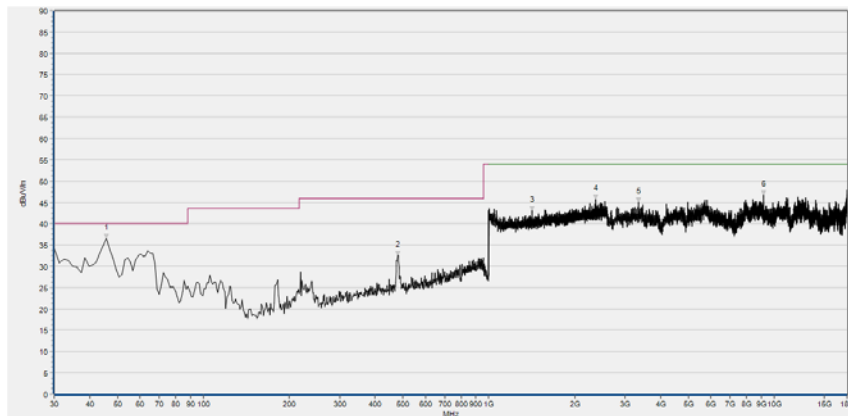


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	36.56	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
479.186	32.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1417.447	43.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2362.465	45.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3342.135	45.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9169.995	46.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 13

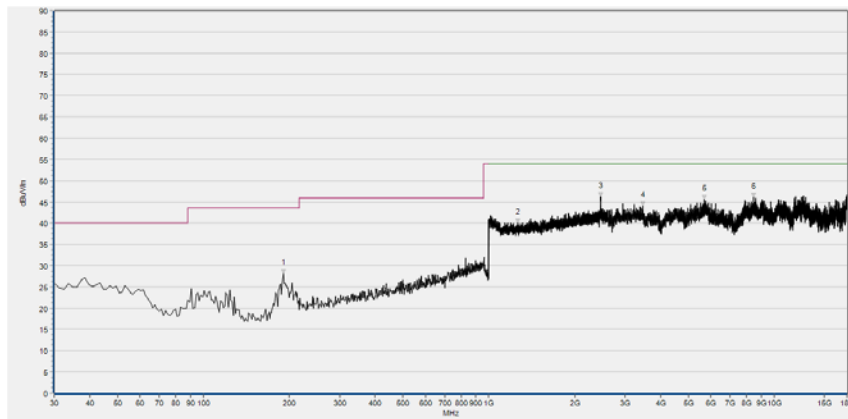

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
190.250	28.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1263.145	40.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2466.186	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3454.155	44.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5677.760	45.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8447.463	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

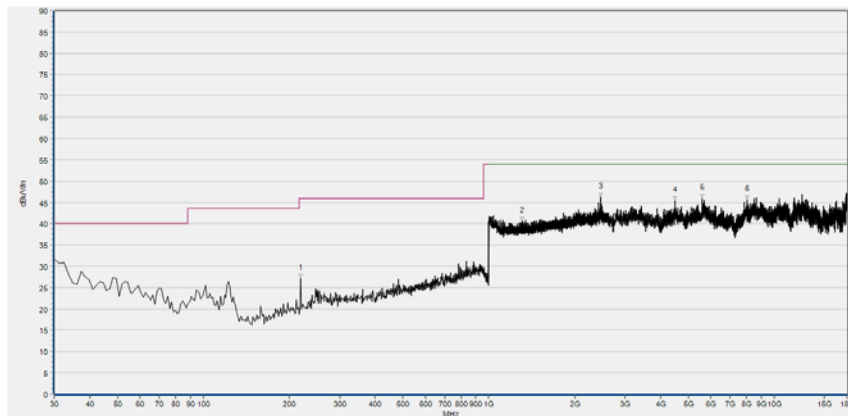


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	27.08	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1306.042	40.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2464.266	46.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4498.745	45.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5596.545	45.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8024.586	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT20) Test mode**

Plots for Channel = 1

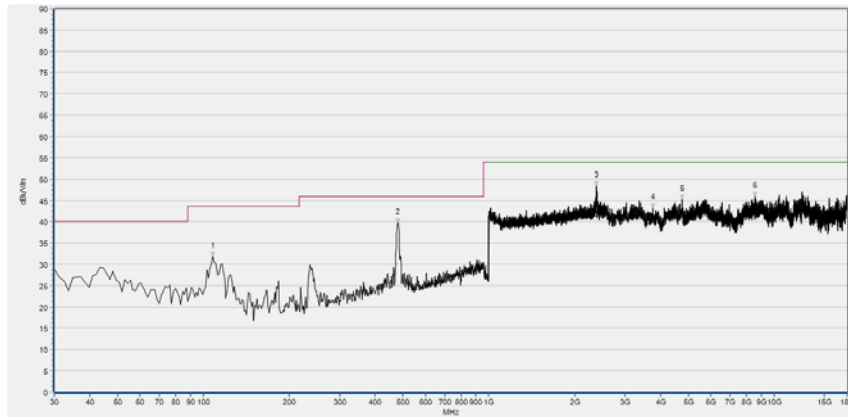

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.697	31.92	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
480.401	39.74	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2378.471	48.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3748.209	43.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4753.592	45.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8537.079	45.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

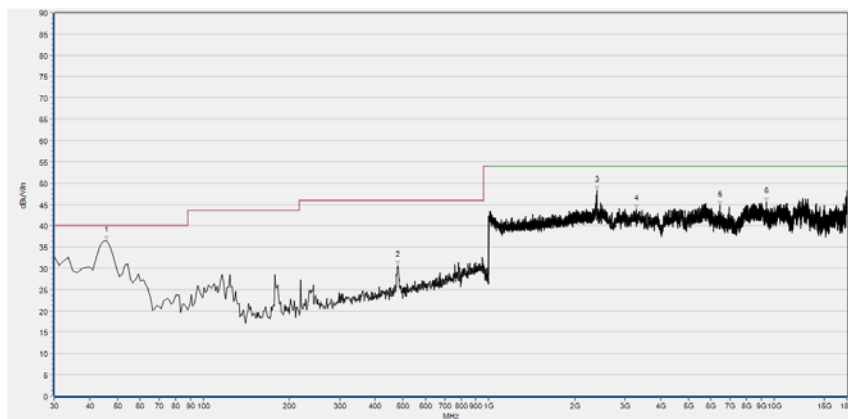


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	36.55	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	30.60	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2388.075	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3294.526	43.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6439.498	44.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9366.030	45.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 7

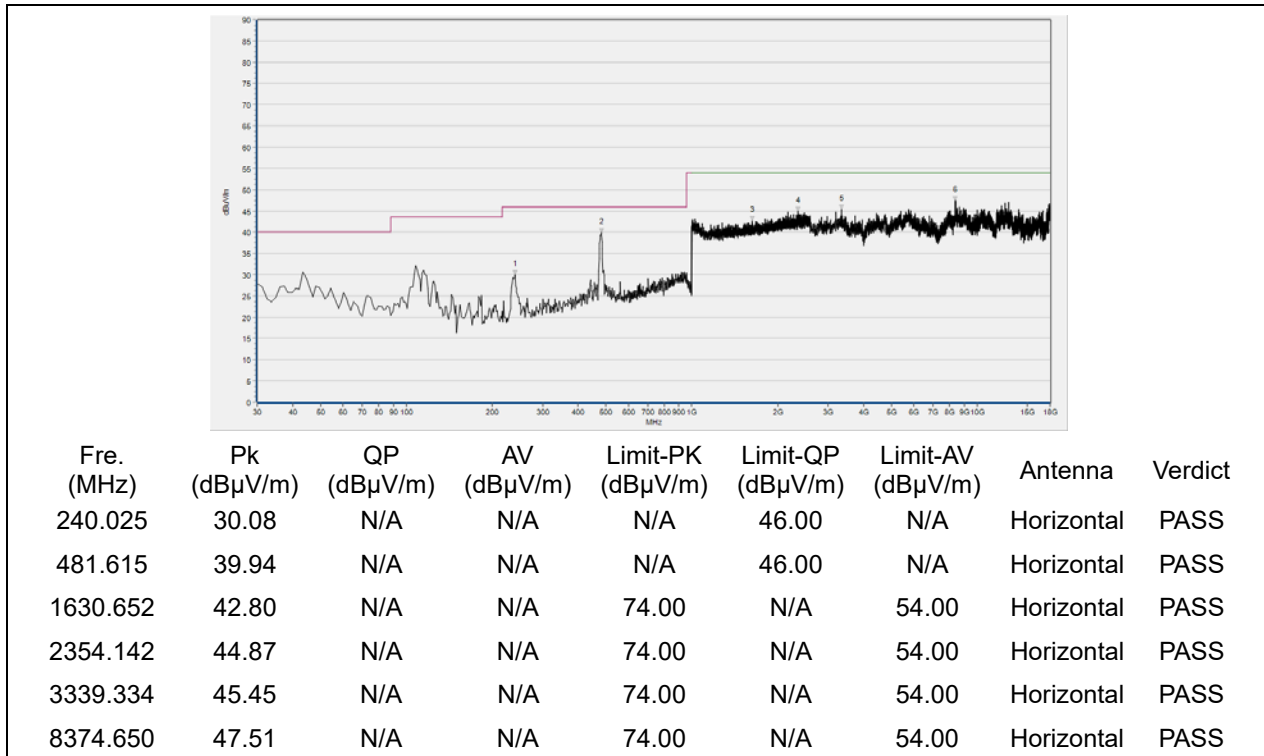


(Antenna Horizontal, 30MHz to 18GHz)

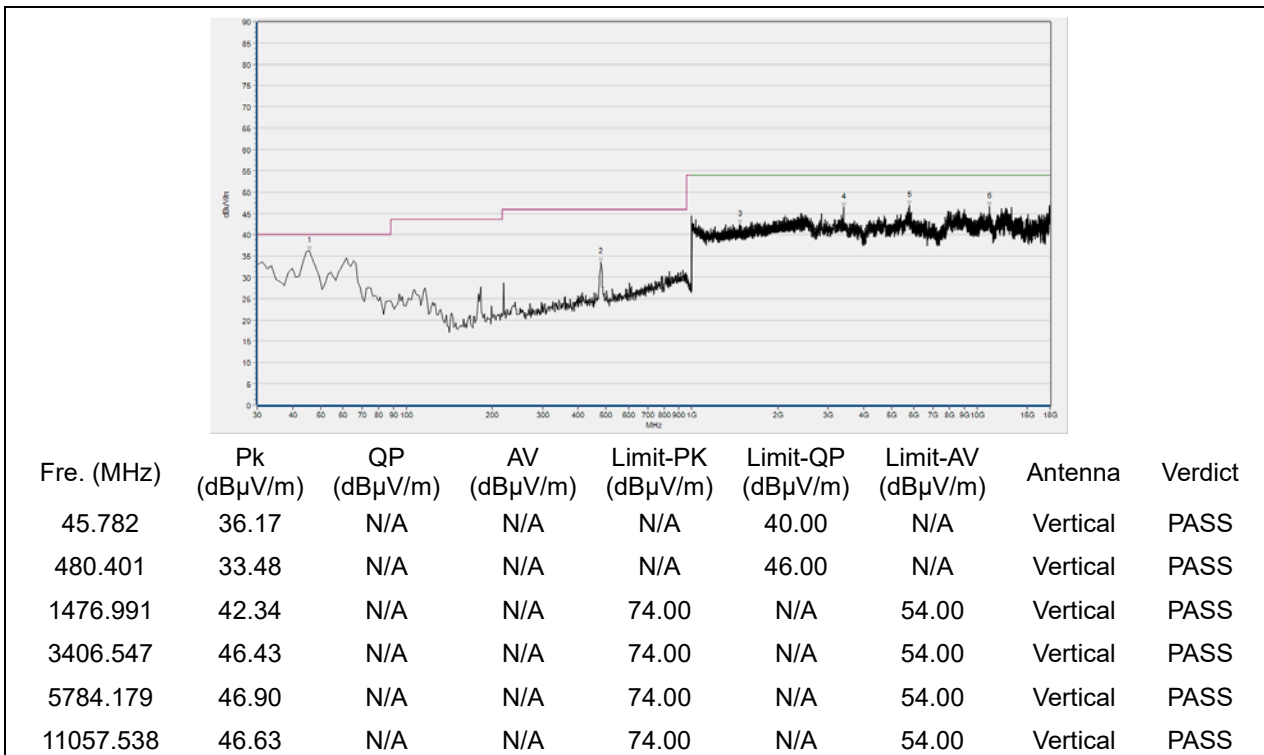


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 13

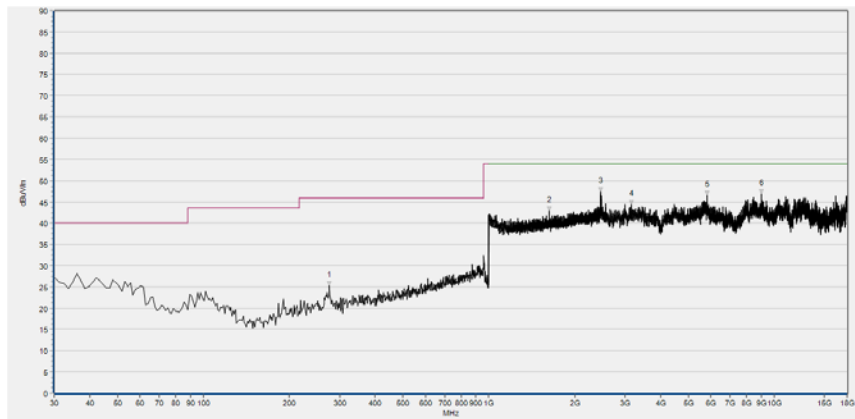

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
276.446	25.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1630.012	42.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2464.266	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3154.501	44.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5826.187	46.52	N/A	42.40	74.00	N/A	54.00	Horizontal	PASS
9035.570	46.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

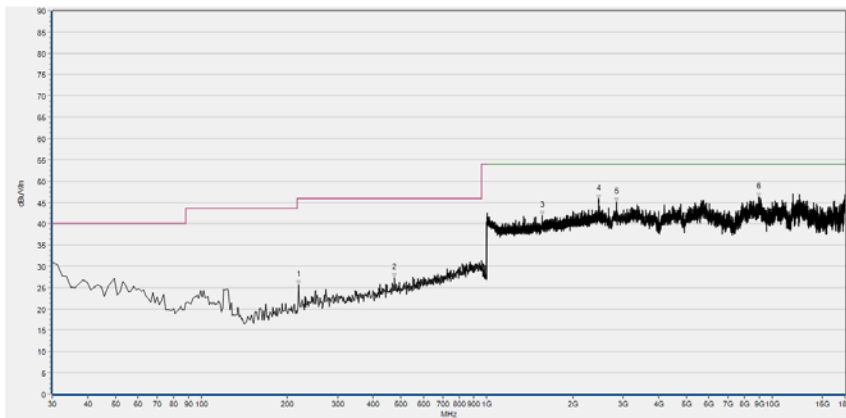


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	25.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
475.544	27.25	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1560.864	41.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2464.266	45.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2846.445	45.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8951.555	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n(HT40) Test mode**

Plots for Channel = 3

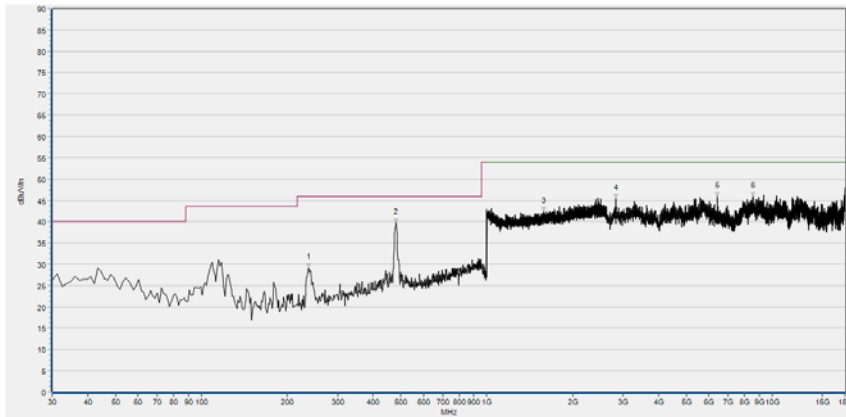

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
237.597	29.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
480.401	39.67	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1579.432	42.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2829.642	45.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6433.897	46.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8559.484	45.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

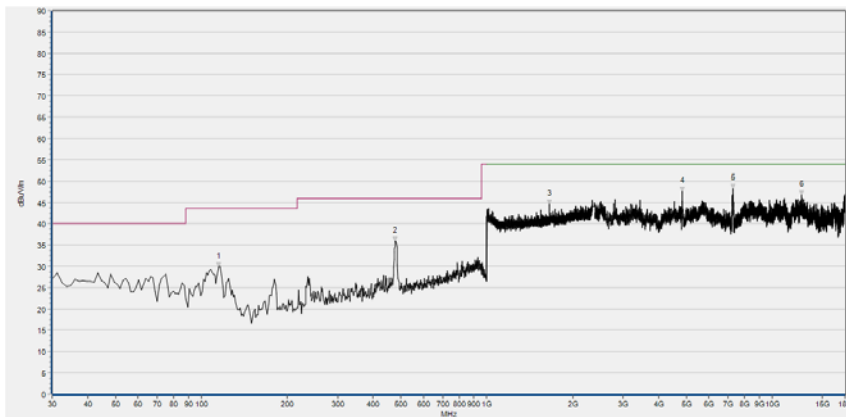

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
114.981	29.91	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
477.972	35.82	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1655.622	44.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4837.607	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7274.050	48.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12676.232	46.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 7

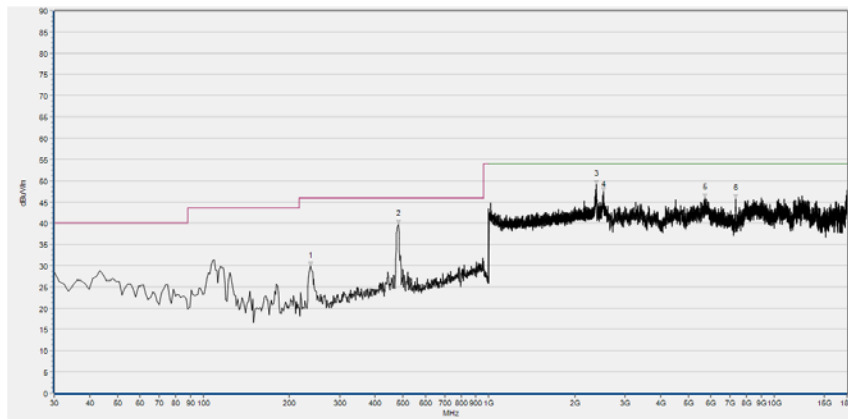

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
237.597	29.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.615	39.69	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2377.831	49.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2521.889	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5716.967	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7316.057	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

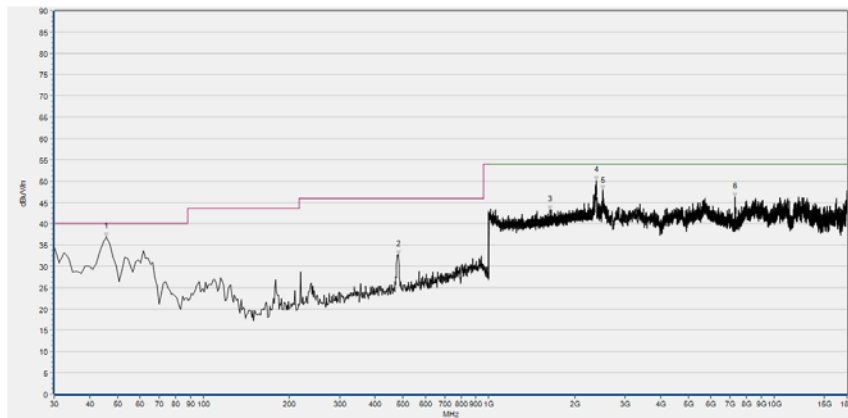


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	36.87	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
481.615	32.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1635.774	43.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2386.154	50.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2511.645	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7293.653	46.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plots for Channel = 11

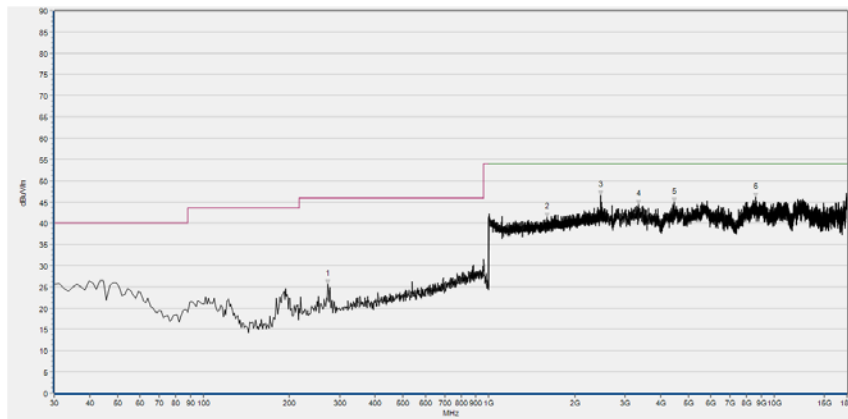

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
272.804	25.66	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1601.841	41.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2464.266	46.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3342.135	44.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4473.541	44.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8615.494	46.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

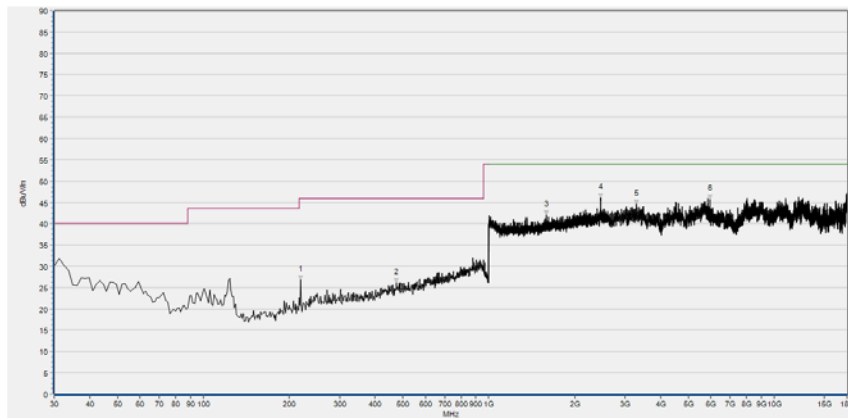

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	26.87	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
474.330	26.17	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1590.316	42.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2466.186	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3294.526	44.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5946.608	45.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2019.04.09	2020.04.08
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2019.04.16	2020.04.15
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2019.05.08	2020.05.09
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
display	6007712	KDL-24EX 520	SONY	N/A	N/A
mouse	Q/ZY 1-2006	OP-220	ShuangFeiYan	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.26	2020.07.25
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2020.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2020.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2019.12.01	2020.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————