

# FCC RADIO TEST REPORT FCC ID: 2AC7RCAMIPPT08

Product: IP Pan and Tilt Wireless Camera

Trade Name: Night Owl

**Model Name**: CAM-IPPT-HDW

## **Prepared for**

Henan Taide Electronic Technology CO., Ltd 16# Gong Ye San Road, Fengqiu Country, Xinxiang City, Henan Province

## **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.

Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang
Road, Dongguan, China



Report No.: PT1410118012FA

#### **TEST RESULT CERTIFICATION**

| Applicant's name | Henan Taide Electronic Technology CO., Ltd               |     |
|------------------|--|-----|
| Address          | 16# Gong Ye San Road, Fengqiu Country, Xinxiang City, He | nan |

Province

Manufacture's Name... Henan Taide Electronic Technology CO., Ltd

Address ....... 16# Gong Ye San Road, Fengqiu Country, Xinxiang City,

Henan Province

**Product description** 

Product name ......IP Pan and Tilt Wireless Camera

Model and/or type

reference ...... CAM-IPPT-HDW

Serial Model ..... N/A

In all, the original product and the alternative product are the same.

Standards ...... FCC Part15.247

Test procedure ...... ANSI C63.10-2003

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.

Date of Test .....

Date (s) of performance of tests ...... 22, Oct. 2014 ~ 27, Oct. 2014

Test Result......Pass

Testing Engineer :

Assistant

fores Song

Technical Manager:

Supervisor

Down Liu

Authorized Signatory:

Jacky Ou / Manager

Report No.: PT1410118012FA

## 2 Test Summary

| Test Items                        | Test Requirement  | Result |
|-----------------------------------|-------------------|--------|
|                                   | 15.205(a)         |        |
| Spurious Radiated Emissions       | 15.209            | PASS   |
|                                   | 15.247(d)         |        |
| Band edge Emissions               | 15.247(d)         | PASS   |
| Conducted Emissions               | 15.207            | PASS   |
| 20dB Bandwidth                    | 15.215c           | PASS   |
| 2006 Baridwidtii                  | 15.247(a)(1)      | PASS   |
| Maximum Peak Output Power         | 15.247(b)(1)      | PASS   |
| Frequency Separation              | 15.247(a)(1)      | PASS   |
| Number of Hopping Frequency       | 15.247(a)(1)(iii) | PASS   |
| Dwell time                        | 15.247(a)(1)(iii) | PASS   |
| Maximum Permissible Exposure      | 1 1207/b\/1\      | DACC   |
| (Exposure of Humans to RF Fields) | 1.1307(b)(1)      | PASS   |

## **TABLE OF CONTENTS**

| 2  | TEST SUMMARY   | 3                                |
|----|--|----------------------------------|
| 3  | GENERAL INFORMATION  | 5                                |
|    | <ul> <li>3.1 GENERAL DESCRIPTION OF E.U.T.</li> <li>3.2 DETAILS OF E.U.T.</li> <li>3.3 CHANNEL LIST</li> <li>3.4 DESCRIPTION OF SUPPORT UNITS</li> <li>3.5 TEST FACILITY</li> <li>3.6 TEST LOCATION</li> </ul>                 | 5<br>5<br>5<br>5<br>6<br>6       |
| 4  | EQUIPMENT USED DURING TEST   | 7                                |
|    | <ul> <li>4.1 EQUIPMENTS LIST</li> <li>4.2 MEASUREMENT UNCERTAINTY</li> <li>4.3 TEST EQUIPMENT CALIBRATION</li> </ul>   | 7<br>7<br>7                      |
| 5  | CONDUCTED EMISSION   | 8                                |
|    | <ul> <li>5.1 E.U.T. OPERATION</li> <li>5.2 EUT SETUP</li> <li>5.3 CONDUCTED EMISSION TEST RESULT</li> </ul>  | 8<br>8<br>8                      |
| 6  | SPURIOUS RADIATED EMISSIONS  | 11                               |
|    | <ul> <li>6.1 EUT OPERATION:</li> <li>6.2 TEST SETUP</li> <li>6.3 SPECTRUM ANALYZER SETUP</li> <li>6.4 TEST PROCEDURE</li> <li>6.5 CORRECTED AMPLITUDE &amp; MARGIN CALCULATION</li> <li>6.6 SUMMARY OF TEST RESULTS</li> </ul> | 11<br>12<br>13<br>14<br>14<br>15 |
| 7  | BAND EDGE MEASUREMENT  | 18                               |
|    | <ul><li>7.1 TEST PROCEDURE</li><li>7.2 TEST RESULT:</li></ul>  | 18<br>19                         |
| 8  | 20 DB BANDWIDTH MEASUREMENT  | 22                               |
|    | <ul><li>8.1 TEST PROCEDURE:</li><li>8.2 TEST RESULT:</li></ul>   | 22<br>22                         |
| 9  | MAXIMUM PEAK OUTPUT POWER  | 28                               |
|    | <ul><li>9.1 Test Procedure:</li><li>9.2 Test Result:</li></ul>   | 28<br>28                         |
| 10 | HOPPING CHANNEL SEPARATION   | 34                               |
|    | 10.1 TEST PROCEDURE:<br>10.2 TEST RESULT:  | 34<br>34                         |
| 11 | NUMBER OF HOPPING FREQUENCY  | 40                               |
|    | 11.1 TEST PROCEDURE:<br>11.2 TEST RESULT:  | 40<br>40                         |
| 12 | DWELL TIME   | 42                               |
|    | 12.1 TEST PROCEDURE:<br>12.2 TEST RESULT:  | 42<br>42                         |
| 13 | ANTENNA REQUIREMENT  | 58                               |

## 3 General Information

#### 3.1 General Description of E.U.T.

Product Name : IP Pan and Tilt Wireless Camera

Model No. : CAM-IPPT-HDW

Brand Name : Night Owl

Model Description : N/A

Operation Frequency : 2400MHz ~ 2482MHz,79 channels in total, separated by 1MHz

Report No.: PT1410118012FA

Type of Modulation : GFSK, Pi/4DQPSK, 8DPSK

Oscillator : 26MHz for RF module

Antenna installation : PCB Printed Antenna

Antenna Gain : 0dBi

3.2 Details of E.U.T.

Technical Data : (1)DC 5V, 2000mA by adapter

(2)AC 100-240V, 0.5A

#### 3.3 Channel List

| Channel<br>No. | Frequency<br>(MHz) | Channel<br>No. | Frequency<br>(MHz) | Channel<br>No. | Frequency<br>(MHz) | Channel<br>No. | Frequency<br>(MHz) |
|----------------|--------------------|----------------|--------------------|----------------|--------------------|----------------|--------------------|
| 1              | 2402               | 2              | 2403               | 3              | 2404               | 4              | 2405               |
| 5              | 2406               | 6              | 2407               | 7              | 2408               | 8              | 2409               |
| 9              | 2410               | 10             | 2411               | 11             | 2412               | 12             | 2413               |
| 13             | 2414               | 14             | 2415               | 15             | 2416               | 16             | 2417               |
| 17             | 2418               | 18             | 2419               | 19             | 2420               | 20             | 2421               |
| 21             | 2422               | 22             | 2423               | 23             | 2424               | 24             | 2425               |
| 25             | 2426               | 26             | 2427               | 27             | 2428               | 28             | 2429               |
| 29             | 2430               | 30             | 2431               | 31             | 2432               | 32             | 2433               |
| 33             | 2434               | 34             | 2435               | 35             | 2436               | 36             | 2437               |
| 37             | 2438               | 38             | 2439               | 39             | 2440               | 40             | 2441               |
| 41             | 2442               | 42             | 2443               | 43             | 2444               | 44             | 2445               |
| 45             | 2446               | 46             | 2447               | 47             | 2448               | 48             | 2449               |
| 49             | 2450               | 50             | 2451               | 51             | 2452               | 52             | 2453               |
| 53             | 2454               | 54             | 2455               | 55             | 2456               | 56             | 2457               |
| 57             | 2458               | 58             | 2459               | 59             | 2460               | 60             | 2461               |
| 61             | 2462               | 62             | 2463               | 63             | 2464               | 64             | 2465               |
| 65             | 2466               | 66             | 2467               | 67             | 2468               | 68             | 2469               |
| 69             | 2470               | 70             | 2471               | 71             | 2472               | 72             | 2473               |
| 73             | 2474               | 74             | 2475               | 75             | 2476               | 76             | 2477               |
| 77             | 2478               | 78             | 2479               | 79             | 2480               | -              | -                  |

## 3.4 Description of Support Units

| No. | Equipment | Manufacturer | Model No. | Serial No. |
|-----|-----------|--------------|-----------|------------|
| 1.  | Notebook  | LENOVO       | X201i     | 75Y4408    |

## 3.5 Test Facility

The test facility has a test site registered with the following organizations:

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

Report No.: PT1410118012FA

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

#### 3.6 Test Location

All the tests were performed at:

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

## 4 Equipment Used during Test

## 4.1 Equipments List

| Mains | Terminal Disturbance          | e Voltage (Conduc    | cted Emission) |            |                      |
|-------|-------------------------------|----------------------|----------------|------------|----------------------|
| Item  | Equipment                     | Manufacturer         | Model No.      | Serial No. | Calibration Due Date |
| 1.    | EMI Test Receiver             | R&S                  | ESCI           | 101155     | Sep.17,2014          |
| 2.    | LISN                          | SCHWARZBECK          | NSLK 8128      | 8128-289   | Sep.17,2014          |
| 3.    | Cable                         | LARGE                | RF300          | -          | Sep.17,2014          |
| 3m Se | mi-anechoic Chambe            | r for Radiation      |                |            | 1                    |
| Item  | Equipment                     | Manufacturer         | Model No.      | Serial No. | Calibration Due Date |
| 1     | EMC Analyzer                  | Agilent              | E7405A         | MY45114943 | Sep.17,2014          |
| 2     | Active Loop Antenna           | Beijing Dazhi        | ZN30900A       | -          | Sep.17,2014          |
| 3     | Trilog Broadband<br>Antenna   | SCHWARZBEC<br>K      | VULB9163       | 336        | Apr.19,2014          |
| 4     | Coaxial Cable<br>(below 1GHz) | Тор                  | TYPE16(13M)    | -          | Sep.17,2014          |
| 5     | Broad-band Horn<br>Antenna    | SCHWARZBEC<br>K      | BBHA 9120 D    | 667        | Apr.19,2014          |
| 6     | Broadband<br>Preamplifier     | COMPLIANCE DIRECTION | PAP-1G18       | 2004       | Apr.06,2014          |
| 7     | Coaxial Cable (above 1GHz)    | Тор                  | 25MHz-18GHz    | EW02014-7  | Apr.19,2014          |
| 8     | Horn Antenna                  | EM                   | EM-AH-10180    | 2011071402 | Apr.19,2014          |

## 4.2 Measurement Uncertainty

| Parameter                | Uncertainty                   |
|--------------------------|-------------------------------|
| Radio Frequency          | ± 1 x 10 <sup>-6</sup>        |
| Bandwidth                | $\pm 1.5 \times 10^{-6}$      |
| RF Power                 | ± 1.0 dB                      |
| RF Power Density         | ± 2.2 dB                      |
| Temperature              | ±1 °C                         |
| DC Source                | ±0.05%                        |
|                          | ± 5.03 dB                     |
| Radiated Emissions test  | (Bilog antenna 30M~1000MHz)   |
| Radiated Effissions test | ± 4.74 dB                     |
|                          | (Horn antenna 1000M~25000MHz) |
| Conducted Emissions test | 3.64dB (150kHz~30MHz)         |

## 4.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 5 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.4:2003

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class: Class B

Limit: 66-56 dB<sub>μ</sub>V between 0.15MHz & 0.5MHz

56 dB<sub>μ</sub>V between 0.5MHz & 5MHz60 dB<sub>μ</sub>V between 5MHz & 30MHz

Detector: Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-

Peak & Average if maximised peak within 6dB of Average

Report No.: PT1410118012FA

Limit

## 5.1 E.U.T. Operation

#### **Operating Environment:**

Temperature: 25.1 °C Humidity: 52% RH

Atmospheric Pressure: 1013 mbar

#### **EUT Operation:**


The pre-test was performed in Bluetooth linking, and the data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

#### 5.2 EUT Setup

The EUT was placed on the test table in shielding room.

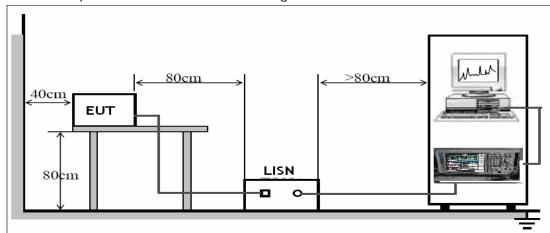


#### 5.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: Running

Live line:

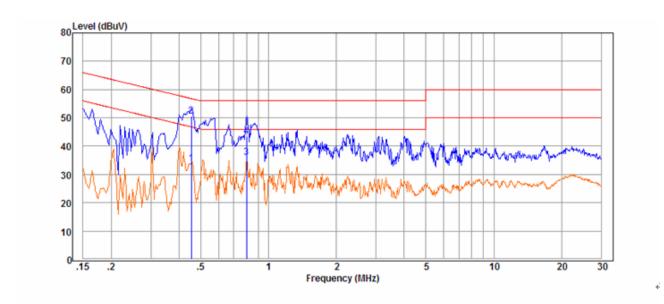

| Freq₽<br>MHz₽ | Reading <i>₽</i><br>dBuV₽ | Factor↓<br>dB↓ | Result⊅<br>dBuV/m₽ | Limit₽<br>dBuV/m₽ | Over Limit₽<br>dB₽ | Remark₽  | Phase₽ |
|---------------|---------------------------|----------------|--------------------|-------------------|--------------------|----------|--------|
| 0.45₽         | 32.47₽                    | 1.30₽          | 33.77₽             | 46.80₽            | -13.03₽            | Average₽ | LINE   |
| 0.45₽         | 49.30₽                    | 1.30₽          | 50.60₽             | 56.80₽            | -6.20₽             | QP₽      | LINE   |
| 0.80₽         | 34.60₽                    | 1.31₽          | 35.91₽             | 46.00₽            | -10.09₽            | Average₽ | LINE   |
| 0.80₽         | 42.21₽                    | 1.31₽          | 43.52∉             | 56.00₽            | -12.48₽            | OP↔      | LINE   |

## Neutral line:

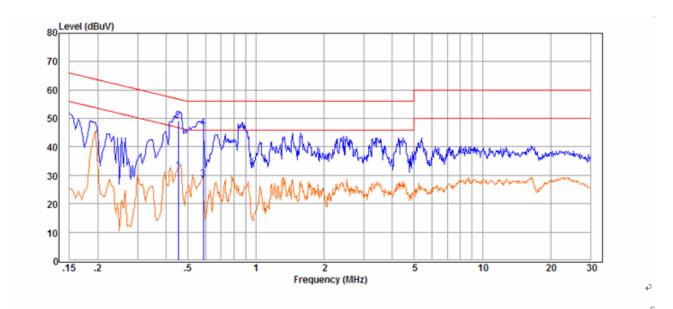

| ↓<br>Freq↓<br>MHz↓ | Reading∂<br>dBuV∂ | Factor↓<br>dB↓ | Result⊅<br>dBuV/m₽ | Limit₽<br>dBuV/m₽ | Over Limit↓<br>dB↓ | Remark₽  | Phase₽  |
|--------------------|-------------------|----------------|--------------------|-------------------|--------------------|----------|---------|
| 0.45₽              | 30.31₽            | 1.30₽          | 31.61₽             | 46.80₽            | -15.19₽            | Average₽ | NEUTRAL |
| 0.45₽              | 47.80₽            | 1.30₽          | 49.10₽             | 56.80₽            | -7.70₽             | QP₽      | NEUTRAL |
| 0.59₽              | 27.23₽            | 1.30₽          | 28.53₽             | 46.00₽            | -17.47₽            | Average₽ | NEUTRAL |
| 0.59₽              | 45.46₽            | 1.30₽          | 46.76₽             | 56.00₽            | -9.24₽             | QP₽      | NEUTRAL |
| 4                  |                   |                |                    |                   |                    |          |         |

## **6** Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Report No.: PT1410118012FA

Test Method: DA 00-705

Test Result: PASS
Measurement Distance: 3m

Limit:

| Frequency     | Field Strei        | ngth | Field Strength Limit at 3m Measurement Dist |                                      |  |
|---------------|--------------------|------|---|--------------------------------------|--|
| (MHz)         | uV/m Distance uV/m |      | dBuV/m                                      |                                      |  |
| 0.009 ~ 0.490 | 2400/F(kHz)        | 300  | 10000 * 2400/F(kHz)                         | 20log <sup>(2400/F(kHz))</sup> + 80  |  |
| 0.490 ~ 1.705 | 24000/F(kHz)       | 30   | 100 * 24000/F(kHz)                          | 20log <sup>(24000/F(kHz))</sup> + 40 |  |
| 1.705 ~ 30    | 30                 | 30   | 100 * 30                                    | 20log <sup>(30)</sup> + 40           |  |
| 30 ~ 88       | 100                | 3    | 100   | 20log <sup>(100)</sup>               |  |
| 88 ~ 216      | 150                | 3    | 150   | 20log <sup>(150)</sup>               |  |
| 216 ~ 960     | 200                | 3    | 200   | 20log <sup>(200)</sup>               |  |
| Above 960     | 500                | 3    | 500   | 20log <sup>(500)</sup>               |  |

## 6.1 EUT Operation:

Operating Environment:

Temperature: 25.2°C

Humidity: 52% RH

Atmospheric Pressure:1010 mbar


## **Operation Mode:**

The EUT was tested in transmitting mode, and the data were shown as follow.


#### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

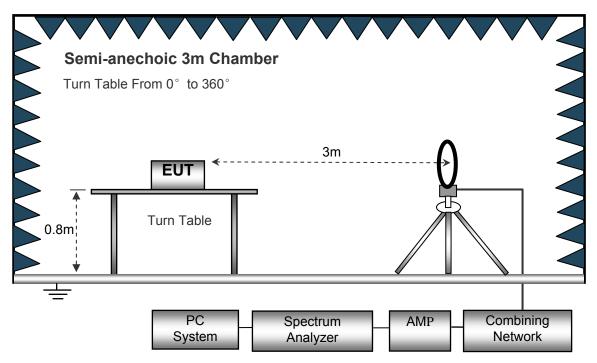

The test setup for emission measurement from 30 MHz to 1 GHz.

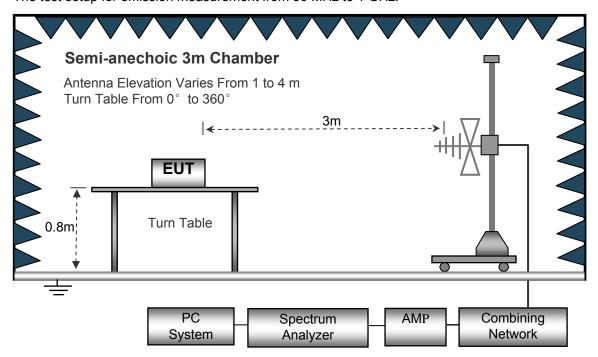

The test setup for emission measurement above 1 GHz.

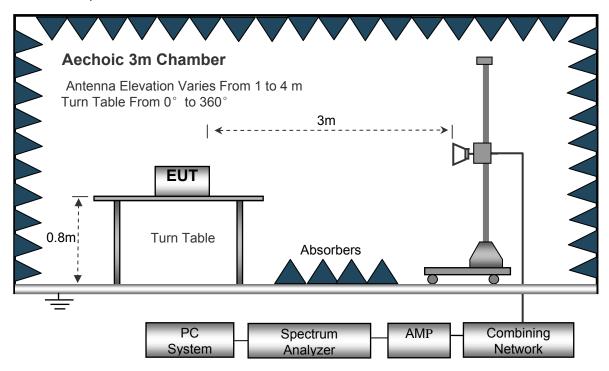

## 6.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9kHz to 25000MHz.

| Below 30MHz  |                      |         |
|--------------|----------------------|---------|
|              | Sweep Speed          | . Auto  |
|              | IF Bandwidth         | .10kHz  |
|              | Video Bandwidth      | 10kHz   |
|              | Resolution Bandwidth | 10kHz   |
| 30MHz ~ 1GHz | <u>z</u>             |         |
|              | Sweep Speed          | Auto    |
|              | Detector             | .PK     |
|              | Resolution Bandwidth | .100kHz |
|              | Video Bandwidth      | 300kHz  |
| Above 1GHz   |                      |         |
|              | Sweep Speed          | . Auto  |
|              | Detector             | .PK     |
|              | Resolution Bandwidth | .1MHz   |
|              | Video Bandwidth      | .3MHz   |
|              | Detector             | Ave.    |
|              | Resolution Bandwidth | .1MHz   |
|              | Video Bandwidth      | .10Hz   |

#### 6.4 Test Procedure

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Report No.: PT1410118012FA

- 3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

#### 6.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Limit

## 6.6 Summary of Test Results

Test Frequency :Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Test mode: transmitting

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the

following pages.

| Frequency                  | Receiver | Detector    | Turn<br>table | RX An  | tenna | Corrected | Corrected | FCC F<br>15.247/2 |        |  |
|----------------------------|----------|-------------|---------------|--------|-------|-----------|-----------|-------------------|--------|--|
| Trequency                  | Reading  | Detector    | Angle         | Height | Polar | Factor    | Amplitude | Limit             | Margin |  |
| (MHz)                      | (dBµV)   | (PK/QP/Ave) | Degree        | (m)    | (H/V) | (dB)      | (dBµV/m)  | (dBµV/m)          | (dB)   |  |
| GFSK Lower Channel 2402MHz |          |             |               |        |       |           |           |                   |        |  |
| 300.65                     | 23.50    | QP          | 293           | 1.1    | Н     | 17.01     | 40.51     | 46.00             | -5.49  |  |
| 300.64                     | 24.06    | QP          | 161           | 1.5    | V     | 17.01     | 41.07     | 46.00             | -4.93  |  |
| 4804                       | 53.65    | PK          | 342           | 1.4    | V     | -1.06     | 52.59     | 74.00             | -21.41 |  |
| 4804                       | 50.26    | Ave         | 342           | 1.4    | V     | -1.06     | 49.20     | 54.00             | -4.80  |  |
| 7206                       | 43.60    | PK          | 39            | 1.2    | V     | 1.33      | 44.93     | 74.00             | -29.07 |  |
| 7206                       | 44.79    | Ave         | 39            | 1.2    | V     | 1.33      | 46.12     | 54.00             | -7.88  |  |
| 2343.54                    | 46.48    | PK          | 108           | 1.0    | V     | -13.19    | 33.29     | 74.00             | -40.71 |  |
| 2343.54                    | 40.73    | Ave         | 108           | 1.0    | V     | -13.19    | 27.54     | 54.00             | -26.46 |  |
| 2366.84                    | 44.05    | PK          | 38            | 2.0    | V     | -13.14    | 30.91     | 74.00             | -43.09 |  |
| 2366.84                    | 38.94    | Ave         | 38            | 2.0    | V     | -13.14    | 25.80     | 54.00             | -28.20 |  |
| 2489.91                    | 42.23    | PK          | 4             | 1.8    | Н     | -13.08    | 29.15     | 74.00             | -44.85 |  |
| 2489.91                    | 39.39    | Ave         | 4             | 1.8    | Н     | -13.08    | 26.31     | 54.00             | -27.69 |  |

| Frequency Re | Receiver                    | Detector    | Turn<br>table | RX Antenna |       | Corrected | Corrected | FCC Part<br>15.247/209/205 |        |
|--------------|-----------------------------|-------------|---------------|------------|-------|-----------|-----------|----------------------------|--------|
| rrequency    | Reading                     | Detector    | Angle         | Height     | Polar | Factor    | Amplitude | Limit                      | Margin |
| (MHz)        | (dBµV)                      | (PK/QP/Ave) | Degree        | (m)        | (H/V) | (dB)      | (dBµV/m)  | (dBµV/m)                   | (dB)   |
|              | GFSK Center Channel 2441MHz |             |               |            |       |           |           |                            |        |
| 300.61       | 23.65                       | QP          | 167           | 1.8        | Н     | 17.01     | 40.66     | 46.00                      | -5.34  |
| 300.61       | 23.84                       | QP          | 5             | 1.9        | V     | 17.01     | 40.85     | 46.00                      | -5.15  |
| 4882         | 54.25                       | PK          | 288           | 1.3        | V     | -0.62     | 53.63     | 74.00                      | -20.37 |
| 4882         | 48.65                       | Ave         | 288           | 1.3        | V     | -0.62     | 48.03     | 54.00                      | -5.97  |
| 7323         | 44.32                       | PK          | 251           | 1.2        | V     | 2.21      | 46.53     | 74.00                      | -27.47 |
| 7323         | 43.21                       | Ave         | 251           | 1.2        | V     | 2.21      | 45.42     | 54.00                      | -8.58  |
| 2340.63      | 45.65                       | PK          | 291           | 1.5        | Н     | -13.19    | 32.46     | 74.00                      | -41.54 |
| 2340.63      | 39.65                       | Ave         | 291           | 1.5        | Н     | -13.19    | 26.46     | 54.00                      | -27.54 |
| 2363.54      | 46.11                       | PK          | 241           | 1.9        | V     | -13.14    | 32.97     | 74.00                      | -41.03 |
| 2363.54      | 40.43                       | Ave         | 241           | 1.9        | V     | -13.14    | 27.29     | 54.00                      | -26.71 |
| 2486.61      | 43.42                       | PK          | 302           | 1.7        | V     | -13.08    | 30.34     | 74.00                      | -43.66 |
| 2486.61      | 40.72                       | Ave         | 302           | 1.7        | V     | -13.08    | 27.64     | 54.00                      | -26.36 |

| Frequency                  | Receiver | Detector    | Turn<br>table | RX Antenna |       | Corrected | Corrected | FCC Part<br>15.247/209/205 |        |
|----------------------------|----------|-------------|---------------|------------|-------|-----------|-----------|----------------------------|--------|
| rrequency                  | Reading  | Detector    | Angle         | Height     | Polar | Factor    | Amplitude | Limit                      | Margin |
| (MHz)                      | (dBµV)   | (PK/QP/Ave) | Degree        | (m)        | (H/V) | (dB)      | (dBµV/m)  | (dBµV/m)                   | (dB)   |
| GFSK Upper Channel 2480MHz |          |             |               |            |       |           |           |                            |        |
| 300.05                     | 25.01    | QP          | 329           | 1.4        | Н     | 17.01     | 42.02     | 46.00                      | -3.98  |
| 300.06                     | 24.06    | QP          | 97            | 1.4        | V     | 17.01     | 41.07     | 46.00                      | -4.93  |
| 4960                       | 55.26    | PK          | 209           | 1.2        | V     | -0.24     | 55.02     | 74.00                      | -18.98 |
| 4960                       | 48.02    | Ave         | 209           | 1.2        | V     | -0.24     | 47.78     | 54.00                      | -6.22  |
| 7440                       | 46.14    | PK          | 41            | 2.0        | V     | 2.84      | 48.98     | 74.00                      | -25.02 |
| 7440                       | 42.00    | Ave         | 41            | 2.0        | V     | 2.84      | 44.84     | 54.00                      | -9.16  |
| 2315.09                    | 36.00    | PK          | 129           | 1.2        | Н     | -13.19    | 22.81     | 74.00                      | -51.19 |
| 2315.09                    | 39.09    | Ave         | 129           | 1.2        | Н     | -13.19    | 25.90     | 54.00                      | -28.10 |
| 2389.64                    | 48.16    | PK          | 4             | 1.9        | V     | -13.14    | 35.02     | 74.00                      | -38.98 |
| 2389.64                    | 40.21    | Ave         | 4             | 1.9        | V     | -13.14    | 27.07     | 54.00                      | -26.93 |
| 2490.41                    | 43.08    | PK          | 250           | 1.9        | Н     | -13.08    | 30.00     | 74.00                      | -44.00 |
| 2490.41                    | 40.54    | Ave         | 250           | 1.9        | Н     | -13.08    | 27.46     | 54.00                      | -26.54 |

Test Frequency :Above 18GHz
The measurements were more than 20 dB below the limit and not reported.

## 7 Band Edge Measurement

Test Requirement: Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see

Report No.: PT1410118012FA

Section 15.205(c)).

Test Method: DA 00-705

Limit: 40.0 dBuV/m between 30MHz & 88MHz;

43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz;

54.0 dBuV/m above 960MHz.

74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

#### 7.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane

2. Measurement Distance is 3m

3. Detector: For Peak value:

RBW = 1 MHz for f ≥ 1 GHz VBW ≥ RBW; Sweep = auto Detector function = peak

Trace = max hold For AVG value:


RBW = 1 MHz for f ≥ 1 GHz VBW = 10Hz; Sweep = auto Detector function = AVG


Trace = max hold


4.continuous transmitting


#### 7.2 Test Result:


Test result plots shown as follows:

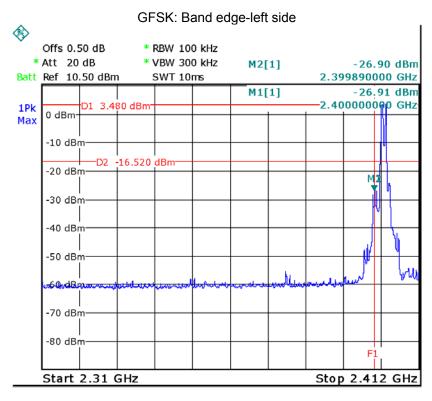


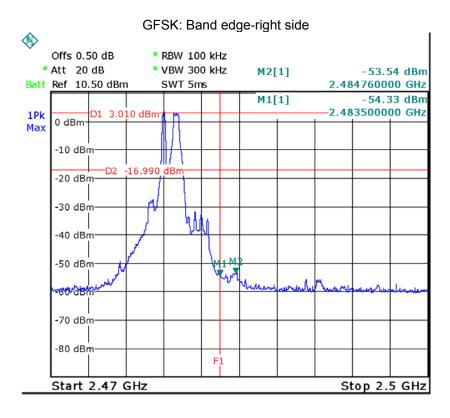

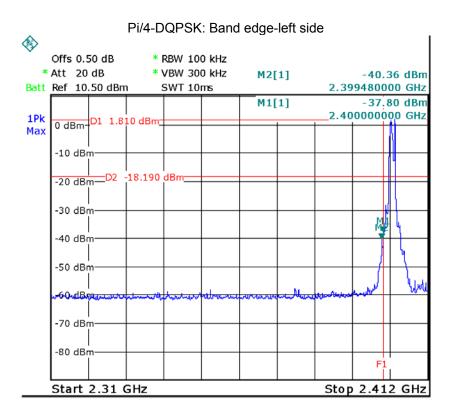

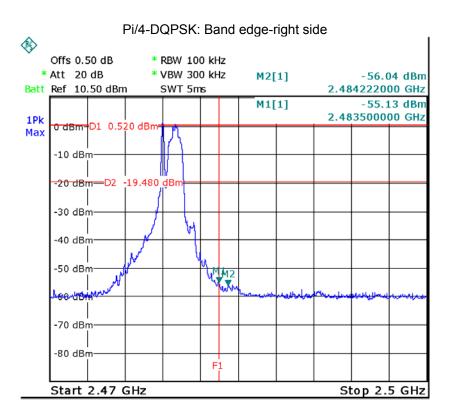

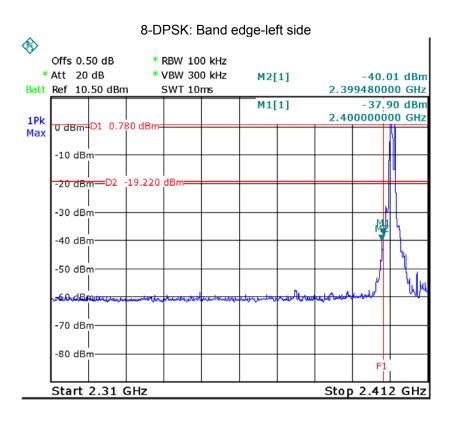

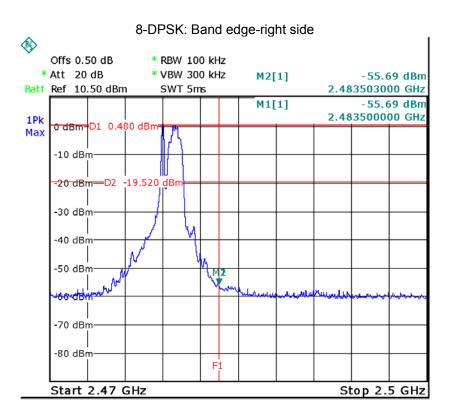

## 8 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

#### 8.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;


2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz


#### 8.2 Test Result:


| Modulation | Test Channel | Bandwidth(MHz) |  |  |
|------------|--------------|----------------|--|--|
|            | Lower        | 1.114          |  |  |
| GFSK       | Middle       | 1.138          |  |  |
|            | Upper        | 1.114          |  |  |
|            | Lower        | 1.353          |  |  |
| Pi/4DQPSK  | Middle       | 1.365          |  |  |
|            | Upper        | 1.377          |  |  |
|            | Lower        | 1.341          |  |  |
| 8DPSK      | Middle       | 1.353          |  |  |
|            | Upper        | 1.365          |  |  |

Test result plot as follows:


#### Modulation:GFSK

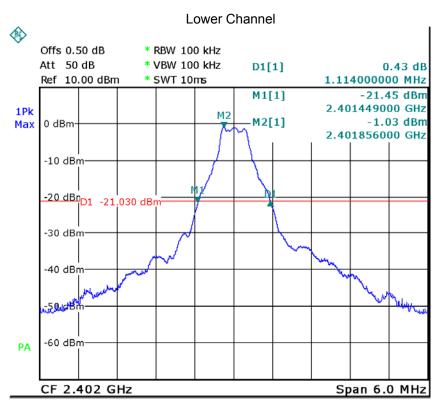


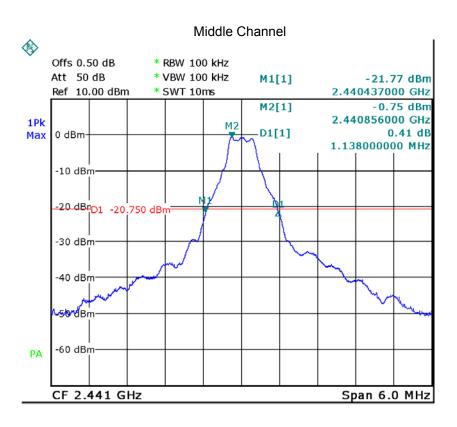


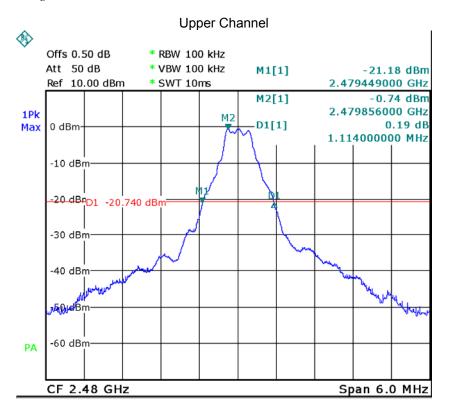



#### Modulation: Pi/4DQPSK **Lower Channel** Offs 0.50 dB \* RBW 100 kHz Att 50 dB \* VBW 100 kHz M1[1] -23.04 dBm \* SWT 10ms Ref 10.00 dBm 2.401329000 GHz -2.58 dBm M2[1] 2.401856000 GHz 1Pk D1[1] 0.18 dB Max 0 dBm 1.353000000 MHz -10 dBm -20 dBm -22.580 dBm -30 dBm -40 dBm -50 dBm-+ -60 dBm PA CF 2.402 GHz Span 6.0 MHz

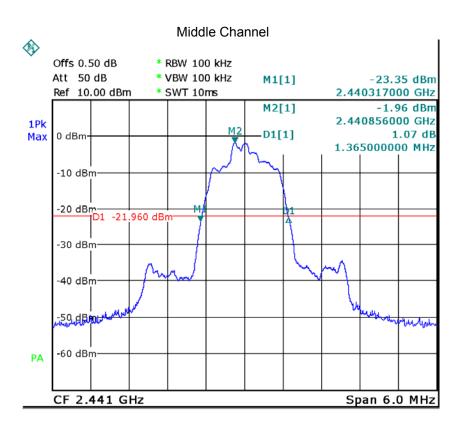

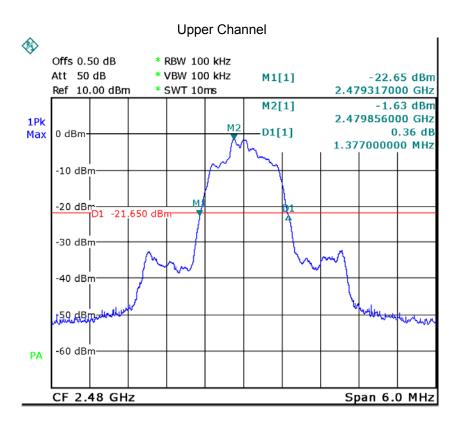




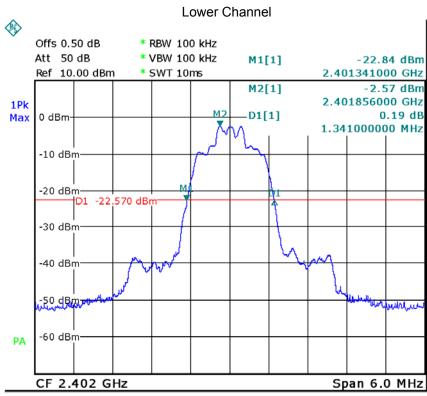

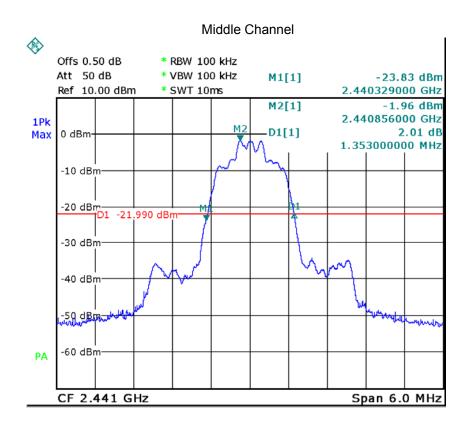

## **Upper Channel**

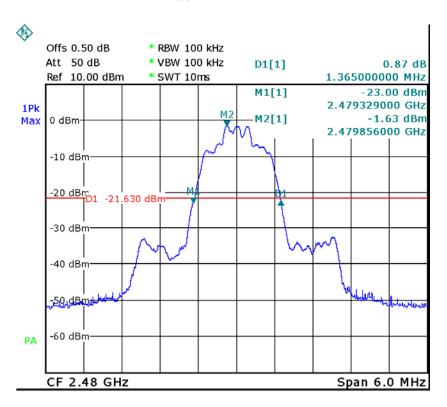

## 9 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247 (b)(1), For frequency hopping systems

operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band:

Report No.: PT1410118012FA

0.125 watts.

Refer to the result "Number of Hopping Frequency" of this

document. The 1watts (30 dBm) limit applies.

Test mode: Test in fixing frequency transmitting mode.

#### 9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


- 2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


#### 9.2 Test Result:


| Modulation | Test Channel | Output Power (dBm) | Limit (dBm) |
|------------|--------------|--------------------|-------------|
|            | Lower        | -3.07              | 30          |
| GFSK       | Middle       | -4.48              | 30          |
|            | Upper        | -6.88              | 30          |
|            | Lower        | -4.33              | 30          |
| Pi/4DQPSK  | Middle       | -5.72              | 30          |
|            | Upper        | -7.76              | 30          |
|            | Lower        | -4.09              | 30          |
| 8DPSK      | Middle       | -5.56              | 30          |
|            | Upper        | -7.76              | 30          |

Test result plot as follows:


#### Modulation:GFSK

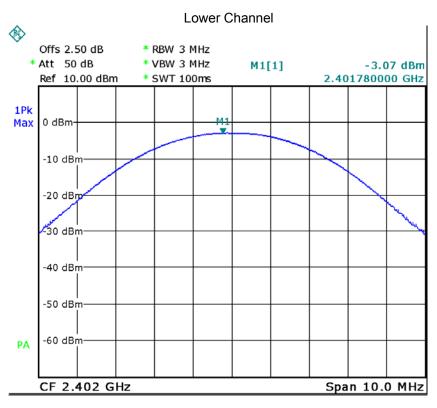


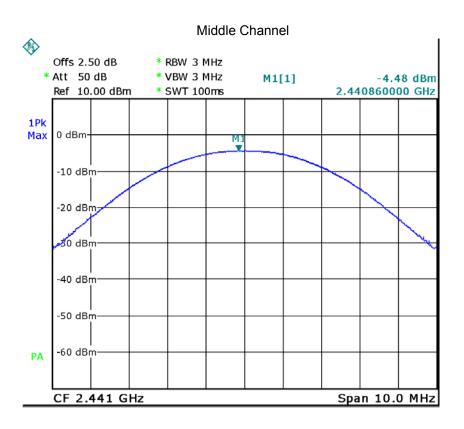


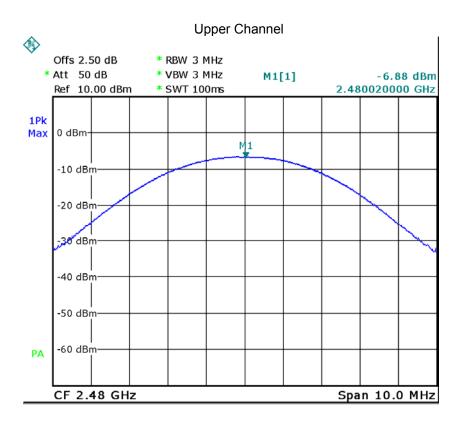





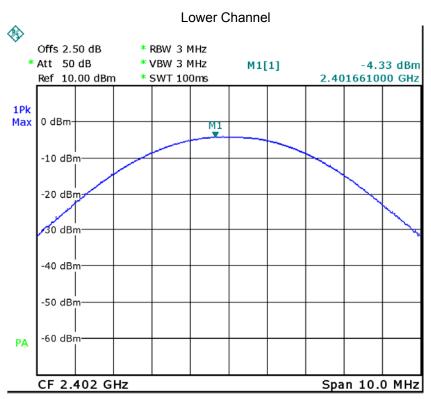


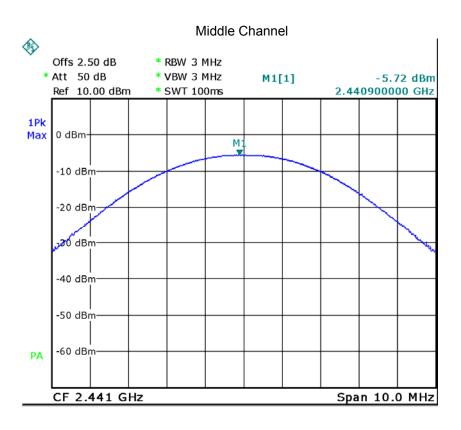


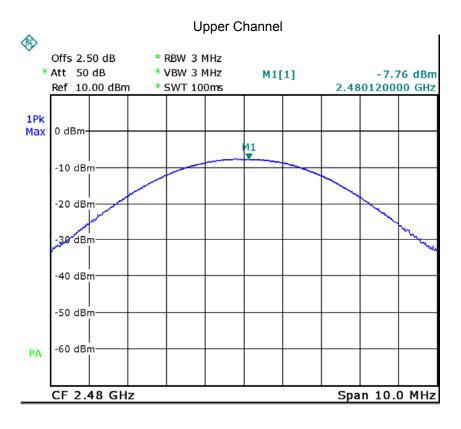



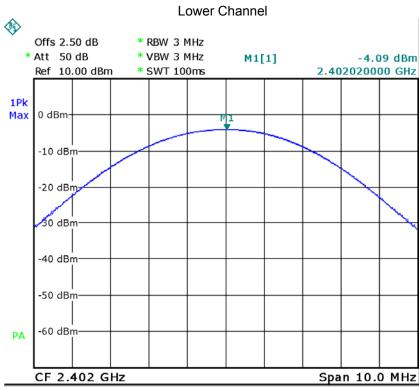

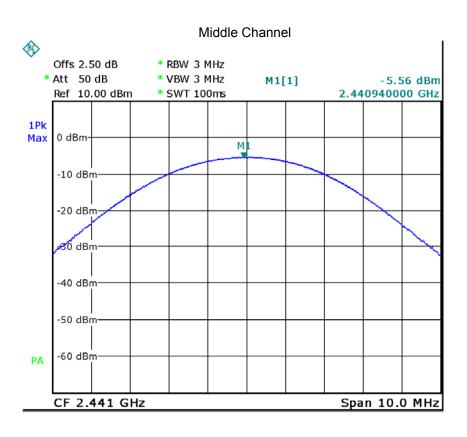

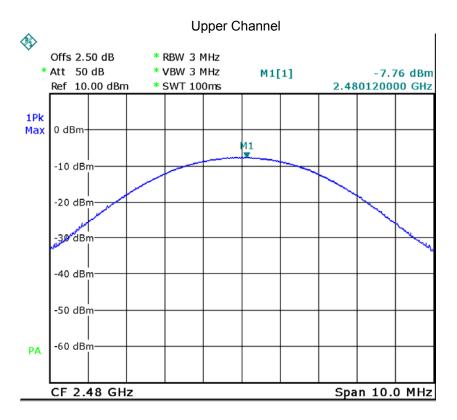

## 10 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have

hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the

Report No.: PT1410118012FA

systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

#### 10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


- 2. Set the spectrum analyzer: RBW = 100KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


#### 10.2 Test Result:

| Modulation | Test Channel | Separation (MHz) |  |  |
|------------|--------------|------------------|--|--|
|            | Lower        | 1.006            |  |  |
| GFSK       | Middle       | 1.006            |  |  |
|            | Upper        | 1.006            |  |  |
|            | Lower        | 1.006            |  |  |
| Pi/4DQPSK  | Middle       | 1.006            |  |  |
|            | Upper        | 1.006            |  |  |
|            | Lower        | 1.006            |  |  |
| 8DPSK      | Middle       | 1.006            |  |  |
|            | Upper        | 1.006            |  |  |


Test result plot as follows:


## Modulation:GFSK Lower Channel

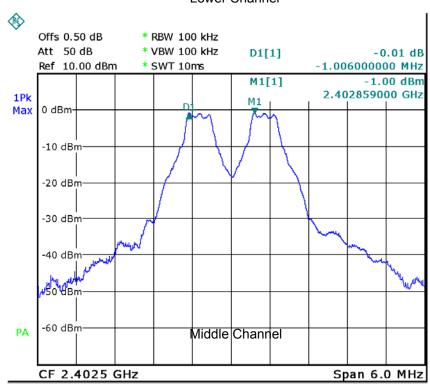

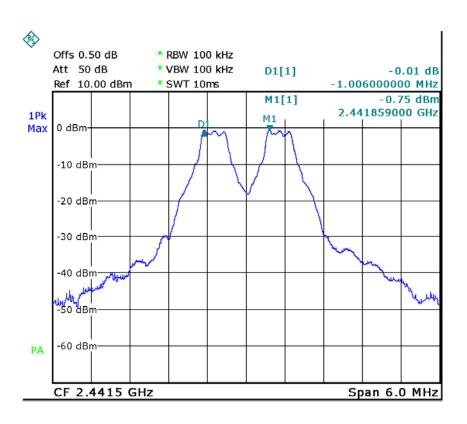



#### **Upper Channel**

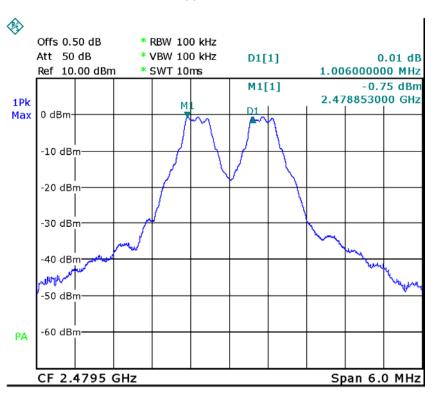

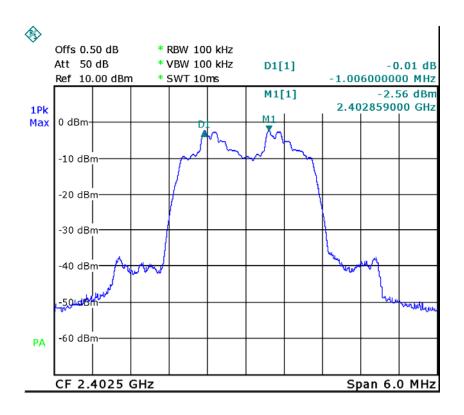


#### Middle Channel

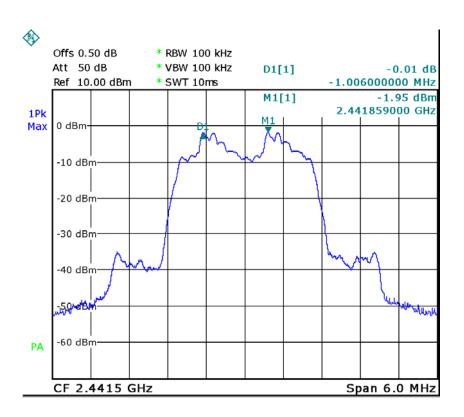


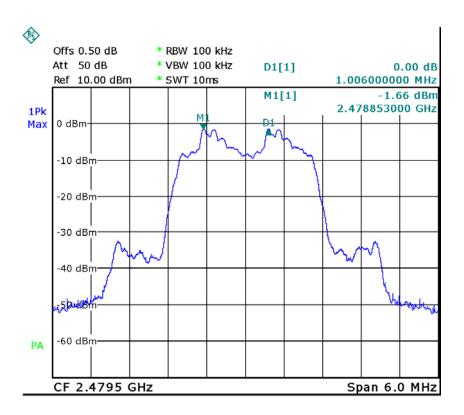


Modulation: 8DPSK
Lower Channel

Report No.: PT1410118012FA

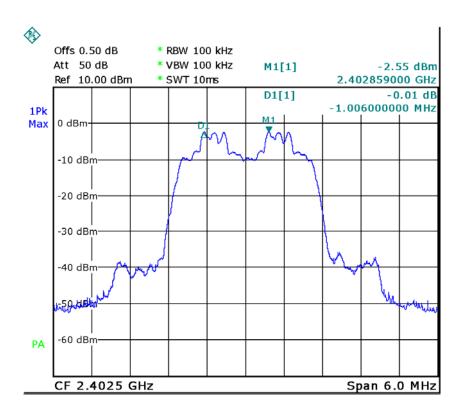

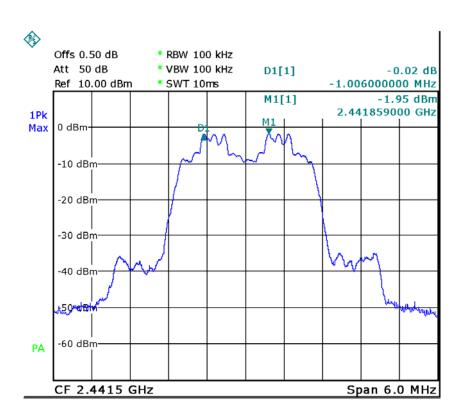

# **Upper Channel**

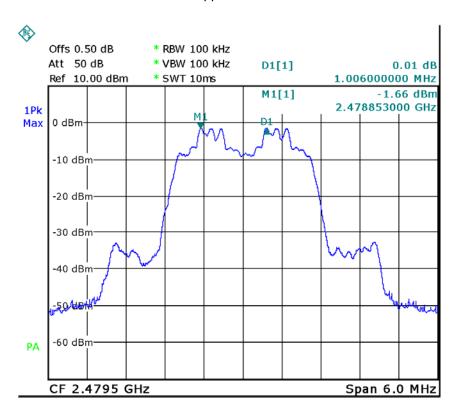

# 11 Number of Hopping Frequency

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the

2400-2483.5 MHz band shall use at least 15 channels.

Report No.: PT1410118012FA

Test Mode: Test in hopping transmitting operating mode.

#### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


- Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak.
   Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;


#### 11.2 Test Result:

Total Channels are 79 Channels.

Modulation: GFSK

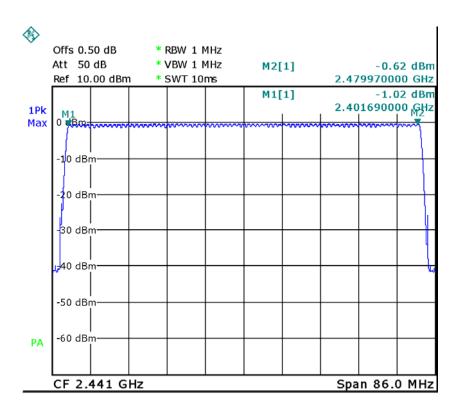

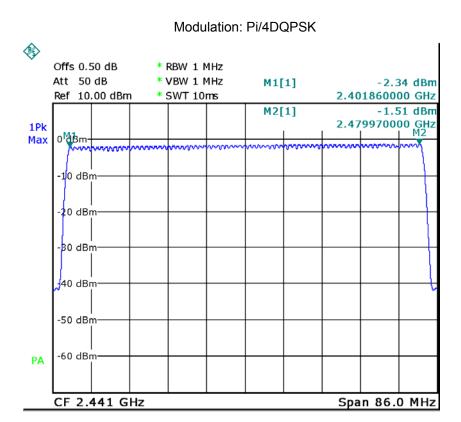

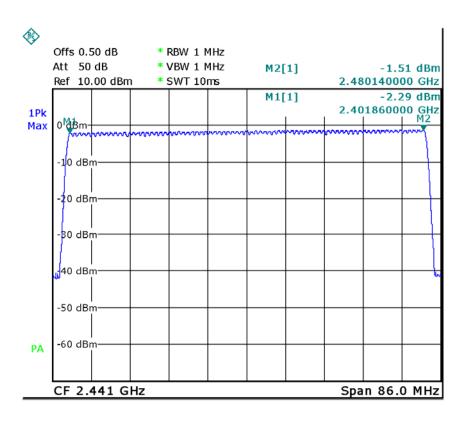

# 12 Dwell Time

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1)(iii) Frequency hopping systems in

the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are

Report No.: PT1410118012FA

used.

Test Mode: Test in hopping transmitting operating mode.

#### 12.1 Test Procedure:

1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

#### 12.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: T = 0.4(s) \* 79 = 31.6(s)

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


| Data Packet | Dwell Time(s)                   |  |  |
|-------------|---------------------------------|--|--|
| DH5         | 1600/79/6*31.6*(MkrDelta)/1000  |  |  |
| DH3         | 1600/79/4*31.6*(MkrDelta)/1000  |  |  |
| DH1         | 1600/79/2*31.6*(MkrDelta)/1000  |  |  |
| Remark      | Mkr Delta is single pulse time. |  |  |


| Modulation | Frequency      | Data Packet | Mkr Delta(ms) | Dwell Time(s) | Limits(s) |
|------------|----------------|-------------|---------------|---------------|-----------|
| GFSK       | Lower channel  | DH1         | 0.428         | 0.137         | 0.400     |
|            | Middle channel |             | 0.432         | 0.138         | 0.400     |
|            | Upper channel  |             | 0.436         | 0.140         | 0.400     |
|            | Lower channel  | DH3         | 1.704         | 0.273         | 0.400     |
|            | Middle channel |             | 1.686         | 0.270         | 0.400     |
|            | Upper channel  |             | 1.692         | 0.271         | 0.400     |
|            | Lower channel  | DH5         | 2.950         | 0.315         | 0.400     |
|            | Middle channel |             | 2.958         | 0.316         | 0.400     |
|            | Upper channel  |             | 2.982         | 0.318         | 0.400     |
| Pi/4DQPSK  | Lower channel  | DH1         | 0.444         | 0.142         | 0.400     |
|            | Middle channel |             | 0.440         | 0.141         | 0.400     |
|            | Upper channel  |             | 0.440         | 0.141         | 0.400     |
|            | Lower channel  | DH3         | 1.696         | 0.271         | 0.400     |
|            | Middle channel |             | 1.684         | 0.269         | 0.400     |
|            | Upper channel  |             | 1.696         | 0.271         | 0.400     |
|            | Lower channel  | DH5         | 2.970         | 0.317         | 0.400     |
|            | Middle channel |             | 2.930         | 0.313         | 0.400     |
|            | Upper channel  |             | 2.938         | 0.313         | 0.400     |
| 8DPSK      | Lower channel  | DH1         | 0.440         | 0.141         | 0.400     |
|            | Middle channel |             | 0.440         | 0.141         | 0.400     |
|            | Upper channel  |             | 0.444         | 0.142         | 0.400     |
|            | Lower channel  | DH3         | 1.698         | 0.272         | 0.400     |
|            | Middle channel |             | 1.716         | 0.275         | 0.400     |
|            | Upper channel  |             | 1.710         | 0.274         | 0.400     |
|            | Lower channel  | DH5         | 2.966         | 0.316         | 0.400     |
|            | Middle channel |             | 2.998         | 0.320         | 0.400     |
|            | Upper channel  |             | 2.982         | 0.318         | 0.400     |

#### Modulation:GFSK

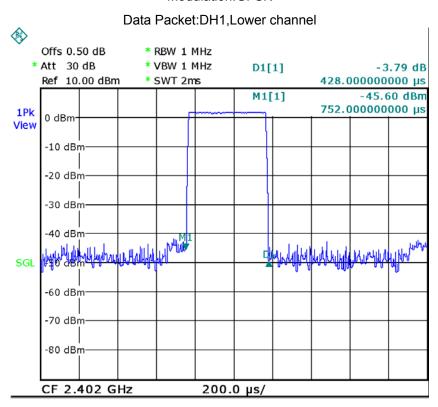


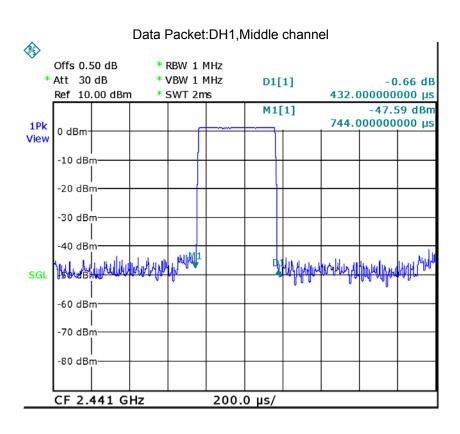


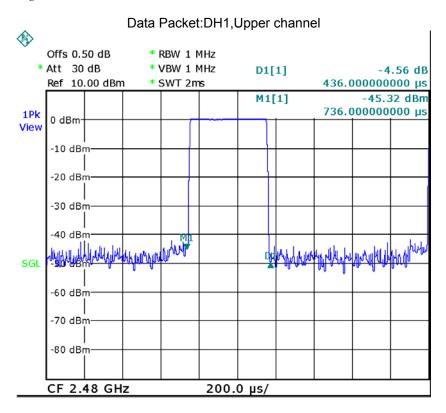

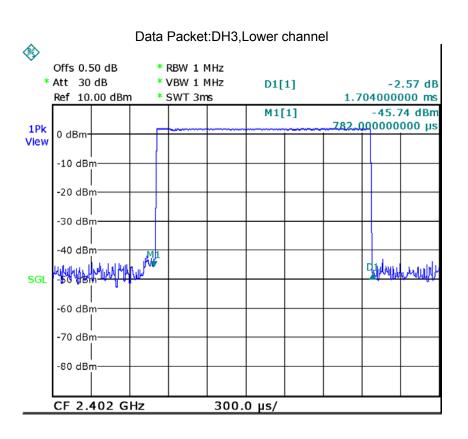


### Data Packet: DH3, Middle channel

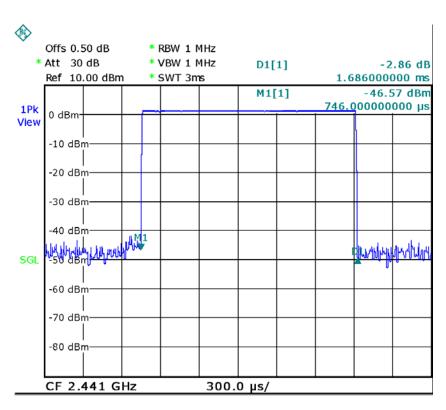


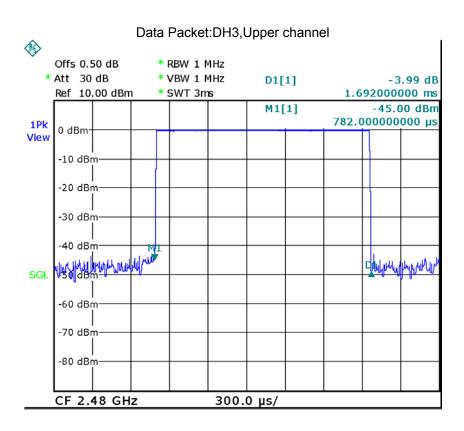


Data Packet: DH5, Lower channel

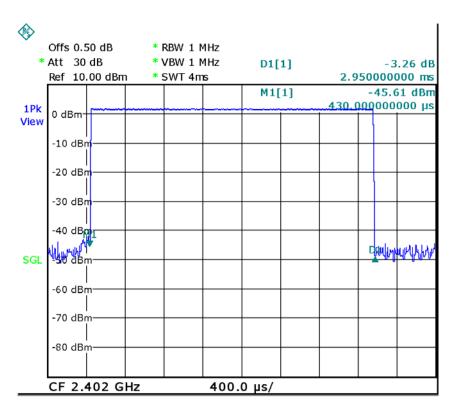


Data Packet: DH5, Middle channel

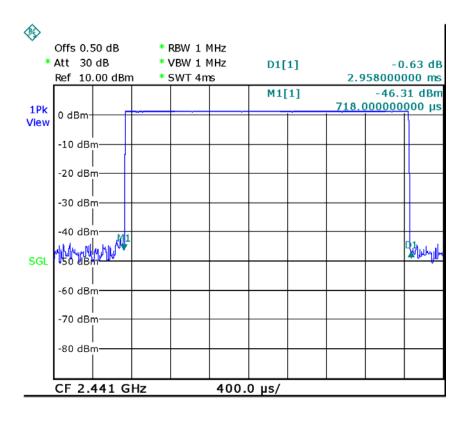


Data Packet: DH5, Upper channel

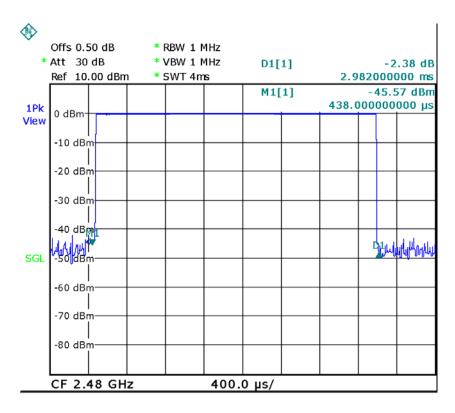


Modulation: Pi/4DQPSK

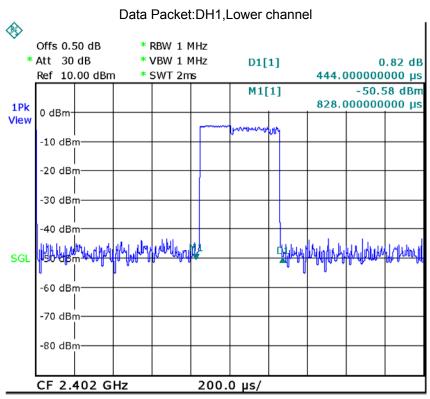


#### Data Packet: DH1, Middle channel

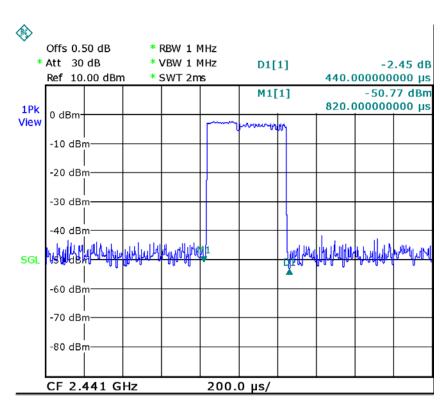


#### Data Packet: DH1, Upper channel

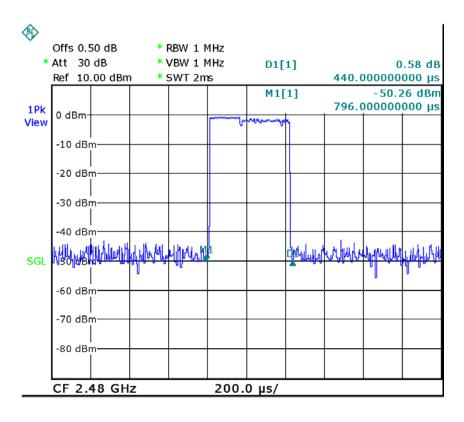


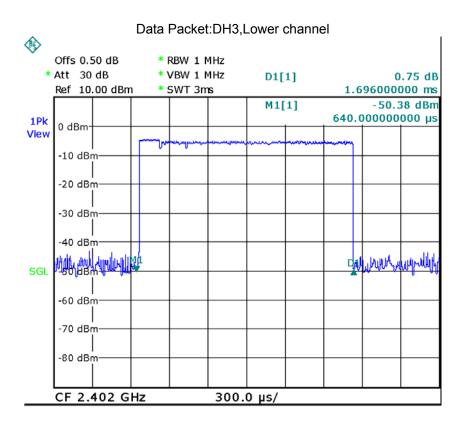


# Data Packet: DH3, Middle channel

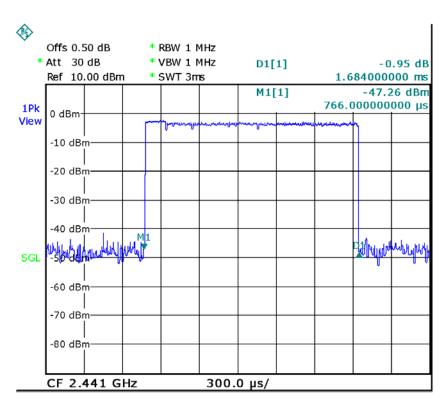


## Data Packet:DH3,Upper channel

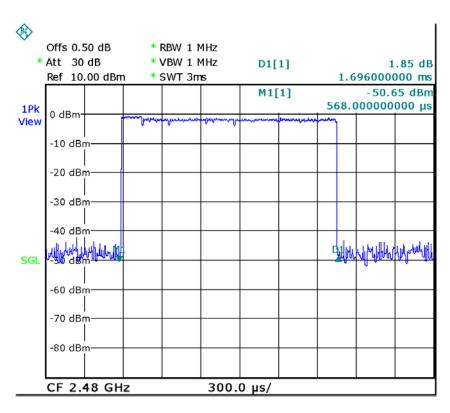


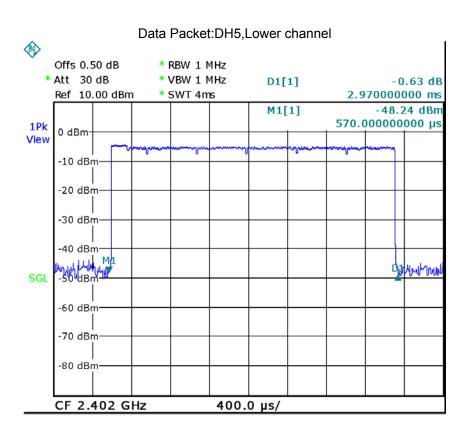

Data Packet: DH5, Middle channel

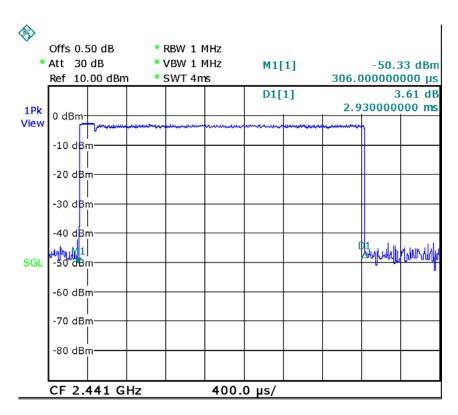



Data Packet: DH5, Upper channel

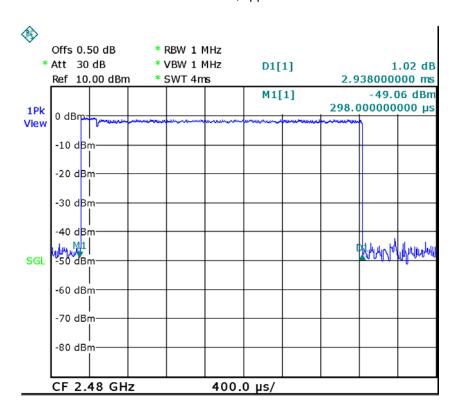


Modulation: 8DPSK

Data Packet:DH1,Lower channel

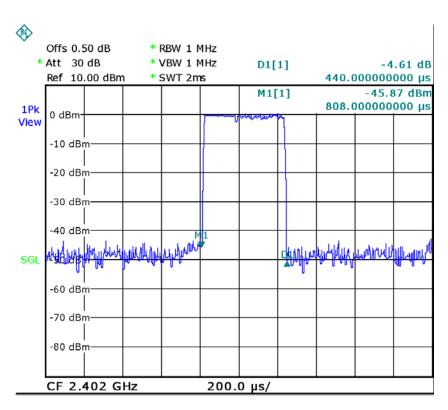


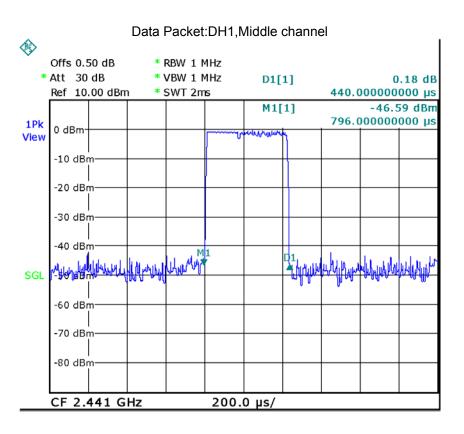


Data Packet: DH1, Upper channel

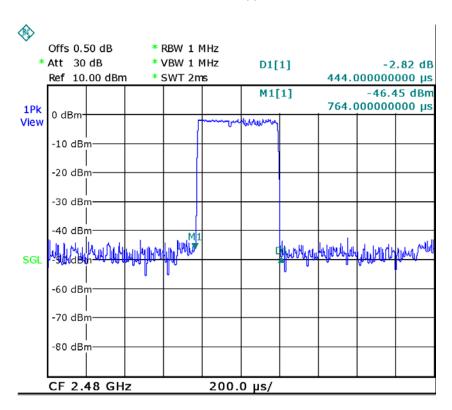


Data Packet: DH3, Lower channel

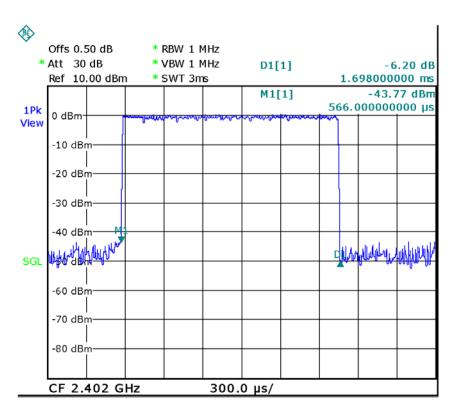



### Data Packet: DH3, Middle channel

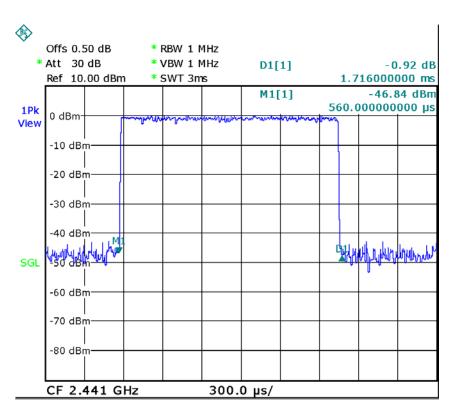

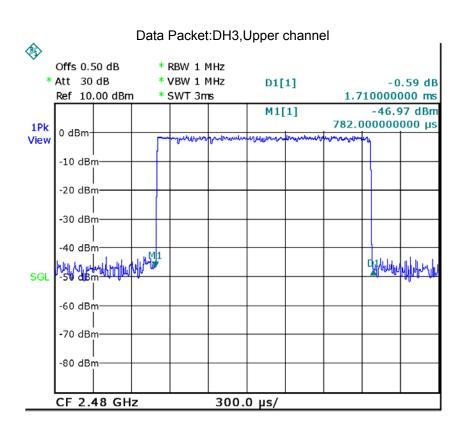


## Data Packet:DH5,Lower channel

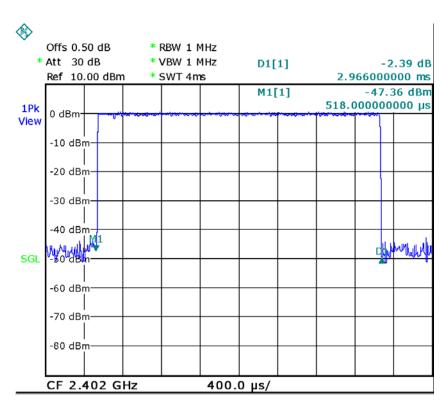

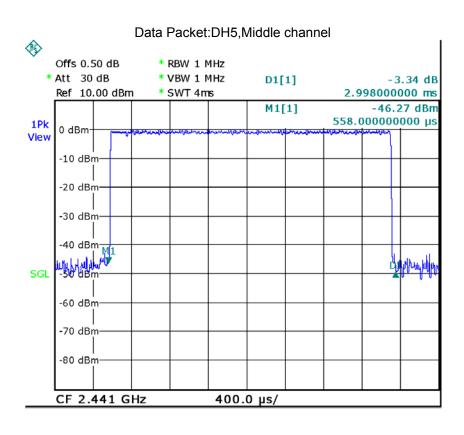

# Data Packet: DH5, Upper channel

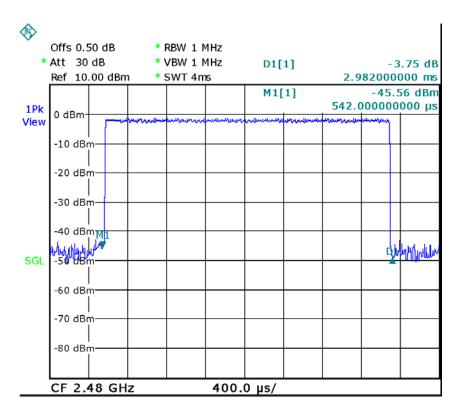

# 13 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section

Report No.: PT1410118012FA