



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz&5GHz Wifi&BLE&Zigbee module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-C5-WROOM-1
FCC ID : 2AC7Z-ESPC5WROOM1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 24, 2025 ~ Apr. 10, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	17
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements.....	23
4 LIST OF MEASURING EQUIPMENT	24
5 MEASUREMENT UNCERTAINTY	25
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR512010B	Rev. 01	Initial issue of report	May 23, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.01 dB at 2483.80 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.37 dB at 0.155 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz&5GHz Wifi&BLE&Zigbee module
Brand Name	ESPRESSIF
Model Name	ESP32-C5-WROOM-1
FCC ID	2AC7Z-ESPC5WROOM1
SN Code	Conducted: 6055F9FC8BC8 Conduction: 6055F9FC8A28 Radiation: 6055F9FC8B4C
HW Version	V1
SW Version	V0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.73 dBm (0.1183 W) 802.11g : 26.21 dBm (0.4178 W) 802.11n HT20 : 26.13 dBm (0.4102 W) 802.11n HT40 : 25.21 dBm (0.3319 W) 802.11ax HE20 : 26.16 dBm (0.4130 W)
99% Occupied Bandwidth	802.11b : 13.067MHz 802.11g : 17.263MHz 802.11n HT40 : 36.284MHz 802.11ax HE20 : 18.861MHz
Antenna Type / Gain	PCB Antenna type with gain 3.62 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note:

1. For 802.11n HT20/ ax HE20 mode, the whole testing have assessed only 802.11 ax HE20 by



referring to the higher output power.

2. The device only support full RU for 11ax.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT40	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN TX + Charging from Notebook

2.3 Connection Diagram of Test System

AC Conducted Emission:

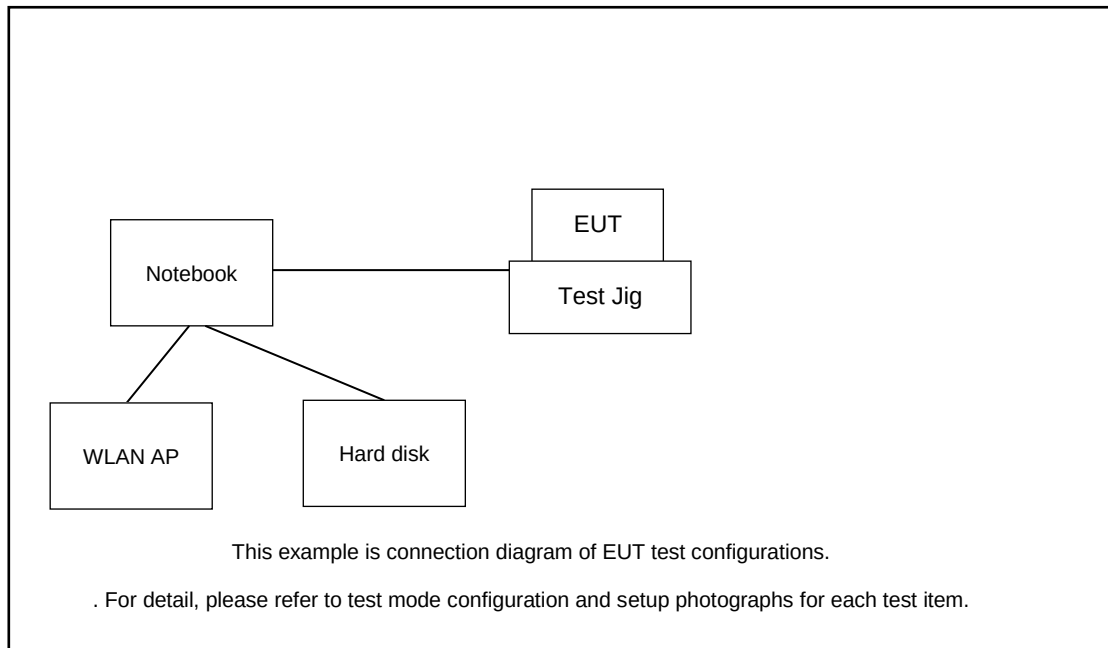

Radiated Emission:

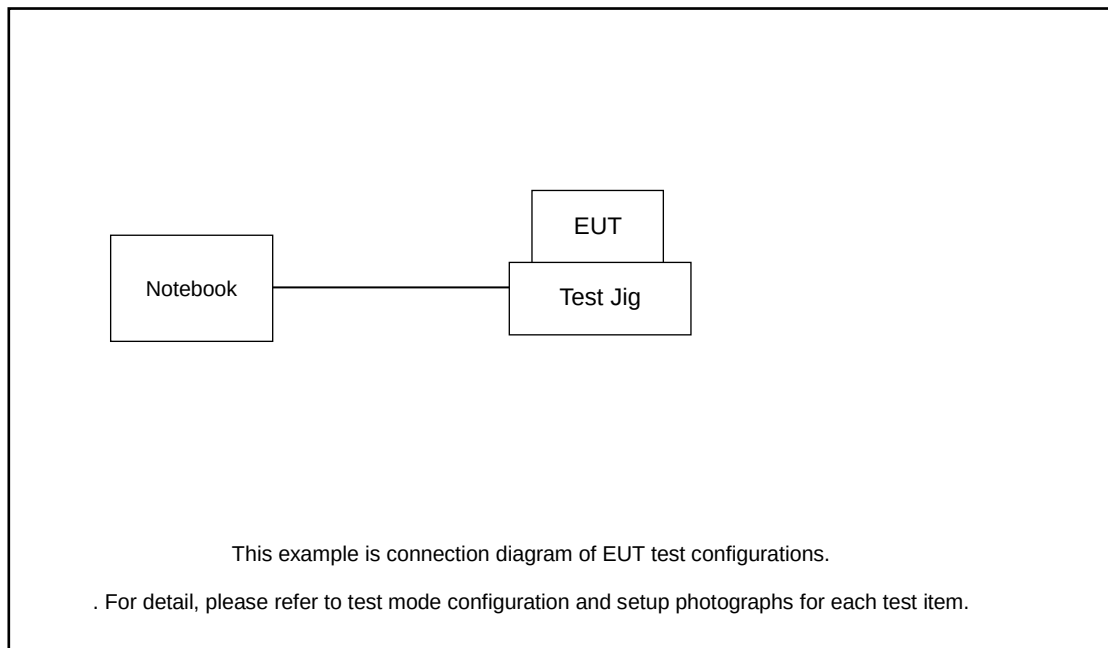

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	AX5400	MSQ-RTAX6100	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
3.	Hard disk	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.25 dB and 20dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.25 + 20 = 22.25 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times$ RBW. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

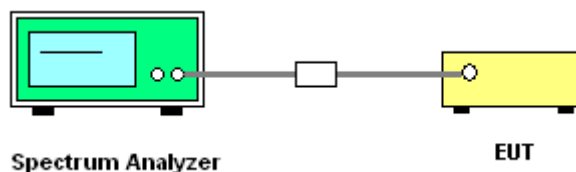

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

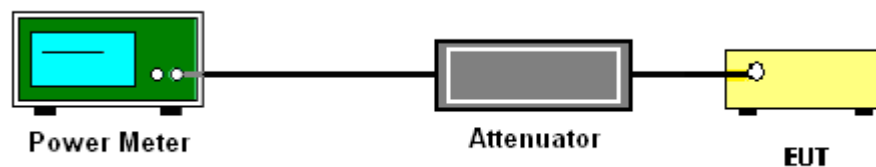



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	19.72	30.00	3.62	23.34	36.00	Pass
11b	1Mbps	1	6	2437	19.94	30.00	3.62	23.56	36.00	Pass
11b	1Mbps	1	11	2462	20.73	30.00	3.62	24.35	36.00	Pass
11g	6Mbps	1	1	2412	25.72	30.00	3.62	29.34	36.00	Pass
11g	6Mbps	1	6	2437	26.21	30.00	3.62	29.83	36.00	Pass
11g	6Mbps	1	11	2462	25.27	30.00	3.62	28.89	36.00	Pass
HT20	MCS0	1	1	2412	24.46	30.00	3.62	28.08	36.00	Pass
HT20	MCS0	1	6	2437	26.13	30.00	3.62	29.75	36.00	Pass
HT20	MCS0	1	11	2462	25.11	30.00	3.62	28.73	36.00	Pass
HT40	MCS0	1	3	2422	23.65	30.00	3.62	27.27	36.00	Pass
HT40	MCS0	1	6	2437	25.21	30.00	3.62	28.83	36.00	Pass
HT40	MCS0	1	9	2452	22.75	30.00	3.62	26.37	36.00	Pass

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant1	Ant1	Ant1	Ant1	Ant1	
HE20	MCS0	1	1	2412	Full	24.55	30.00	3.62	28.17	36.00	Pass
HE20	MCS0	1	6	2437	Full	26.16	30.00	3.62	29.78	36.00	Pass
HE20	MCS0	1	11	2462	Full	25.22	30.00	3.62	28.84	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
					Ant 1	Ant1	Ant1	Ant1	Ant1	Ant1		
11b	1Mbps	1	1	2412	0.00	16.99	30.00	3.62	20.61	36.00	Pass	0.00
11b	1Mbps	1	6	2437	0.00	17.17	30.00	3.62	20.79	36.00	Pass	0.00
11b	1Mbps	1	11	2462	0.00	17.98	30.00	3.62	21.60	36.00	Pass	0.00
11g	6Mbps	1	1	2412	0.00	16.39	30.00	3.62	20.01	36.00	Pass	4.00
11g	6Mbps	1	6	2437	0.00	17.58	30.00	3.62	21.20	36.00	Pass	0.00
11g	6Mbps	1	11	2462	0.00	16.42	30.00	3.62	20.04	36.00	Pass	8.00
HT20	MCS0	1	1	2412	0.00	14.62	30.00	3.62	18.24	36.00	Pass	12.00
HT20	MCS0	1	6	2437	0.00	17.19	30.00	3.62	20.81	36.00	Pass	0.00
HT20	MCS0	1	11	2462	0.00	15.51	30.00	3.62	19.13	36.00	Pass	10.00
HT40	MCS0	1	3	2422	0.05	13.44	30.00	3.62	17.06	36.00	Pass	16.00
HT40	MCS0	1	6	2437	0.05	15.60	30.00	3.62	19.22	36.00	Pass	6.00
HT40	MCS0	1	9	2452	0.05	13.16	30.00	3.62	16.78	36.00	Pass	20.00

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
						Ant1	Ant1	Ant1	Ant1	Ant1	Ant1		
HE20	MCS0	1	1	2412	Full	0.03	14.99	30.00	3.62	18.61	36.00	Pass	12.00
HE20	MCS0	1	6	2437	Full	0.03	17.45	30.00	3.62	21.07	36.00	Pass	0.00
HE20	MCS0	1	11	2462	Full	0.03	15.79	30.00	3.62	19.41	36.00	Pass	10.00

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

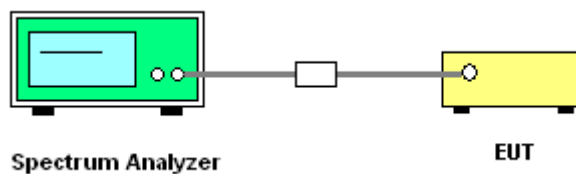

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

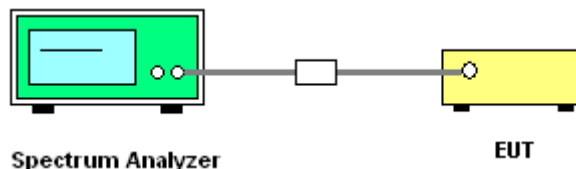

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW = RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

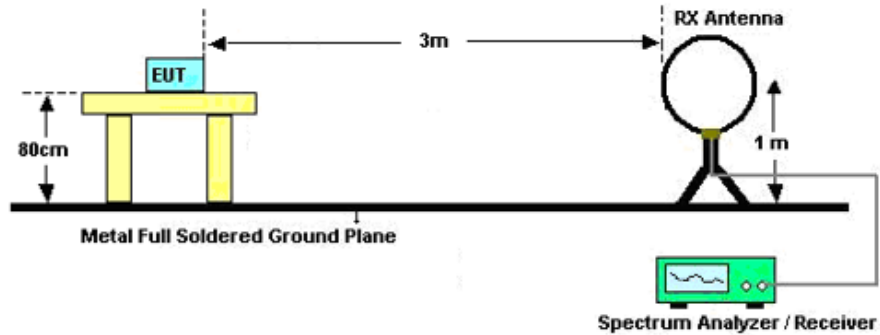

For radiated emissions from 30MHz to 1GHz

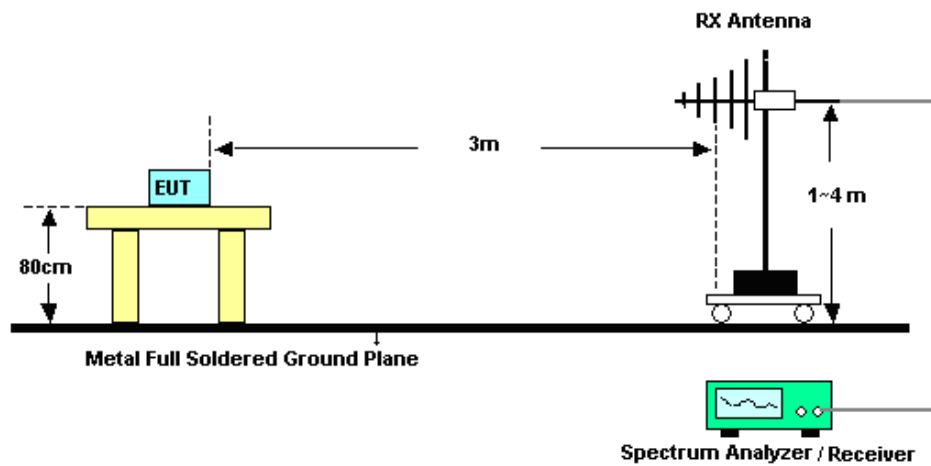

For radiated emissions above 1GHz

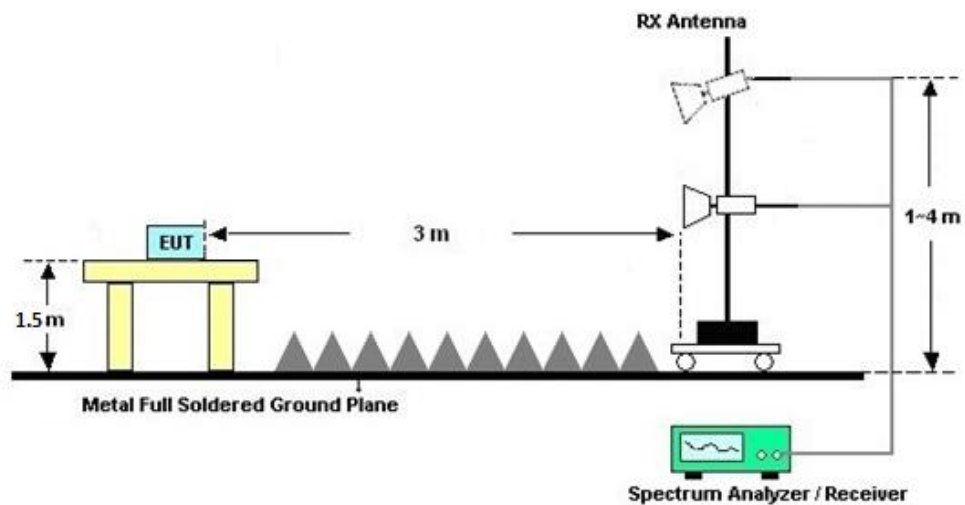

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

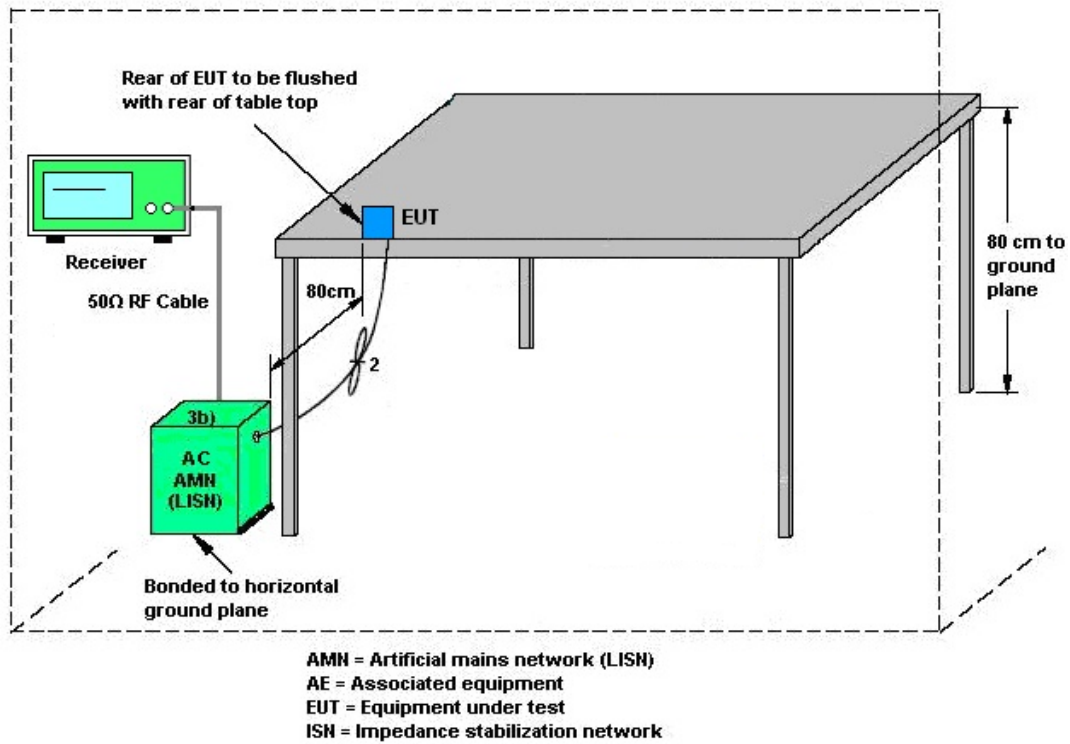

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Mar. 31, 2025 Apr. 09, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Mar. 31, 2025 Apr. 09, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Mar. 31, 2025 Apr. 09, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 04, 2024	Mar. 24, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 09, 2024	Mar. 24, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Mar. 24, 2025	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Mar. 24, 2025	Aug. 17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Mar. 24, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1GHz~18GHz	Jul. 23, 2024	Mar. 24, 2025	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Mar. 24, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9kHz~1GHz	Jul. 03, 2024	Mar. 24, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 09, 2024	Mar. 24, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Mar. 24, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 24, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 24, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 24, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Apr. 10, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Apr. 10, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Apr. 10, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Apr. 10, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2024.3.31~2025.4.9

Test Engineer: Jiang Jun


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.56	2407.48	2417.04	0.5	PASS
		2437	9.52	2432.48	2442.00	0.5	PASS
		2462	9.68	2457.32	2467.00	0.5	PASS
11G	Ant1	2412	16.36	2403.84	2420.20	0.5	PASS
		2437	16.00	2429.16	2445.16	0.5	PASS
		2462	16.08	2454.08	2470.16	0.5	PASS
11N40SISO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
		2437	35.12	2419.48	2454.60	0.5	PASS
		2452	35.12	2434.48	2469.60	0.5	PASS
11AX20SISO	Ant1	2412	17.48	2403.16	2420.64	0.5	PASS
		2437	16.28	2429.08	2445.36	0.5	PASS
		2462	18.08	2453.12	2471.20	0.5	PASS





Test Graphs

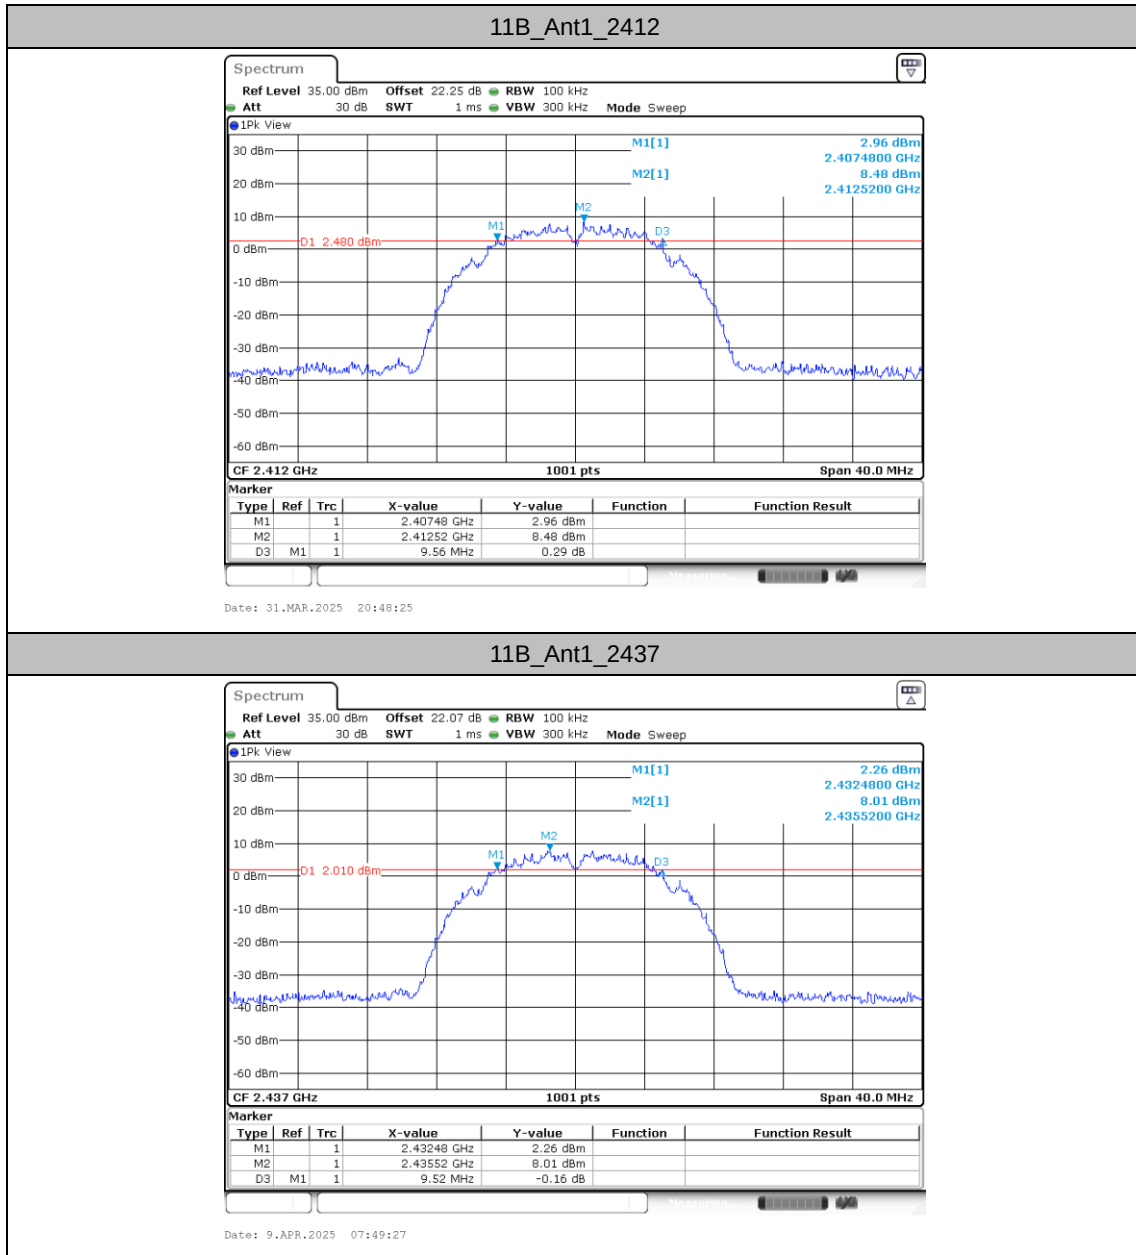


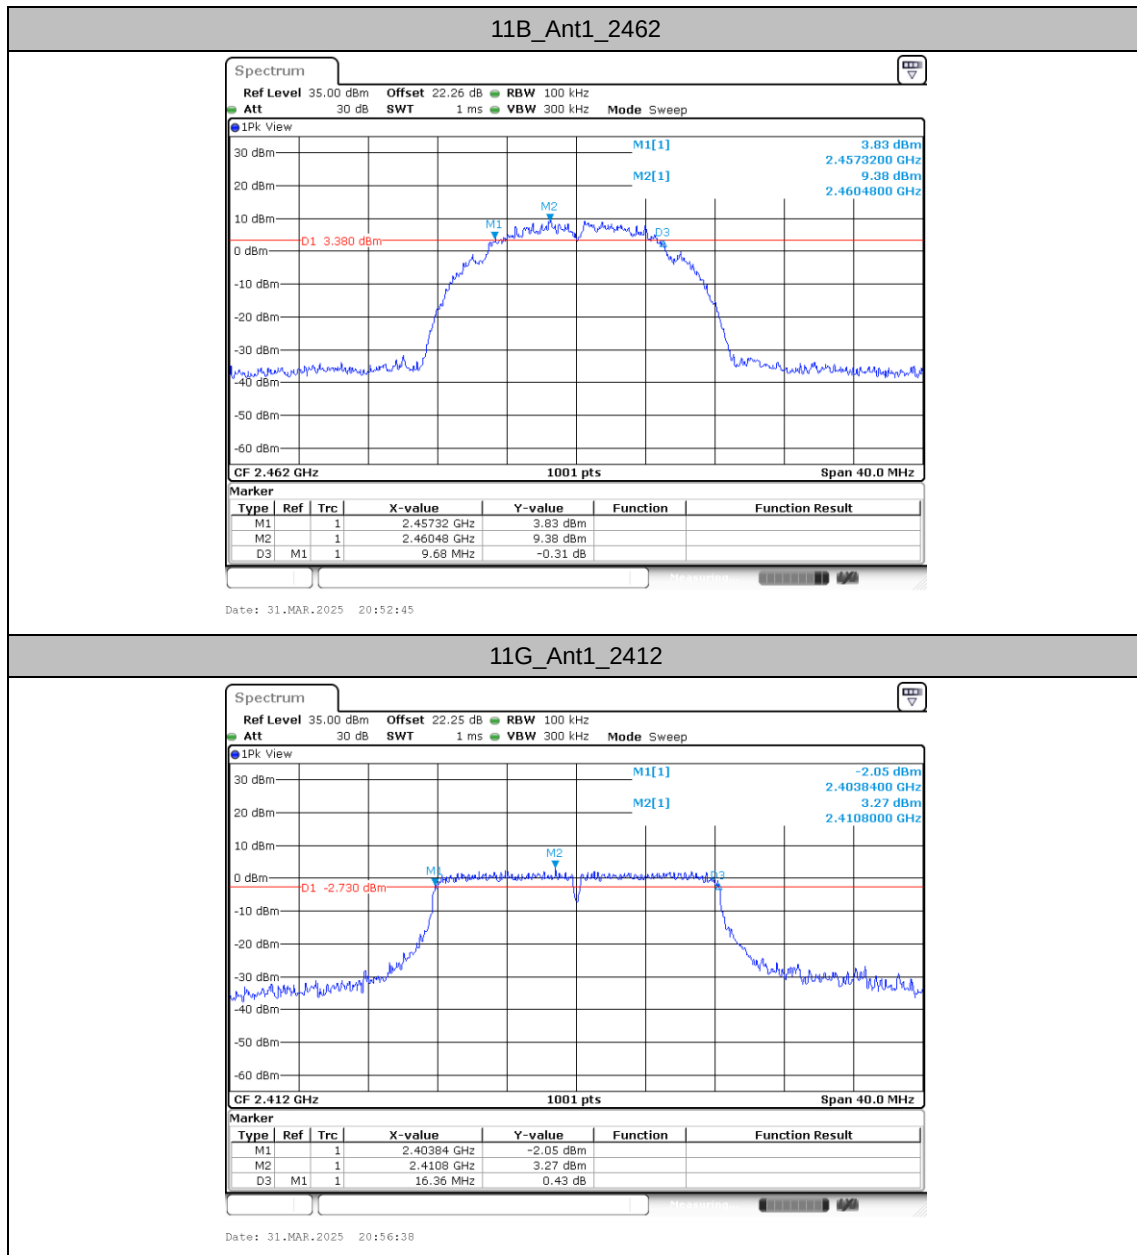

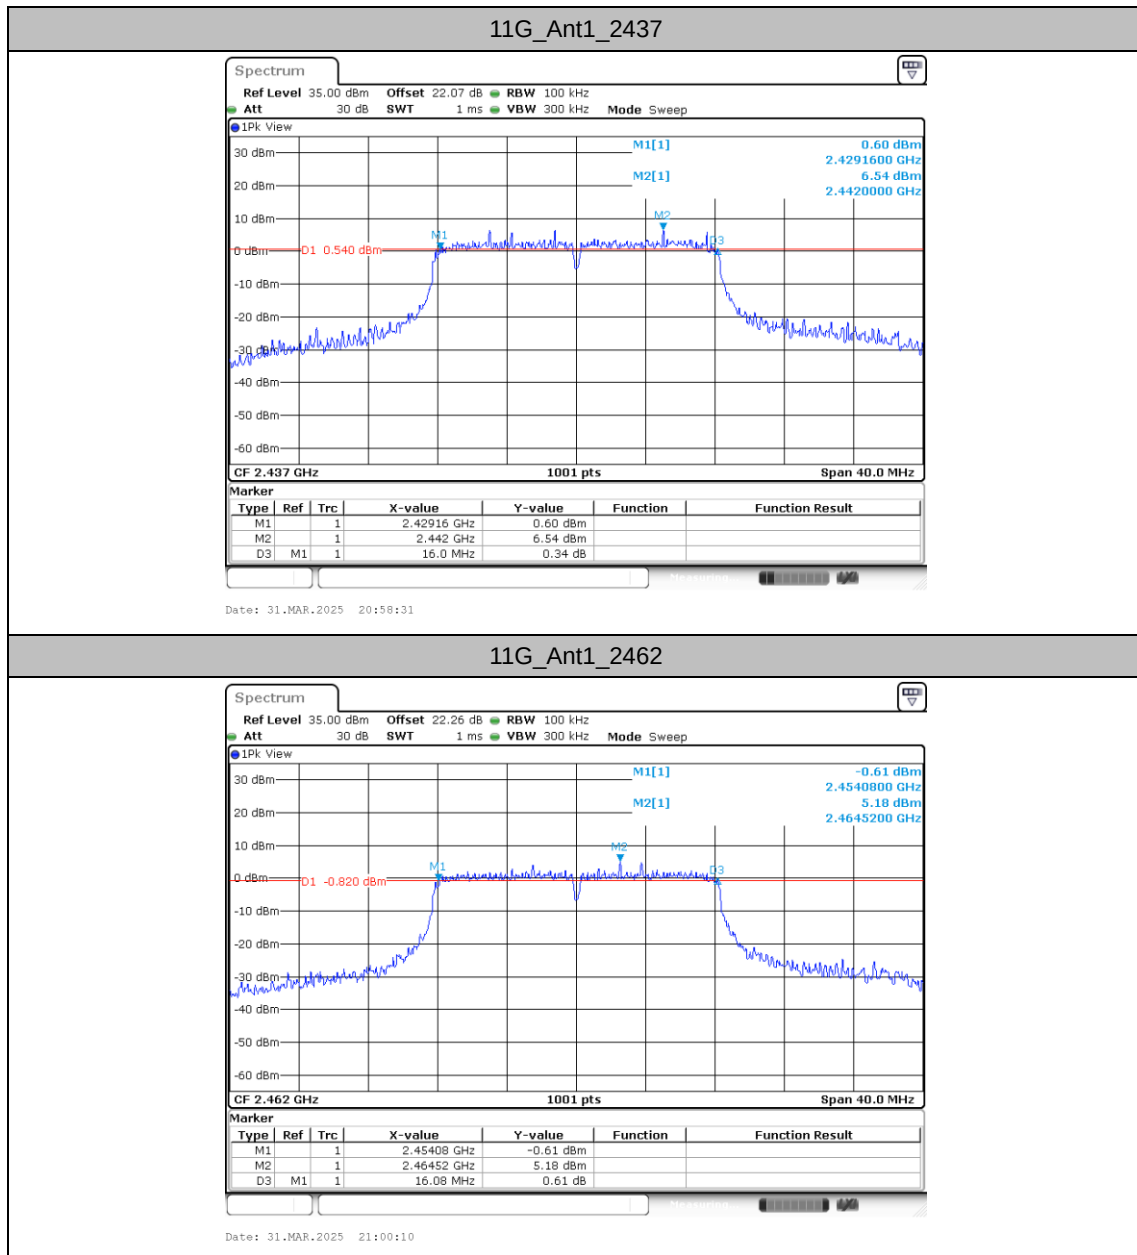

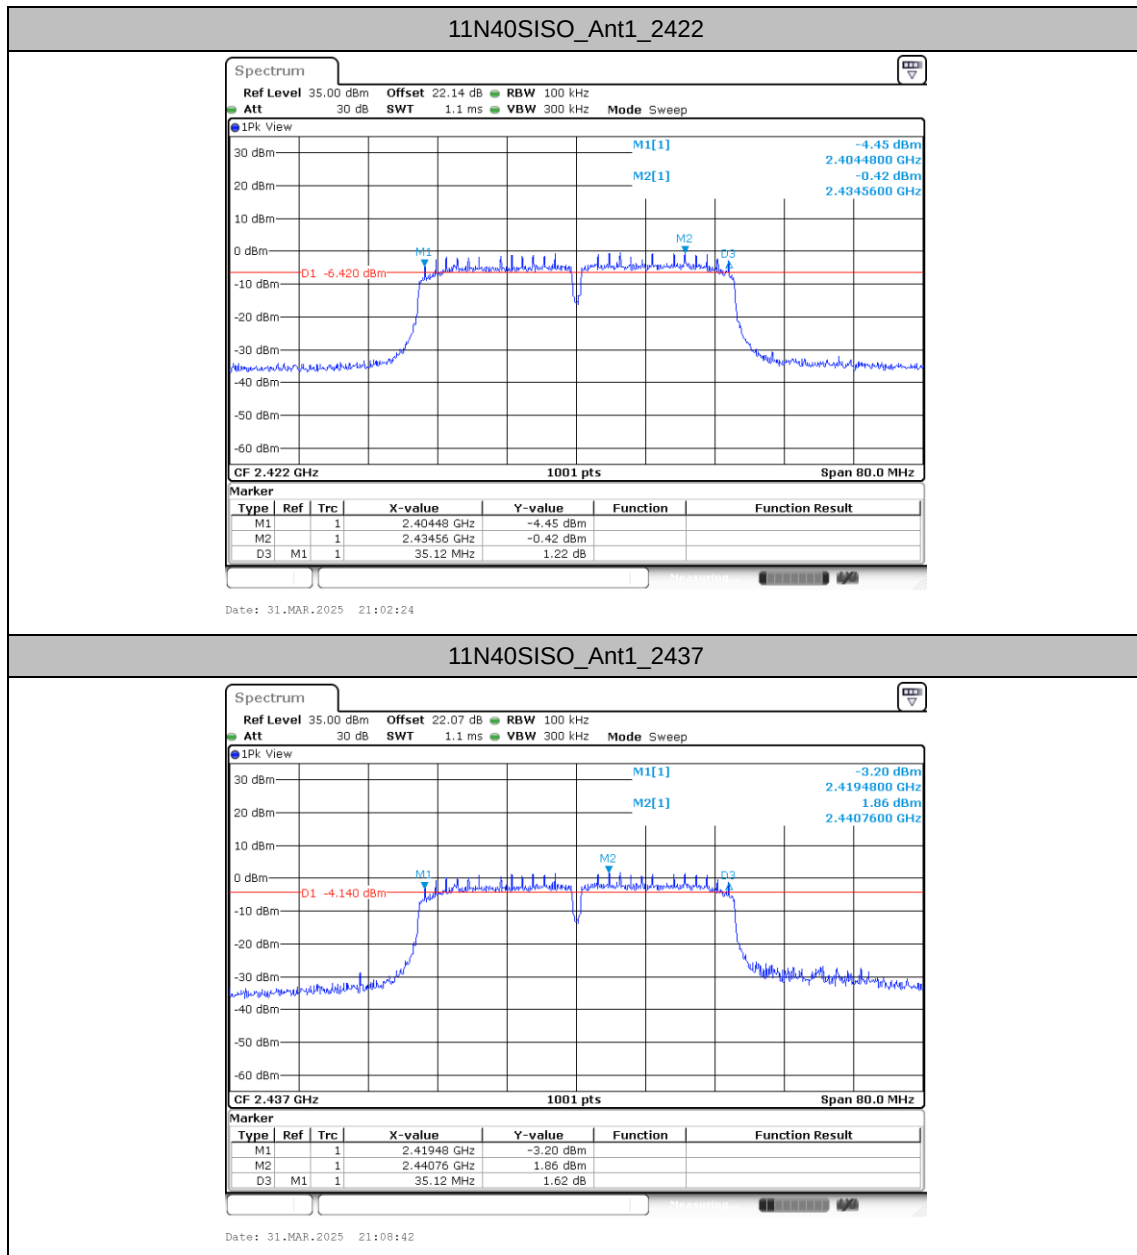

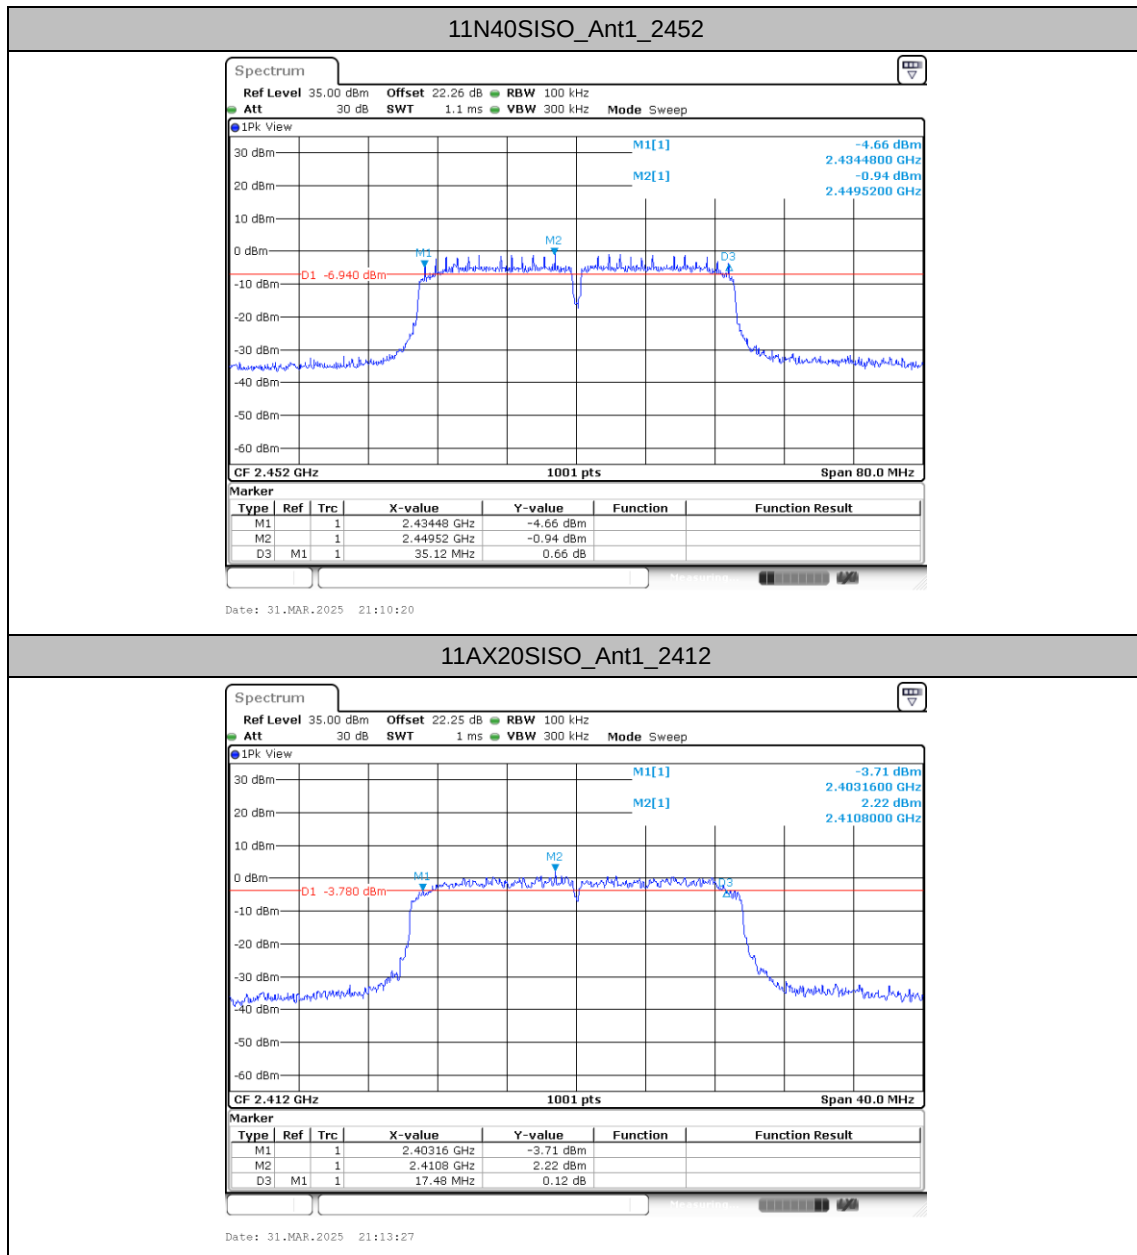

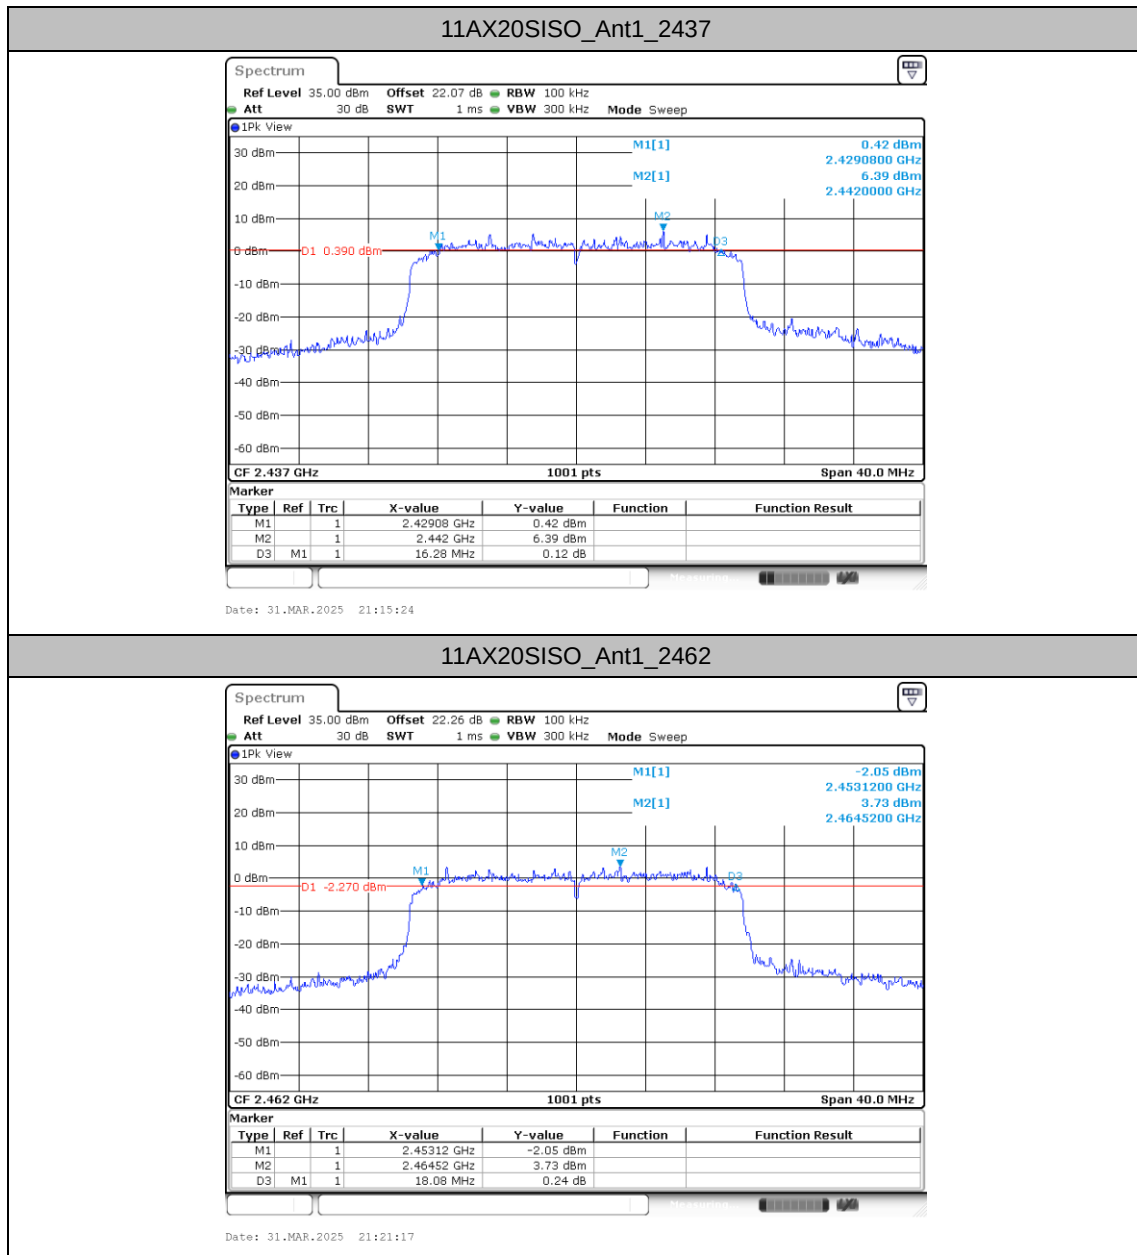




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.067	2405.4466	2418.5135	---	---
		2437	12.987	2430.4865	2443.4735	---	---
		2462	12.987	2455.5265	2468.5135	---	---
11G	Ant1	2412	17.023	2403.5684	2420.5914	---	---
		2437	17.263	2428.5285	2445.7912	---	---
		2462	17.063	2453.5684	2470.6314	---	---
11N40SISO	Ant1	2422	36.284	2403.9381	2440.2218	---	---
		2437	36.284	2419.0180	2455.3017	---	---
		2452	36.284	2433.9381	2470.2218	---	---
11AX20SISO	Ant1	2412	18.781	2402.6494	2421.4306	---	---
		2437	18.861	2427.6094	2446.4705	---	---
		2462	18.861	2452.6094	2471.4705	---	---



Test Graphs

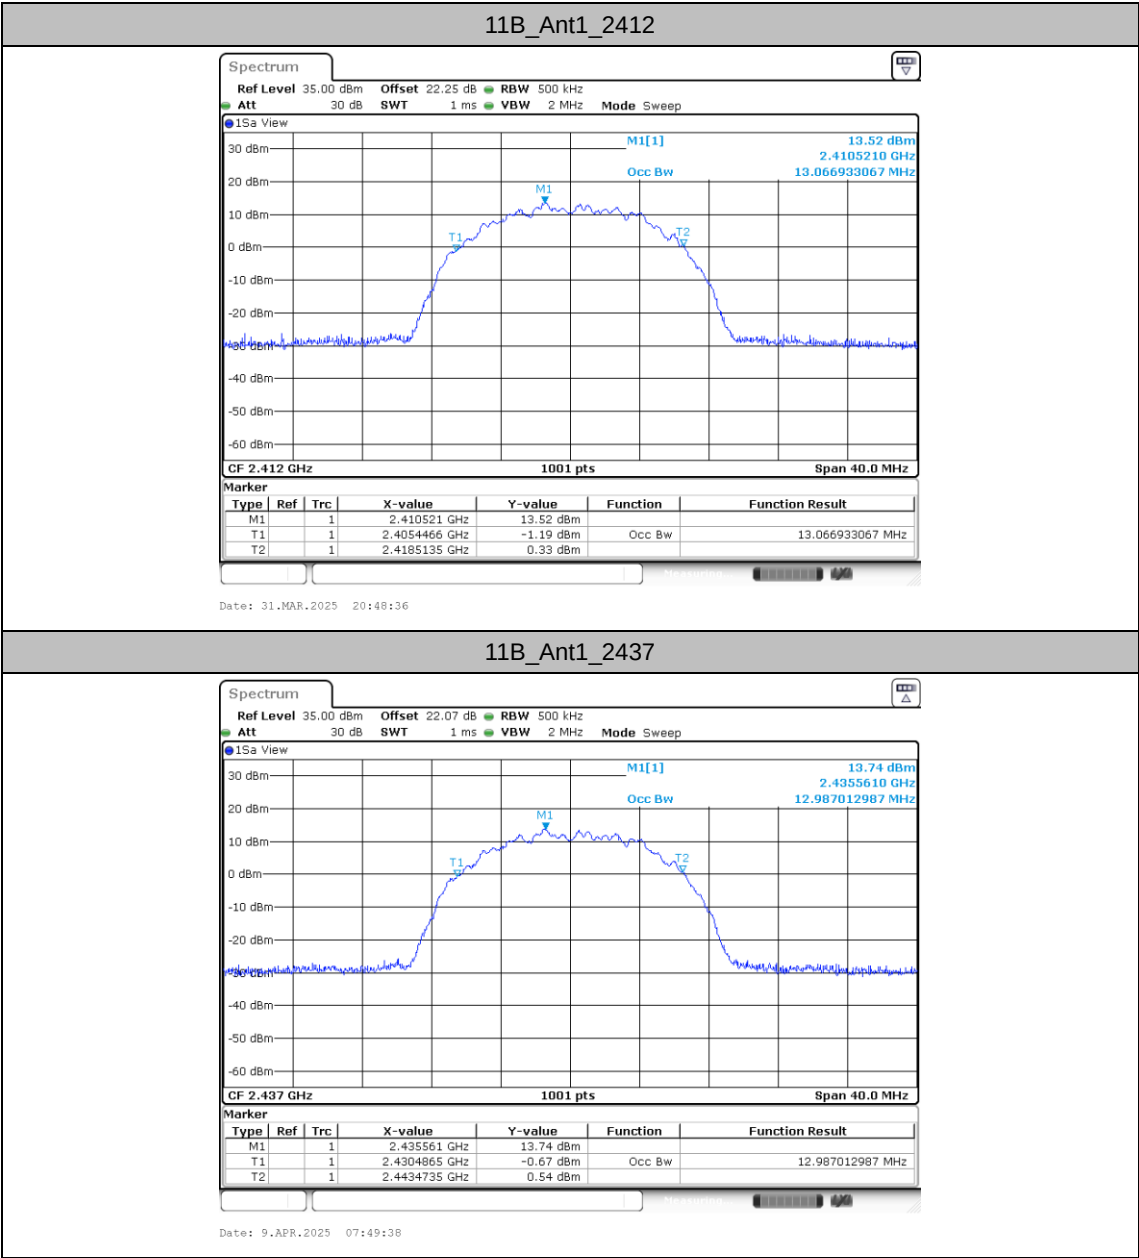


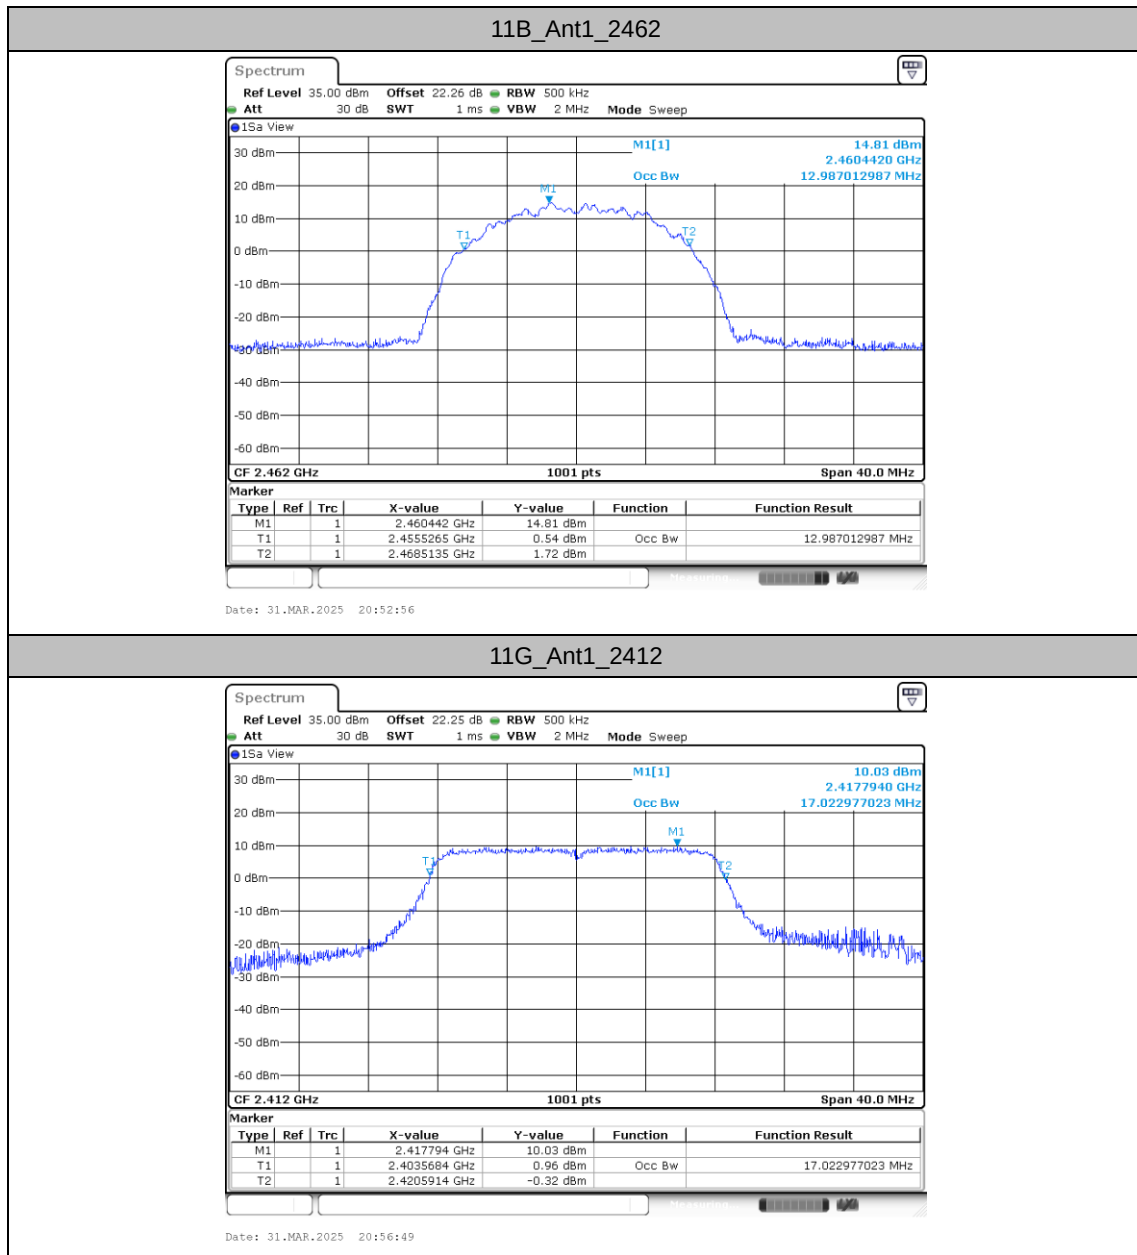

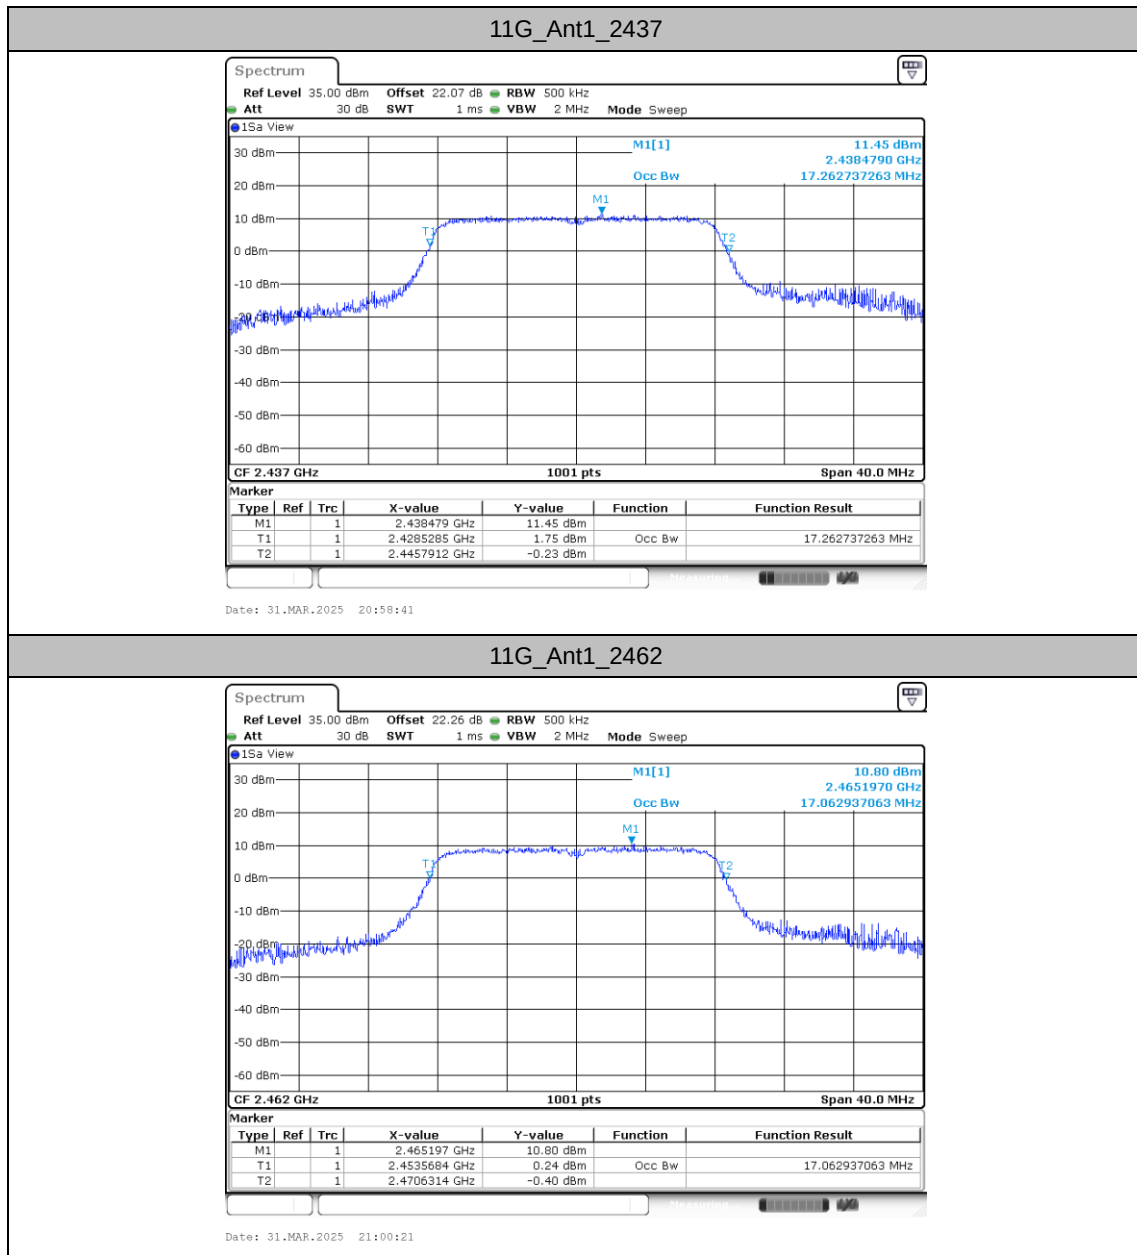






11N40SISO_Ant1_2422

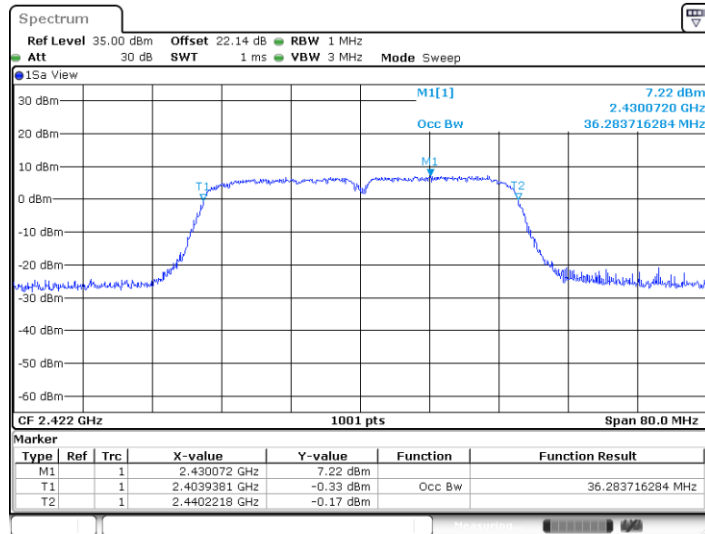

11N40SISO_Ant1_2437

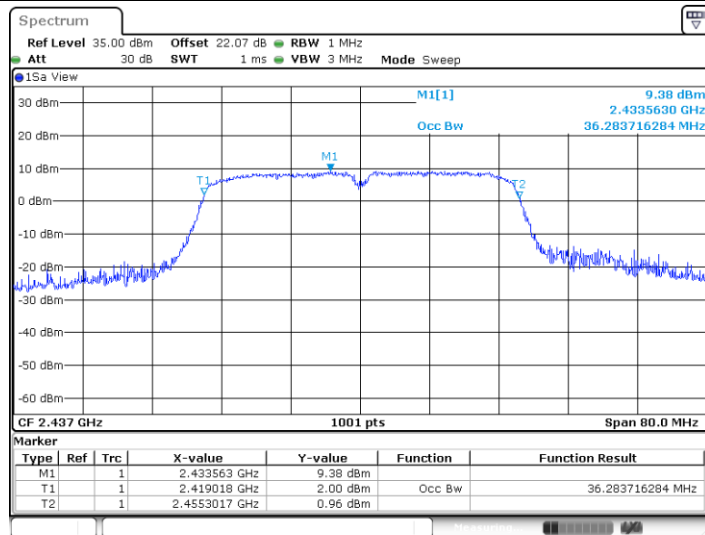

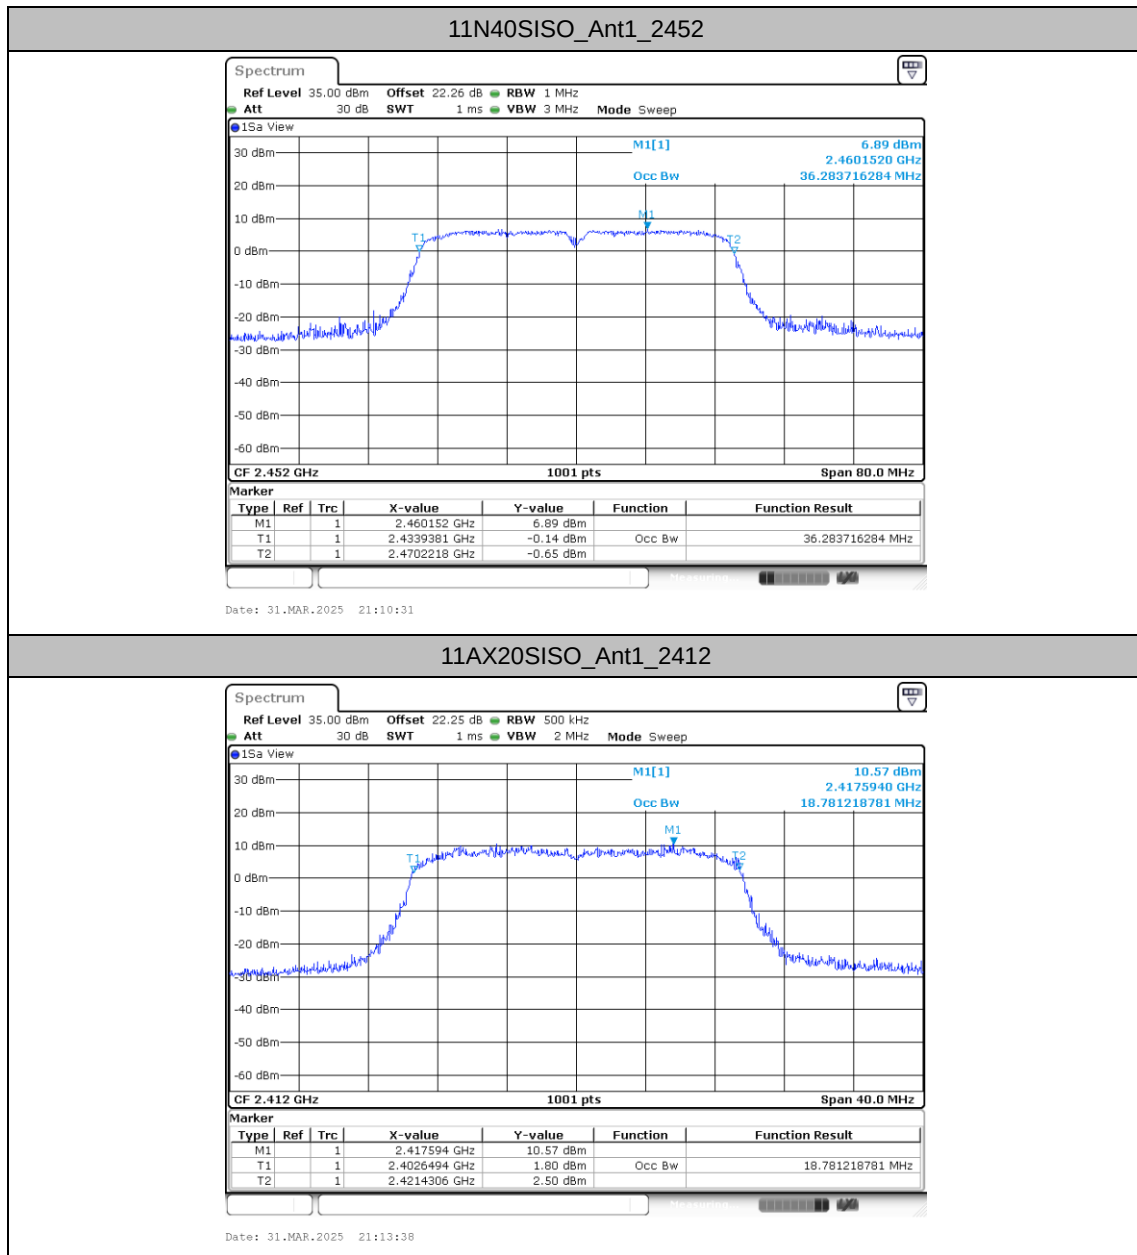

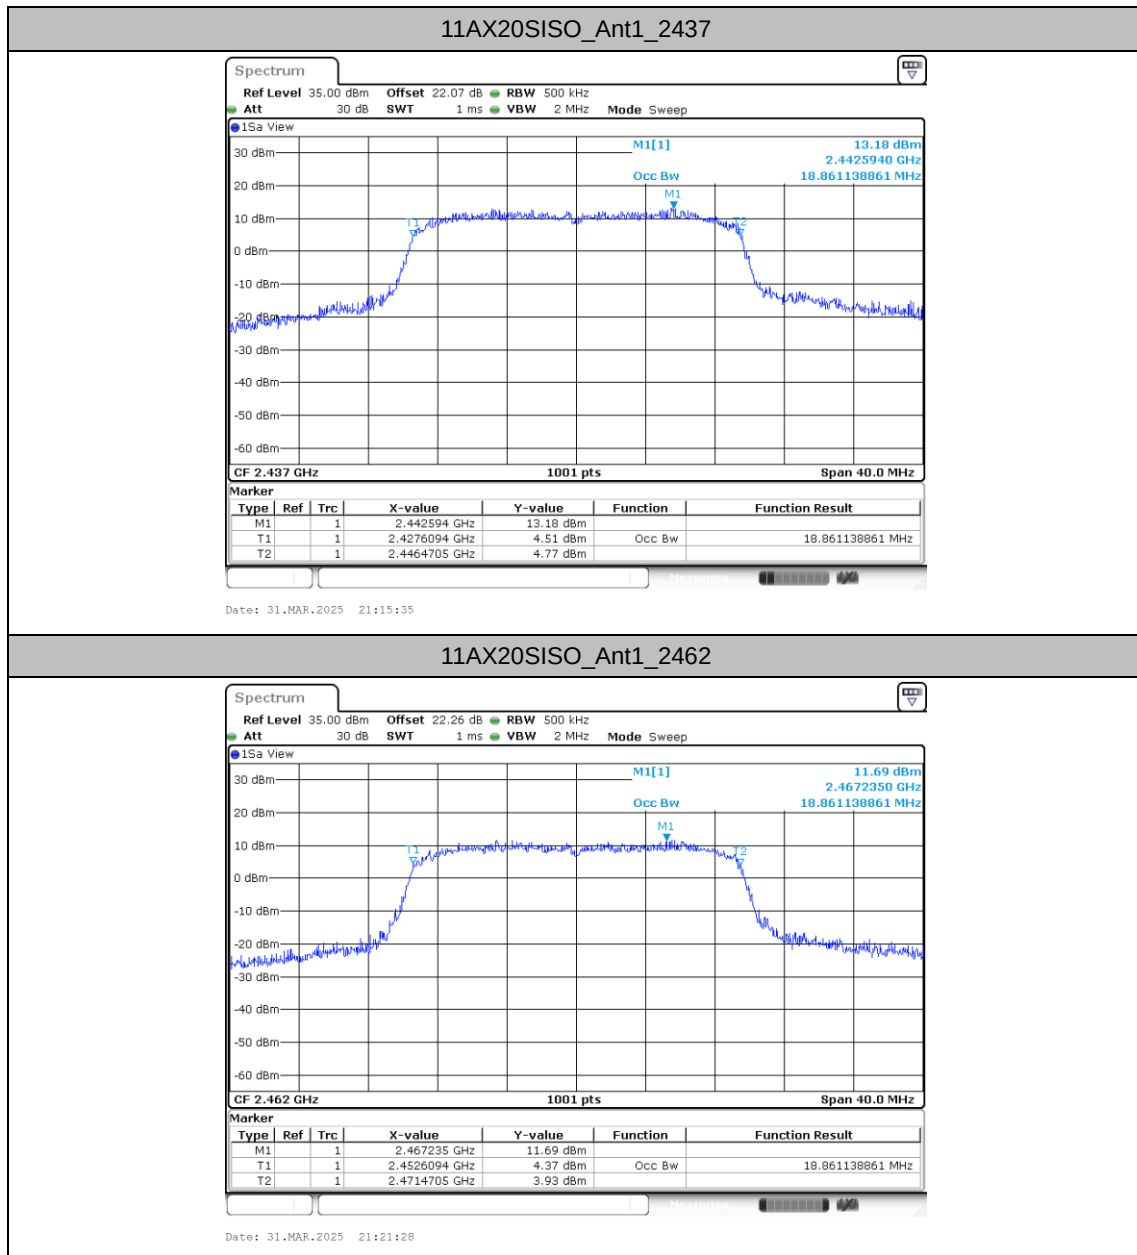




Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-5.52	≤8.00	PASS
		2437	-5.83	≤8.00	PASS
		2462	-4.83	≤8.00	PASS
11G	Ant1	2412	-8.50	≤8.00	PASS
		2437	-7.50	≤8.00	PASS
		2462	-8.88	≤8.00	PASS
11N40SISO	Ant1	2422	-14.41	≤8.00	PASS
		2437	-11.63	≤8.00	PASS
		2452	-15.59	≤8.00	PASS
11AX20SISO	Ant1	2412	-11.83	≤8.00	PASS
		2437	-8.10	≤8.00	PASS
		2462	-10.92	≤8.00	PASS





Test Graphs

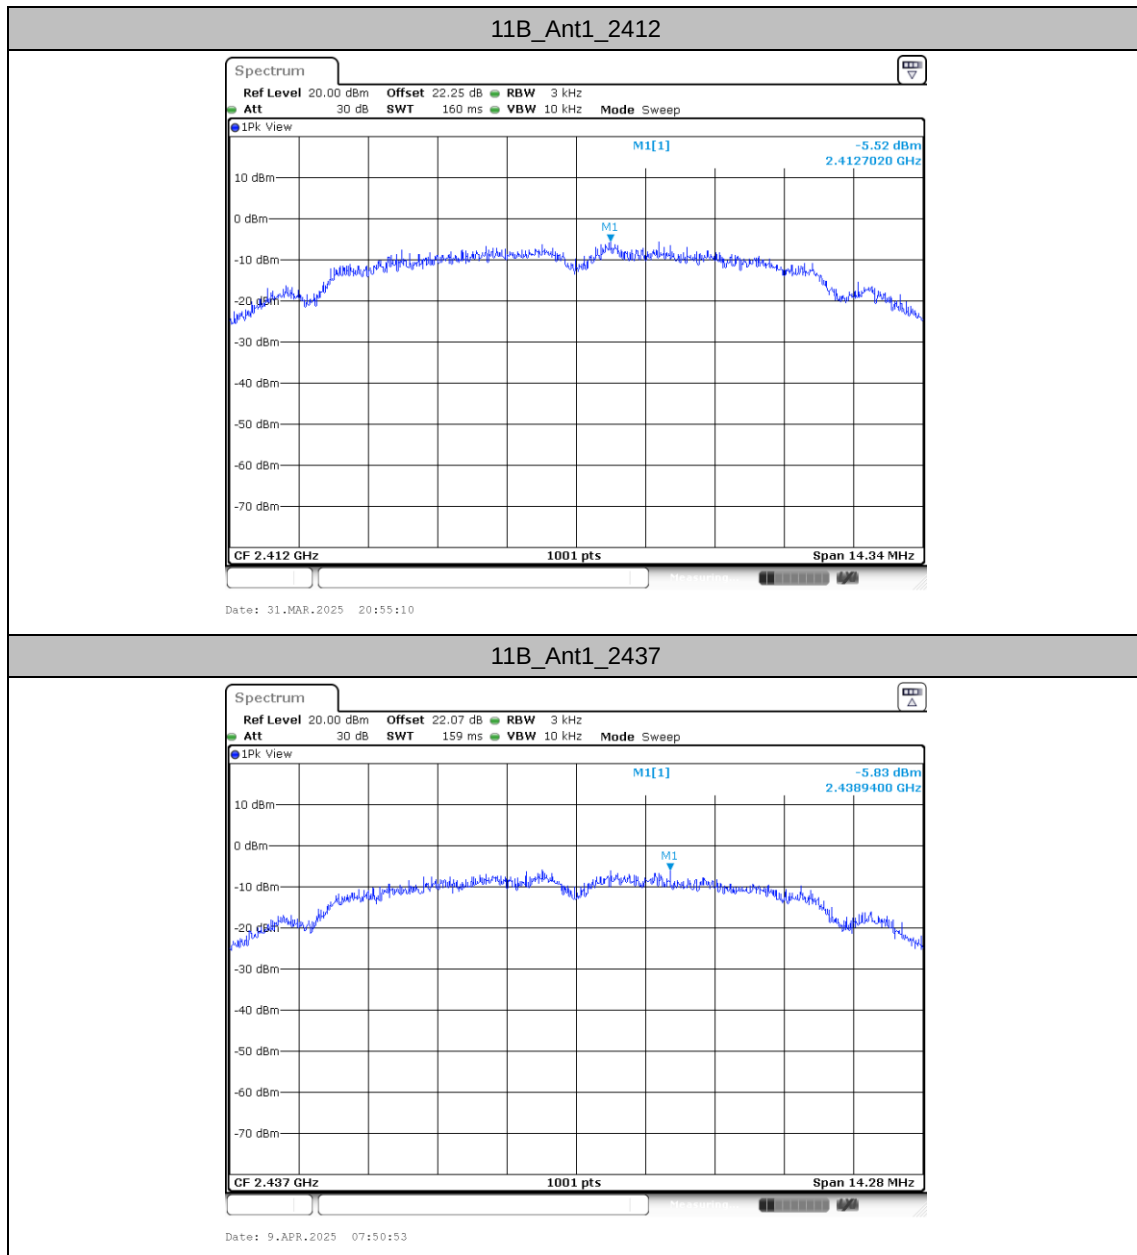


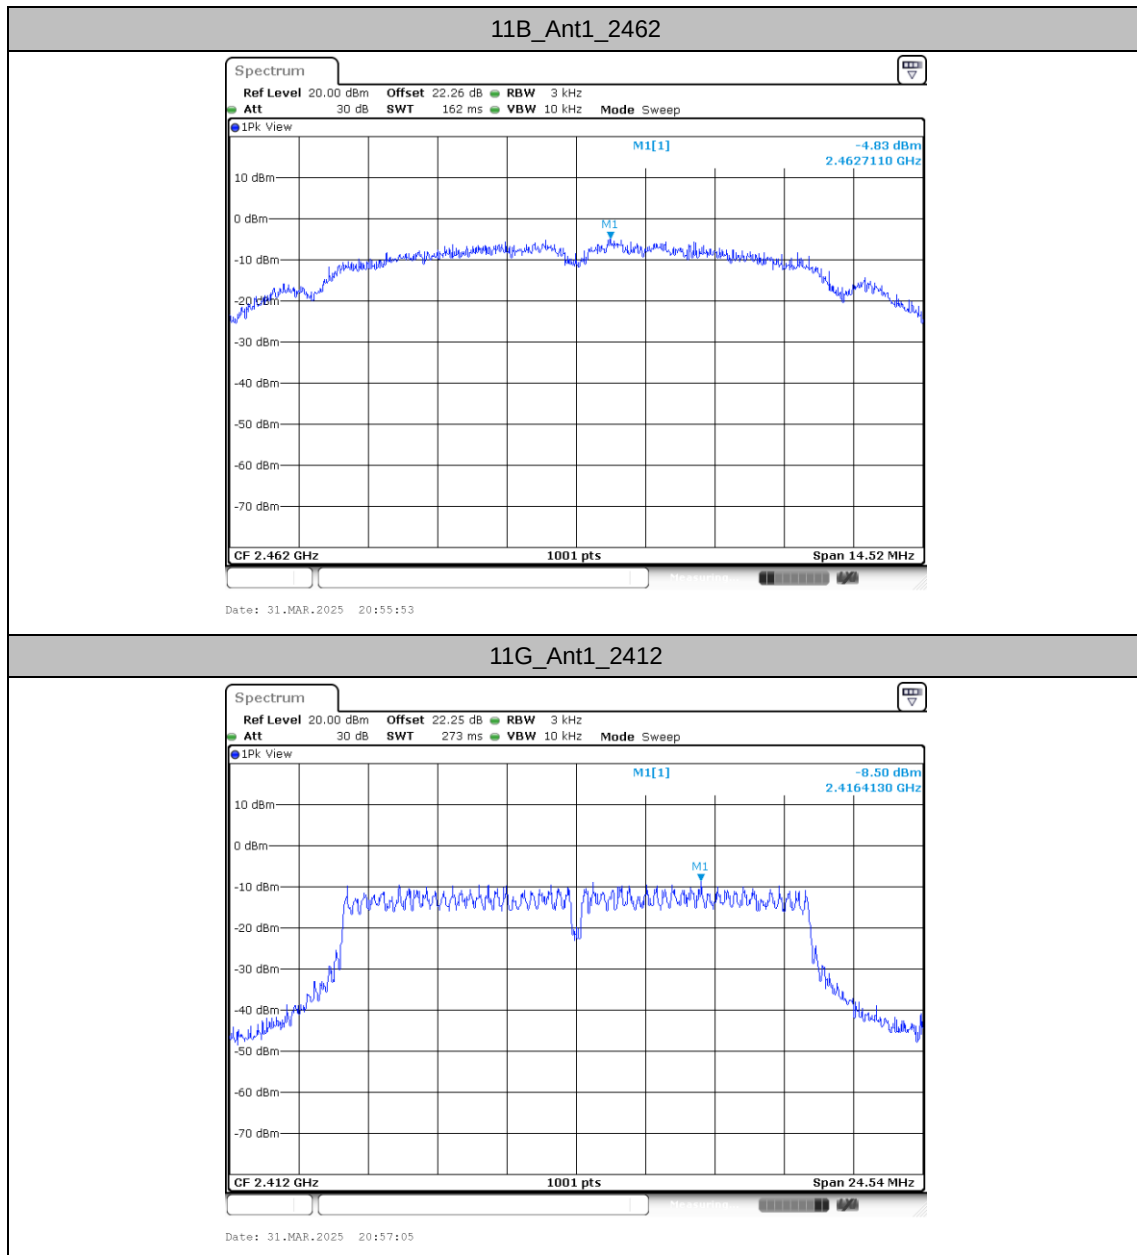

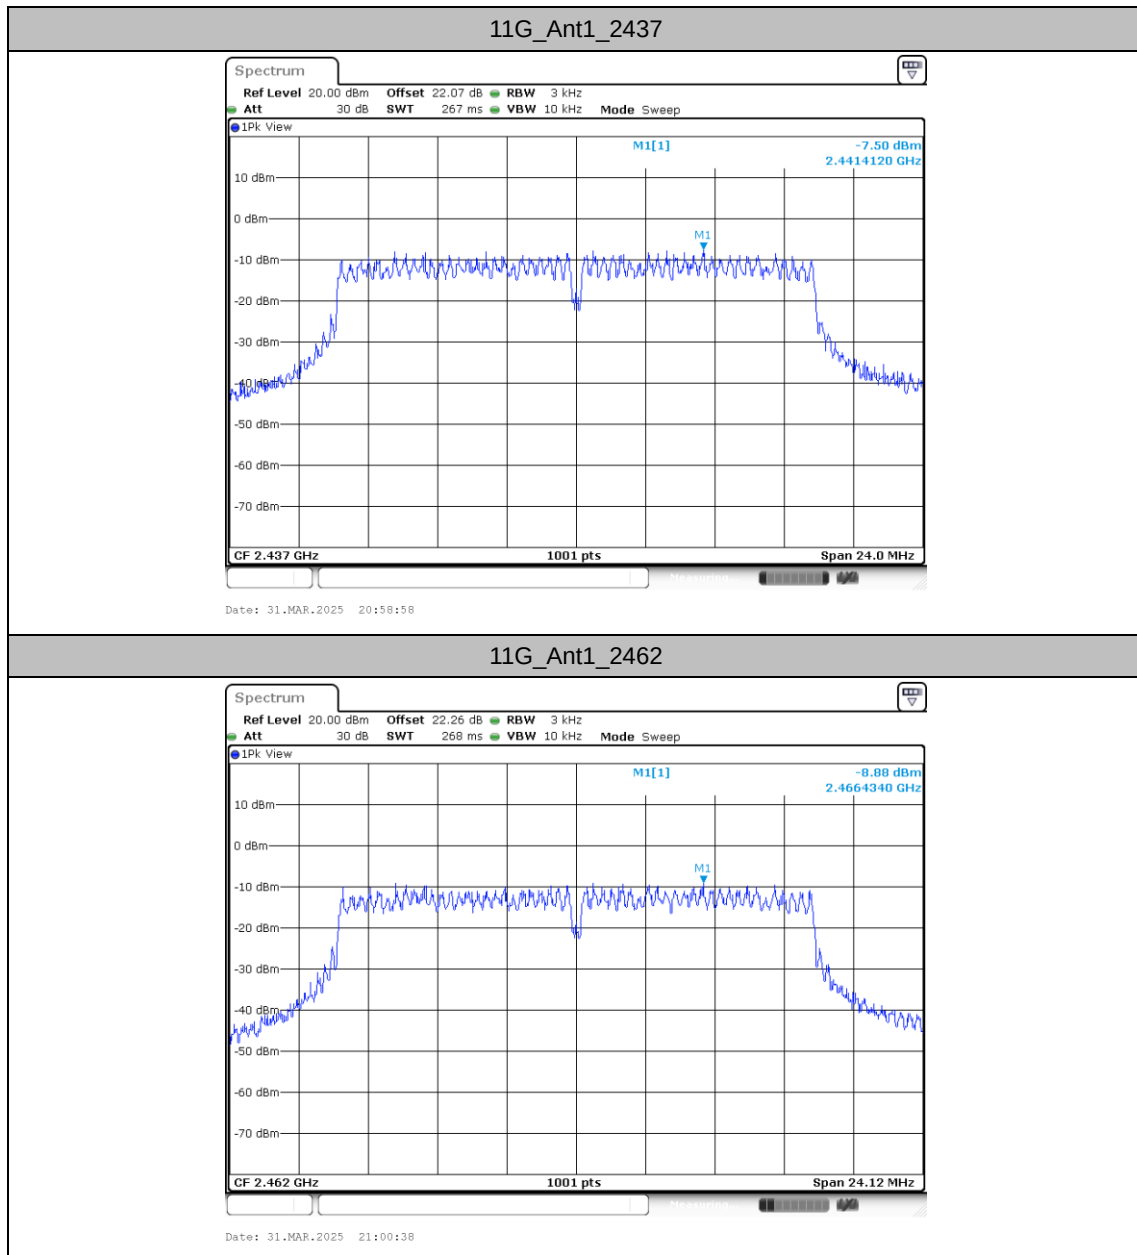

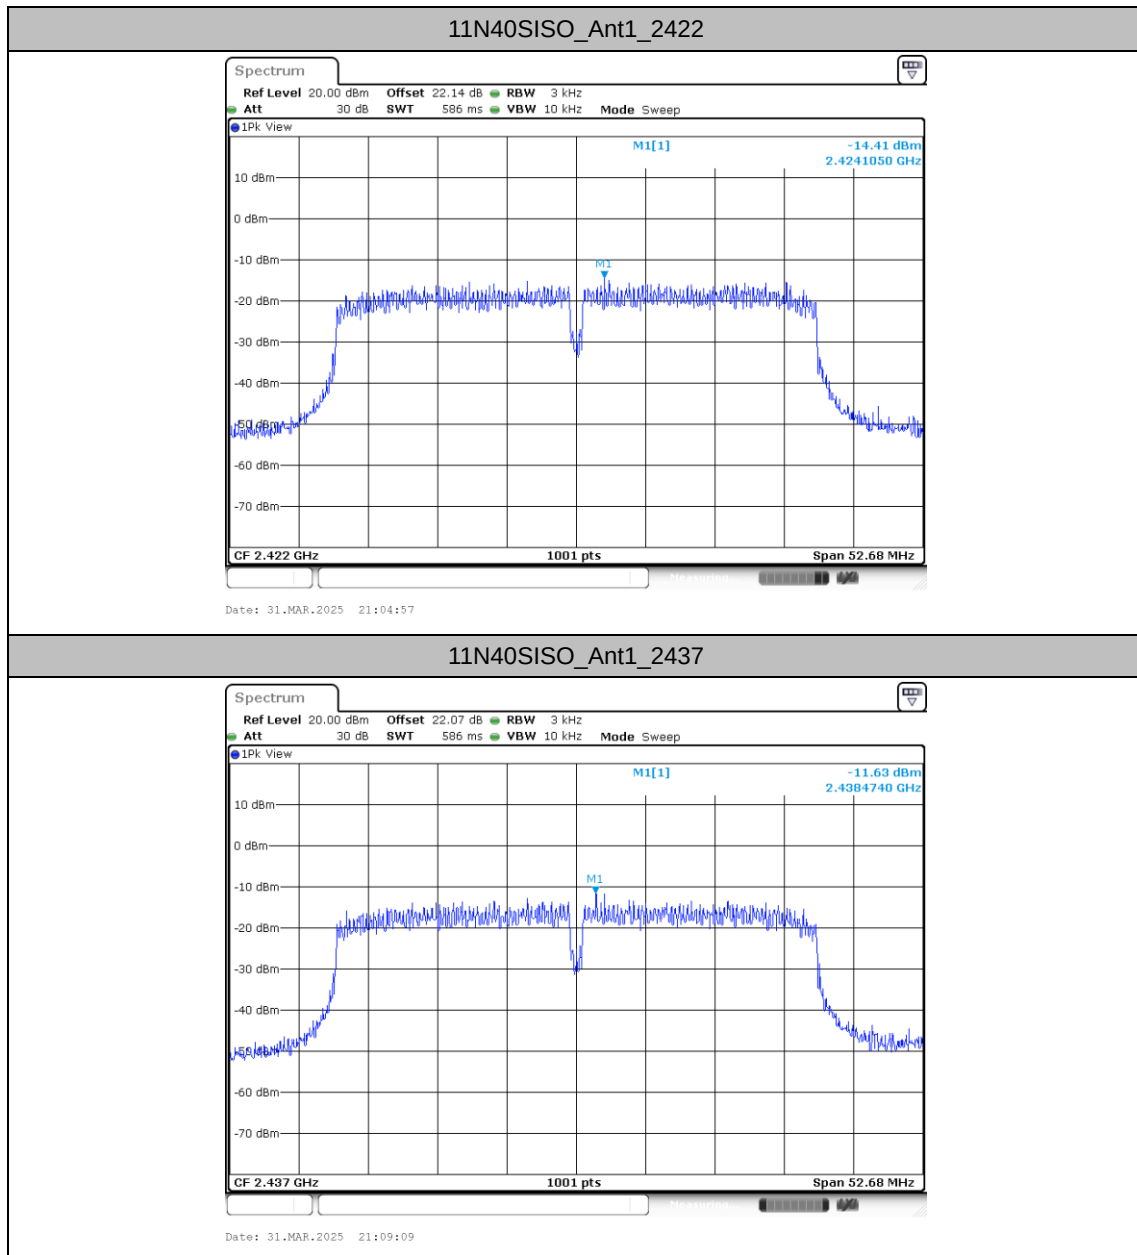

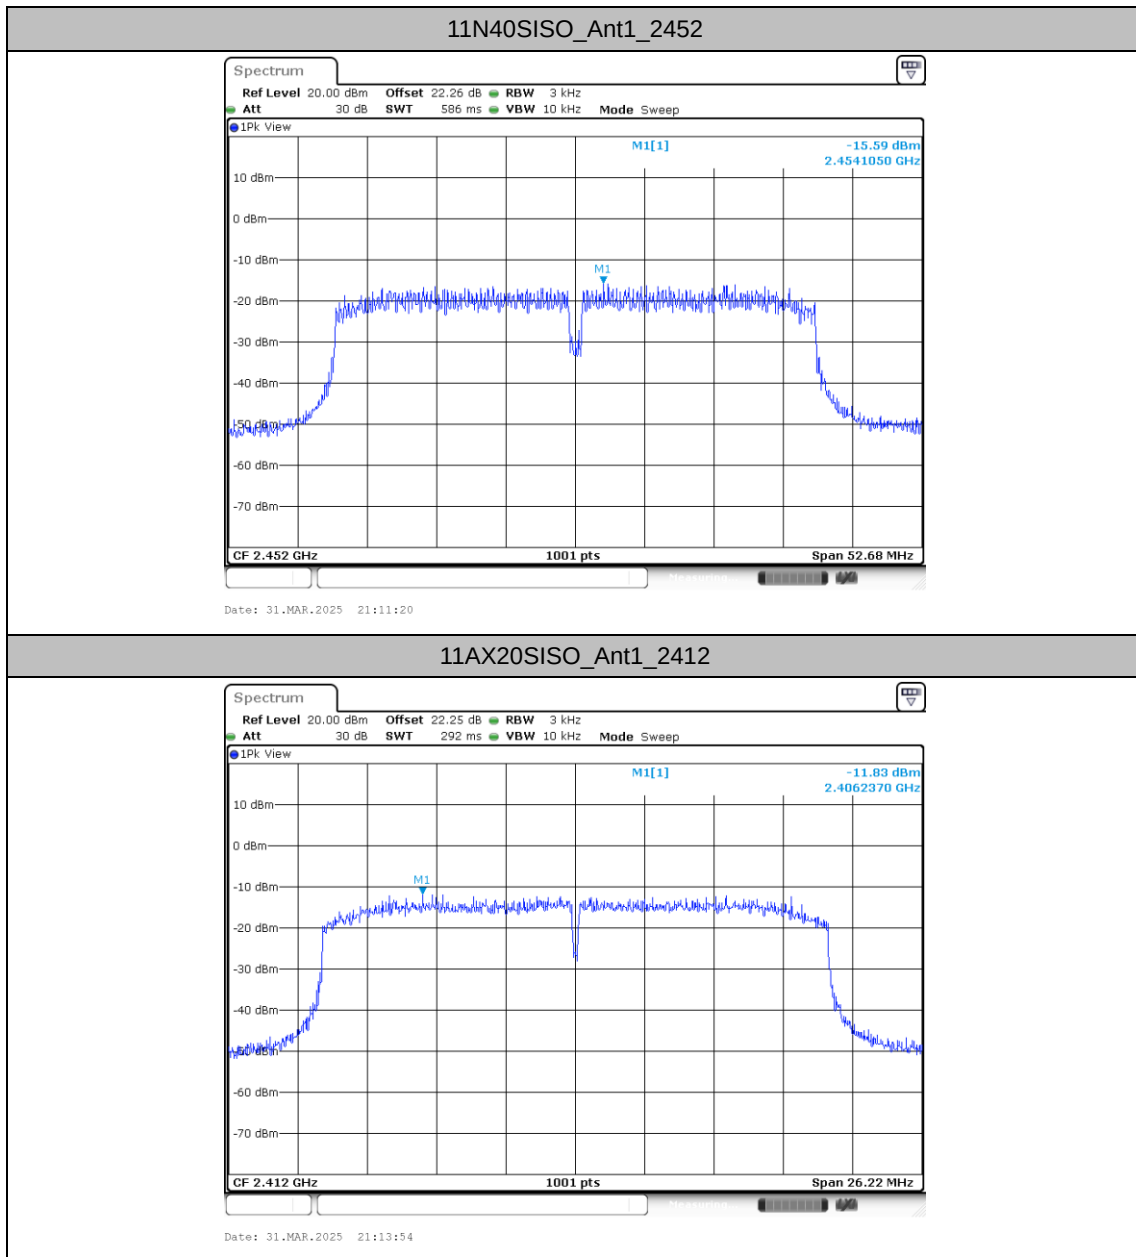

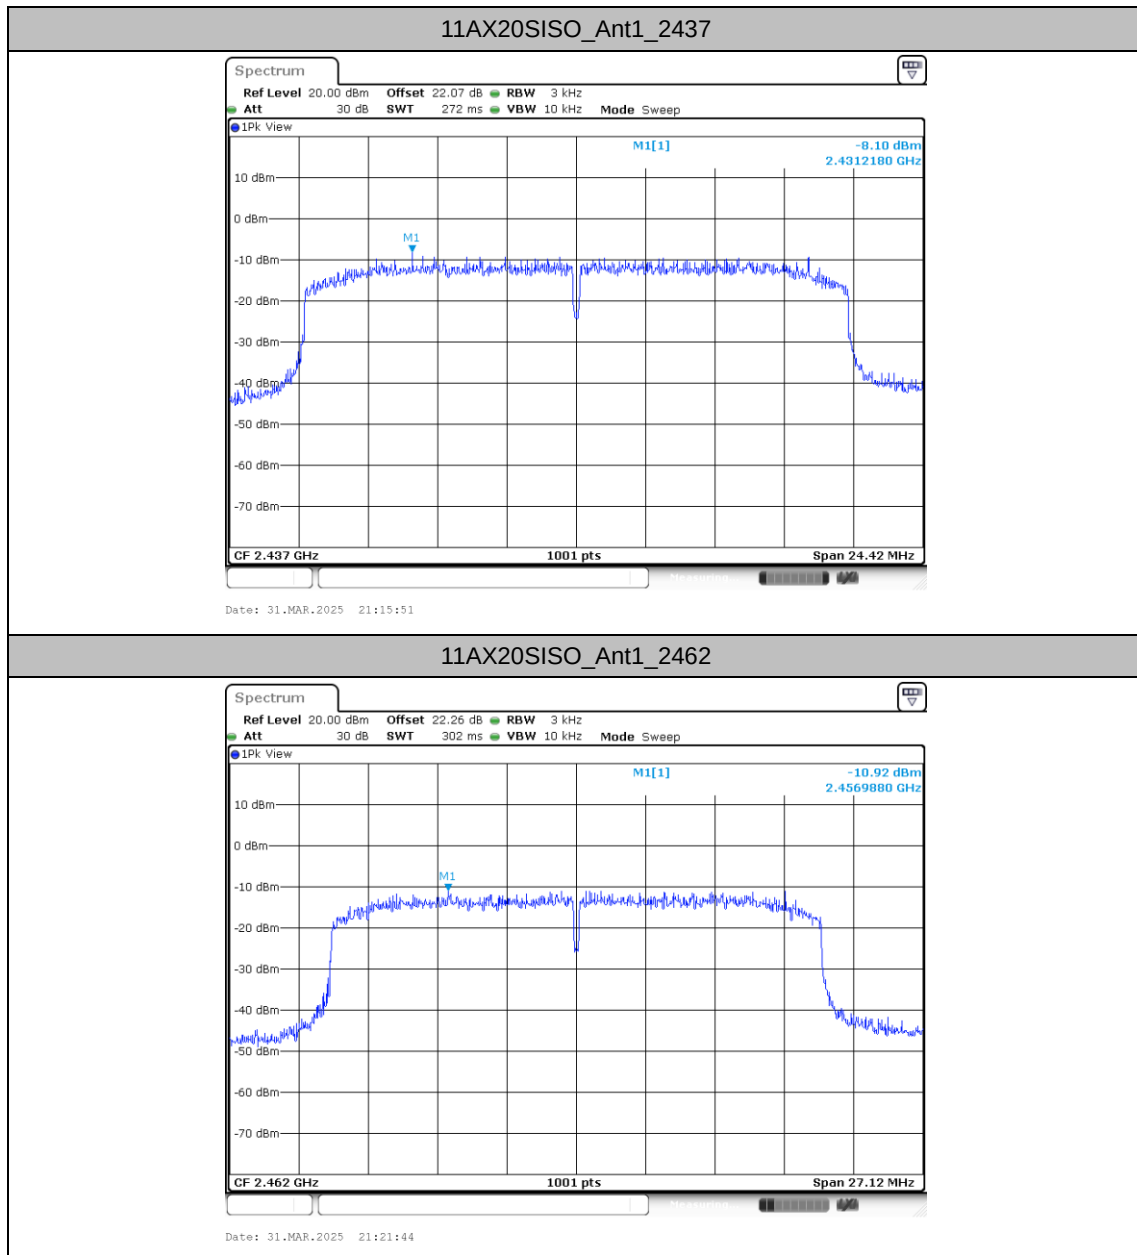




Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant1	2412	2412.50	8.40
		2437	2435.45	8.57
		2462	2461.50	9.86
11G	Ant1	2412	2417.01	5.31
		2437	2430.75	5.69
		2462	2457.01	4.91
11N40SISO	Ant1	2422	2434.50	-0.35
		2437	2442.03	1.88
		2452	2457.03	-1.10
11AX20SISO	Ant1	2412	2410.75	3.25
		2437	2439.51	5.96
		2462	2460.74	4.54





Test Graphs

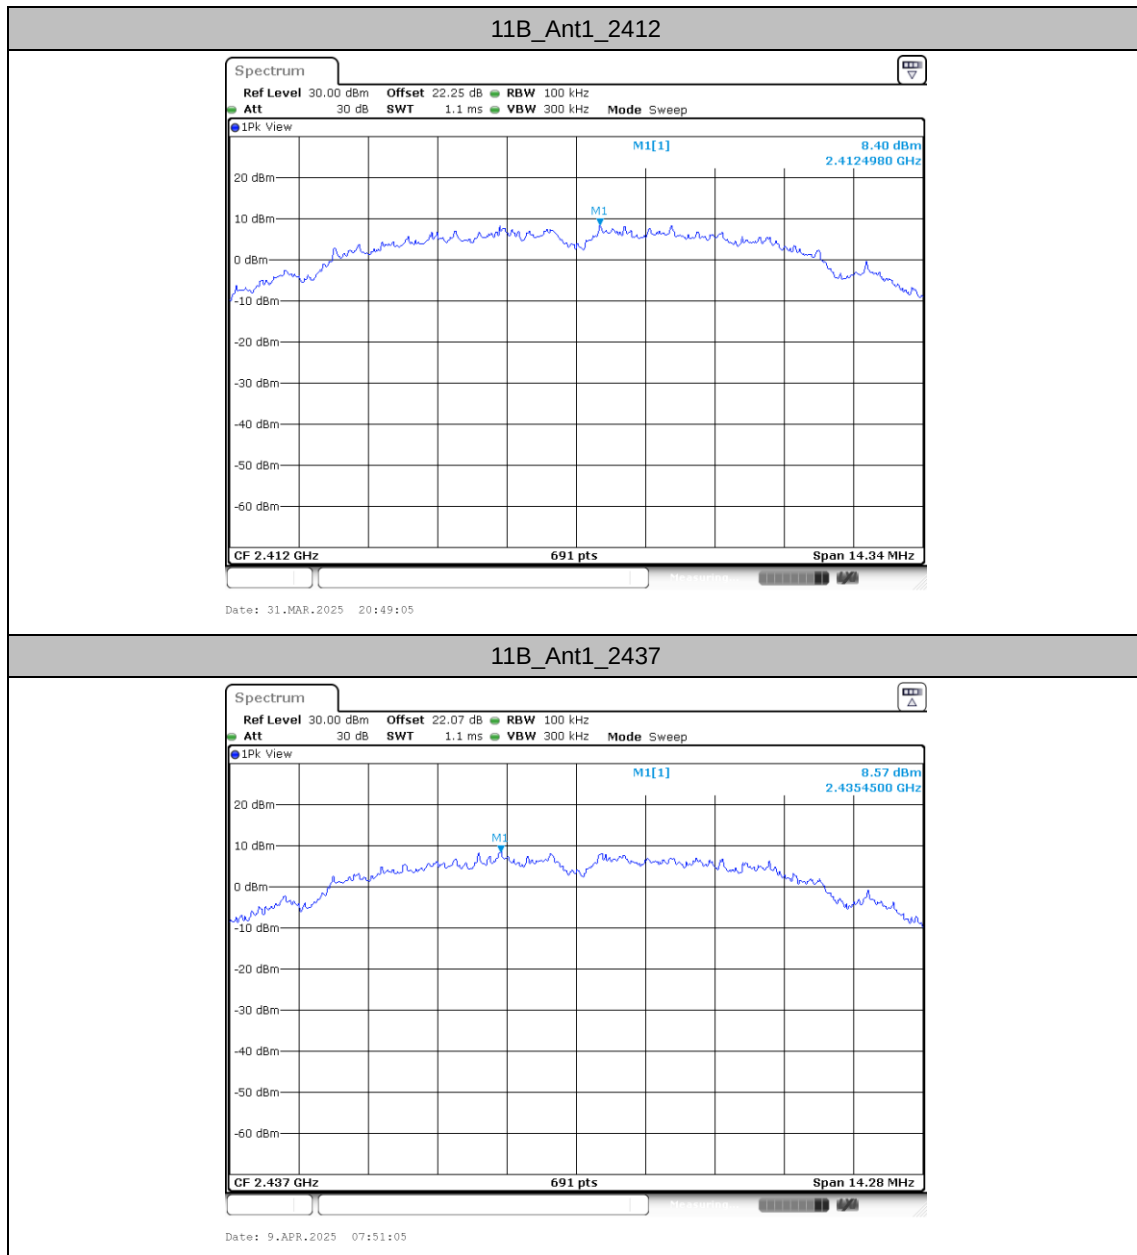


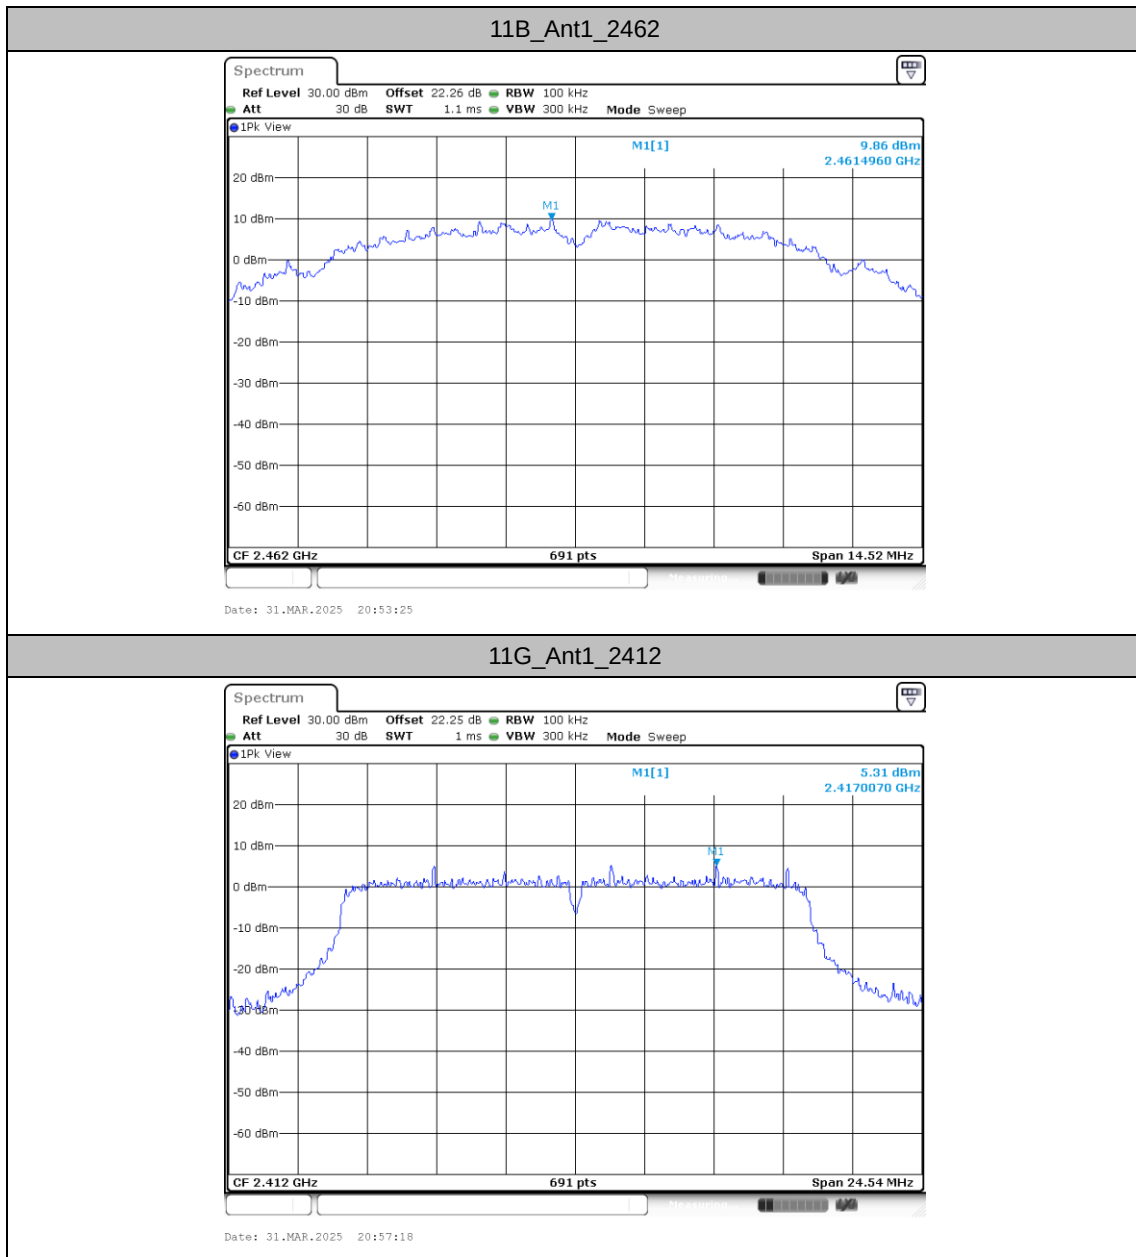

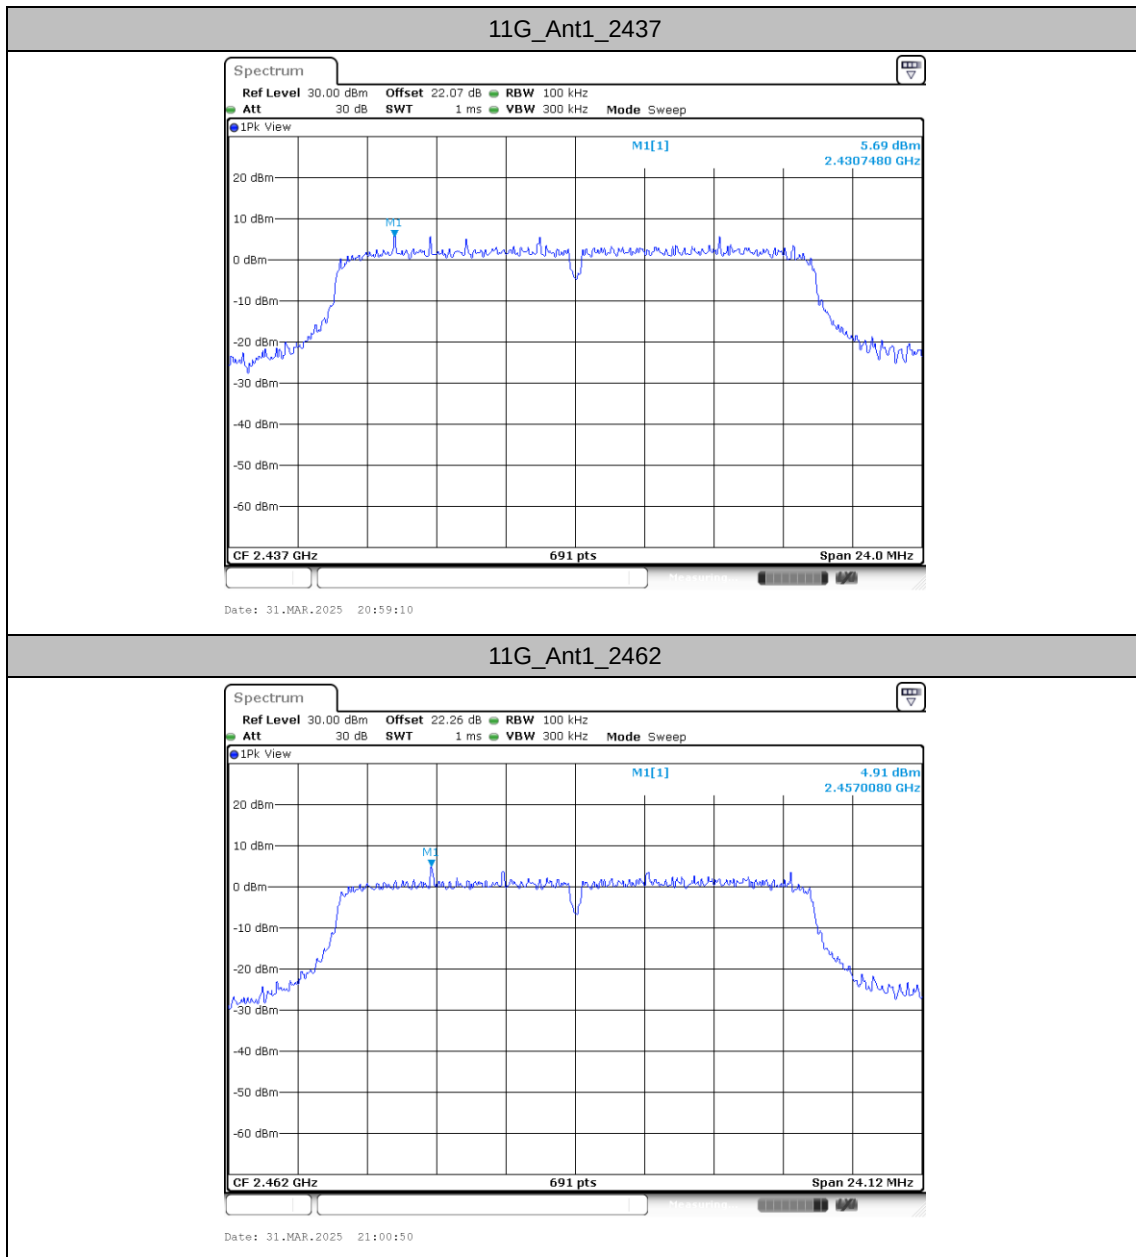

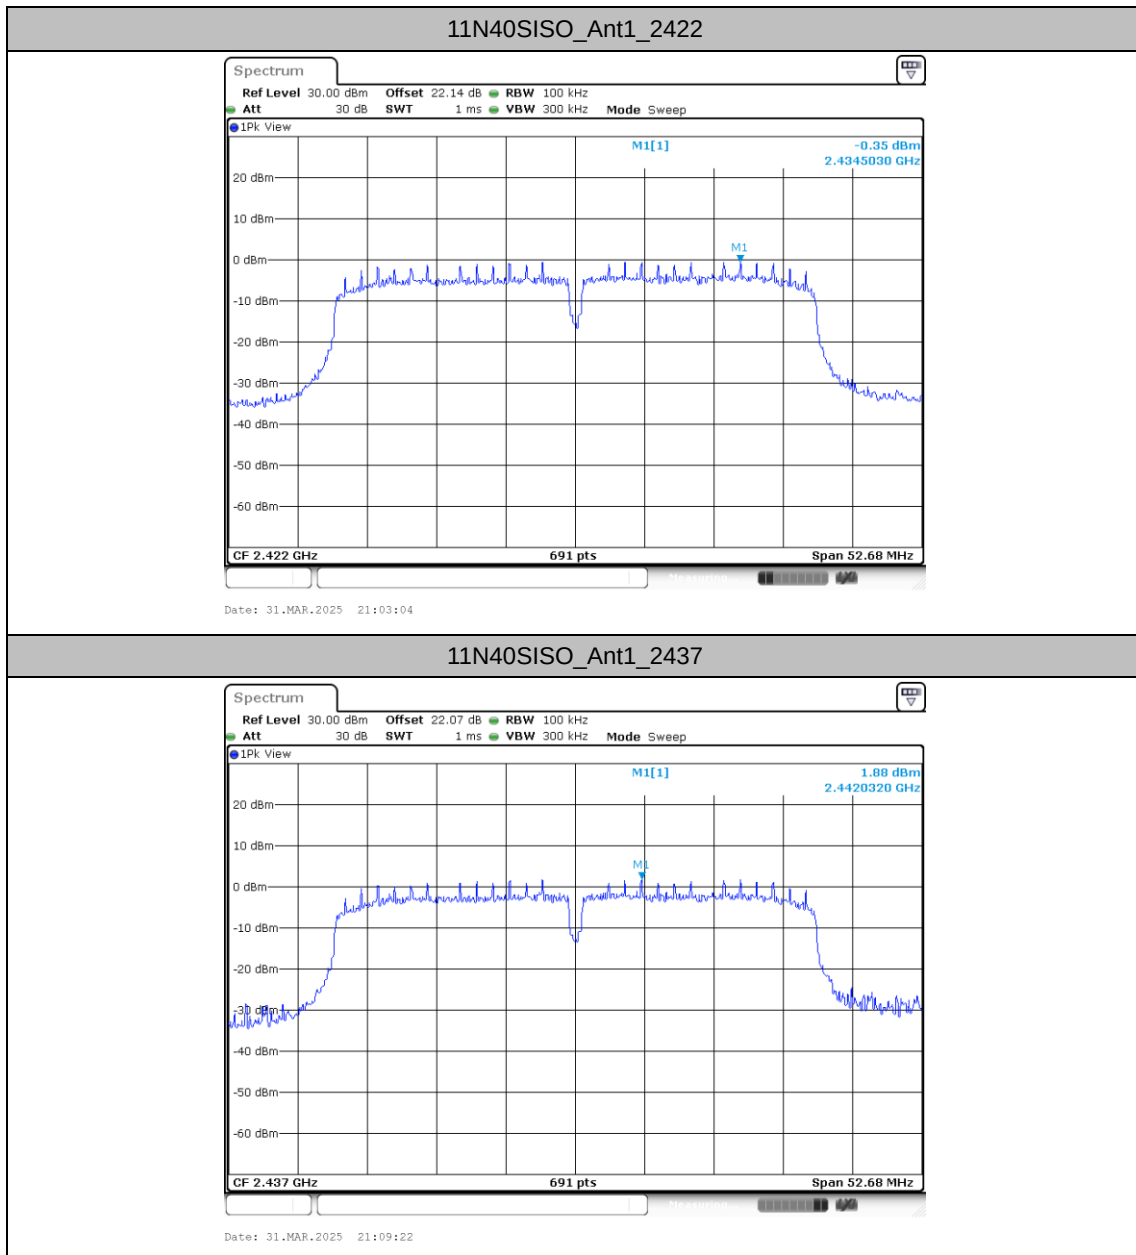

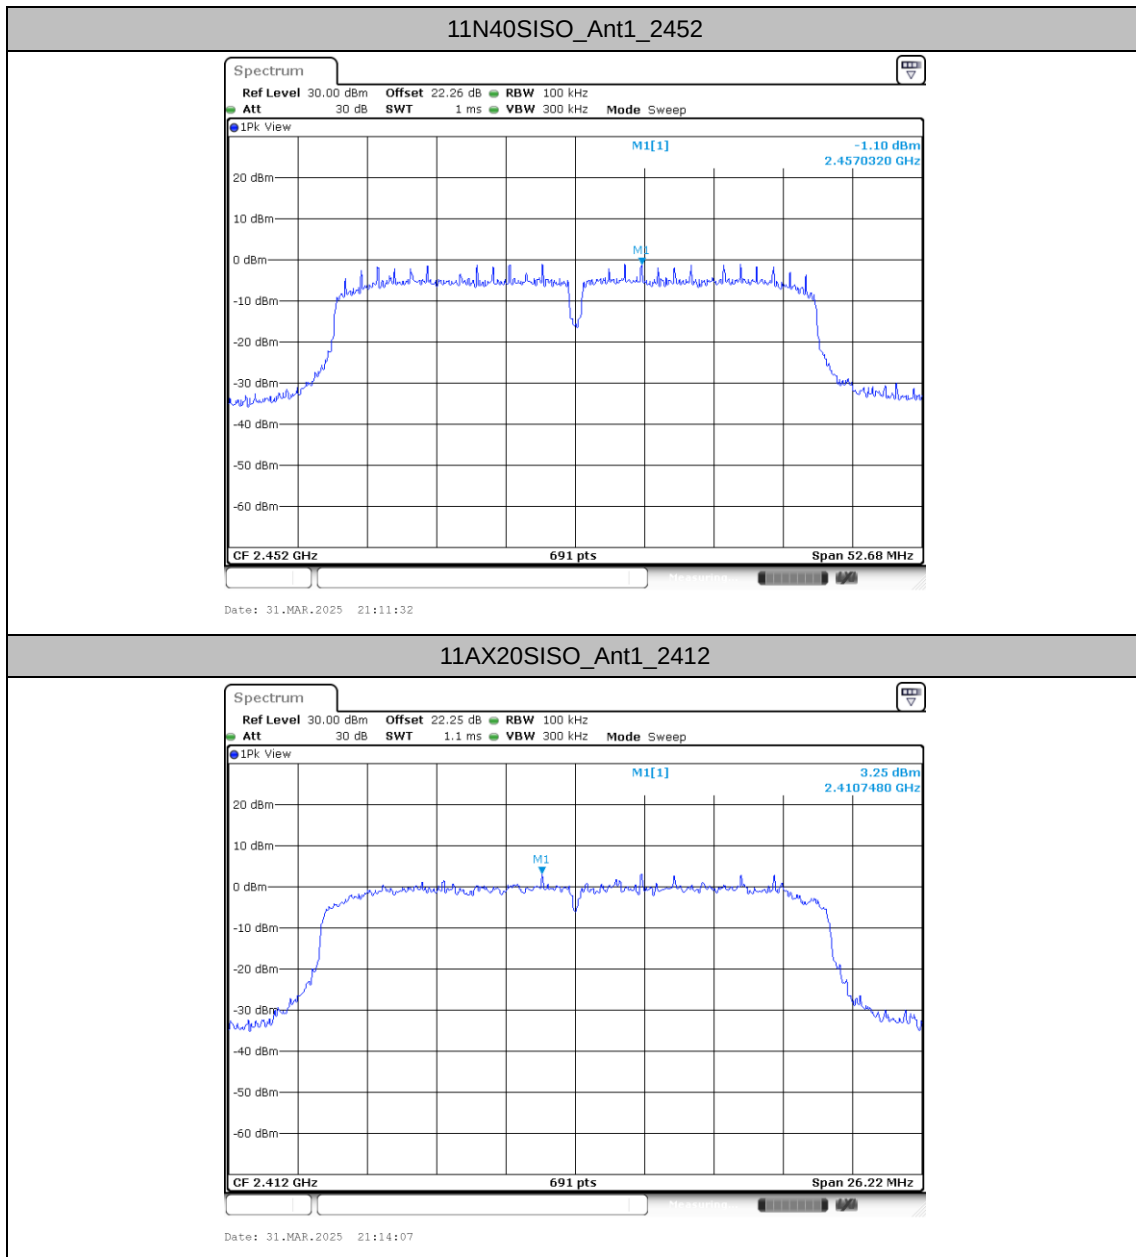

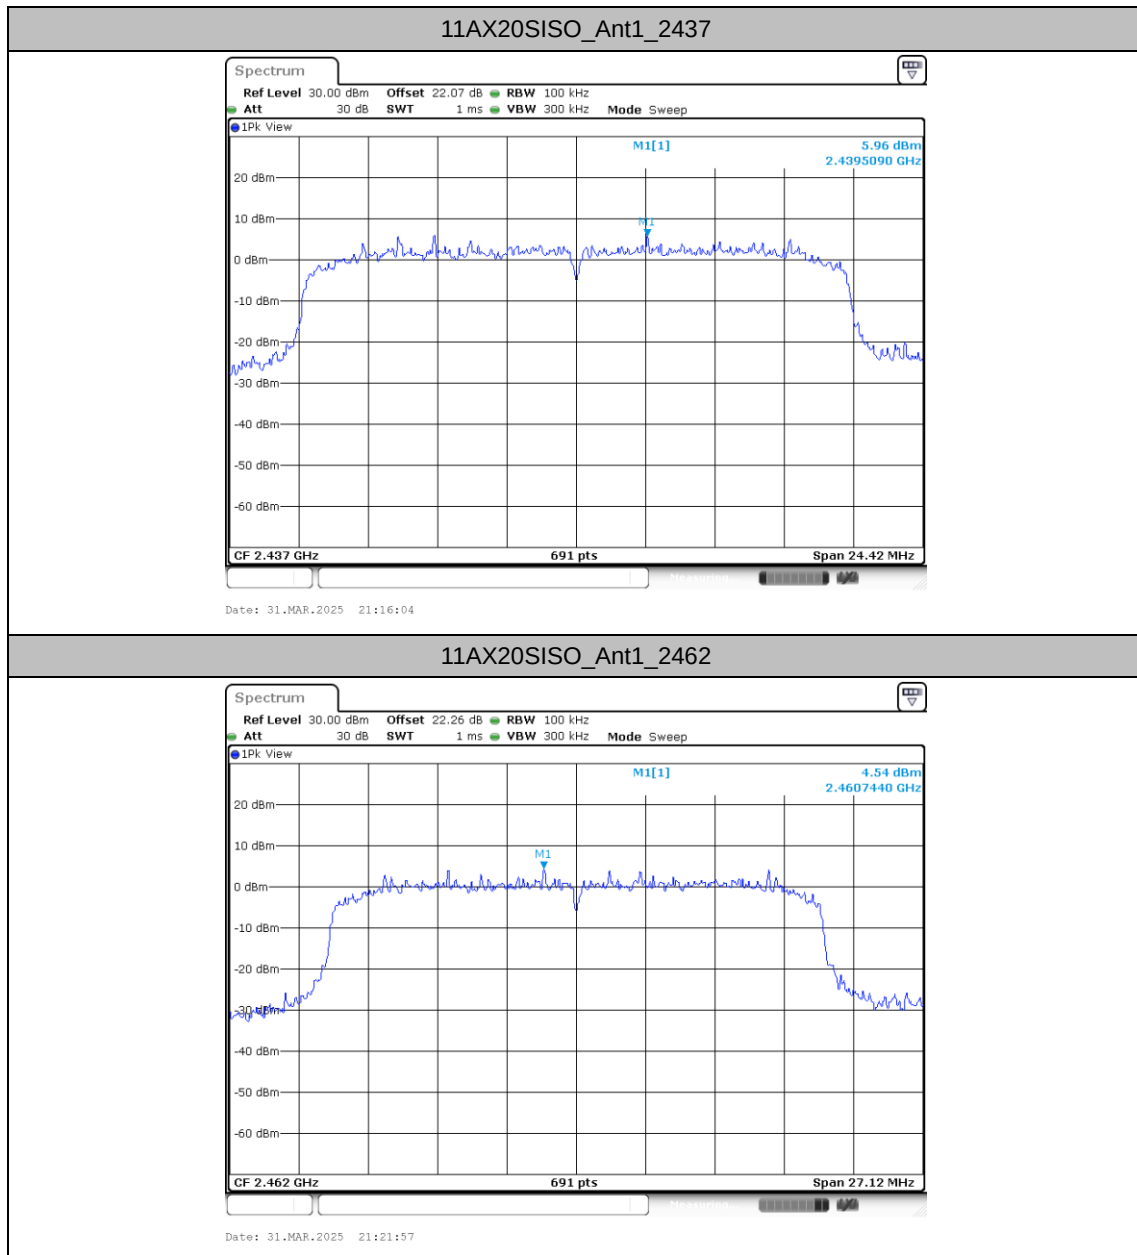




Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
11B	Ant1	Low	2412	8.40	-33.57	≤-11.6	PASS
		High	2462	9.86	-32.77	≤-10.14	PASS
11G	Ant1	Low	2412	5.31	-27.5	≤-14.69	PASS
		High	2462	4.91	-31.9	≤-15.09	PASS
11N40SISO	Ant1	Low	2422	-0.35	-32.7	≤-20.35	PASS
		High	2452	-1.10	-31.37	≤-21.1	PASS
11AX20SISO	Ant1	Low	2412	3.25	-31.4	≤-16.75	PASS
		High	2462	4.54	-30.33	≤-15.46	PASS




Test Graphs

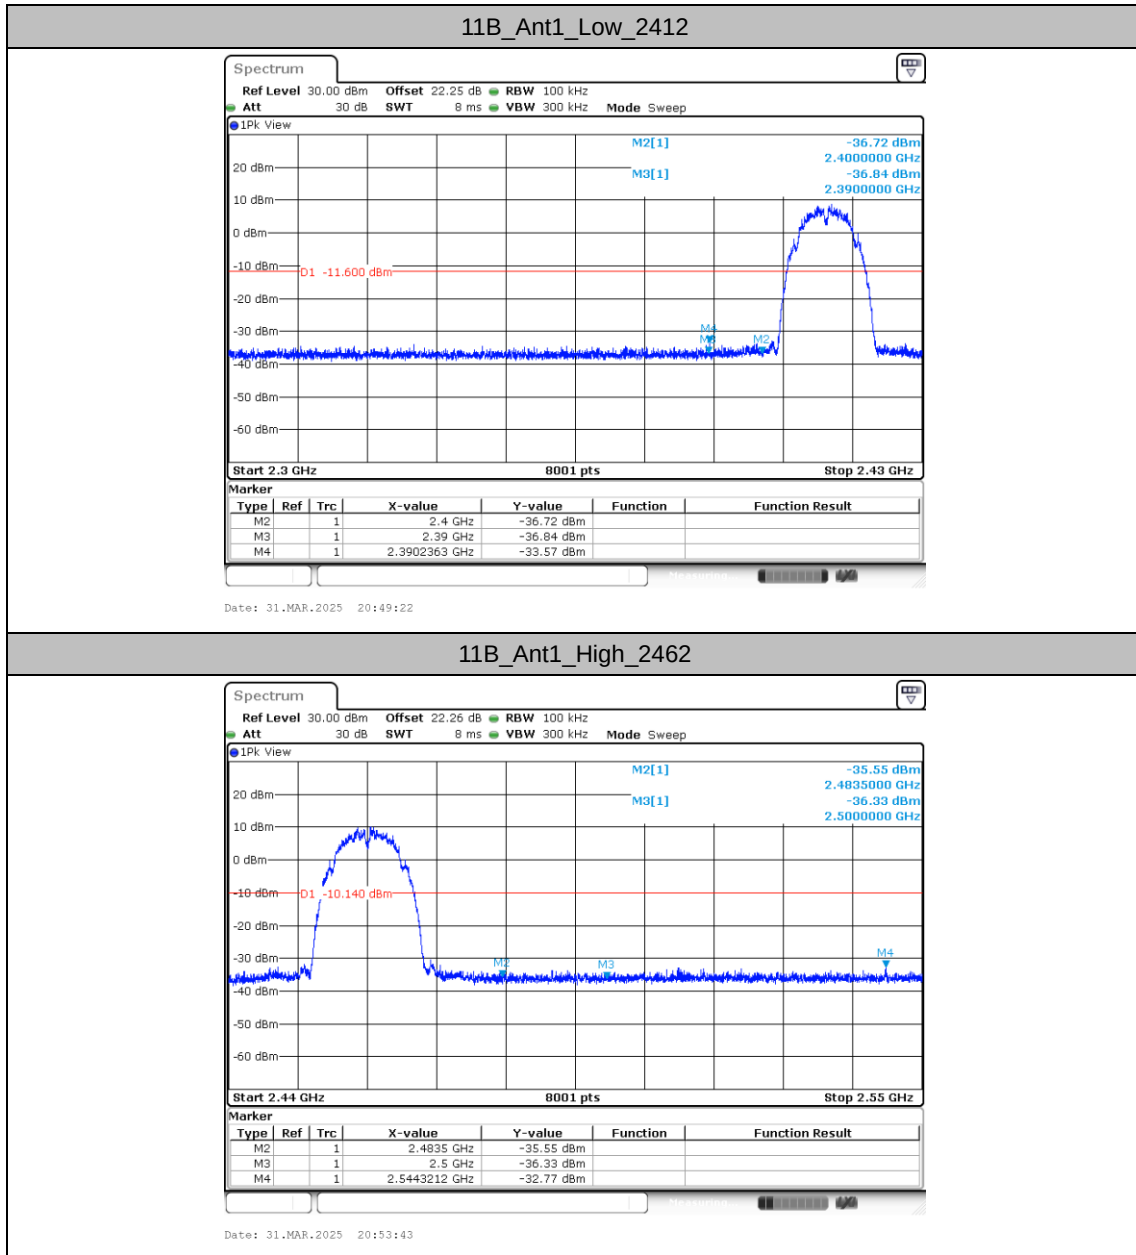

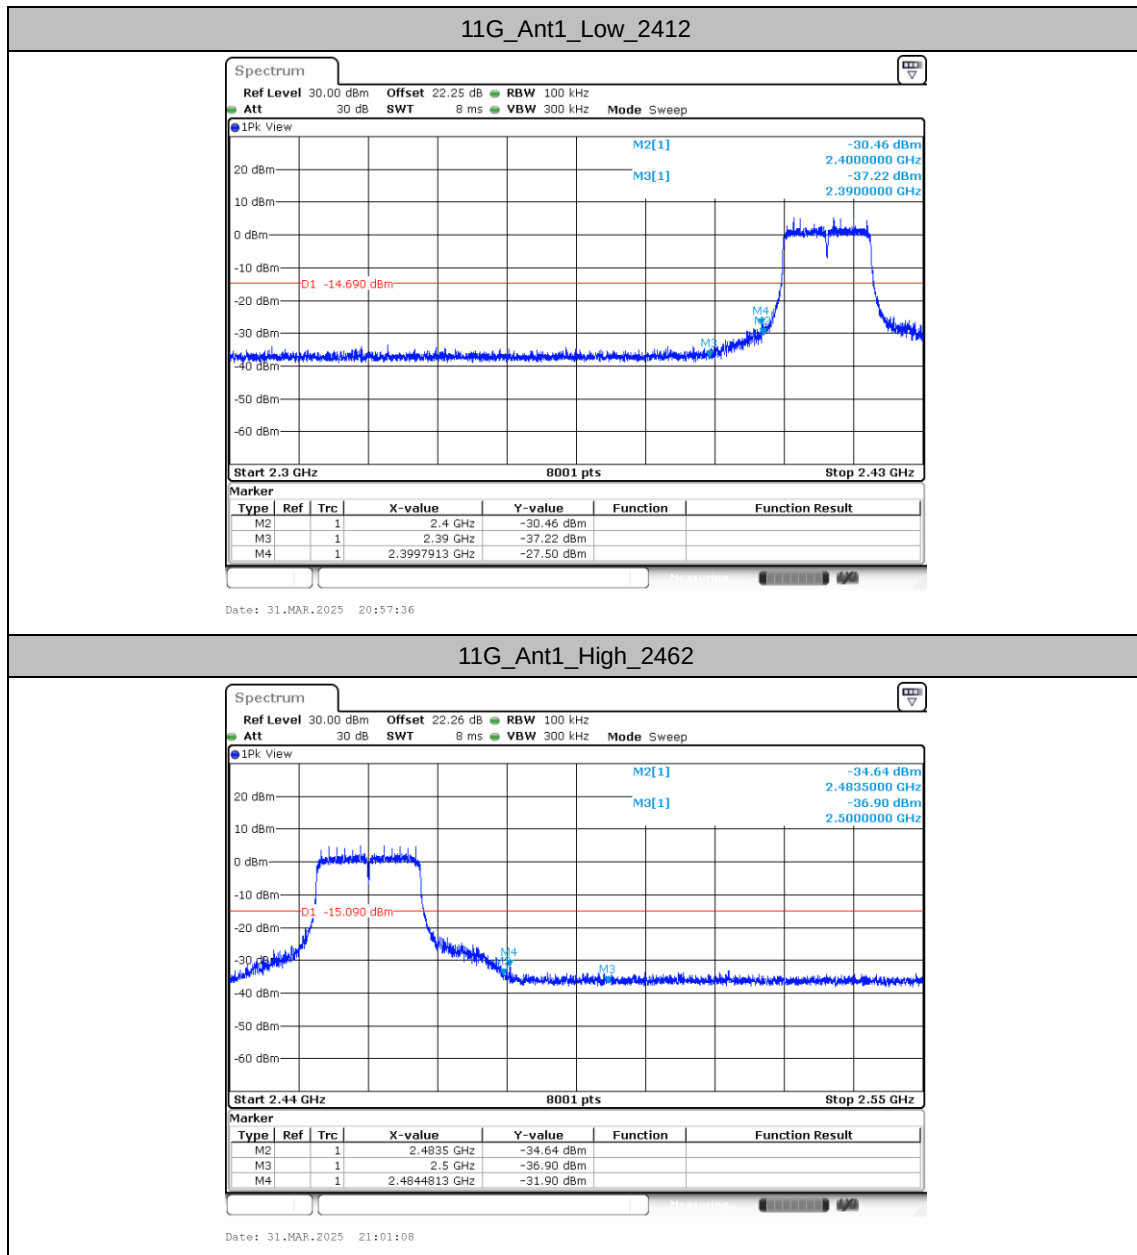

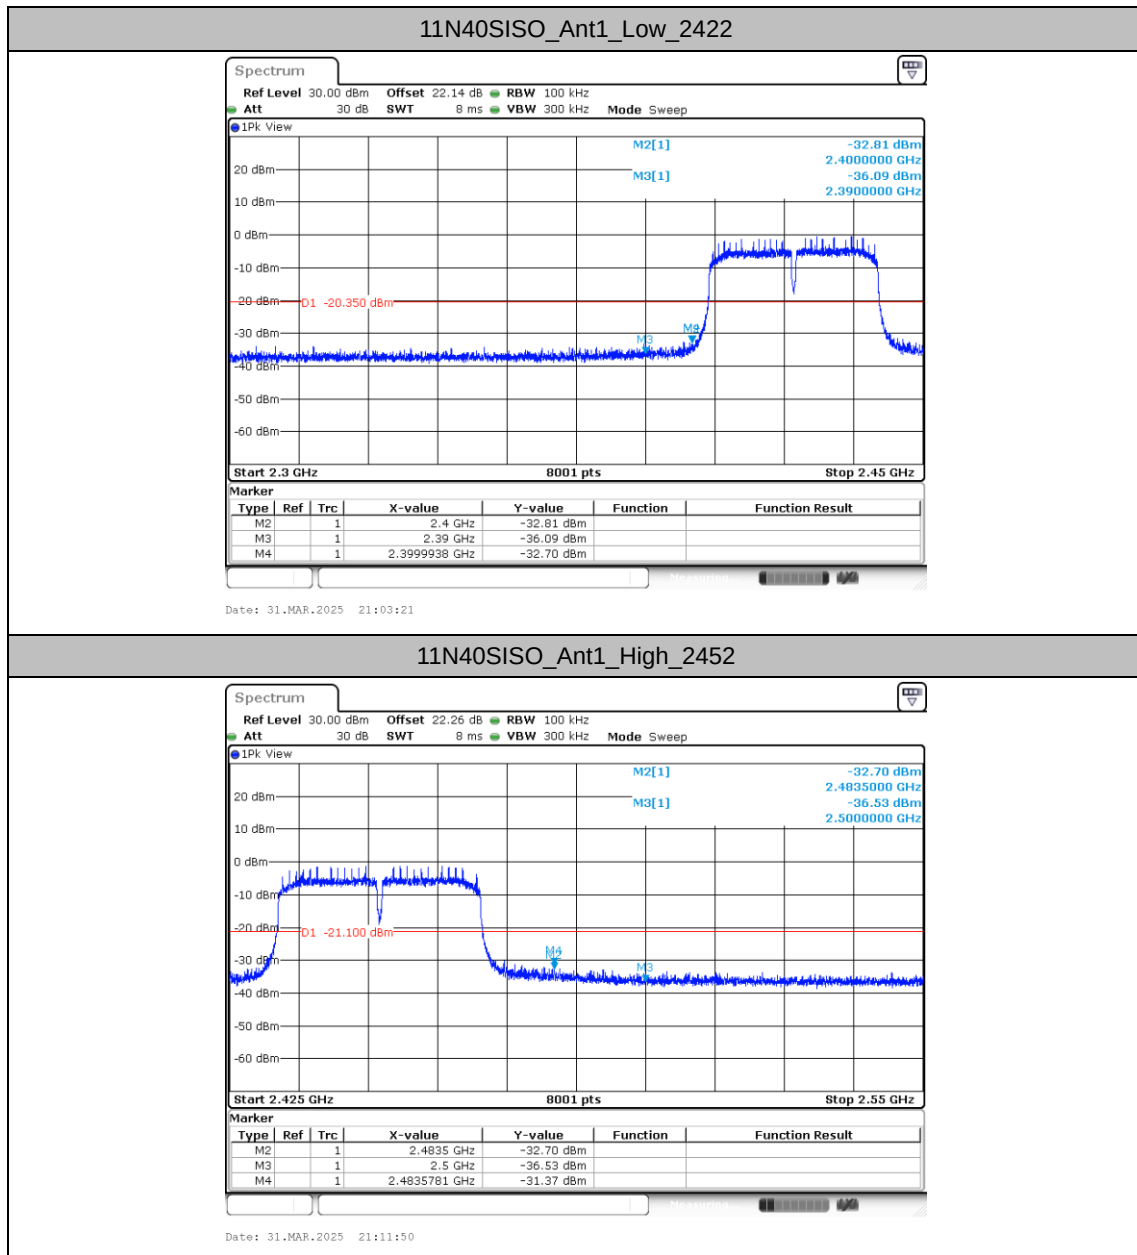

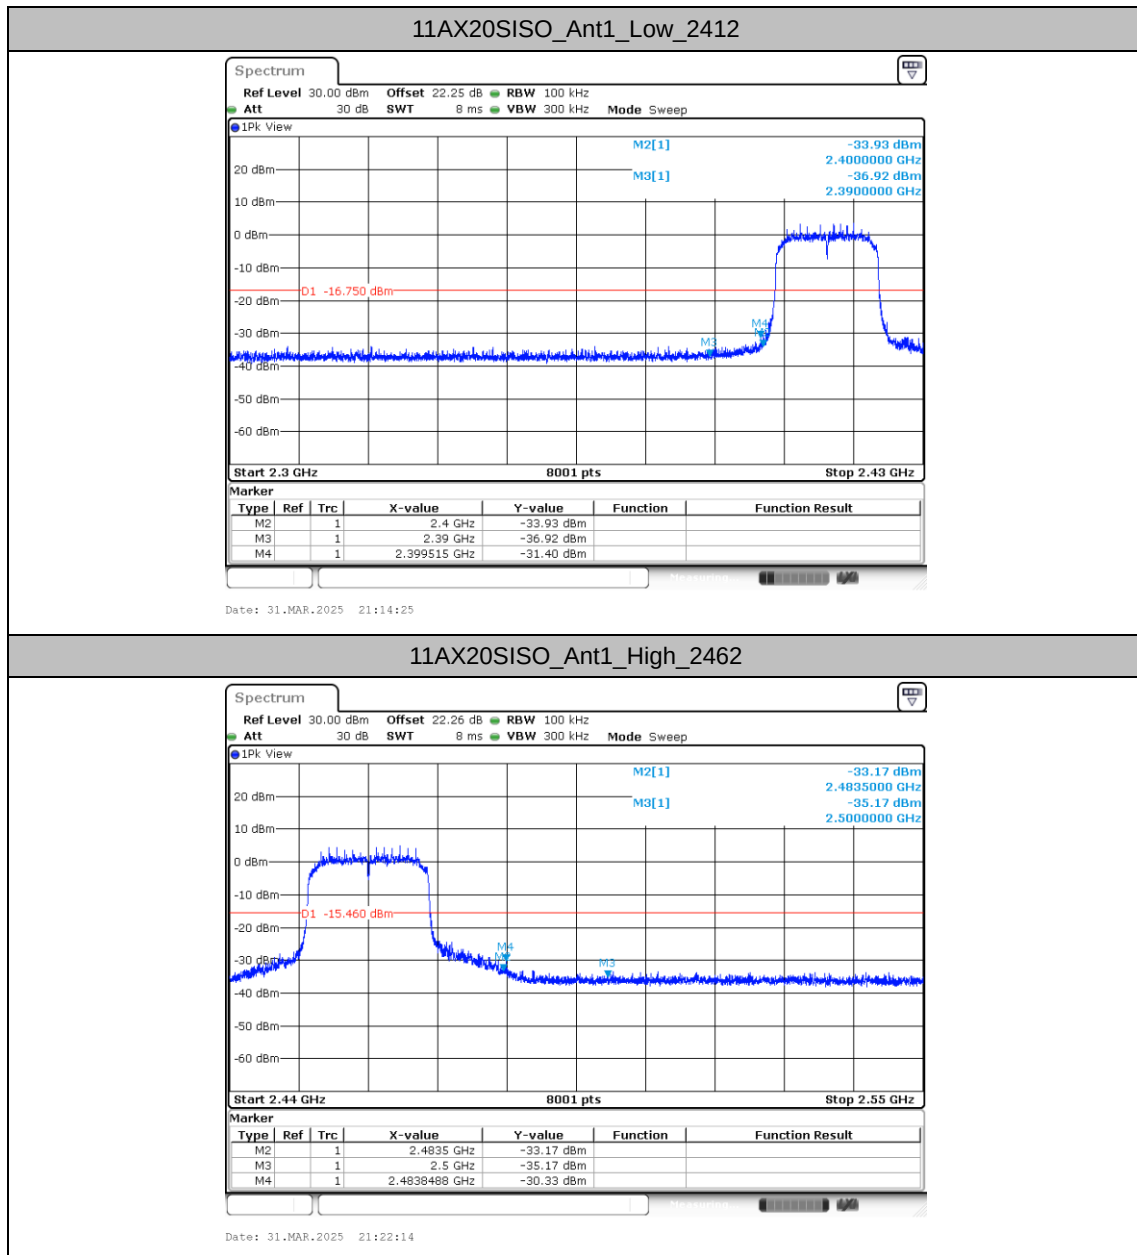




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	2412	30~1000	8.40	-44.9	≤-11.6	PASS
			1000~26500	8.40	-36.06	≤-11.6	PASS
		2437	30~1000	8.57	-44.67	≤-11.43	PASS
			1000~26500	8.57	-36.5	≤-11.43	PASS
		2462	30~1000	9.86	-45.04	≤-10.14	PASS
			1000~26500	9.86	-35.99	≤-10.14	PASS
11G	Ant1	2412	30~1000	5.31	-44.6	≤-14.69	PASS
			1000~26500	5.31	-35.56	≤-14.69	PASS
		2437	30~1000	5.69	-45.3	≤-14.31	PASS
			1000~26500	5.69	-35.84	≤-14.31	PASS
		2462	30~1000	4.91	-44	≤-15.09	PASS
			1000~26500	4.91	-36.44	≤-15.09	PASS
11N40SISO	Ant1	2422	30~1000	-0.35	-44.85	≤-20.35	PASS
			1000~26500	-0.35	-36.59	≤-20.35	PASS
		2437	30~1000	1.88	-44.49	≤-18.12	PASS
			1000~26500	1.88	-36.35	≤-18.12	PASS
		2452	30~1000	-1.10	-44.71	≤-21.1	PASS
			1000~26500	-1.10	-35.94	≤-21.1	PASS
11AX20SISO	Ant1	2412	30~1000	3.25	-44.96	≤-16.75	PASS
			1000~26500	3.25	-36.34	≤-16.75	PASS
		2437	30~1000	5.96	-43.97	≤-14.04	PASS
			1000~26500	5.96	-35.87	≤-14.04	PASS
		2462	30~1000	4.54	-45.02	≤-15.46	PASS
			1000~26500	4.54	-35.57	≤-15.46	PASS





Test Graphs

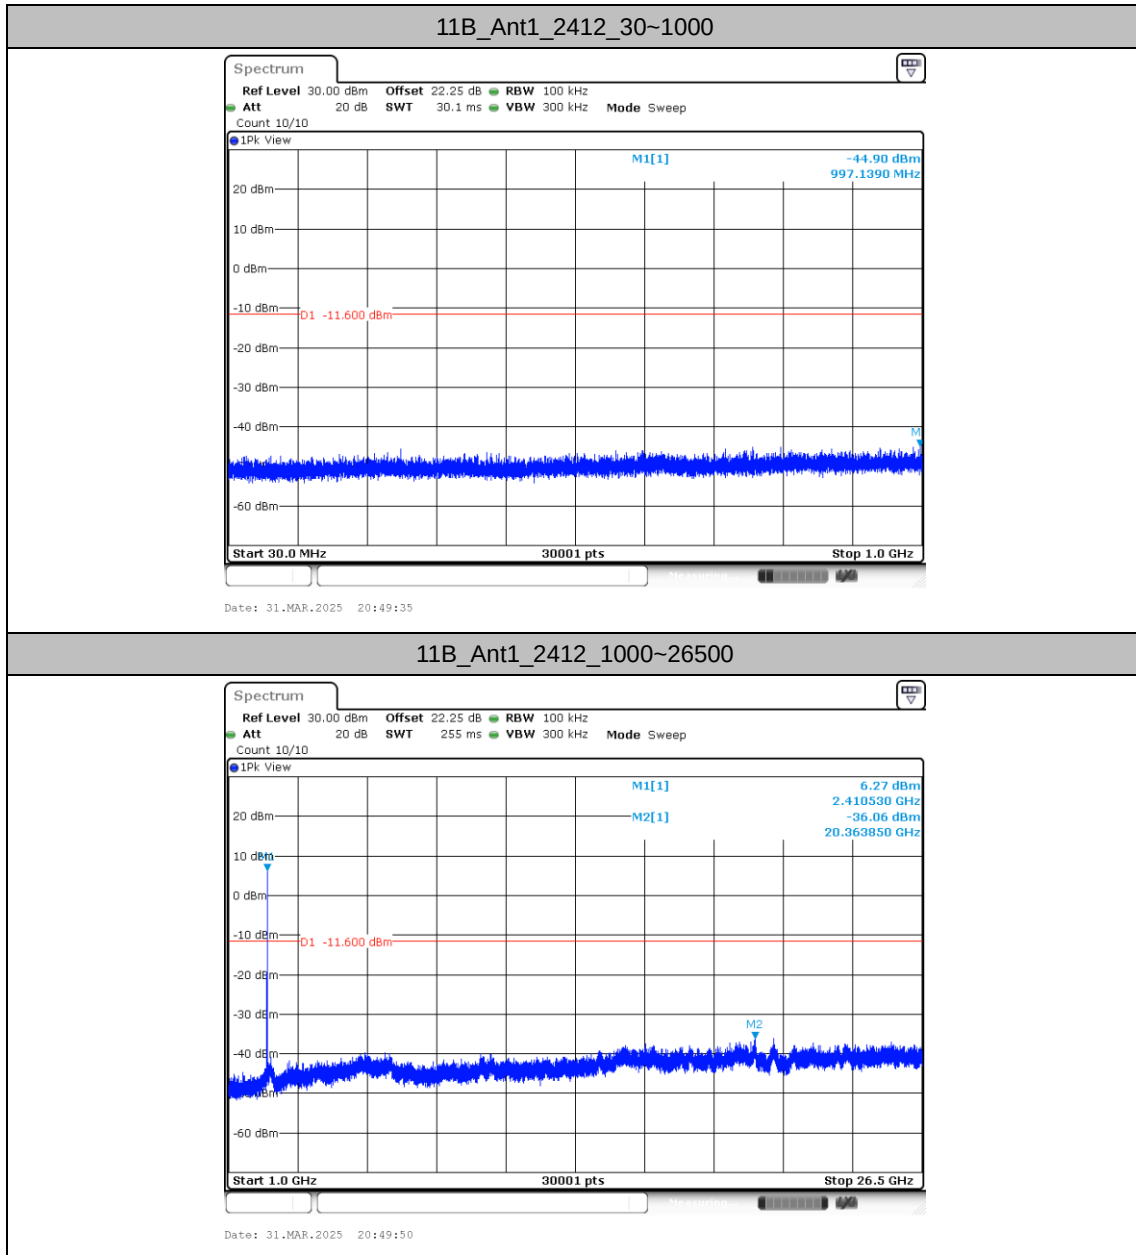


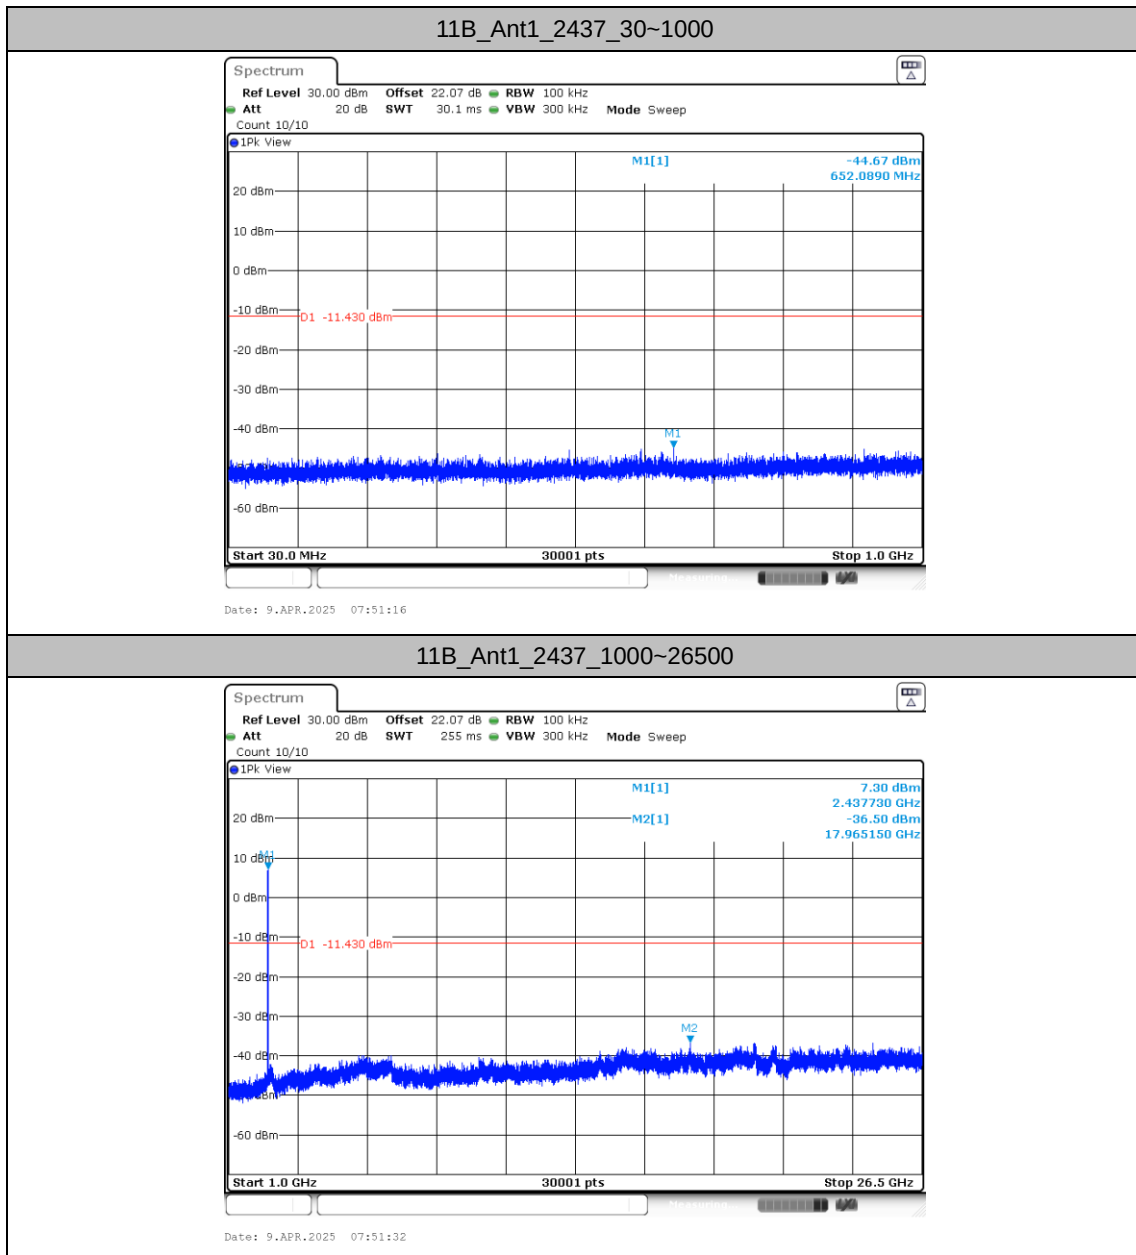


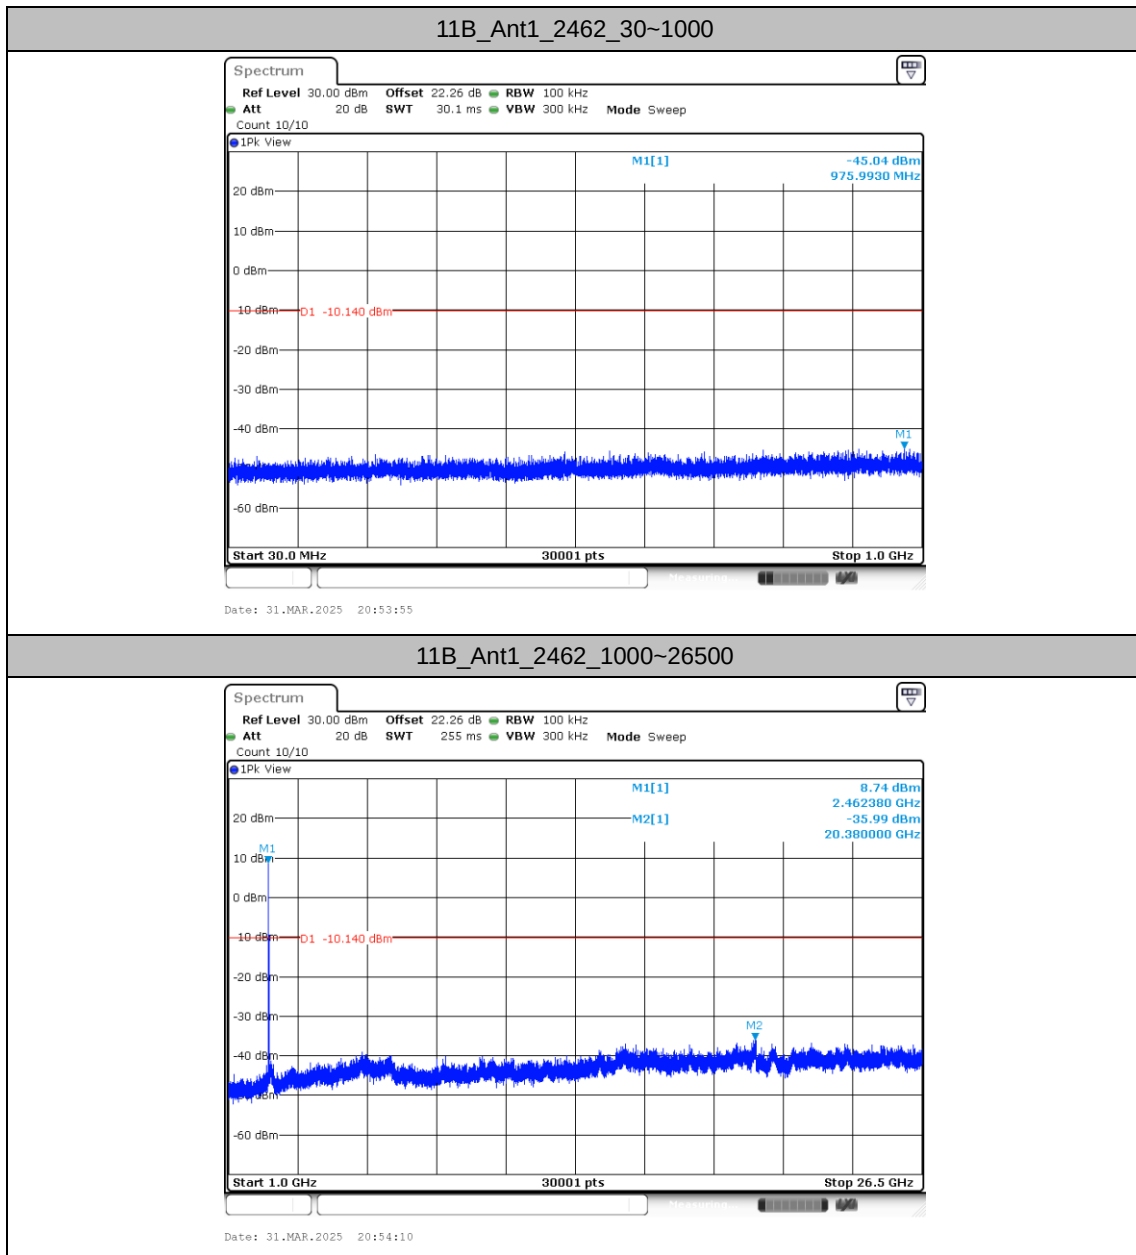


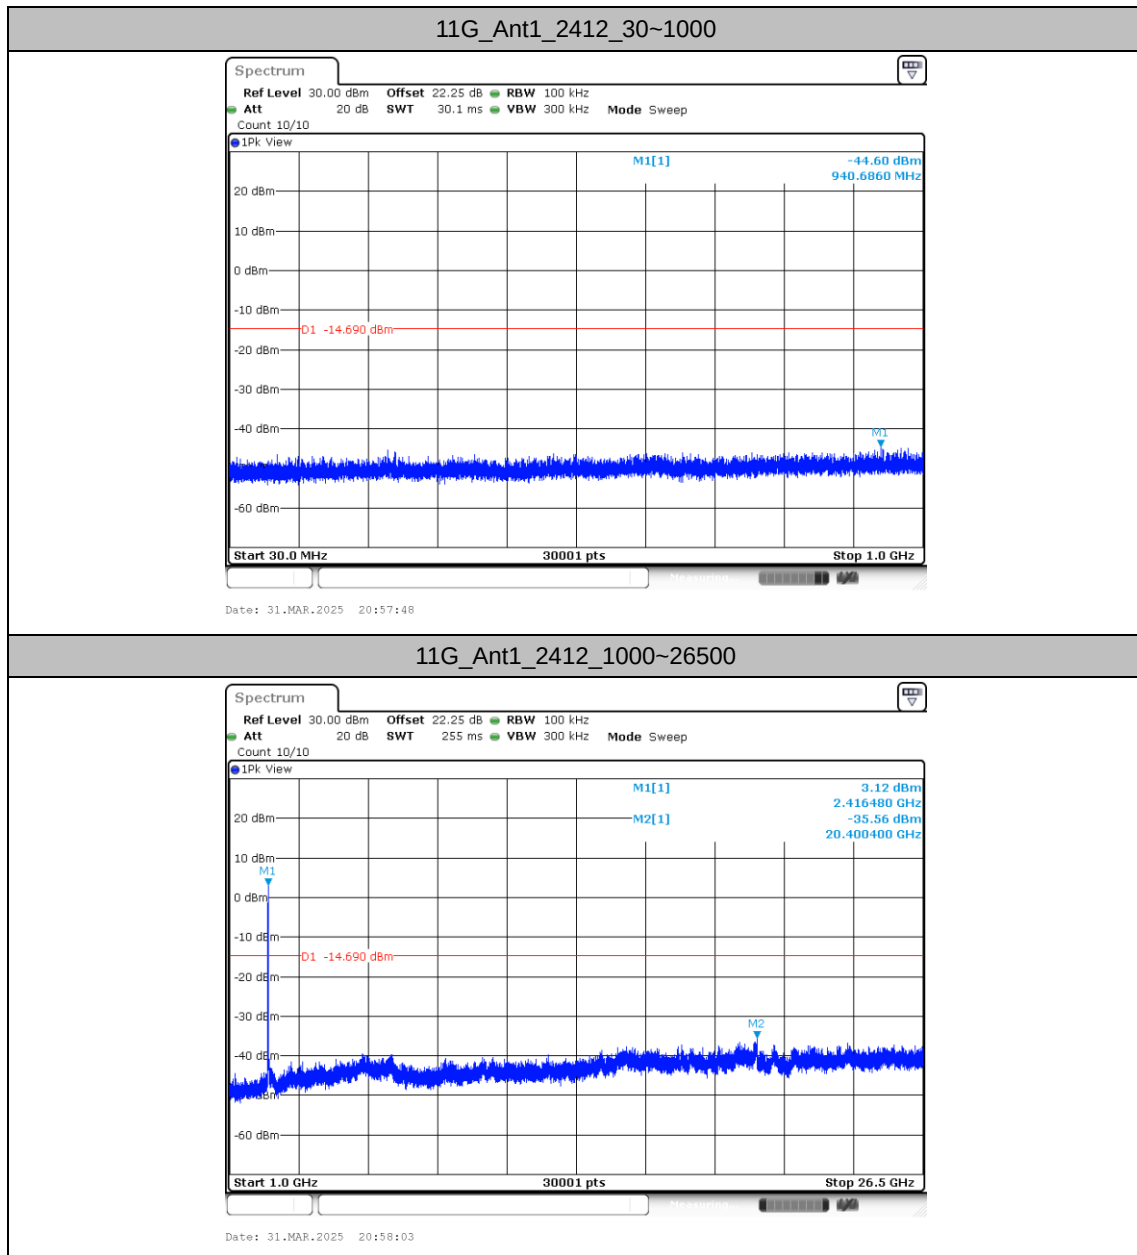


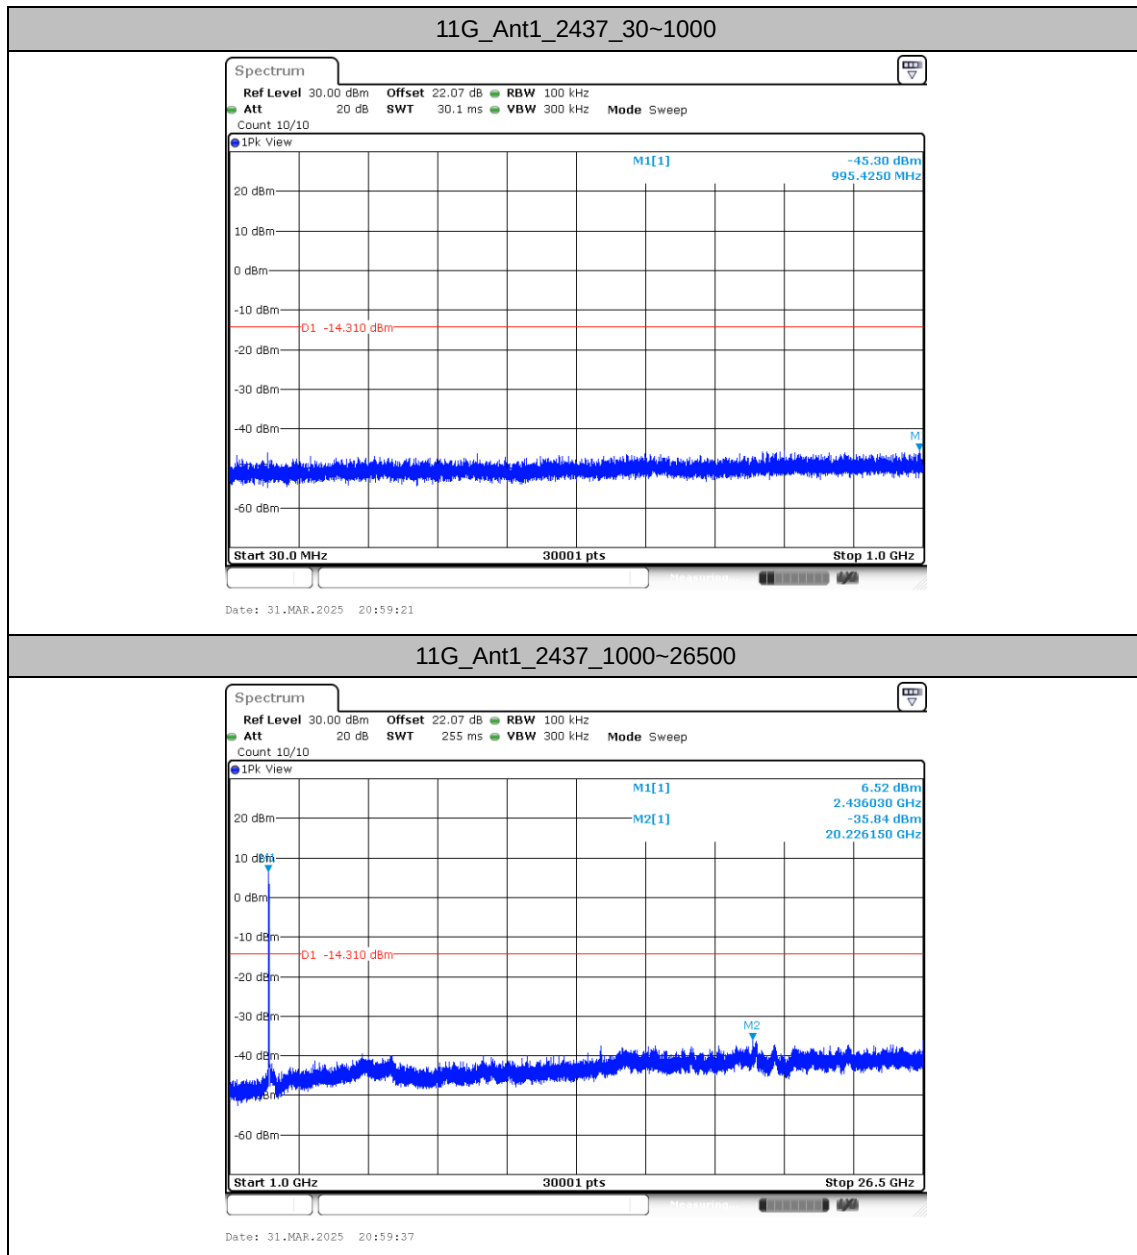


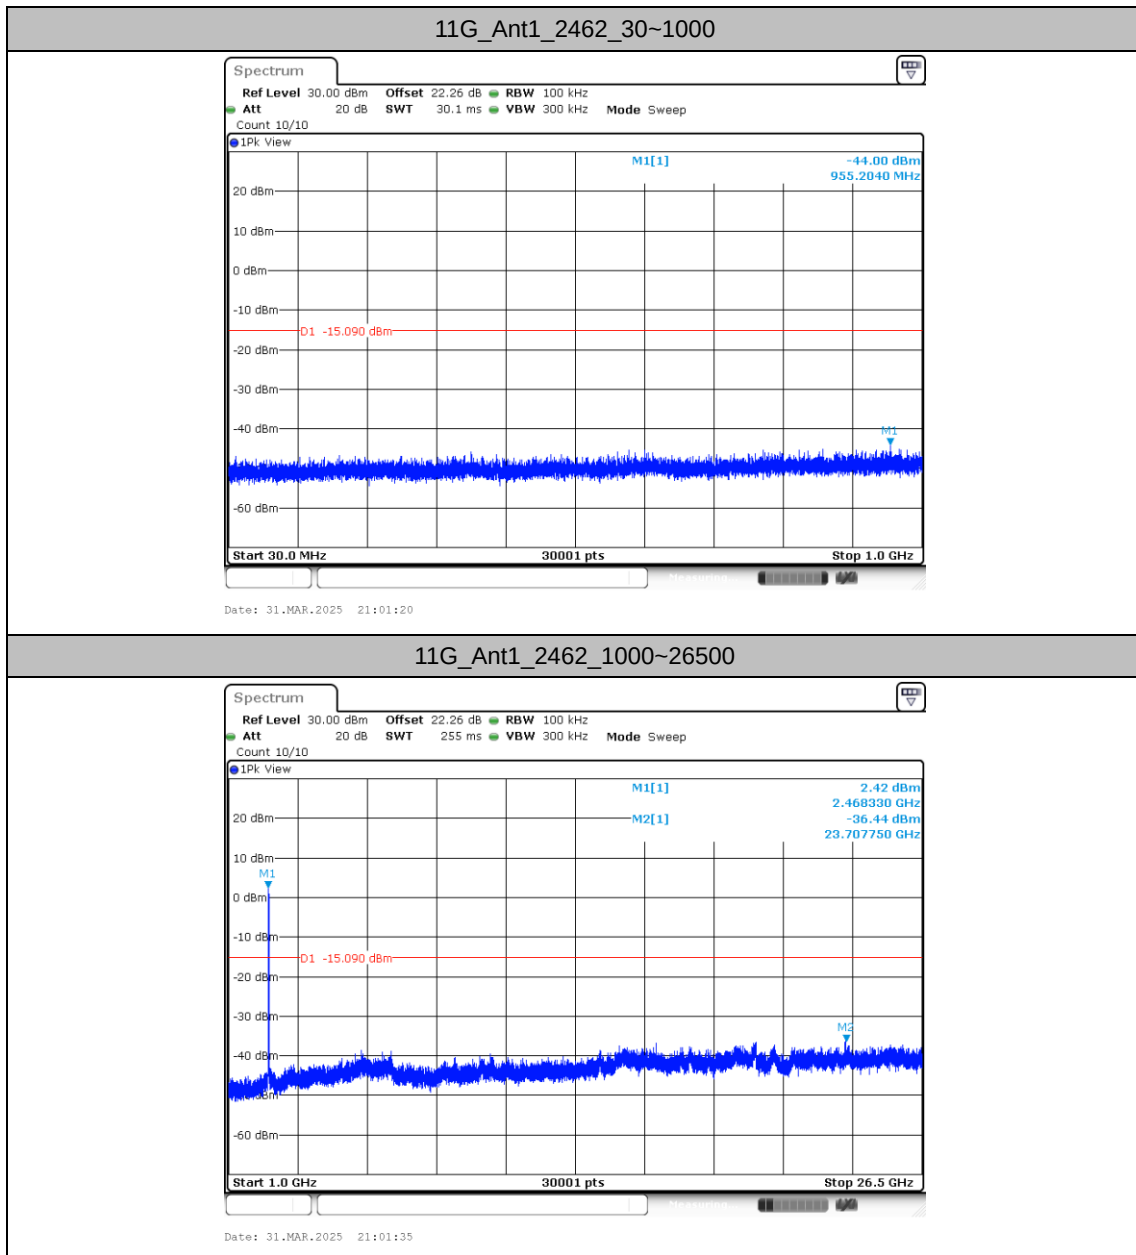


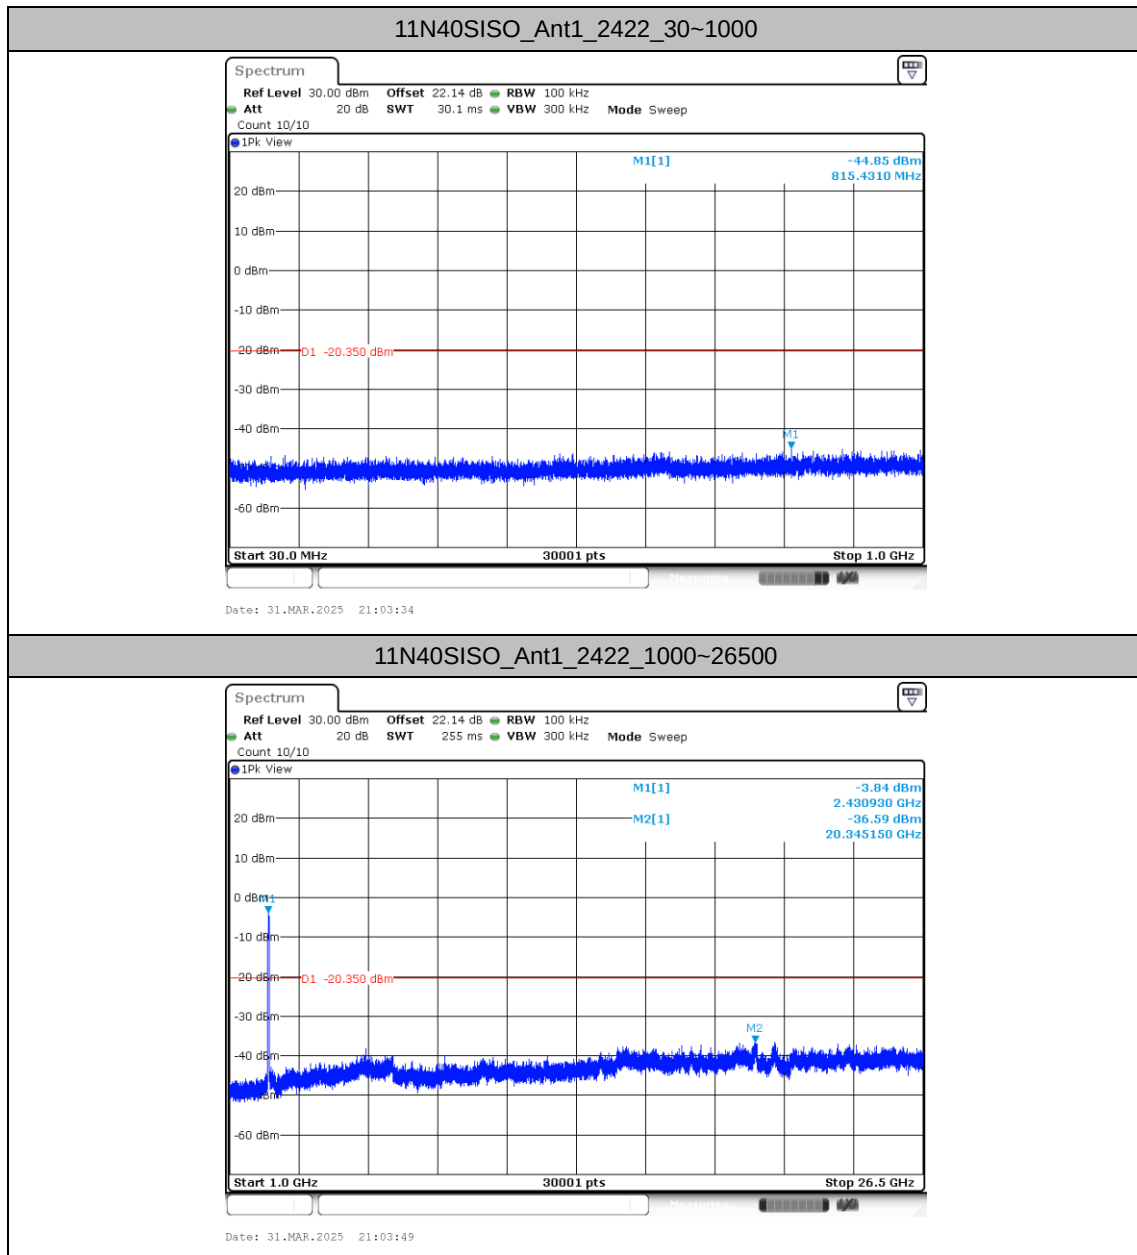


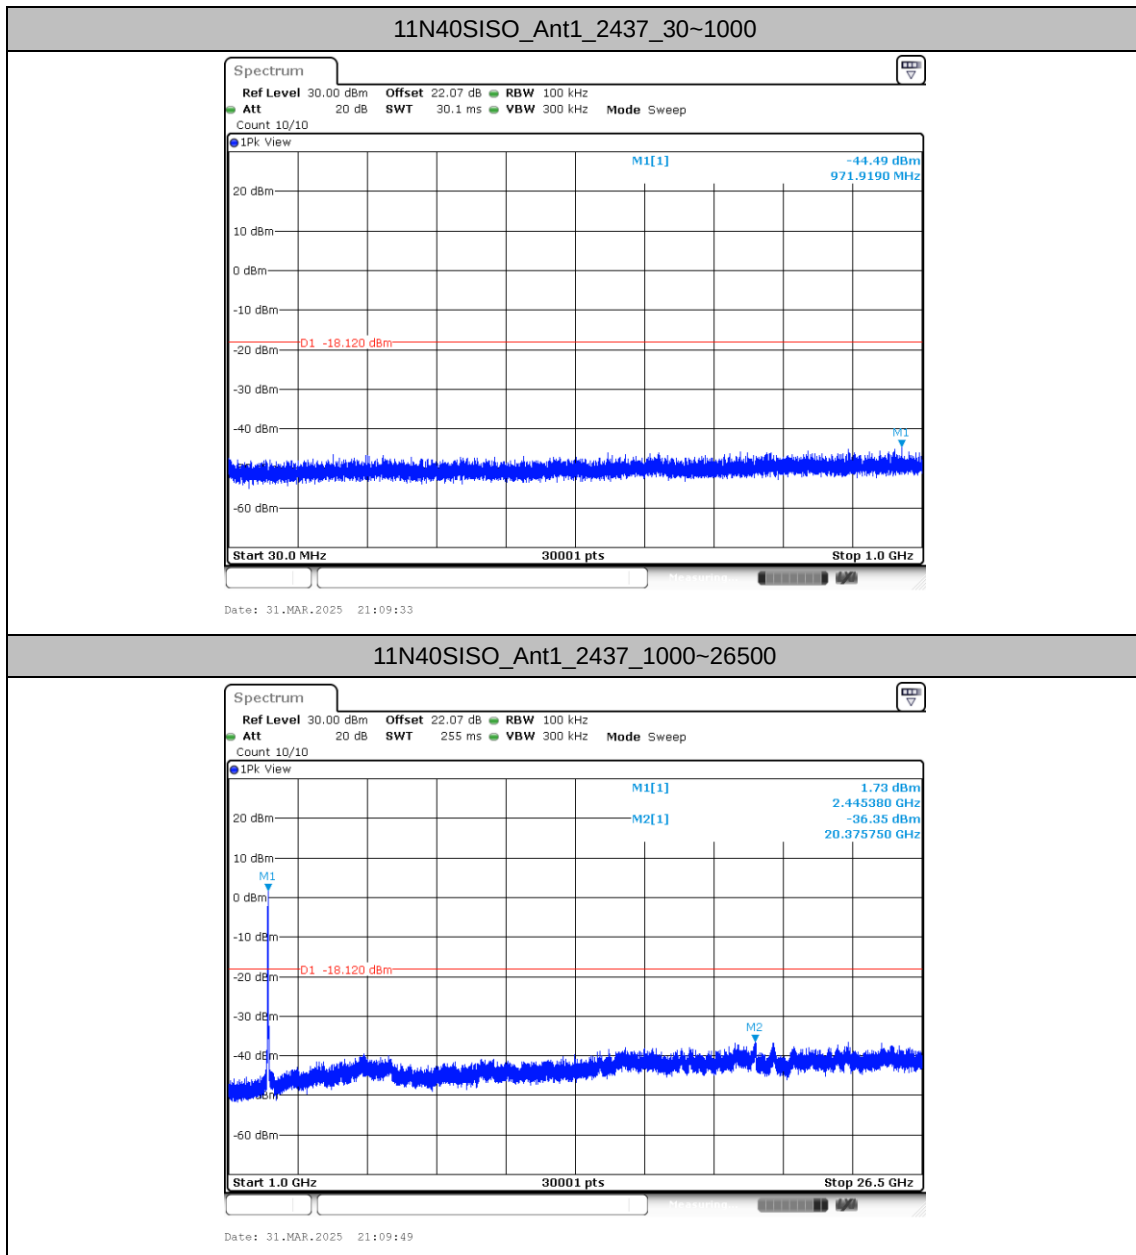

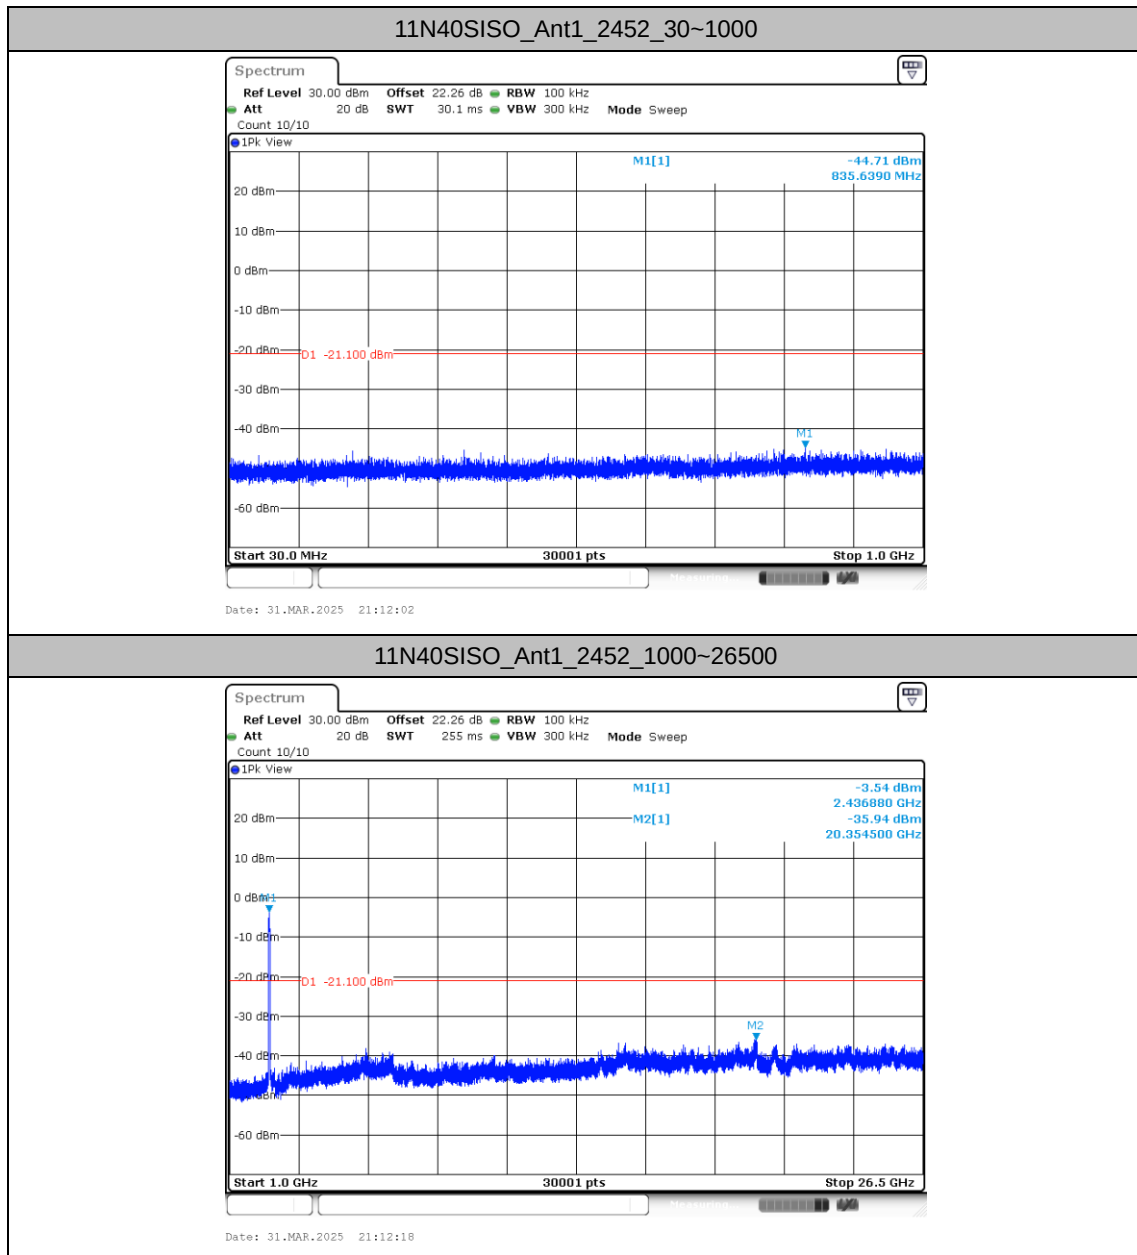

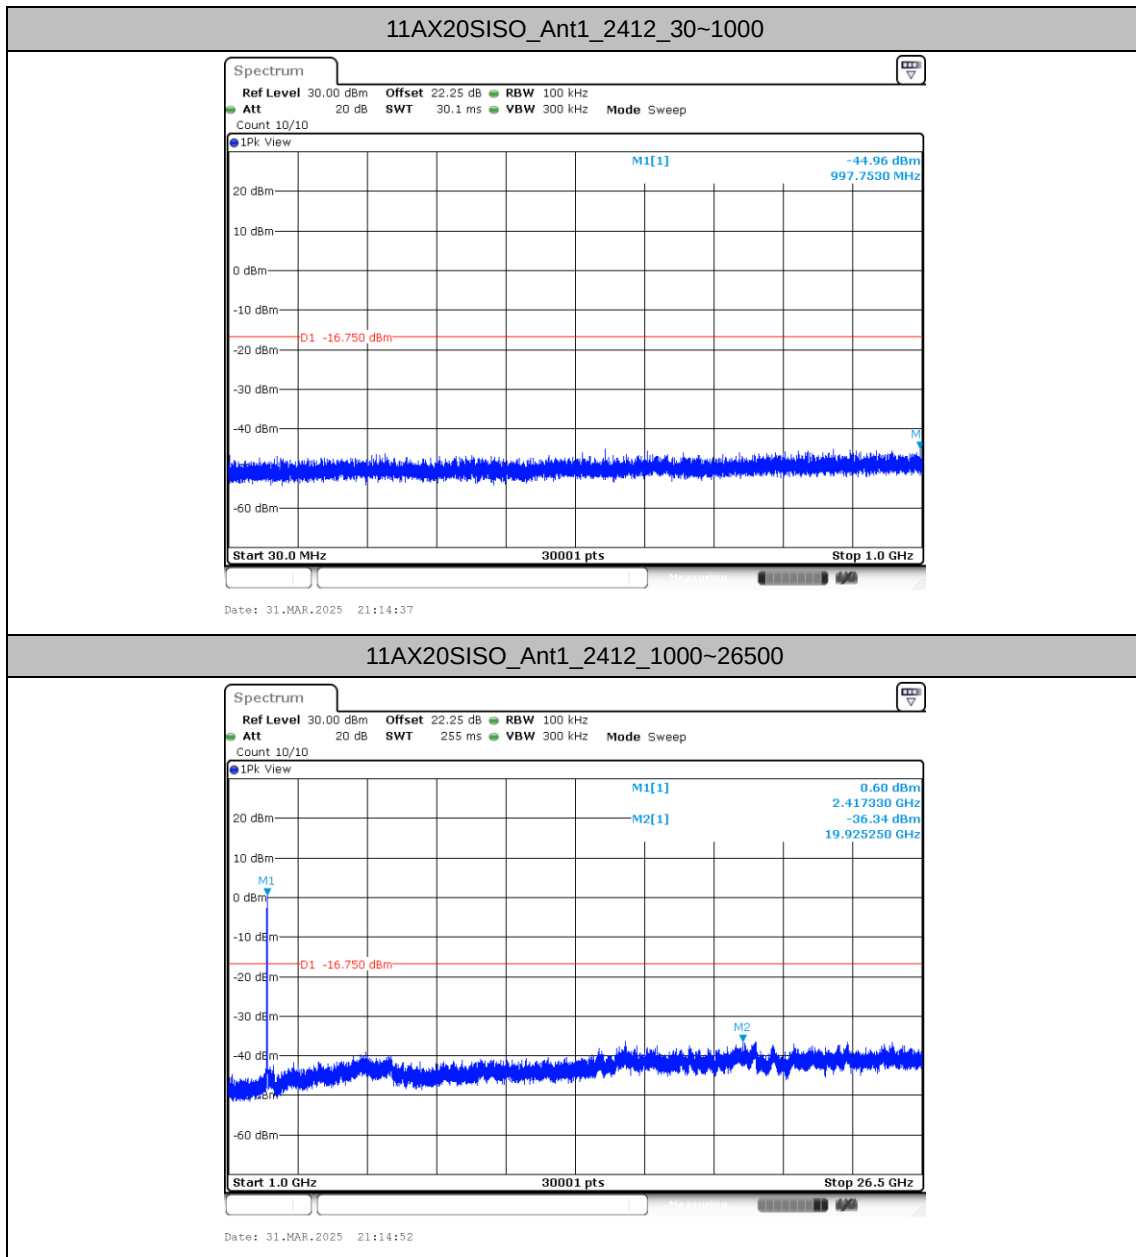

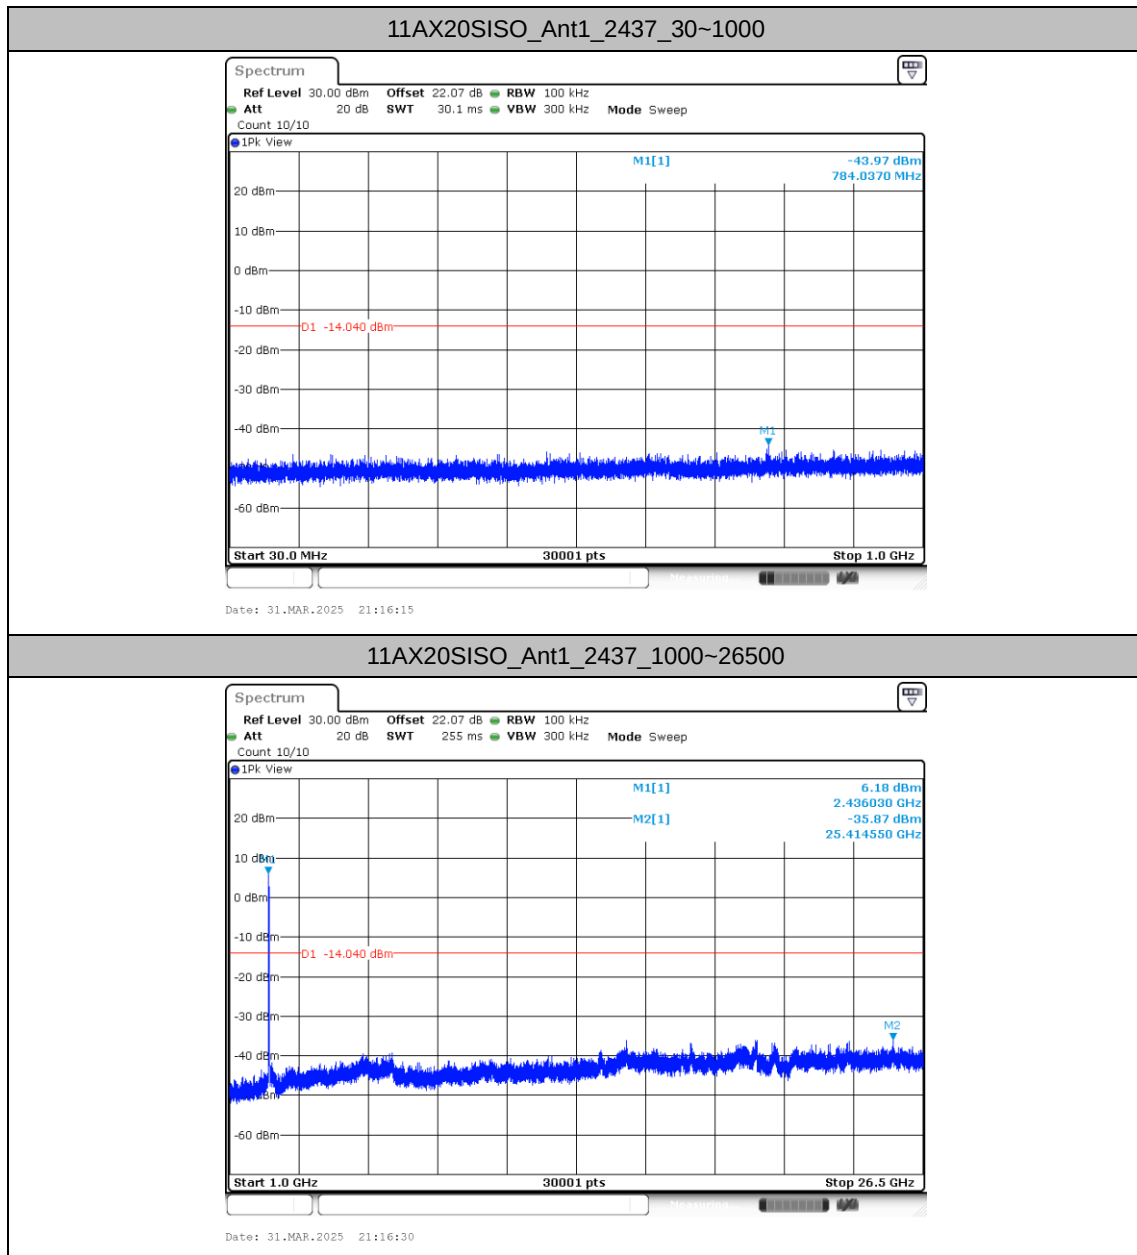


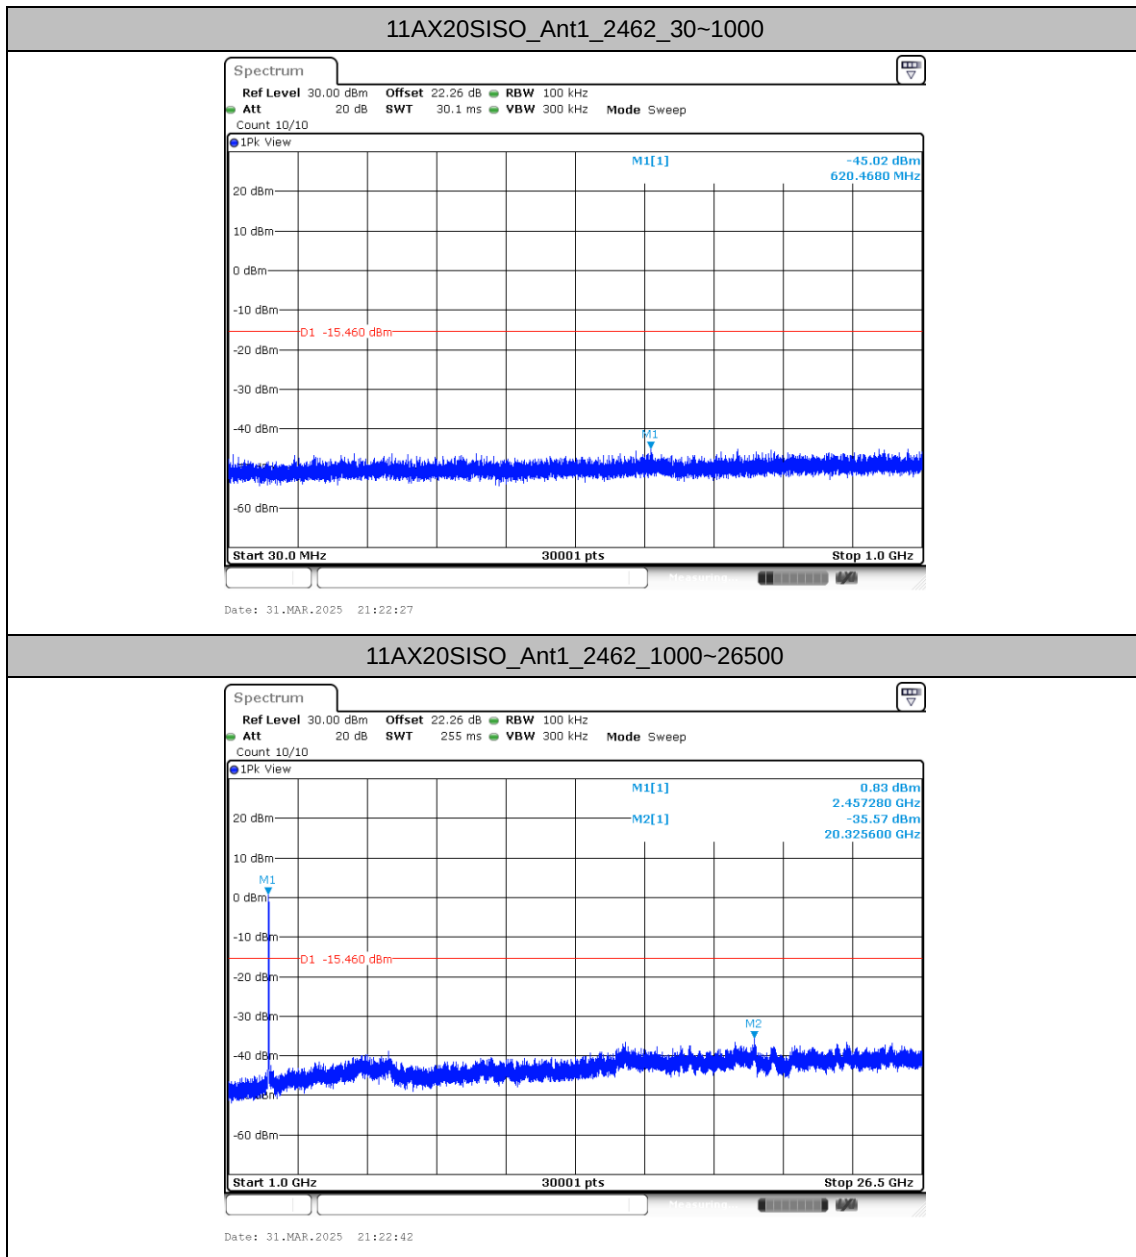



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

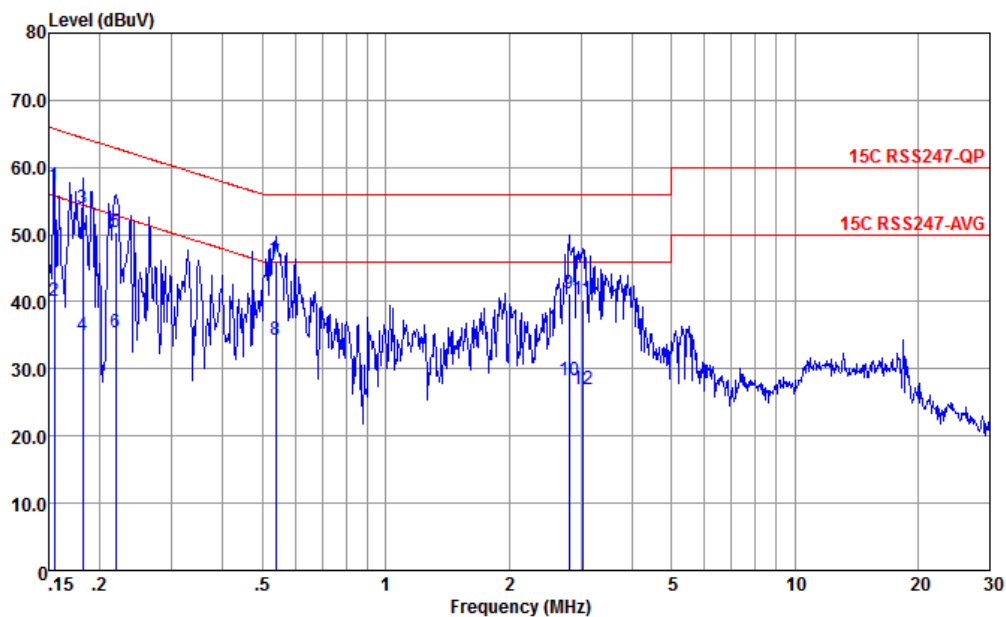


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.155	57.37	-8.37	65.74	46.80	0.12	10.45	QP
2	0.155	40.17	-15.57	55.74	29.60	0.12	10.45	Average
3	0.182	53.85	-10.57	64.42	43.30	0.09	10.46	QP
4	0.182	35.05	-19.37	54.42	24.50	0.09	10.46	Average
5	0.219	50.45	-12.43	62.88	39.91	0.08	10.46	QP
6	0.219	35.35	-17.53	52.88	24.81	0.08	10.46	Average
7	0.538	45.88	-10.12	56.00	35.61	-0.12	10.39	QP
8	0.538	34.40	-11.60	46.00	24.13	-0.12	10.39	Average
9	2.809	41.26	-14.74	56.00	31.20	-0.17	10.23	QP
10	2.809	28.26	-17.74	46.00	18.20	-0.17	10.23	Average
11	3.025	40.26	-15.74	56.00	30.20	-0.16	10.22	QP
12	3.025	26.86	-19.14	46.00	16.80	-0.16	10.22	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

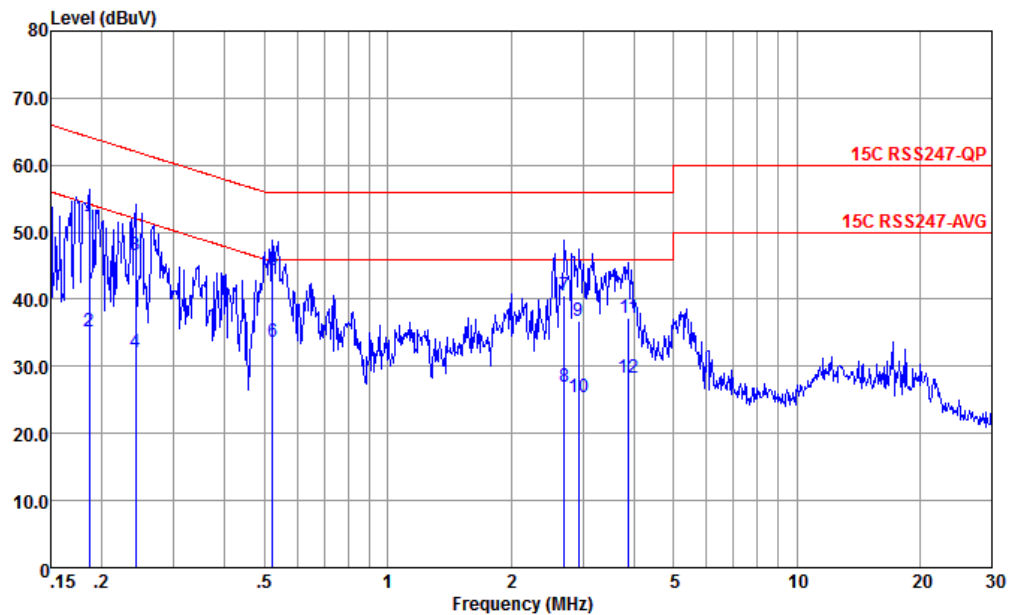

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.186	51.09	-13.11	64.20	40.50	0.13	10.46	QP
2	0.186	35.19	-19.01	54.20	24.60	0.13	10.46	Average
3	0.242	46.68	-15.36	62.04	36.20	0.01	10.47	QP
4	0.242	32.08	-19.96	52.04	21.60	0.01	10.47	Average
5 *	0.524	44.45	-11.55	56.00	34.20	-0.15	10.40	QP
6	0.524	33.75	-12.25	46.00	23.50	-0.15	10.40	Average
7	2.707	40.52	-15.48	56.00	30.49	-0.20	10.23	QP
8	2.707	26.92	-19.08	46.00	16.89	-0.20	10.23	Average
9	2.931	36.81	-19.19	56.00	26.80	-0.21	10.22	QP
10	2.931	25.51	-20.49	46.00	15.50	-0.21	10.22	Average
11	3.881	37.20	-18.80	56.00	27.20	-0.21	10.21	QP
12	3.881	28.20	-17.80	46.00	18.20	-0.21	10.21	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Koi Ji	Relative Humidity :	41~43%
		Temperature :	20.2~21.5℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 11	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 12	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 14	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 15	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	1	802.11ax HE20	01	2412	MCS0	-	-
Mode 17	2400-2483.5	1	802.11ax HE20	06	2437	MCS0	-	-
Mode 18	2400-2483.5	1	802.11ax HE20	11	2462	MCS0	-	-
Mode 19	2400-2483.5	1	802.11n HT40	3	2422	MCS0	-	-
Mode 20	2400-2483.5	1	802.11n HT40	6	2437	MCS0	-	-
Mode 21	2400-2483.5	1	802.11n HT40	9	2452	MCS0	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	01	2386.18	46.84	54.00	-7.16	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	47.42	54.00	-6.58	H	AVERAGE	Pass	Harmonic
11	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	4874.00	45.59	54.00	-8.41	H	AVERAGE	Pass	Harmonic
12	802.11b	11	2494.00	46.18	54.00	-7.82	H	AVERAGE	Pass	Band Edge
	802.11b	11	4924.00	44.12	54.00	-9.88	H	AVERAGE	Pass	Harmonic
13	802.11g	01	2389.95	52.93	54.00	-1.07	H	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	42.84	74.00	-31.16	V	PEAK	Pass	Harmonic
14	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	4874.00	43.17	74.00	-30.83	H	PEAK	Pass	Harmonic
15	802.11g	11	2483.50	52.03	54.00	-1.97	H	AVERAGE	Pass	Band Edge
15	802.11g	11	7386.00	42.68	74.00	-31.32	V	PEAK	Pass	Harmonic
16	802.11ax HE20	01	2389.95	51.72	54.00	-2.28	H	AVERAGE	Pass	Band Edge
16	802.11ax HE20	01	4824.00	42.60	74.00	-31.40	V	PEAK	Pass	Harmonic
17	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	06	7311.00	43.08	74.00	-30.92	V	PEAK	Pass	Harmonic
18	802.11ax HE20	11	2483.80	72.99	74.00	-1.01	H	PEAK	Pass	Band Edge
18	802.11ax HE20	11	7386.00	42.72	74.00	-31.28	V	PEAK	Pass	Harmonic
19	802.11n HT40	3	2389.95	52.82	54.00	-1.18	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	3	7266.00	43.09	74.00	-30.91	V	PEAK	Pass	Harmonic
20	802.11n HT40	6	2483.50	51.92	54.00	-2.08	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	6	7311.00	43.25	74.00	-30.75	V	PEAK	Pass	Harmonic
21	802.11n HT40	9	2483.50	52.93	54.00	-1.07	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	9	7356.00	42.66	74.00	-31.34	V	PEAK	Pass	Harmonic

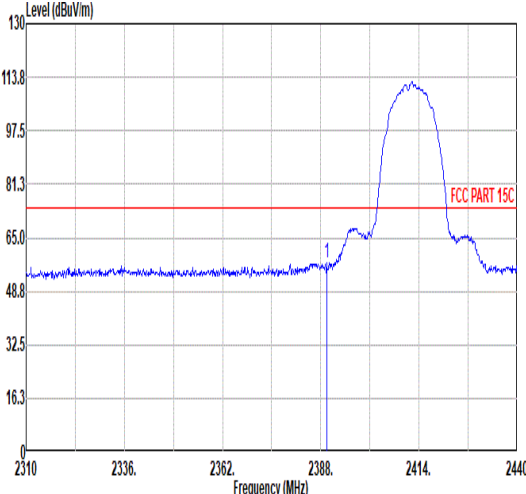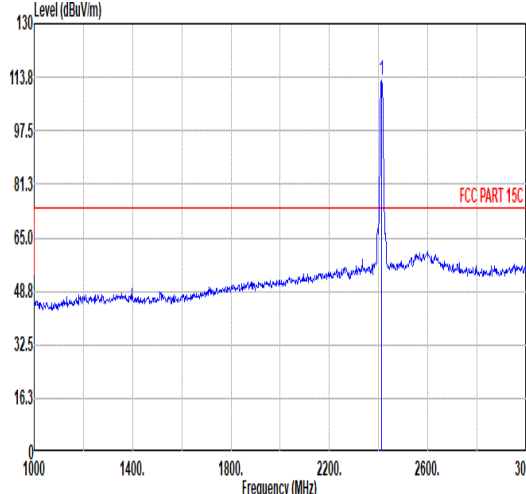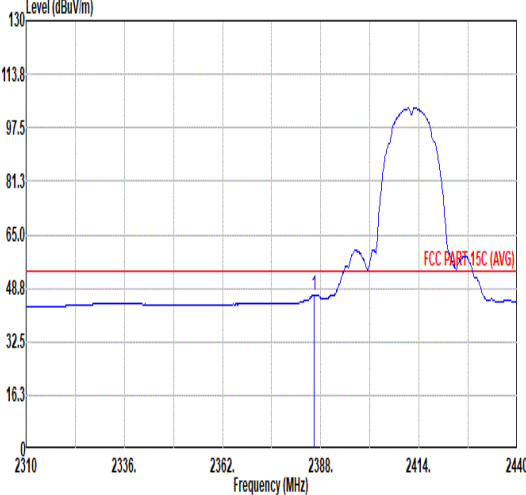
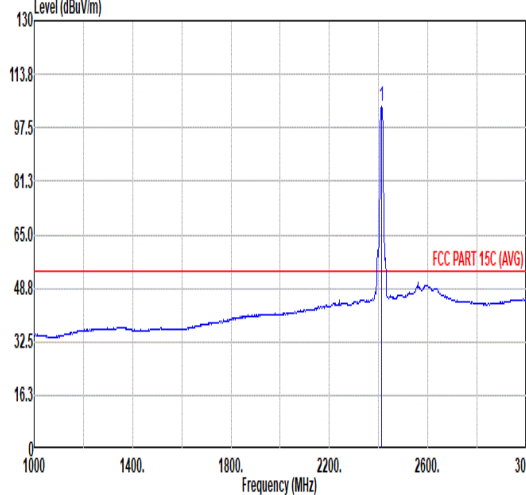


Mode	10																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																						
Peak																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>57.30</td><td>74.00</td><td>-16.70</td><td>41.80</td><td>32.14</td><td>8.05</td><td>30.69</td><td>6.00</td><td>100</td><td>112 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	57.30	74.00	-16.70	41.80	32.14	8.05	30.69	6.00	100	112 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>112.71</td><td>-----</td><td>-----</td><td>97.08</td><td>32.22</td><td>8.09</td><td>30.68</td><td>6.00</td><td>100</td><td>112 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	112.71	-----	-----	97.08	32.22	8.09	30.68	6.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.56	57.30	74.00	-16.70	41.80	32.14	8.05	30.69	6.00	100	112 PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	112.71	-----	-----	97.08	32.22	8.09	30.68	6.00	100	112 PEAK																																																																																																		
Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>46.84</td><td>54.00</td><td>-7.16</td><td>31.36</td><td>32.12</td><td>8.05</td><td>30.69</td><td>6.00</td><td>100</td><td>112 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	46.84	54.00	-7.16	31.36	32.12	8.05	30.69	6.00	100	112 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.78</td><td>-----</td><td>-----</td><td>88.15</td><td>32.22</td><td>8.09</td><td>30.68</td><td>6.00</td><td>100</td><td>112 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.78	-----	-----	88.15	32.22	8.09	30.68	6.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2386.18	46.84	54.00	-7.16	31.36	32.12	8.05	30.69	6.00	100	112 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	103.78	-----	-----	88.15	32.22	8.09	30.68	6.00	100	112 AVERAGE																																																																																																		

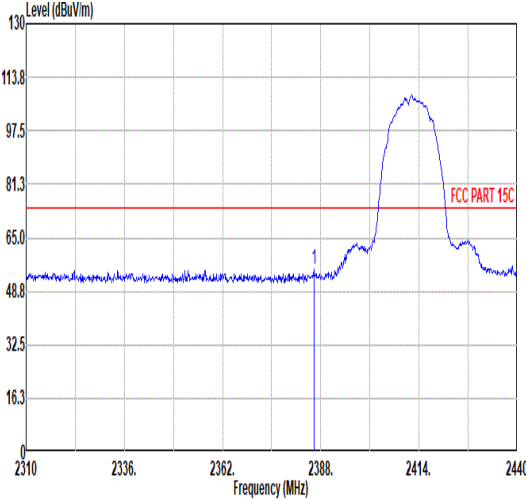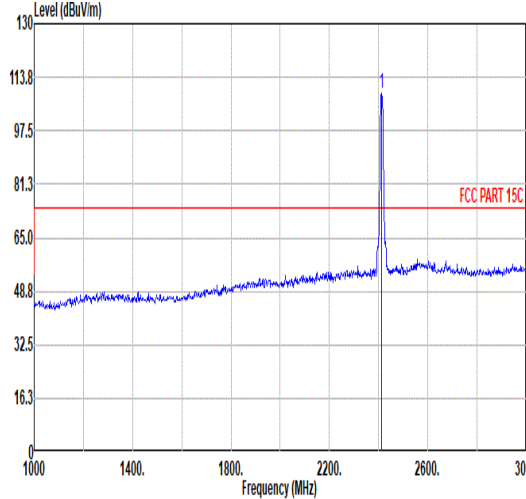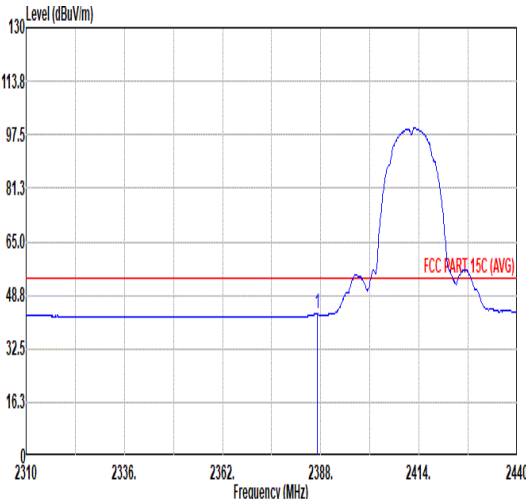
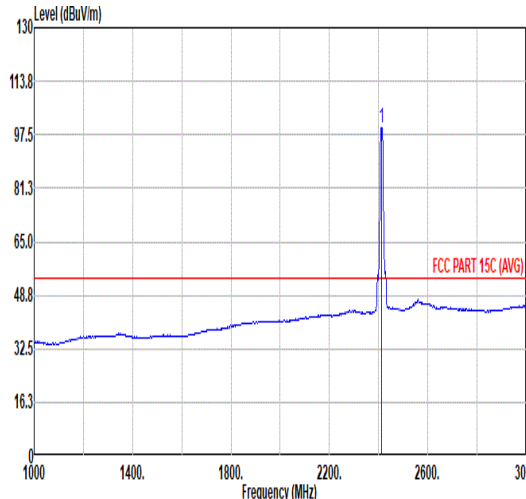


Mode	10																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>39.87</td><td>32.12</td><td>8.05</td><td>30.69</td><td>6.00</td><td>385</td><td>64</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	55.35	74.00	-18.65	39.87	32.12	8.05	30.69	6.00	385	64	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.76</td><td>-----</td><td>-----</td><td>93.13</td><td>32.22</td><td>8.09</td><td>30.68</td><td>6.00</td><td>385</td><td>64</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.76	-----	-----	93.13	32.22	8.09	30.68	6.00	385	64
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2386.18	55.35	74.00	-18.65	39.87	32.12	8.05	30.69	6.00	385	64	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	108.76	-----	-----	93.13	32.22	8.09	30.68	6.00	385	64	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>27.54</td><td>32.12</td><td>8.05</td><td>30.69</td><td>6.00</td><td>385</td><td>64</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	43.02	54.00	-10.98	27.54	32.12	8.05	30.69	6.00	385	64	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.73</td><td>-----</td><td>-----</td><td>84.08</td><td>32.23</td><td>8.10</td><td>30.68</td><td>6.00</td><td>385</td><td>64</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.73	-----	-----	84.08	32.23	8.10	30.68	6.00	385	64
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2387.09	43.02	54.00	-10.98	27.54	32.12	8.05	30.69	6.00	385	64	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	99.73	-----	-----	84.08	32.23	8.10	30.68	6.00	385	64	AVERAGE																																																																																																			



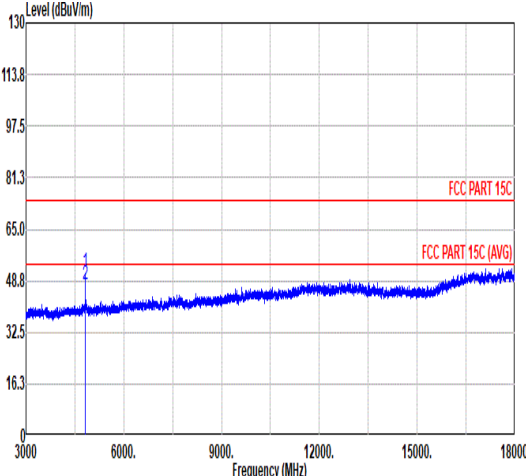
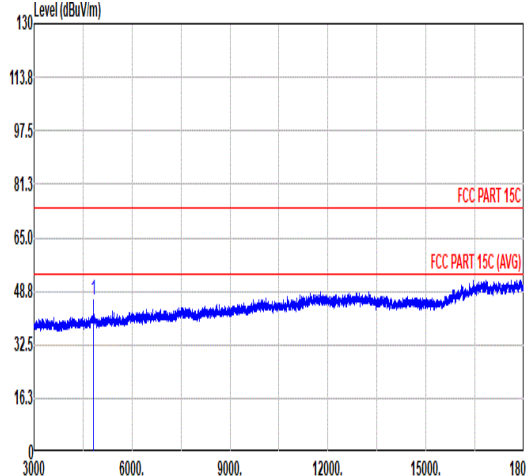


Mode	10																																																																																																																
	Harmonic																																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																
ANT	1																																																																																																																
Pol.	Horizontal						Vertical																																																																																																										
Peak Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>71.17</td><td>34.15</td><td>11.58</td><td>65.24</td><td>0.00</td><td>123</td><td>34</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>47.42</td><td>54.00</td><td>-6.58</td><td>66.93</td><td>34.15</td><td>11.58</td><td>65.24</td><td>0.00</td><td>123</td><td>34</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	51.66	74.00	-22.34	71.17	34.15	11.58	65.24	0.00	123	34	PEAK	2	4824.00	47.42	54.00	-6.58	66.93	34.15	11.58	65.24	0.00	123	34	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>65.55</td><td>34.15</td><td>11.58</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.04	74.00	-27.96	65.55	34.15	11.58	65.24	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	4824.00	51.66	74.00	-22.34	71.17	34.15	11.58	65.24	0.00	123	34	PEAK																																																																																																					
2	4824.00	47.42	54.00	-6.58	66.93	34.15	11.58	65.24	0.00	123	34	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	4824.00	46.04	74.00	-27.96	65.55	34.15	11.58	65.24	0.00	--	--	PEAK																																																																																																					

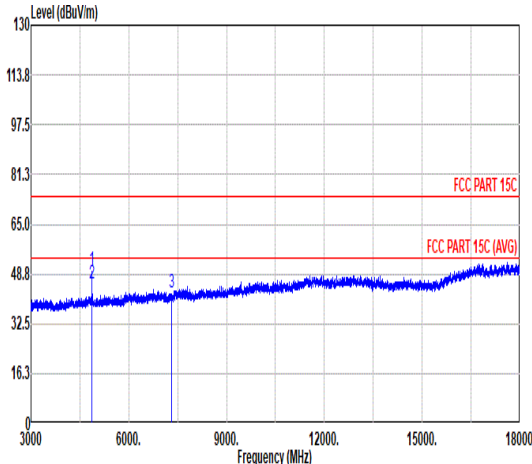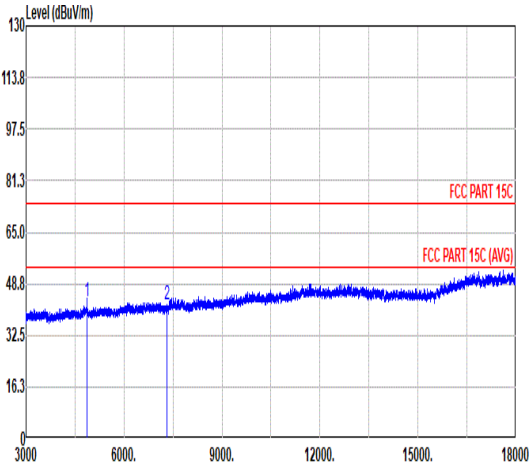

Mode	11																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.17</td><td>74.00</td><td>-23.83</td><td>69.57</td><td>34.15</td><td>11.68</td><td>65.23</td><td>0.00</td><td>100</td><td>269</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>64.99</td><td>34.15</td><td>11.68</td><td>65.23</td><td>0.00</td><td>100</td><td>269</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>59.94</td><td>35.78</td><td>14.48</td><td>67.43</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	50.17	74.00	-23.83	69.57	34.15	11.68	65.23	0.00	100	269	PEAK	2	4874.00	45.59	54.00	-8.41	64.99	34.15	11.68	65.23	0.00	100	269	AVERAGE	3	7311.00	42.77	74.00	-31.23	59.94	35.78	14.48	67.43	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>62.37</td><td>34.15</td><td>11.68</td><td>65.23</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.08</td><td>74.00</td><td>-31.92</td><td>59.25</td><td>35.78</td><td>14.48</td><td>67.43</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	42.97	74.00	-31.03	62.37	34.15	11.68	65.23	0.00	--	--	PEAK	2	7311.00	42.08	74.00	-31.92	59.25	35.78	14.48	67.43	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	4874.00	50.17	74.00	-23.83	69.57	34.15	11.68	65.23	0.00	100	269	PEAK																																																																																																																																
2	4874.00	45.59	54.00	-8.41	64.99	34.15	11.68	65.23	0.00	100	269	AVERAGE																																																																																																																																
3	7311.00	42.77	74.00	-31.23	59.94	35.78	14.48	67.43	0.00	--	--	PEAK																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4874.00	42.97	74.00	-31.03	62.37	34.15	11.68	65.23	0.00	--	--	PEAK																																																																																																																																
2	7311.00	42.08	74.00	-31.92	59.25	35.78	14.48	67.43	0.00	--	--	PEAK																																																																																																																																

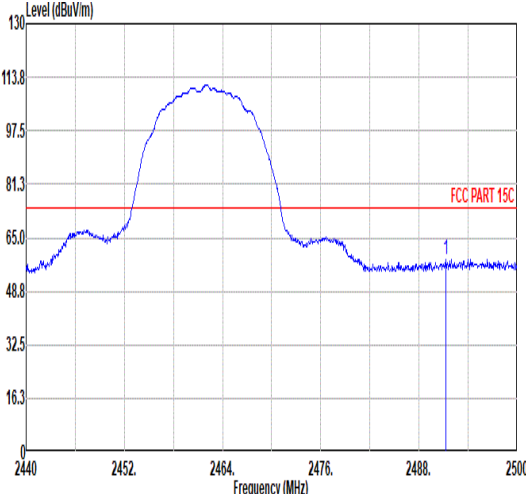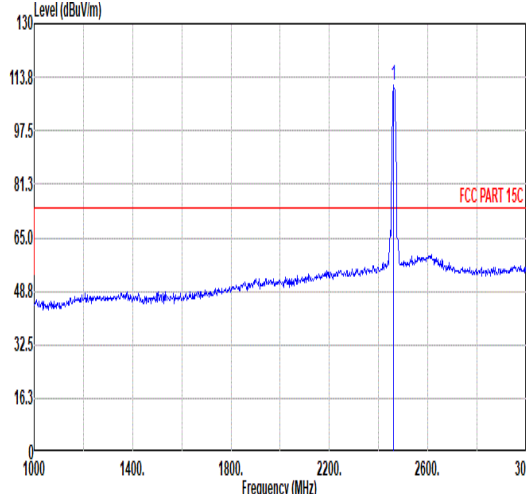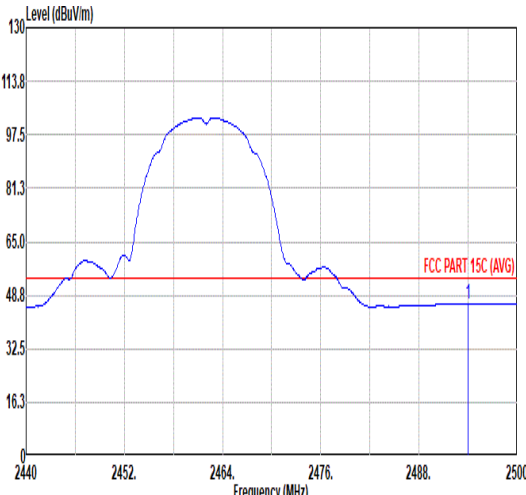
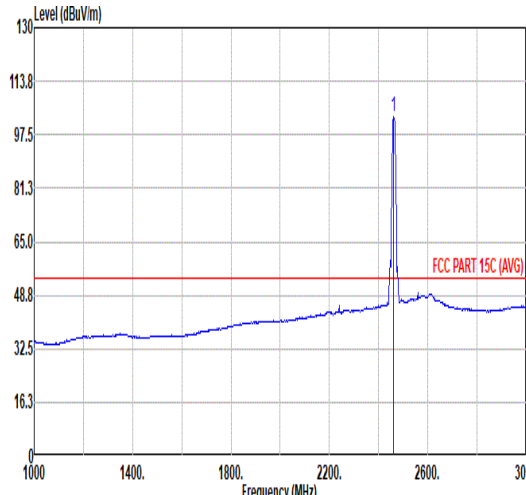


Mode	12																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.30</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>42.50</td><td>32.38</td><td>8.25</td><td>30.65</td><td>6.00</td><td>137</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.30	58.48	74.00	-15.52	42.50	32.38	8.25	30.65	6.00	137	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.26</td><td>-----</td><td>-----</td><td>95.41</td><td>32.32</td><td>8.19</td><td>30.66</td><td>6.00</td><td>137</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.26	-----	-----	95.41	32.32	8.19	30.66	6.00	137	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2491.30	58.48	74.00	-15.52	42.50	32.38	8.25	30.65	6.00	137	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	111.26	-----	-----	95.41	32.32	8.19	30.66	6.00	137	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.00</td><td>46.18</td><td>54.00</td><td>-7.82</td><td>30.19</td><td>32.39</td><td>8.25</td><td>30.65</td><td>6.00</td><td>137</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.00	46.18	54.00	-7.82	30.19	32.39	8.25	30.65	6.00	137	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.82</td><td>-----</td><td>-----</td><td>86.97</td><td>32.32</td><td>8.19</td><td>30.66</td><td>6.00</td><td>137</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.82	-----	-----	86.97	32.32	8.19	30.66	6.00	137	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2494.00	46.18	54.00	-7.82	30.19	32.39	8.25	30.65	6.00	137	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	102.82	-----	-----	86.97	32.32	8.19	30.66	6.00	137	360	AVERAGE																																																																																																			



Mode	12																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.88</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>40.19</td><td>32.37</td><td>8.24</td><td>30.65</td><td>6.00</td><td>376</td><td>61 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	56.15	74.00	-17.85	40.19	32.37	8.24	30.65	6.00	376	61 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>106.90</td><td>-----</td><td>-----</td><td>91.05</td><td>32.32</td><td>8.19</td><td>30.66</td><td>6.00</td><td>376</td><td>61 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.90	-----	-----	91.05	32.32	8.19	30.66	6.00	376
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2484.88	56.15	74.00	-17.85	40.19	32.37	8.24	30.65	6.00	376	61 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	106.90	-----	-----	91.05	32.32	8.19	30.66	6.00	376	61 PEAK																																																																																						
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>44.32</td><td>54.00</td><td>-9.68</td><td>28.37</td><td>32.37</td><td>8.23</td><td>30.65</td><td>6.00</td><td>376</td><td>61 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.32	54.00	-9.68	28.37	32.37	8.23	30.65	6.00	376	61 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.88</td><td>-----</td><td>-----</td><td>83.03</td><td>32.32</td><td>8.19</td><td>30.66</td><td>6.00</td><td>376</td><td>61 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.88	-----	-----	83.03	32.32	8.19	30.66	6.00	376
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	44.32	54.00	-9.68	28.37	32.37	8.23	30.65	6.00	376	61 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	98.88	-----	-----	83.03	32.32	8.19	30.66	6.00	376	61 AVERAGE																																																																																						

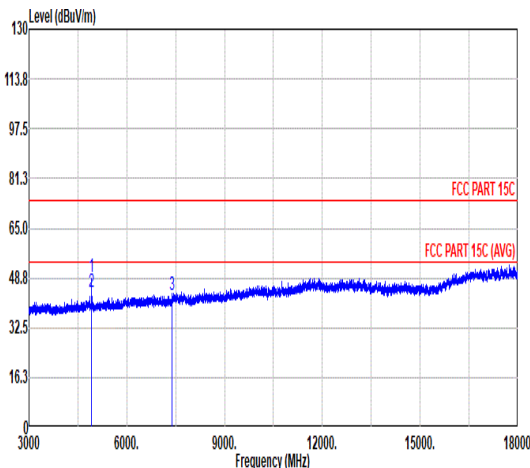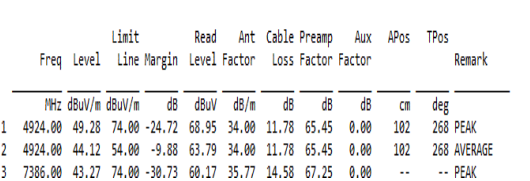

Mode	12																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																										
ANT	1																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>68.95</td><td>34.00</td><td>11.78</td><td>65.45</td><td>0.00</td><td>102</td><td>268</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>44.12</td><td>54.00</td><td>-9.88</td><td>63.79</td><td>34.00</td><td>11.78</td><td>65.45</td><td>0.00</td><td>102</td><td>268</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.27</td><td>74.00</td><td>-30.73</td><td>68.17</td><td>35.77</td><td>14.58</td><td>67.25</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	49.28	74.00	-24.72	68.95	34.00	11.78	65.45	0.00	102	268	PEAK	2	4924.00	44.12	54.00	-9.88	63.79	34.00	11.78	65.45	0.00	102	268	AVERAGE	3	7386.00	43.27	74.00	-30.73	68.17	35.77	14.58	67.25	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.81</td><td>74.00</td><td>-33.19</td><td>68.48</td><td>34.00</td><td>11.78</td><td>65.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.96</td><td>74.00</td><td>-31.04</td><td>59.86</td><td>35.77</td><td>14.58</td><td>67.25</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	40.81	74.00	-33.19	68.48	34.00	11.78	65.45	0.00	--	--	PEAK	2	7386.00	42.96	74.00	-31.04	59.86	35.77	14.58	67.25	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4924.00	49.28	74.00	-24.72	68.95	34.00	11.78	65.45	0.00	102	268	PEAK																																																																																																																															
2	4924.00	44.12	54.00	-9.88	63.79	34.00	11.78	65.45	0.00	102	268	AVERAGE																																																																																																																															
3	7386.00	43.27	74.00	-30.73	68.17	35.77	14.58	67.25	0.00	--	--	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4924.00	40.81	74.00	-33.19	68.48	34.00	11.78	65.45	0.00	--	--	PEAK																																																																																																																															
2	7386.00	42.96	74.00	-31.04	59.86	35.77	14.58	67.25	0.00	--	--	PEAK																																																																																																																															