# **FCC Test Report**

Report No.: AGC02427140901FE04

FCC ID : 2AC83ZOCAD42Z

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: 4 inch Zoca D42Z 3G android phone

**BRAND NAME** : D3

**MODEL NAME** : Zoca D42z

**CLIENT** : HK VIsen Technology Co., Ltd.

**DATE OF ISSUE** : Sept.28, 2014

**STANDARD(S) TEST PROCEDURE(S)**FCC Part 15.247
KDB 558074 v03r02

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC &

## **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 68

## **Report Revise Record**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Sept.28, 2014 | Valid         | Original Report |

## **TABLE OF CONTENTS**

| 1. VERIFICATION OF CONFORMITY                      | 5  |
|--|----|
| 2. GENERAL INFORMATION                             | 6  |
| 2.1. PRODUCT DESCRIPTION                           | 6  |
| 2.2. TABLE OF CARRIER FREQUENCYS                   | 6  |
| 2.3. IEEE 802.11N MODULATION SCHEME                | 7  |
| 2.4. RELATED SUBMITTAL(S) / GRANT (S)              | 7  |
| 2.5. TEST METHODOLOGY                              | 7  |
| 2.6. SPECIAL ACCESSORIES                           | 7  |
| 2.7. EQUIPMENT MODIFICATIONS                       | 7  |
| 3. MEASUREMENT UNCERTAINTY                         | 8  |
| 4. DESCRIPTION OF TEST MODES                       | 8  |
| 5. SYSTEM TEST CONFIGURATION                       | 9  |
| 5.1. CONFIGURATION OF EUT SYSTEM                   | g  |
| 5.2. EQUIPMENT USED IN EUT SYSTEM                  |    |
| 5.3. SUMMARY OF TEST RESULTS                       | g  |
| 6. TEST FACILITY                                   |    |
| 7. PEAK OUTPUT POWER                               |    |
| 7.1. MEASUREMENT PROCEDURE                         |    |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  |    |
| 7.3. LIMITS AND MEASUREMENT RESULT                 |    |
| 8. 6DB BANDWIDTH                                   |    |
| 8.1. MEASUREMENT PROCEDURE                         |    |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  |    |
| 8.3. LIMITS AND MEASUREMENT RESULTS                |    |
| 9. CONDUCTED SPURIOUS EMISSION                     |    |
| 9.1. MEASUREMENT PROCEDURE                         |    |
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  |    |
| 9.3. MEASUREMENT EQUIPMENT USED                    |    |
| 9.4. LIMITS AND MEASUREMENT RESULT                 |    |
| 10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL D |    |
| 10.1 MEASUREMENT PROCEDURE                         |    |
| 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  |    |
| 10.3 MEASUREMENT EQUIPMENT USED                    |    |
| 10.4 LIMITS AND MEASUREMENT RESULT                 | 31 |

| 11. RADIATED EMISSION                                       | 39 |
|---|----|
| 11.1. MEASUREMENT PROCEDURE                                 | 39 |
| 11.2. TEST SETUP  | 40 |
| 11.3. LIMITS AND MEASUREMENT RESULT                         | 41 |
| 11.4. TEST RESULT   | 41 |
| 12. BAND EDGE EMISSION                                      | 50 |
| 12.1. MEASUREMENT PROCEDURE                                 | 50 |
| 12.2. TEST SET-UP   | 50 |
| 12.3. Radiated Test Result                                  |    |
| 12.4. Conducted Test Result                                 | 55 |
| 13. FCC LINE CONDUCTED EMISSION TEST                        | 58 |
| 13.1. LIMITS OF LINE CONDUCTED EMISSION TEST                | 58 |
| 13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST         | 58 |
| 13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST | 59 |
| 13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST       | 59 |
| 13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST           | 60 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP                       | 62 |
| APPENDIX B: PHOTOGRAPHS OF EUT                              | 63 |

Page 5 of 68

## 1. VERIFICATION OF CONFORMITY

| Applicant   | HK VIsen Technology Co., Ltd.   |
|---|---|
| Address   | Room 505, 5c, Block CD, TianJing building , Tianan digital City, Che gong miao, Futian district, SZ., China |
| Manufacturer  | HK VIsen Technology Co.,Ltd.  |
| Address Room 505,5c,Block CD,TianJing building,Tianan digital City, Che gong miao,Futian district,SZ.,China |   |
| Product Designation   | 4 inch Zoca D42Z 3G android phone   |
| Brand Name  | D3  |
| Test Model  | Zoca D42z   |
| Date of test  | Sept.22, 2014 to Sept. 27, 2014   |
| Deviation   | None  |
| Condition of Test Sample  | Normal  |
| Report Template   | AGCRT-US-BGN/RF   |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Matt Zhang Sept.28, 2014

Checked By

Kidd Yang Sept.28, 2014

Authorized By

Solger Zhang Sept.28, 2014

Page 6 of 68

## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "4 inch Zoca D42Z 3G android phone". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

| A major technical description of EoT is described as following |   |  |  |  |
|--|---|--|--|--|
| Operation Frequency  | 2.412 GHz~2.462GHz                                  |  |  |  |
| Output Bower   | IEEE 802.11b:11.86dBm; IEEE 802.11g:9.63dBm;        |  |  |  |
| Output Power   | IEEE 802.11n(20):9.24dBm; IEEE 802.11n(40):6.58dBm  |  |  |  |
| Modulation   | DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM) |  |  |  |
| Number of channels   | 11  |  |  |  |
| Hardware Version   | P1909_MB_1V2  |  |  |  |
| Software Version   | N/A   |  |  |  |
| Antenna Designation  | Integrated Antenna                                  |  |  |  |
| Antenna Gain   | 0.8dBi  |  |  |  |
| Power Supply   | DC3.7V by Built-in Li-ion Battery                   |  |  |  |

## 2.2. TABLE OF CARRIER FREQUENCYS

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
|                | 1              | 2412 MHZ  |
|                | 2              | 2417 MHZ  |
|                | 3              | 2422 MHZ  |
|                | 4              | 2427 MHZ  |
|                | 5              | 2432 MHZ  |
| 2400~2483.5MHZ | 6              | 2437 MHZ  |
|                | 7              | 2442 MHZ  |
|                | 8              | 2447 MHZ  |
|                | 9              | 2452 MHZ  |
|                | 10             | 2457 MHZ  |
|                | 11             | 2462 MHZ  |

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11 For 40MHZ bandwidth system use Channel 3 to Channel 9

Page 7 of 68

#### 2.3. IEEE 802.11N MODULATION SCHEME

| MCS<br>Index | Nss | Modulation | R   | NBPSC | NCBPS NDBPS |       |       | ata<br>Mbps)<br>nsGl |       |       |
|--------------|-----|------------|-----|-------|-------------|-------|-------|----------------------|-------|-------|
|              |     |            |     |       | 20MHz       | 40MHz | 20MHz | 40MHz                | 20MHz | 40MHz |
| 0            | 1   | BPSK       | 1/2 | 1     | 52          | 108   | 26    | 54                   | 6.5   | 13.5  |
| 1            | 1   | QPSK       | 1/2 | 2     | 104         | 216   | 52    | 108                  | 13.0  | 27.0  |
| 2            | 1   | QPSK       | 3/4 | 2     | 104         | 216   | 78    | 162                  | 19.5  | 40.5  |
| 3            | 1   | 16-QAM     | 1/2 | 4     | 208         | 432   | 104   | 216                  | 26.0  | 54.0  |
| 4            | 1   | 16-QAM     | 3/4 | 4     | 208         | 432   | 156   | 324                  | 39.0  | 81.0  |
| 5            | 1   | 64-QAM     | 2/3 | 6     | 312         | 648   | 208   | 432                  | 52.0  | 108.0 |
| 6            | 1   | 64-QAM     | 3/4 | 6     | 312         | 648   | 234   | 489                  | 58.5  | 121.5 |
| 7            | 1   | 64-QAM     | 5/6 | 6     | 312         | 648   | 260   | 540                  | 65.0  | 135.0 |

| Symbol | Explanation                             |
|--------|---|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPSC  | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | Guard interval                          |

## 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AC83ZOCAD42Z** filing to comply with the FCC Part 15 requirements.

## 2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 DTS Meas Guidance v03r02.

#### 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

## 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 8 of 68

#### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

#### 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1   | Low channel TX        |
| 2   | Middle channel TX     |
| 3   | High channel TX       |
| 4   | Normal operating      |

#### Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate

(13.5/27/40.5/54/81/108/121.5/135)

#### Note:


- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 9 of 68

## 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



## **5.2. EQUIPMENT USED IN EUT SYSTEM**

| Item | Equipment     | Model No. | ID or Specification     | Remark    |  |
|------|---------------|-----------|-------------------------|-----------|--|
| 1    | Mobile Phone  | Zoca D42z | FCC<br>ID:2AC83ZOCAD42Z | EUT       |  |
| 2    | Adapter       | Zoca      | DC5.0V / 500mA          | Accessory |  |
| 3    | Battery BL-4D |           | DC3.7V / 1000 mAh       | Accessory |  |
| 4    | Earphone      | Zoca D42z | N/A                     | Accessory |  |
| 5    | USB Cable     | Zoca D42z | N/A                     | Accessory |  |

Note: All the accessories have been used during the test in conduction emission test.

## **5.3. SUMMARY OF TEST RESULTS**

| FCC RULES | DESCRIPTION OF TEST                             | RESULT    |
|-----------|---|-----------|
| §15.247   | Peak Output Power                               | Compliant |
| §15.247   | 6 dB Bandwidth                                  | Compliant |
| §15.247   | Conducted Spurious Emission                     | Compliant |
| §15.247   | Maximum Conducted Output Power SPECTRAL Density | Compliant |
| §15.209   | Radiated Emission                               | Compliant |
| §15.247   | Band Edges                                      | Compliant |
| §15.207   | Line Conduction Emission                        | Compliant |

Note: The EUT received power from DC3.7V lithium battery.

Page 10 of 68

## **6. TEST FACILITY**

| Site        | Attestation of Global Compliance (Shenzhen) Co., Ltd   |  |  |
|-------------|--|--|--|
| Location    | 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China |  |  |
| Description | The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.                           |  |  |

## **ALL TEST EQUIPMENT LIST**

| Description        | Manufacturer      | Model       | S/N        | Cal. Date  | Cal. Due   |
|--------------------|-------------------|-------------|------------|------------|------------|
| Power Probe        | R&S               | NRP-Z23     | 100323     | 07/25/2014 | 07/24/2015 |
| Power Meter        | Agilent           | N1911A      | MY45100361 | 04/20/2014 | 04/20/2015 |
| RF attenuator      | N/A               | RFA20db     | 68         | N/A        | N/A        |
| Spectrum Analyzer  | Agilent           | E4440A      | US41421290 | 07/25/2014 | 07/24/2015 |
| Amplifier          | EM                | EM30180     | 0607030    | 02/27/2014 | 02/26/2015 |
| Horn Antenna       | EM                | EM-AH-10180 | 67         | 04/19/2014 | 04/18/2015 |
| Horn Antenna       | A.H. Systems Inc. | SAS-574     |            | 07/25/2014 | 07/24/2015 |
| EMI Test Receiver  | Rohde & Schwarz   | ESCI        | 100694     | 07/25/2014 | 07/24/2015 |
| Biological Antenna | A.H. Systems Inc. | SAS-521-4   | 26         | 06/06/2014 | 06/05/2015 |
| Loop Antenna       | A.H.              | SAS-526B    | 264        | 07/13/2014 | 07/12/2015 |
| LISN               | R&S               | ESH3-Z5     | 8389791009 | 07/25/2014 | 07/24/2015 |
| Radiation Cable 1  | Sat               | RE1         | R003       | 06/04/2014 | 06/03/2015 |
| Radiation Cable 2  | Sat               | RE2         | R002       | 06/04/2014 | 06/03/2015 |
| Conduction Cable   | Sat               | CE1         | C001       | 06/04/2014 | 06/03/2015 |

Page 11 of 68

## 7. PEAK OUTPUT POWER

## 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Use a direct connection between the antenna port of the transmitter and the power meter, through suitable attenuation
- 2. Set the bandwidth of the power meter is 40MHz
- 3. Record the peak value

For average power test:


- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 1 Watt (30dBm).

**Note**: The EUT was tested according to KDB 558074v03r02 for compliance to FCC 47CFR 15.247 requirements.


Page 12 of 68

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

## **PEAK POWER TEST SETUP**



## **AVERAGE POWER SETUP**



Page 13 of 68

## 7.3. LIMITS AND MEASUREMENT RESULT

| TEST ITEM | PEAK POWER               |
|-----------|--------------------------|
| TEST MODE | 802.11b with data rate 1 |

|                    | LIMITS AND MEASUREMENT RESULT |                     |                         |              |
|--------------------|-------------------------------|---------------------|-------------------------|--------------|
| Frequency<br>(GHz) | Average Power (dBm)           | Peak Power<br>(dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.412              | 9.49                          | 11.47               | 30                      | Pass         |
| 2.437              | 9.88                          | 11.86               | 30                      | Pass         |
| 2.462              | 9.44                          | 11.42               | 30                      | Pass         |

| TEST ITEM | PEAK POWER               |
|-----------|--------------------------|
| TEST MODE | 802.11g with data rate 6 |

| LIMITS AND MEASUREMENT RESULT |                     |                     |                         |              |
|-------------------------------|---------------------|---------------------|-------------------------|--------------|
| Frequency<br>(GHz)            | Average Power (dBm) | Peak Power<br>(dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.412                         | 7.49                | 9.47                | 30                      | Pass         |
| 2.437                         | 7.65                | 9.63                | 30                      | Pass         |
| 2.462                         | 7.31                | 9.29                | 30                      | Pass         |

| TEST ITEM | PEAK POWER                    |
|-----------|-------------------------------|
| TEST MODE | 802.11n 20 with data rate 6.5 |

|                    | LIMITS AND MEASUREMENT RESULT |                     |                         |              |
|--------------------|-------------------------------|---------------------|-------------------------|--------------|
| Frequency<br>(GHz) | Average Power (dBm)           | Peak Power<br>(dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.412              | 7.2                           | 9.18                | 30                      | Pass         |
| 2.437              | 7.26                          | 9.24                | 30                      | Pass         |
| 2.462              | 7.13                          | 9.11                | 30                      | Pass         |

Page 14 of 68

| TEST ITEM | PEAK POWER                     |
|-----------|--------------------------------|
| TEST MODE | 802.11n 40 with data rate 13.5 |

|                    | LIMITS AND MEASUREMENT RESULT |                     |                         |              |
|--------------------|-------------------------------|---------------------|-------------------------|--------------|
| Frequency<br>(GHz) | Average Power (dBm)           | Peak Power<br>(dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.422              | 4.48                          | 6.46                | 30                      | Pass         |
| 2.437              | 4.6                           | 6.58                | 30                      | Pass         |
| 2.452              | 4.33                          | 6.31                | 30                      | Pass         |

Page 15 of 68


## 8. 6DB BANDWIDTH

## **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

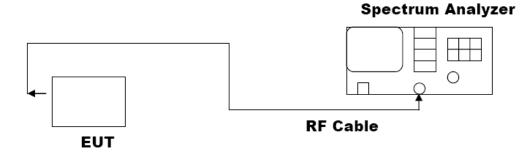

Page 16 of 68

## 8.3. LIMITS AND MEASUREMENT RESULTS

| TEST ITEM | 6DB BANDWIDTH             |
|-----------|---------------------------|
| TEST MODE | 802.11b with data rate 11 |

| LIMITS AND MEASUREMENT RESULT |                          |       |      |  |
|-------------------------------|--------------------------|-------|------|--|
| Applicable Limite             | Applicable Limits        |       |      |  |
| Applicable Limits             | Test Data (MHz) Criteria |       |      |  |
|                               | Low Channel              | 9.116 | PASS |  |
| >500KHZ                       | Middle Channel           | 9.066 | PASS |  |
|                               | High Channel             | 9.099 | PASS |  |

| TEST ITEM | 6DB BANDWIDTH             |
|-----------|---------------------------|
| TEST MODE | 802.11g with data rate 54 |

| LIMITS AND MEASUREMENT RESULT |                   |        |          |
|-------------------------------|-------------------|--------|----------|
| Annlinghla Limita             | Applicable Limits |        |          |
| Applicable Limits             | Test Data (MHz)   |        | Criteria |
| >500KHZ                       | Low Channel       | 15.134 | PASS     |
|                               | Middle Channel    | 15.956 | PASS     |
|                               | High Channel      | 15.833 | PASS     |

| TEST ITEM | 6DB BANDWIDTH                |
|-----------|------------------------------|
| TEST MODE | 802.11n 20 with data rate 65 |

| LIMITS AND MEASUREMENT RESULT |                   |        |          |
|-------------------------------|-------------------|--------|----------|
| Applicable Limite             | Applicable Limits |        |          |
| Applicable Limits             | Test Data (MHz)   |        | Criteria |
| >500KHZ                       | Low Channel       | 15.097 | PASS     |
|                               | Middle Channel    | 15.151 | PASS     |
|                               | High Channel      | 16.876 | PASS     |


Page 17 of 68

| TEST ITEM | 6DB BANDWIDTH                 |
|-----------|-------------------------------|
| TEST MODE | 802.11n 40 with data rate 135 |


| LIMITS AND MEASUREMENT RESULT |                 |        |          |
|-------------------------------|-----------------|--------|----------|
| Applicable Limits             |                 |        |          |
| Applicable Limits             | Test Data (MHz) |        | Criteria |
| >500KHZ                       | Low Channel     | 35.235 | PASS     |
|                               | Middle Channel  | 35.236 | PASS     |
|                               | High Channel    | 35.240 | PASS     |

Page 18 of 68

802.11b TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

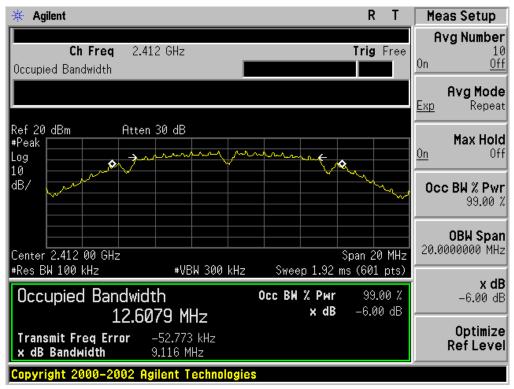


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

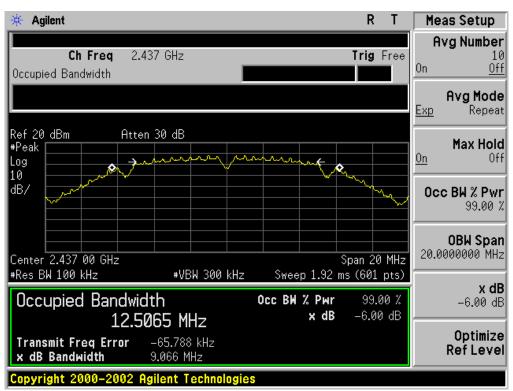


Page 19 of 68

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

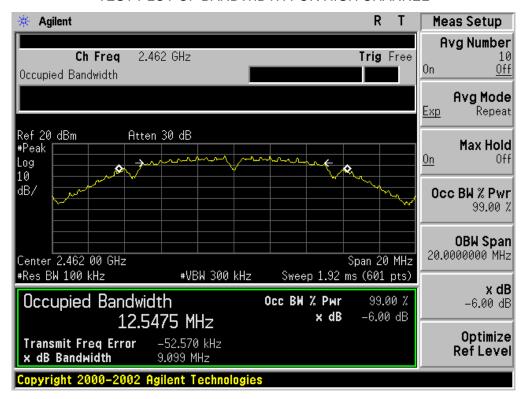


802.11g TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

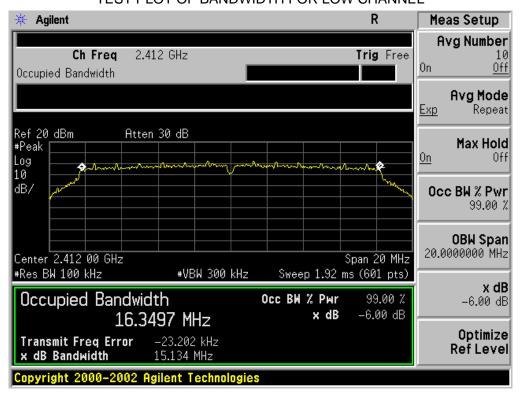


Page 20 of 68


#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

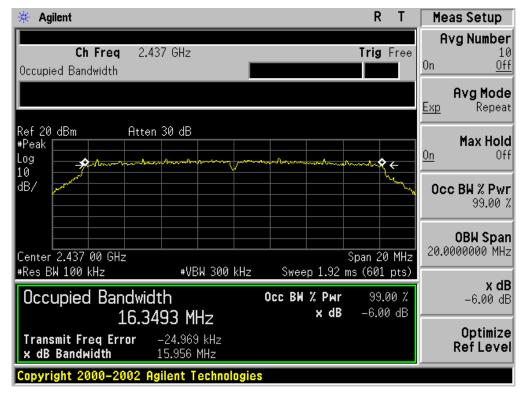


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

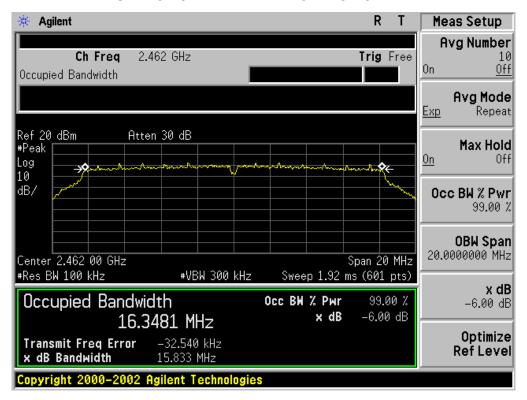

# **802.11n (20) TEST RESULT**TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

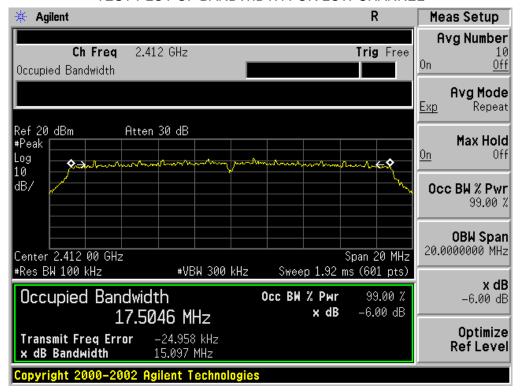


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

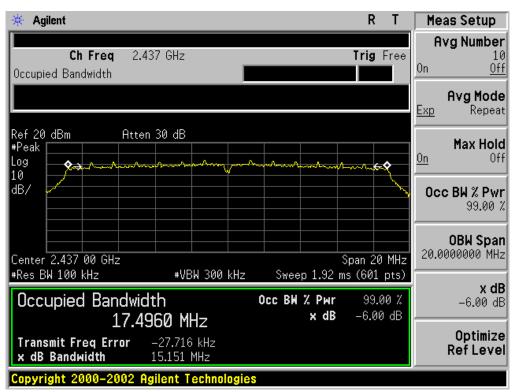


Page 22 of 68

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

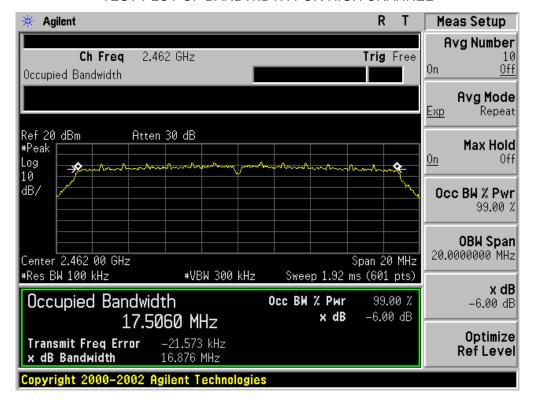


## 802.11n(40) TEST RESULT

## TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

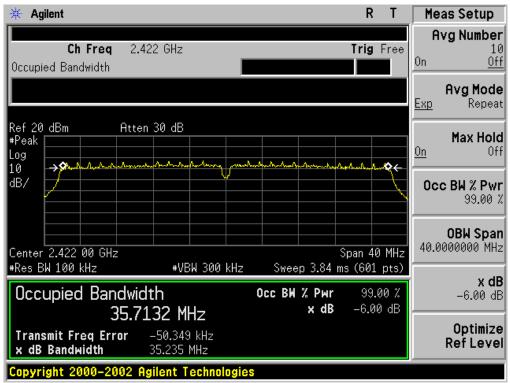


Page 23 of 68

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

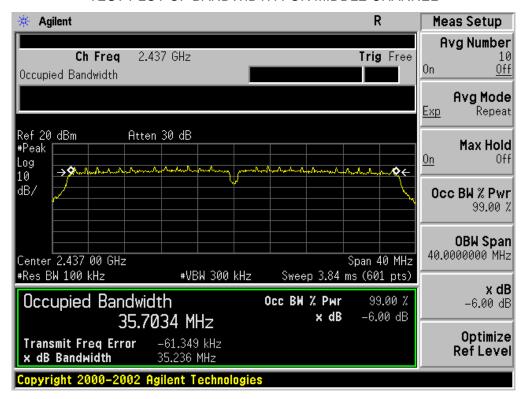

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

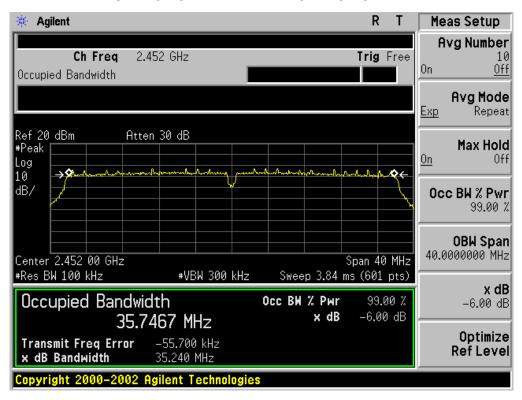

Page 24 of 68

## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

## 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.


#### 9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT                          |                                |          |  |  |
|--|--------------------------------|----------|--|--|
| Angliaghla Limite                                      | Measurement Result             |          |  |  |
| Applicable Limits                                      | Test Data                      | Criteria |  |  |
| In any 100 KHz Bandwidth Outside the                   | At least -20dBc than the limit |          |  |  |
| frequency band in which the spread spectrum            | Specified on the BOTTOM        | PASS     |  |  |
| intentional radiator is operating, the radio frequency | Channel                        |          |  |  |
| power that is produce by the intentional radiator      |                                |          |  |  |
| shall be at least 20 dB below that in 100KHz           |                                |          |  |  |
| bandwidth within the band that contains the highest    |                                |          |  |  |
| level of the desired power.                            | At least -20dBc than the limit | PASS     |  |  |
| In addition, radiation emissions which fall in the     | Specified on the TOP Channel   | PASS     |  |  |
| restricted bands, as defined in §15.205(a), must also  |                                |          |  |  |
| comply with the radiated emission limits specified     |                                |          |  |  |
| in§15.209(a))  |                                |          |  |  |


Page 25 of 68


## TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b FOR MODULATION IN LOW CHANNEL

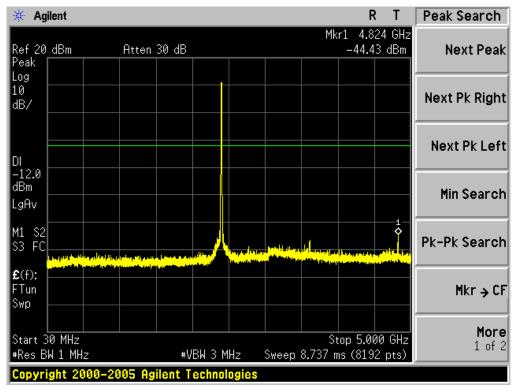

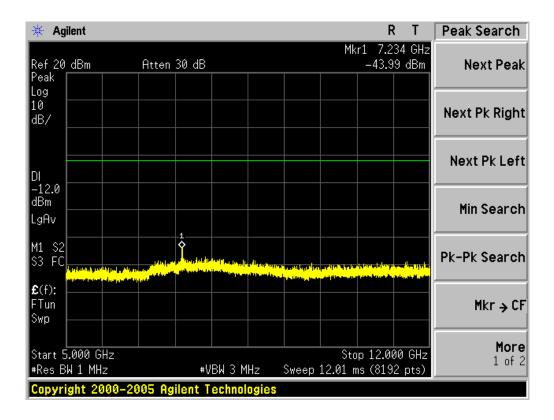



Page 26 of 68

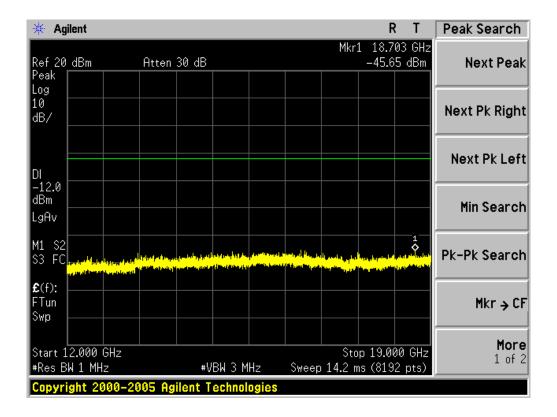

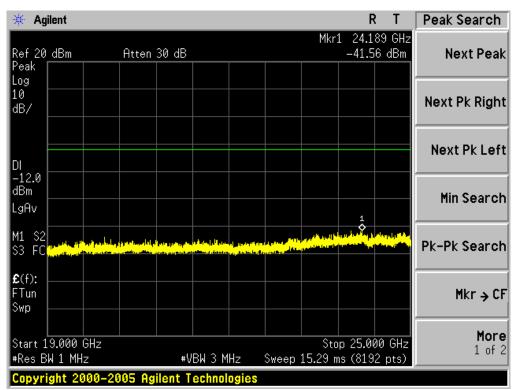



## TEST PLOT OF OUT OF BAND EMISSIONS OF 802.11b FOR MODULATION IN MIDDLE CHANNEL

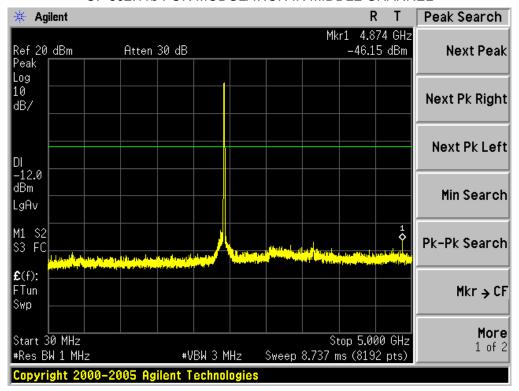

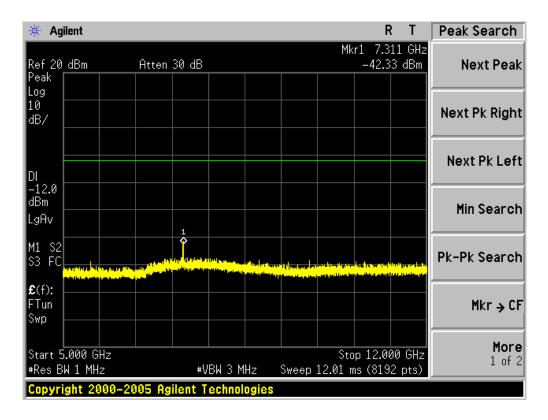



Page 28 of 68

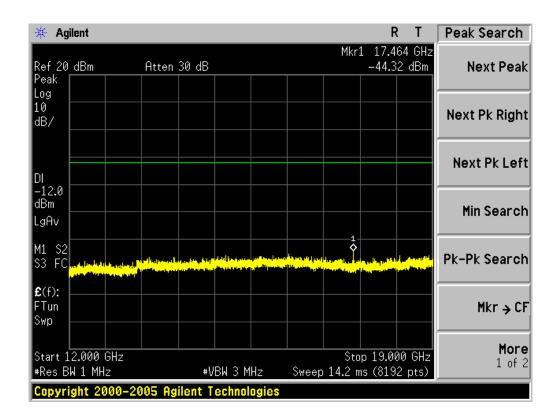

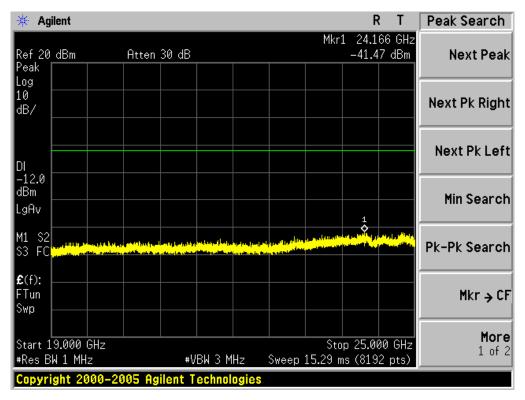



# TEST PLOT OF OUT OF BAND EMISSIONS OF 802.11b FOR MODULATION IN HIGH CHANNEL

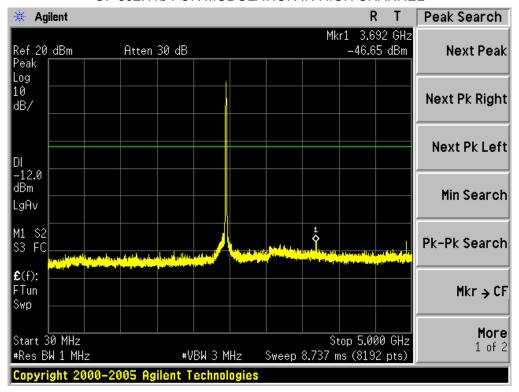

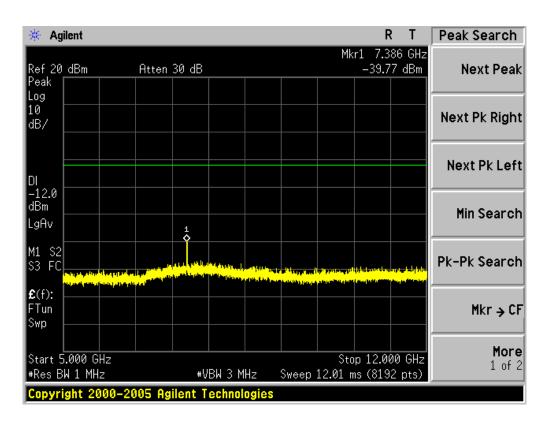

Page 30 of 68

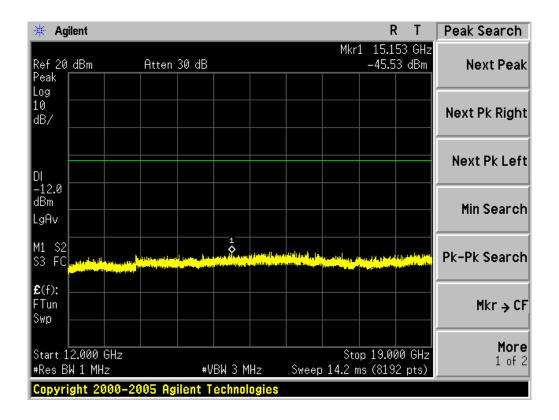

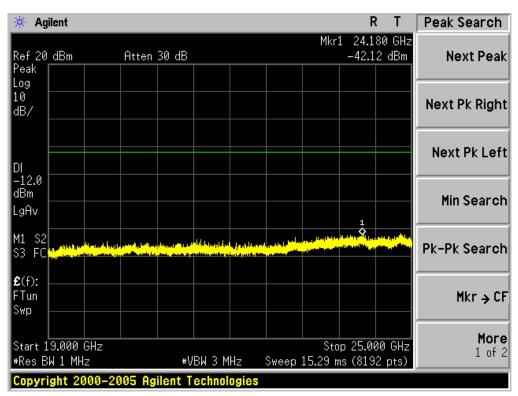

Page 31 of 68

## 10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

## **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

## 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

## **10.3 MEASUREMENT EQUIPMENT USED**

Refer To Section 6.

## **10.4 LIMITS AND MEASUREMENT RESULT**

| TEST ITEM | POWER PECTRAL DENSITY    |
|-----------|--------------------------|
| TEST MODE | 802.11b with data rate 1 |

| Channel No.    | PSD<br>(dBm) | Limit<br>(dBm) | Result |
|----------------|--------------|----------------|--------|
| Low Channel    | -7.08        | 8              | Pass   |
| Middle Channel | -5.58        | 8              | Pass   |
| High Channel   | -6.77        | 8              | Pass   |

| TEST ITEM | POWER PECTRAL DENSITY    |
|-----------|--------------------------|
| TEST MODE | 802.11g with data rate 6 |

| Channel No.    | PSD<br>(dBm) | Limit<br>(dBm) | Result |
|----------------|--------------|----------------|--------|
| Low Channel    | -11.89       | 8              | Pass   |
| Middle Channel | -11.28       | 8              | Pass   |
| High Channel   | -11.53       | 8              | Pass   |

Page 32 of 68

| TEST ITEM | POWER PECTRAL DENSITY         |
|-----------|-------------------------------|
| TEST MODE | 802.11n 20 with data rate 6.5 |


| Channel No.    | PSD<br>(dBm) | Limit<br>(dBm) | Result |
|----------------|--------------|----------------|--------|
| Low Channel    | -12.21       | 8              | Pass   |
| Middle Channel | -12.13       | 8              | Pass   |
| High Channel   | -12.31       | 8              | Pass   |

| TEST ITEM | POWER PECTRAL DENSITY          |
|-----------|--------------------------------|
| TEST MODE | 802.11n 40 with data rate 13.5 |


| Channel No.    | PSD<br>(dBm) | Limit<br>(dBm) | Result |
|----------------|--------------|----------------|--------|
| Low Channel    | -17.85       | 8              | Pass   |
| Middle Channel | -15.31       | 8              | Pass   |
| High Channel   | -17.3        | 8              | Pass   |

Page 33 of 68

**802.11b TEST RESULT**TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

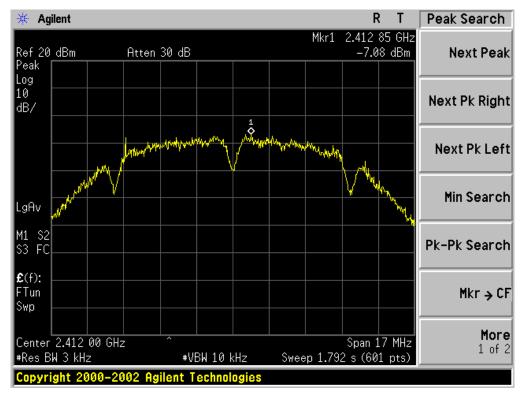


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

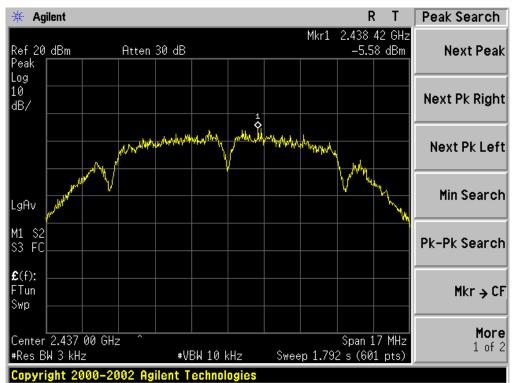


Page 34 of 68


#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

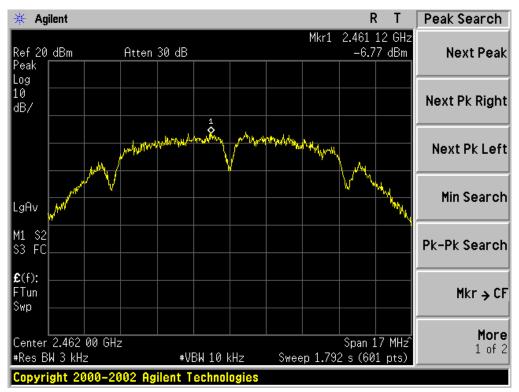


802.11g TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

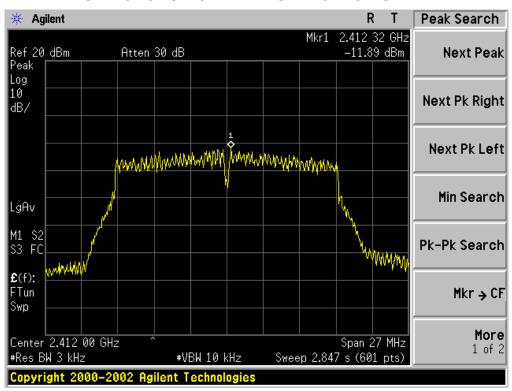

#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

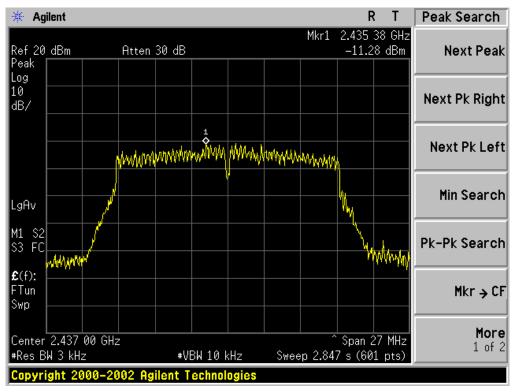


#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

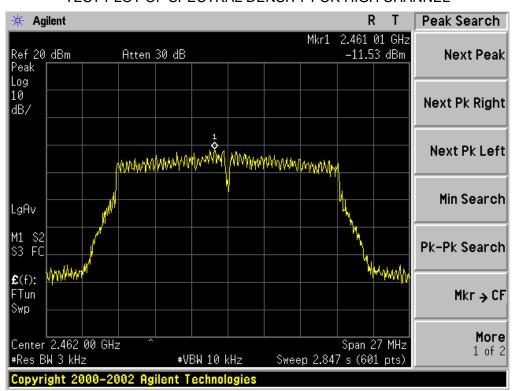


Page 36 of 68

802.11n 20 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

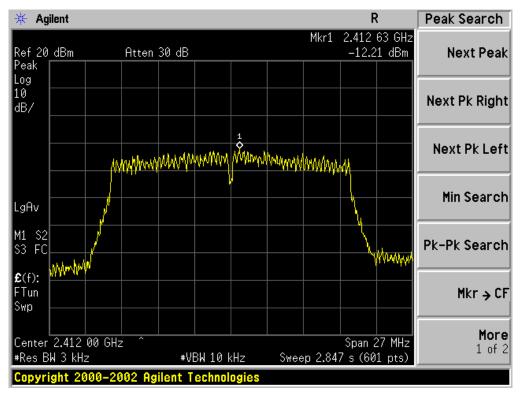


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

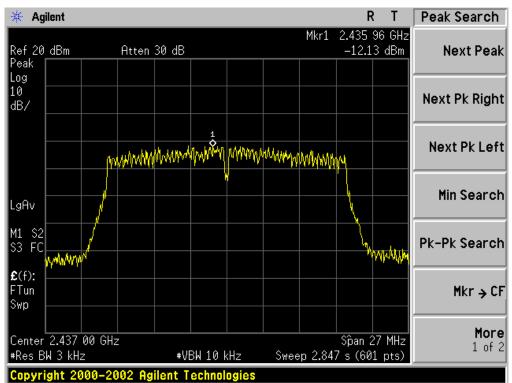


Page 37 of 68

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

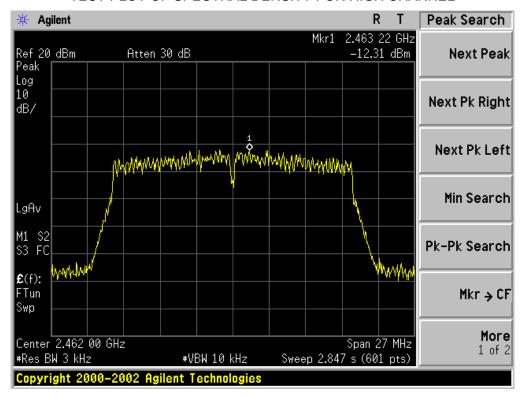


802.11n 40 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

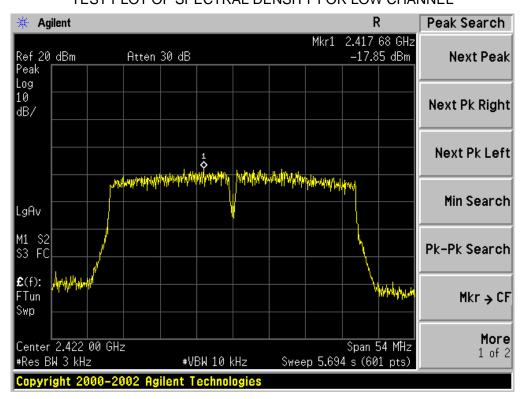


## Page 38 of 68

#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

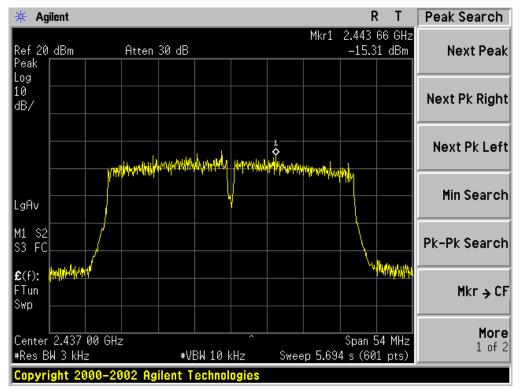

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

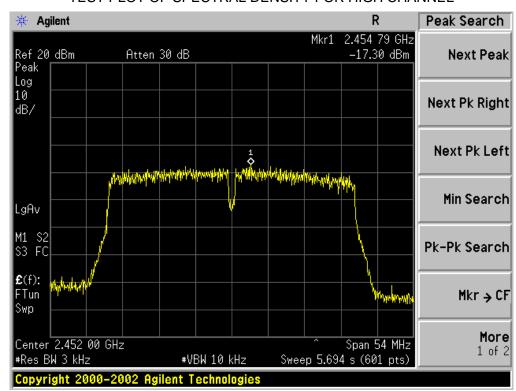

Page 39 of 68

#### 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 40 of 68

## 11.2. TEST SETUP

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

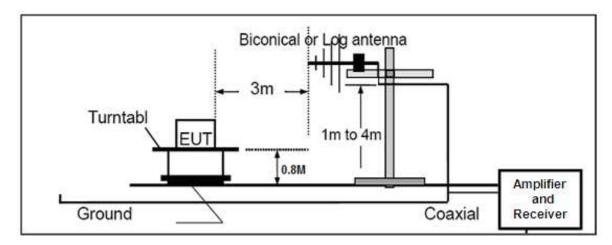

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

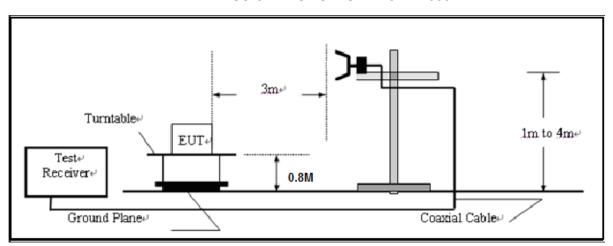

Page 41 of 68

## 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

| Frequencies<br>(MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|-----------------------------------|-------------------------------|
| 0.009~0.490          | 2400/F(KHz)                       | 300                           |
| 0.490~1.705          | 24000/F(KHz)                      | 30                            |
| 1.705~30.0           | 30                                | 30                            |
| 30~88                | 100                               | 3                             |
| 88~216               | 150                               | 3                             |
| 216~960              | 200                               | 3                             |
| Above 960            | 500                               | 3                             |

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

## 11.4. TEST RESULT


#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 42 of 68

## **RADIATED EMISSION BELOW 1GHZ**

| EUT         | 4 inch Zoca D42Z 3G android phone   | Model Name        | Zoca D42z      |
|-------------|-------------------------------------|-------------------|----------------|
| Temperature | 25°C                                | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                              | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1<br>2412MHZ | Antenna           | Horizontal     |

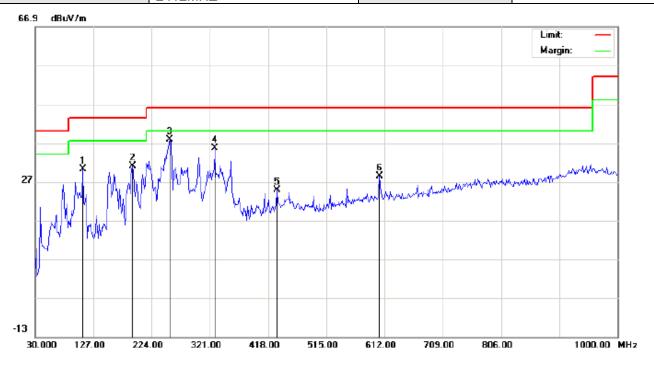

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m


M/N: Zoca D42z Mode: Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 109.2167 | 19.06   | 11.12  | 30.18       | 43.50  | -13.32 | peak     |                   |                 |         |
| 2   |    | 191.6667 | 19.42   | 11.61  | 31.03       | 43.50  | -12.47 | peak     |                   |                 |         |
| 3   | *  | 254.7167 | 23.71   | 14.04  | 37.75       | 46.00  | -8.25  | peak     |                   |                 |         |
| 4   |    | 329.0833 | 18.28   | 17.35  | 35.63       | 46.00  | -10.37 | peak     |                   |                 |         |
| 5   |    | 432.5500 | 4.78    | 20.06  | 24.84       | 46.00  | -21.16 | peak     |                   |                 |         |
| 6   |    | 603.9167 | 4.73    | 23.74  | 28.47       | 46.00  | -17.53 | peak     |                   |                 |         |

Page 43 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2412MHZ  | Antenna           | Vertical       |

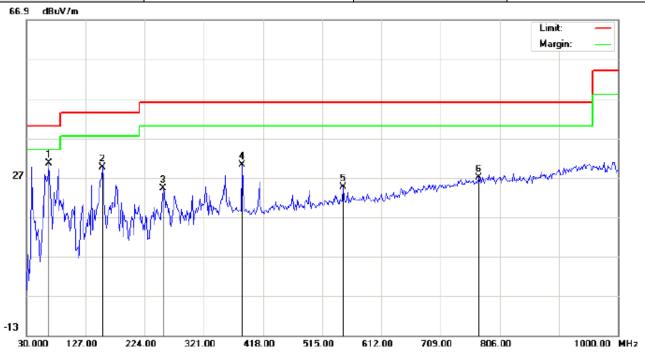

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone


M/N: Zoca D42z Mode: Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   | *  | 67.1833  | 25.32   | 5.36   | 30.68       | 40.00  | -9.32  | peak     |                   |                 |         |
| 2   |    | 154.4833 | 14.28   | 15.29  | 29.57       | 43.50  | -13.93 | peak     |                   |                 |         |
| 3   |    | 254.7167 | 10.16   | 14.04  | 24.20       | 46.00  | -21.80 | peak     |                   |                 |         |
| 4   |    | 384.0500 | 11.28   | 18.96  | 30.24       | 46.00  | -15.76 | peak     |                   |                 |         |
| 5   |    | 548.9500 | 2.24    | 22.45  | 24.69       | 46.00  | -21.31 | peak     |                   |                 |         |
| 6   |    | 772.0500 | 0.15    | 26.93  | 27.08       | 46.00  | -18.92 | peak     |                   |                 |         |

Page 44 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2437MHZ  | Antenna           | Horizontal     |

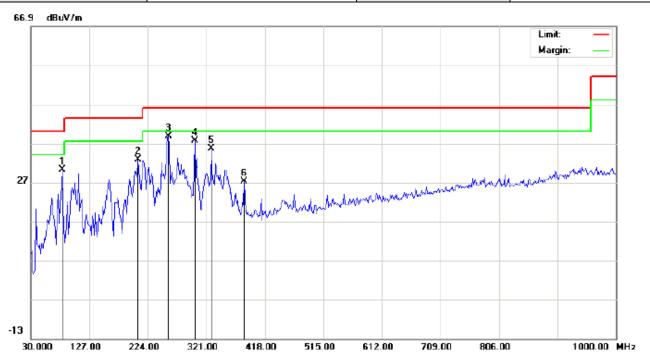

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 81.7333  | 20.53   | 9.73   | 30.26       | 40.00  | -9.74  | peak     |                   |                 |         |
| 2   |    | 207.8333 | 20.48   | 12.30  | 32.78       | 43.50  | -10.72 | peak     |                   |                 |         |
| 3   | *  | 257.9500 | 24.70   | 14.14  | 38.84       | 46.00  | -7.16  | peak     |                   |                 |         |
| 4   |    | 301.6000 | 22.12   | 15.52  | 37.64       | 46.00  | -8.36  | peak     |                   |                 |         |
| 5   |    | 329.0833 | 18.30   | 17.35  | 35.65       | 46.00  | -10.35 | peak     |                   |                 |         |
| 6   |    | 384.0500 | 8.25    | 18.96  | 27.21       | 46.00  | -18.79 | peak     |                   |                 |         |

Page 45 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |  |
|-------------|-----------------------------------|-------------------|----------------|--|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |  |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |  |
| Test Mode   | 802.11b with date rate 1 2437MHZ  | Antenna           | Vertical       |  |

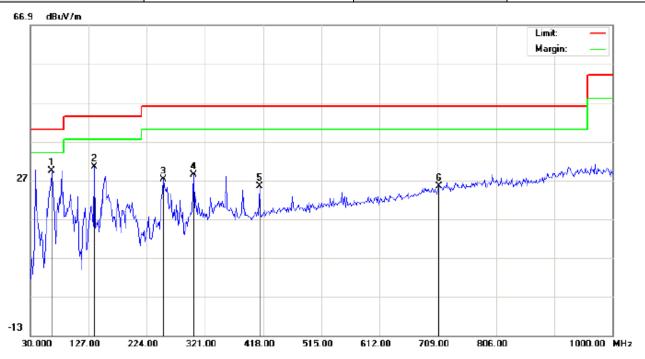

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   | *  | 65.5667  | 23.34   | 5.98   | 29.32       | 40.00  | -10.68 | peak     |                   |                 |         |
| 2   |    | 136.7000 | 16.50   | 13.82  | 30.32       | 43.50  | -13.18 | peak     |                   |                 |         |
| 3   |    | 251.4833 | 13.24   | 13.94  | 27.18       | 46.00  | -18.82 | peak     |                   |                 |         |
| 4   |    | 301.6000 | 12.86   | 15.52  | 28.38       | 46.00  | -17.62 | peak     |                   |                 |         |
| 5   |    | 411.5333 | 5.95    | 19.42  | 25.37       | 46.00  | -20.63 | peak     |                   |                 |         |
| 6   |    | 710.6167 | -0.18   | 25.50  | 25.32       | 46.00  | -20.68 | peak     |                   |                 |         |

Page 46 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2462MHZ  | Antenna           | Horizontal     |

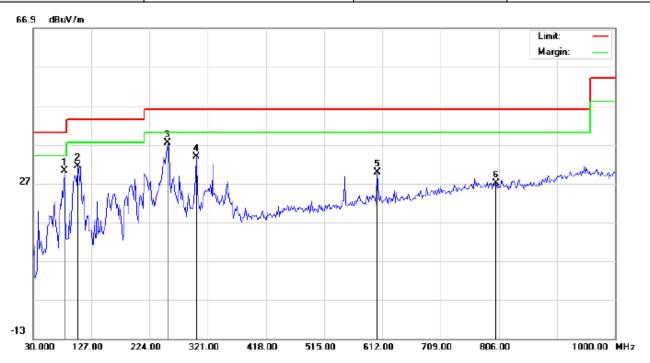

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone


M/N: Zoca D42z Mode: High Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu√/m | dB     |          | cm                | degree          |         |
| 1   |    | 81.7333  | 20.42   | 9.73   | 30.15       | 40.00  | -9.85  | peak     |                   |                 |         |
| 2   |    | 104.3667 | 20.61   | 10.78  | 31.39       | 43.50  | -12.11 | peak     |                   |                 |         |
| 3   | *  | 254.7167 | 23.27   | 14.04  | 37.31       | 46.00  | -8.69  | peak     |                   |                 |         |
| 4   |    | 301.6000 | 18.32   | 15.52  | 33.84       | 46.00  | -12.16 | peak     |                   |                 |         |
| 5   |    | 603.9167 | 6.10    | 23.74  | 29.84       | 46.00  | -16.16 | peak     |                   |                 |         |
| 6   |    | 801.1500 | -0.23   | 27.32  | 27.09       | 46.00  | -18.91 | peak     |                   |                 |         |

Page 47 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2462MHZ  | Antenna           | Vertical       |

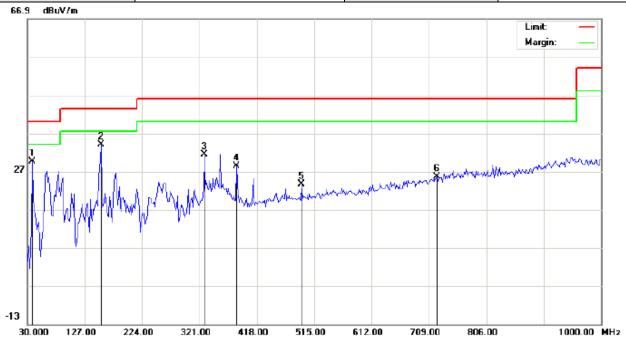

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z Mode: High Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBuV/m      | dBu√/m | dB     |          | cm                | degree          |         |
| 1   |    | 38.0833  | 23.19   | 6.39   | 29.58       | 40.00  | -10.42 | peak     |                   |                 |         |
| 2   | *  | 154.4833 | 18.77   | 15.29  | 34.06       | 43.50  | -9.44  | peak     |                   |                 |         |
| 3   |    | 329.0833 | 13.99   | 17.35  | 31.34       | 46.00  | -14.66 | peak     |                   |                 |         |
| 4   |    | 384.0500 | 9.46    | 18.96  | 28.42       | 46.00  | -17.58 | peak     |                   |                 |         |
| 5   |    | 493.9833 | 2.60    | 21.07  | 23.67       | 46.00  | -22.33 | peak     |                   |                 |         |
| 6   |    | 721.9333 | -0.13   | 25.82  | 25.69       | 46.00  | -20.31 | peak     |                   |                 |         |

## **RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 48 of 68

## **RADIATED EMISSION ABOVE 1GHZ**

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2412MHZ  | Antenna           | Horizontal     |

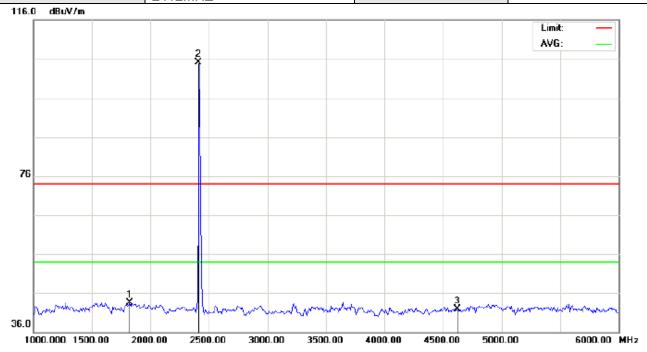

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z


Mode: 802.11b Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu\//m     | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 1825.000 | 55.56   | -11.96 | 43.60       | 74.00  | -30.40 | peak     |                   |                 |         |
| 2   | *  | 2412.000 | 114.78  | -9.67  | 105.11      | 74.00  | 31.11  | peak     |                   |                 |         |
| 3   |    | 4625.000 | 44.76   | -2.78  | 41.98       | 74.00  | -32.02 | peak     |                   |                 |         |

Page 49 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |
|-------------|-----------------------------------|-------------------|----------------|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with date rate 1 2412MHZ  | Antenna           | Vertical       |

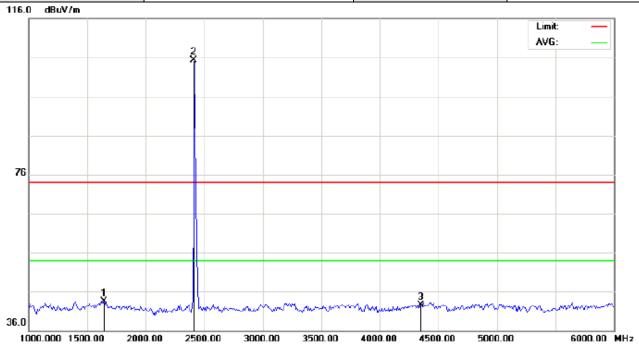

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z

Mode: 802.11b Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 1641.667 | 57.32   | -13.89 | 43.43       | 74.00  | -30.57 | peak     |                   |                 |         |
| 2   | *  | 2412.000 | 115.07  | -9.67  | 105.40      | 74.00  | 31.40  | peak     |                   |                 |         |
| 3   |    | 4350.000 | 46.19   | -3.62  | 42.57       | 74.00  | -31.43 | peak     |                   |                 |         |

## **RESULT: PASS**

**Note:** The other modes radiation emissions have more than 20dB margin.

All modes radiation emission from 6GHz to 25GHz at least have 20dB margin.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 50 of 68

## 12. BAND EDGE EMISSION

## 12.1. MEASUREMENT PROCEDURE

1)Radiated restricted band edge measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

- 2)Conducted Emissions at the bang edge
  - a)The transmitter output was connected to the spectrum analyzer
  - b)Set RBW=100kHz,VBW=300kHz
  - c)Suitable frequency span including 100kHz bandwidth from band edge

## 12.2. TEST SET-UP


Radiated same as 11.2

Conducted set up



## 12.3. Radiated Test Result

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |  |
|-------------|-----------------------------------|-------------------|----------------|--|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |  |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |  |
| Test Mode   | 802.11b with data rate 1 2412MHZ  | Antenna           | Horizontal     |  |

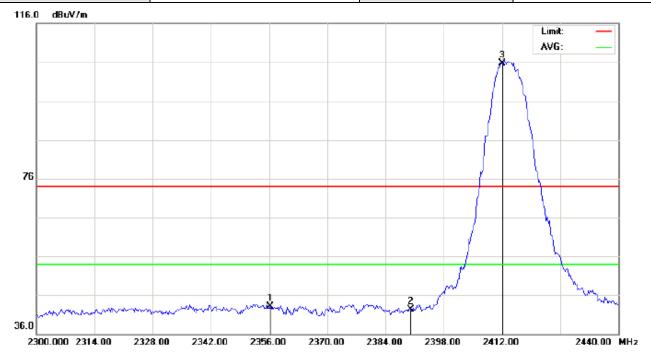

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z


Mode: 802.11b Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu\//m     | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 2356.233 | 52.83   | -9.73  | 43.10       | 74.00  | -30.90 | peak     |                   |                 |         |
| 2   |    | 2390.000 | 51.90   | -9.69  | 42.21       | 74.00  | -31.79 | peak     |                   |                 |         |
| 3   | *  | 2412.000 | 115.36  | -9.67  | 105.69      | 74.00  | 31.69  | peak     |                   |                 |         |

Page 52 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name        | Zoca D42z      |  |
|-------------|-----------------------------------|-------------------|----------------|--|
| Temperature | 25°C                              | Relative Humidity | 55.4%          |  |
| Pressure    | 960hPa                            | Test Voltage      | Normal Voltage |  |
| Test Mode   | 802.11b with data rate 1 2412MHZ  | Antenna           | Vertical       |  |

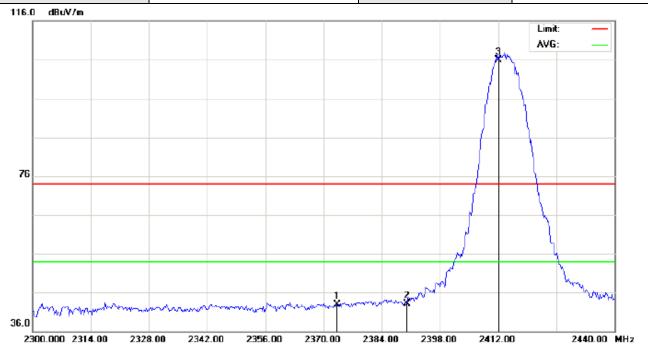

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z


Mode: 802.11b Low Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu\//m     | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 2373.267 | 52.66   | -9.71  | 42.95       | 74.00  | -31.05 | peak     |                   |                 |         |
| 2   |    | 2390.000 | 52.77   | -9.69  | 43.08       | 74.00  | -30.92 | peak     |                   |                 |         |
| 3   | *  | 2412.000 | 115.58  | -9.67  | 105.91      | 74.00  | 31.91  | peak     |                   |                 |         |

Page 53 of 68

| EUT         | 4 inch Zoca D42Z 3G android phone | Model Name   | Zoca D42z      |
|-------------|-----------------------------------|--------------|----------------|
| Temperature | 25°C Relative Hum                 |              | 55.4%          |
| Pressure    | 960hPa                            | Test Voltage | Normal Voltage |
| Test Mode   | 802.11b with data rate 1 2462MHZ  | Antenna      | Horizontal     |

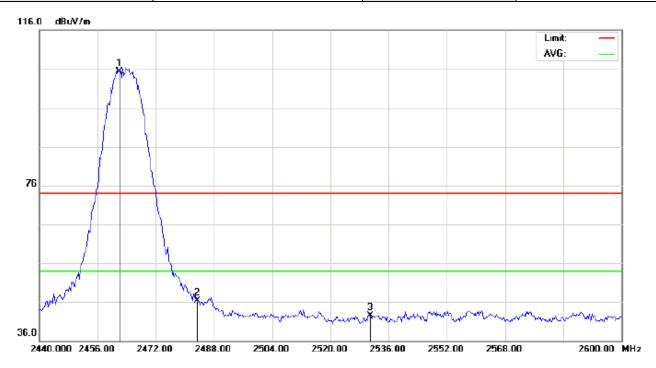

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m


M/N: Zoca D42z

Mode: 802.11b High Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   | *  | 2462.000 | 114.89  | -9.61  | 105.28      | 74.00  | 31.28  | peak     |                   |                 |         |
| 2   |    | 2483.500 | 55.81   | -9.59  | 46.22       | 74.00  | -27.78 | peak     |                   |                 |         |
| 3   |    | 2530.933 | 52.01   | -9.50  | 42.51       | 74.00  | -31.49 | peak     |                   |                 |         |

| EUT         | 4 inch Zoca D42Z 3G android phone Model Name |                   | Zoca D42z      |
|-------------|--|-------------------|----------------|
| Temperature | 25°C   | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                                       | Test Voltage      | Normal Voltage |
| Test Mode   | 802.11b with data rate 1 2462MHZ             | Antenna           | Vertical       |

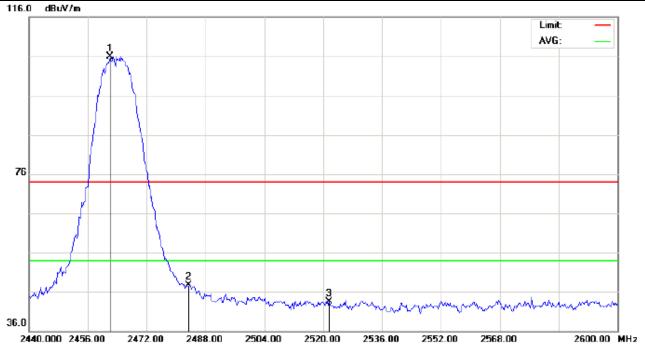

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z

Mode: 802.11b High Channel TX

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | -  | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   | *  | 2462.000 | 115.42  | -9.61  | 105.81      | 74.00  | 31.81  | peak     |                   |                 |         |
| 2   |    | 2483.500 | 57.22   | -9.59  | 47.63       | 74.00  | -26.37 | peak     |                   |                 |         |
| 3   |    | 2521.600 | 53.06   | -9.52  | 43.54       | 74.00  | -30.46 | peak     |                   |                 |         |

#### **RESULT: PASS**


Note: The other modes radiation emission have enough 20dB margin.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

#### 12.4. Conducted Test Result


802.11b-CH1

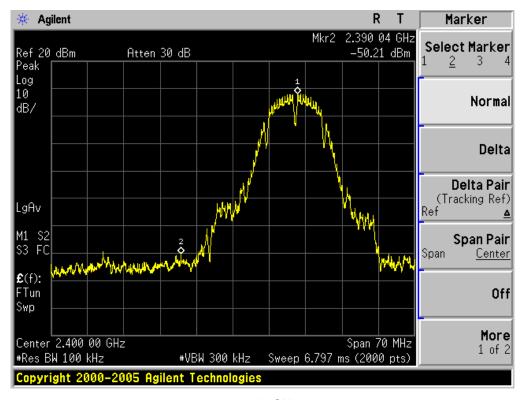


802.11b-CH11

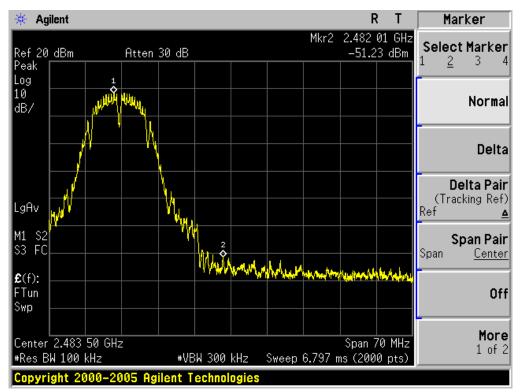


802.11g- CH1

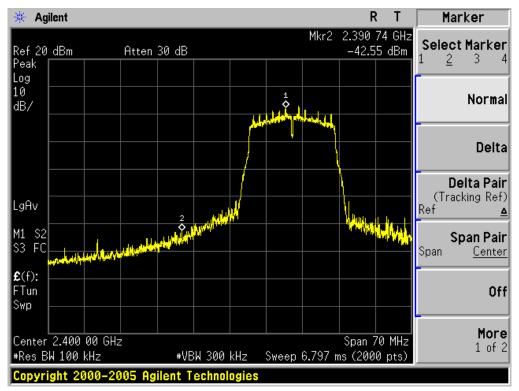


802.11g- CH11

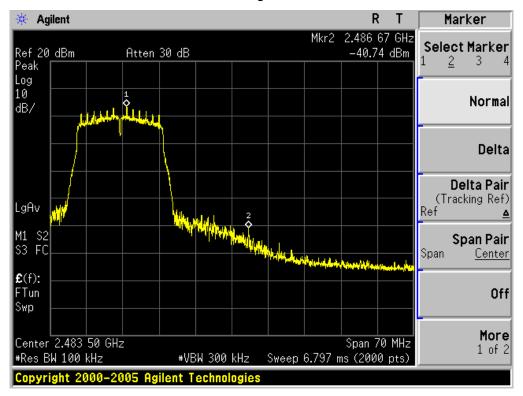

802.11n-CH1

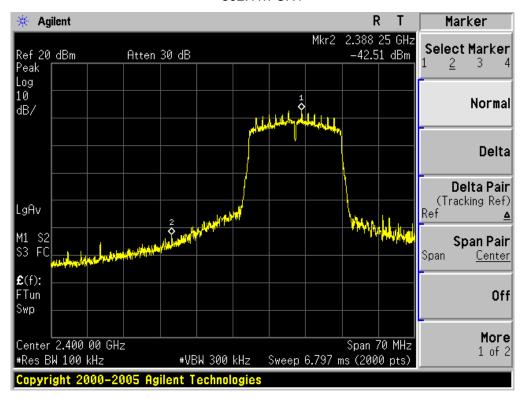

802.11n-CH11

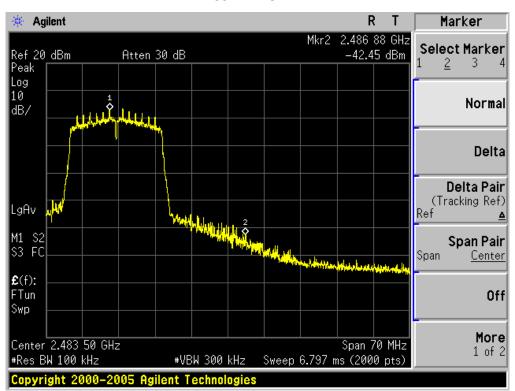

Page 58 of 68

## 13. FCC LINE CONDUCTED EMISSION TEST


## 13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Francisco     | Maximum RF Line Voltage |                |  |  |  |  |  |  |  |
|---------------|-------------------------|----------------|--|--|--|--|--|--|--|
| Frequency     | Q.P.( dBuV)             | Average( dBuV) |  |  |  |  |  |  |  |
| 150kHz~500kHz | 66-56                   | 56-46          |  |  |  |  |  |  |  |
| 500kHz~5MHz   | 56                      | 46             |  |  |  |  |  |  |  |
| 5MHz~30MHz    | 60                      | 50             |  |  |  |  |  |  |  |

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

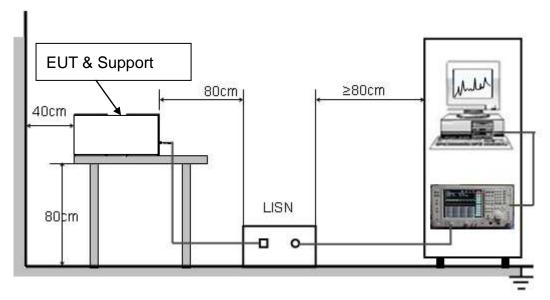

Page 59 of 68

#### 13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


## 13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 60 of 68

## 13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

## LINE CONDUCTED EMISSION TEST LINE 1-L

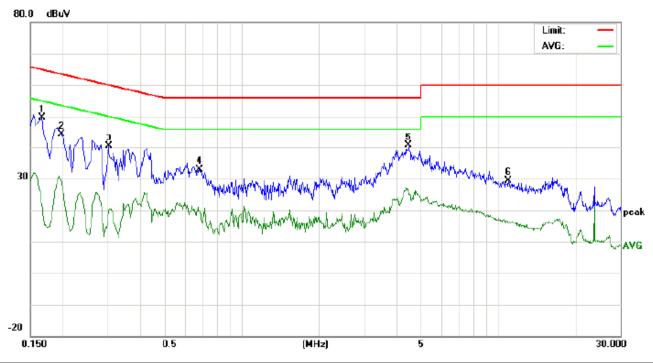

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone


M/N: Zoca D42z

Mode: Normal Operating(WIFI)

Note:

| No. | Freq.<br>(MHz) | Reading_Level<br>(dBuV) |    |       | Correct<br>Factor |       |    |       | Limit<br>(dBuV) |       | Margin<br>(dB) |        | P/F | Comment |
|-----|----------------|-------------------------|----|-------|-------------------|-------|----|-------|-----------------|-------|----------------|--------|-----|---------|
|     |                | Peak                    | QP | AVG   | dB                | Peak  | QP | AVG   | QP              | AVG   | QP             | AVG    |     |         |
| 1   | 0.1660         | 39.39                   |    | 11.42 | 10.18             | 49.57 |    | 21.60 | 65.15           | 55.15 | -15.58         | -33.55 | Р   |         |
| 2   | 0.1997         | 37.01                   |    | 19.04 | 10.21             | 47.22 |    | 29.25 | 63.62           | 53.62 | -16.40         | -24.37 | Р   |         |
| 3   | 0.3020         | 30.14                   |    | 9.67  | 10.29             | 40.43 |    | 19.96 | 60.19           | 50.19 | -19.76         | -30.23 | Р   |         |
| 4   | 0.6860         | 22.57                   |    | 9.47  | 10.34             | 32.91 |    | 19.81 | 56.00           | 46.00 | -23.09         | -26.19 | Р   |         |
| 5   | 4.4820         | 30.36                   |    | 15.61 | 10.22             | 40.58 |    | 25.83 | 56.00           | 46.00 | -15.42         | -20.17 | Р   |         |
| 6   | 10.9700        | 19.27                   |    | 6.03  | 10.10             | 29.37 |    | 16.13 | 60.00           | 50.00 | -30.63         | -33.87 | Р   |         |

## Line Conducted Emission Test Line 2-N

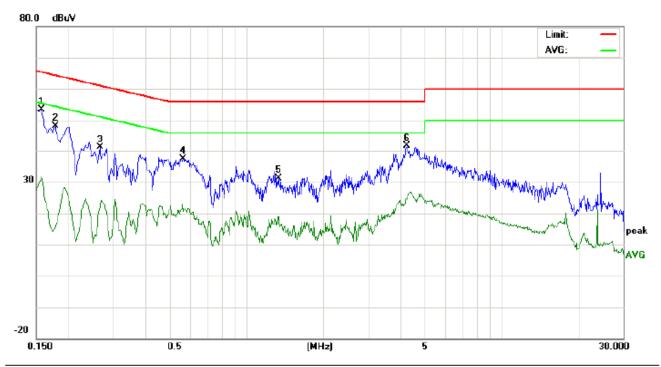

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z

Mode: Normal Operating(WIFI)

Note:

| No. | Freq.<br>(MHz) | Reading_Level<br>(dBuV) |    |       | Correct<br>Factor | 1     |    |       | Limit<br>(dBuV) |       | Margin<br>(dB) |        | P/F | Comment |
|-----|----------------|-------------------------|----|-------|-------------------|-------|----|-------|-----------------|-------|----------------|--------|-----|---------|
|     |                | Peak                    | QP | AVG   | dB                | Peak  | QP | AVG   | QP              | AVG   | QP             | AVG    |     |         |
| 1   | 0.1582         | 42.94                   |    | 17.12 | 10.17             | 53.11 |    | 27.29 | 65.55           | 55.55 | -12.44         | -28.26 | Р   |         |
| 2   | 0.1780         | 37.91                   |    | 5.42  | 10.19             | 48.10 |    | 15.61 | 64.57           | 54.57 | -16.47         | -38.96 | Р   |         |
| 3   | 0.2660         | 30.77                   |    | 12.11 | 10.28             | 41.05 |    | 22.39 | 61.24           | 51.24 | -20.19         | -28.85 | Р   |         |
| 4   | 0.5660         | 27.15                   |    | 10.19 | 10.34             | 37.49 |    | 20.53 | 56.00           | 46.00 | -18.51         | -25.47 | Р   |         |
| 5   | 1.3340         | 20.84                   |    | 8.50  | 10.38             | 31.22 |    | 18.88 | 56.00           | 46.00 | -24.78         | -27.12 | Р   |         |
| 6   | 4.2619         | 31.28                   |    | 14.07 | 10.31             | 41.59 |    | 24.38 | 56.00           | 46.00 | -14.41         | -21.62 | Р   |         |


Page 62 of 68

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

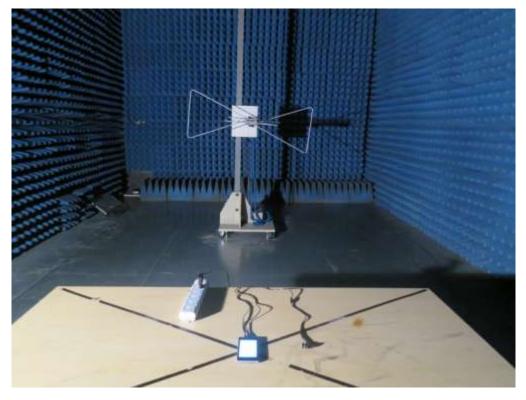


Page 63 of 68

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



**TOP VIEW OF EUT** 

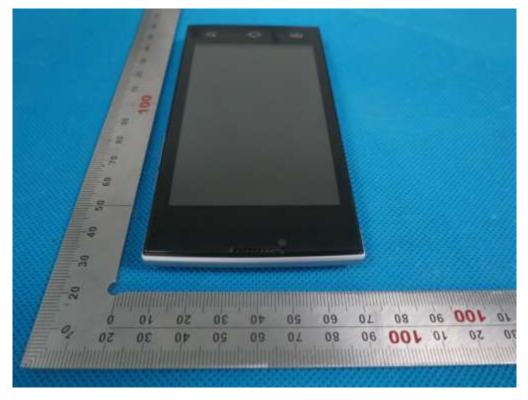

**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



LEFT VIEW OF EUT




Page 66 of 68

RIGHT VIEW OF EUT



**OPEN VIEW OF EUT-1** 

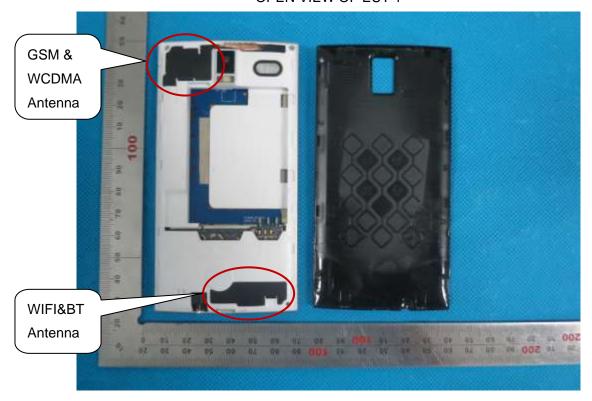

## **OPEN VIEW OF EUT-2**




### **OPEN VIEW OF EUT-3**




Page 68 of 68

## **INTERNAL VIEW OF EUT-1**

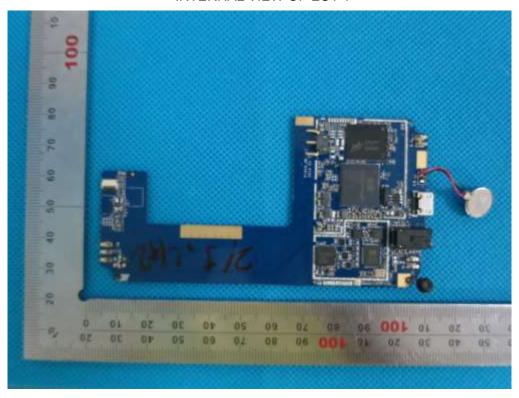

**INTERNAL VIEW OF EUT-2** 

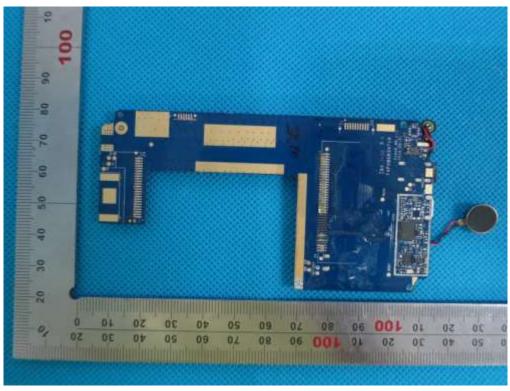

----END OF REPORT----