# **FCC Test Report**

Report No.: AGC02427140901FE08

FCC ID : 2AC83ZOCAD42Z

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: 4 inch Zoca D42Z 3G android phone

**BRAND NAME** : D3

**MODEL NAME** : Zoca D42z

CLIENT : HK VIsen Technology Co., Ltd.

**DATE OF ISSUE** : Sept.28, 2014

**STANDARD(S)** FCC Part 15.247

TEST PROCEDURE(S) KDB 558074 v03r02

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 49

## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes		
V1.0	/	Sept.28, 2014	Valid	Original Report		

## **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	
2.1PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 TEST FACILITY	6
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	6
3. SYSTEM TEST CONFIGURATION	<b>7</b>
3.2 EQUIPMENT USED IN TESTED SYSTEM	
4. SUMMARY OF TEST RESULTS	9
6.2. TEST RESULT	9
7. RADIATED EMISSION	
7.2 TEST SETUP	
7.3 LIMITS AND MEASUREMENT RESULT	12
7.4 TEST RESULT	
8.1. MEASUREMENT PROCEDURE	25
8.2. TEST SET-UP	
8.3. RADIATED TEST RUSULT	
8.4. CONDUCTED TEST RESULT	30
9.1. TEST EQUIPMENT LIST AND DETAILS	
9.2. TEST PROCEDURE	31
9.3. SUMMARY OF TEST RESULTS/PLOTS	
10. CONDUCTED OUTPUT POWER	<b>33</b>
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
10.3. LIMITS AND MEASUREMENT RESULT	
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	

Page 4 of 49

	PPENDIX B: PHOTOGRAPHS OF EUT	
ΑF	PPENDIX A: PHOTOGRAPHS OF TEST SETUP	43
	12.5 TEST RESULT OF POWER LINE	41
	12.4 FINAL TEST PROCEDURE	40
	12.3 PRELIMINARY PROCEDURE	40
	12.2 TEST SETUP	39
12	2. FCC LINE CONDUCTED EMISSION TEST	39
	11.4 LIMITS AND MEASUREMENT RESULT	
	11.3 MEASUREMENT EQUIPMENT USED	
	11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36

Page 5 of 49

#### 1. VERIFICATION OF COMPLIANCE

Applicant	HK VIsen Technology Co., Ltd.
Address	Room 505, 5c, Block CD, TianJing building , Tianan digital City, Che gong miao, Futian district, SZ., China
Manufacturer	HK VIsen Technology Co.,Ltd.
Address	Room 505,5c,Block CD,TianJing building,Tianan digital City, Che gong miao,Futian district,SZ.,China
Product Designation	4 inch Zoca D42Z 3G android phone
Brand Name	D3
Test Model	Zoca D42z
Date of test	Sept.22, 2014 to Sept. 27, 2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Matt Zhang Sept.28, 2014

Checked By

Kidd Yang Sept.28, 2014

Authorized By

Solger Zhang Sept.28, 2014

Page 6 of 49

## 2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "4 inch Zoca D42Z 3G android phone". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	0.8dBi
Hardware Version	P1909_MB_1V2
Software Version	N/A
Power Supply	DC3.7V by Built-in Li-ion Battery

#### 2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AC83ZOCAD42Z** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

#### 2.3TEST METHODOLOGY

All measurements contained in this report were conducted with KDB 558074 D01 DTS Meas Guidance v03r02, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

#### 2.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance (Shenzhen) Co, Ltd

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China.

FCC register No.: 259865

#### 2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

#### 2.6 EQUIPMENT MODIFICATIONS


Not available for this EUT intended for grant.

Page 7 of 49

## 3. SYSTEM TEST CONFIGURATION

## 3.1 CONFIGURATION OF TESTED SYSTEM

## Configuration:



## 3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone Zoca D42z FCC ID:2AC83ZOCAD42Z		FCC ID:2AC83ZOCAD42Z	EUT
2	Adapter	Zoca	DC5.0V / 500mA	Accessory
3	Battery	BL-4D	DC3.7V / 1000 mAh	Accessory
4	Earphone Zoca D42z N/A		N/A	Accessory
5	USB Cable	Zoca D42z	N/A	Accessory

## **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	Power Probe R&S		100323	07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/25/2014	07/24/2015
Amplifier	EM	EM30180	0607030	02/27/2014	02/26/2015
Horn Antenna EM		EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/25/2014	07/24/2015
Biological Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
Loop Antenna	A.H.	SAS-526B	264	07/13/2014	07/12/2015
LISN	R&S	ESH3-Z5	8389791009	07/25/2014	07/24/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 8 of 49

## 4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

### 5. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

NO.	TEST MODE DESCRIPTION					
1	Low channel TX					
2	Middle channel TX					
3	High channel TX					
4	Normal Operating (BT)					

#### Note:

- 1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Eut is operating at its maximum duty cycle>or equal 98%

Page 9 of 49

#### 6. ANTENNA REQUIREMENT

#### **6.1. STANDARD APPLICABLE**

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### **6.2. TEST RESULT**

This product has a permanent antenna, fulfill the requirement of this section.

Page 10 of 49

#### 7. RADIATED EMISSION

#### 7.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 11 of 49

#### 7.2 TEST SETUP

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

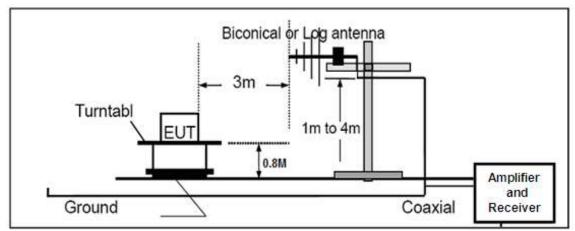

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

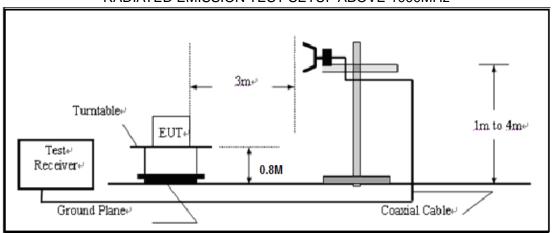

Page 12 of 49

#### 7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

#### 7.4 TEST RESULT


## **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 13 of 49

#### **RADIATED EMISSION BELOW 1GHZ**

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

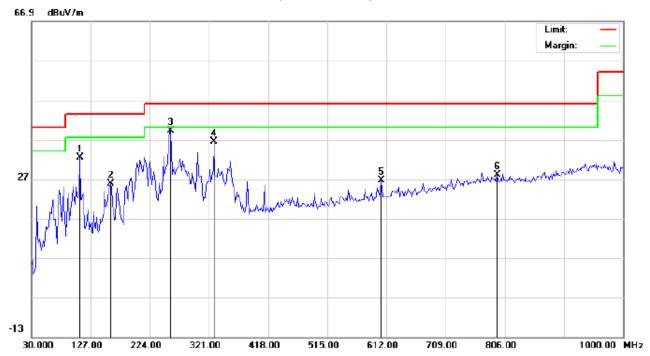

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m


M/N: Zoca D42z Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		109.2167	21.38	11.12	32.50	43.50	-11.00	peak			
2		159.3333	10.46	15.33	25.79	43.50	-17.71	peak			
3	*	257.9500	25.11	14.14	39.25	46.00	-6.75	peak			
4		329.0833	19.00	17.35	36.35	46.00	-9.65	peak			
5		603.9167	2.93	23.74	26.67	46.00	-19.33	peak			
6		793.0667	0.86	27.22	28.08	46.00	-17.92	peak			

Page 14 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

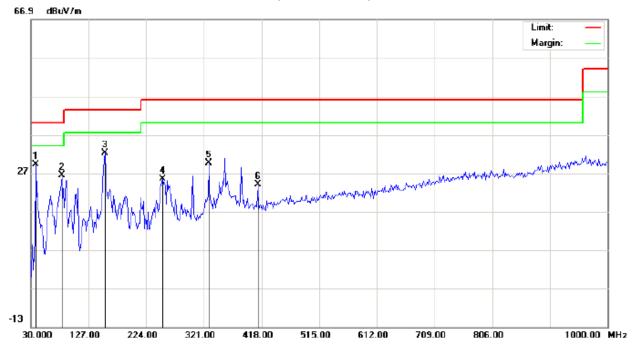

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z Mode: Low Channel TX

Note:


Polarization: Vertical Temperature: 26
Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	38.0833	22.72	6.39	29.11	40.00	-10.89	peak			
2		81.7333	24.03	2.42	26.45	40.00	-13.55	peak			
3		154.4833	16.85	15.29	32.14	43.50	-11.36	peak			
4		251.4833	11.55	13.94	25.49	46.00	-20.51	peak			
5		329.0833	12.20	17.35	29.55	46.00	-16.45	peak		·	
6		411.5333	4.50	19.42	23.92	46.00	-22.08	peak			

Page 15 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

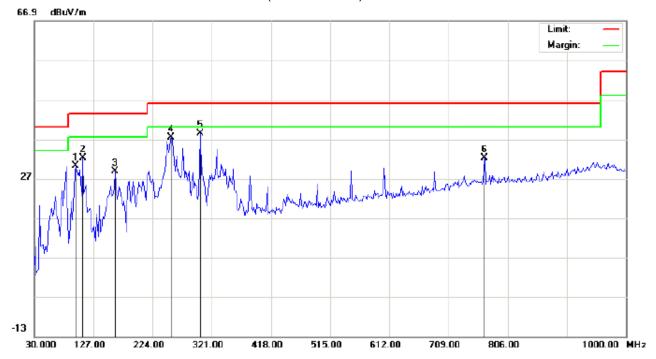

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		97.9000	19.88	10.25	30.13	43.50	-13.37	peak			
2		109.2167	21.11	11.12	32.23	43.50	-11.27	peak			
3		162.5667	14.02	14.78	28.80	43.50	-14.70	peak			
4		254.7167	23.36	14.04	37.40	46.00	-8.60	peak			
5	*	301.6000	22.89	15.52	38.41	46.00	-7.59	peak			
6		767.2000	5.28	26.87	32.15	46.00	-13.85	peak			

Page 16 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

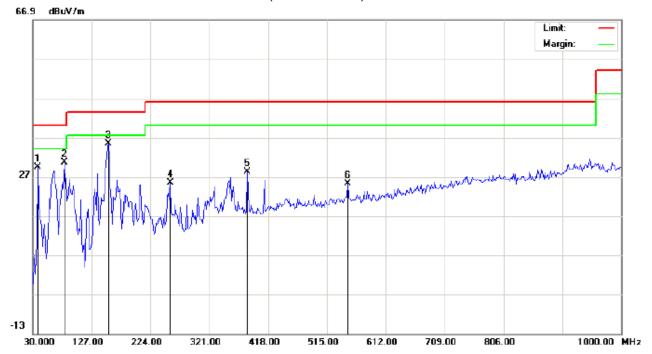

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		38.0833	22.99	6.39	29.38	40.00	-10.62	peak			
2		81.7333	28.18	2.42	30.60	40.00	-9.40	peak			
3	*	154.4833	20.17	15.29	35.46	43.50	-8.04	peak			
4		256.3333	11.31	14.09	25.40	46.00	-20.60	peak			
5		384.0500	9.26	18.96	28.22	46.00	-17.78	peak			
6		548.9500	2.80	22.45	25.25	46.00	-20.75	peak		·	

Page 17 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

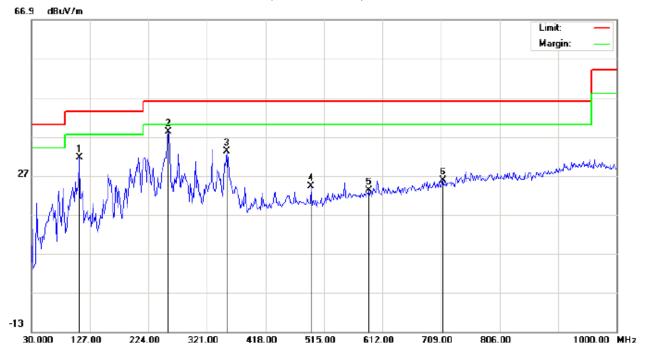

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance: 3m


M/N: Zoca D42z Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		109.2167	20.50	11.12	31.62	43.50	-11.88	peak			
2	*	256.3333	24.12	14.09	38.21	46.00	-7.79	peak			
3		353.3333	14.48	18.76	33.24	46.00	-12.76	peak			
4		493.9833	3.18	21.07	24.25	46.00	-21.75	peak			
5		589.3667	-0.27	23.46	23.19	46.00	-22.81	peak			
6		712.2333	0.27	25.54	25.81	46.00	-20.19	peak			

Page 18 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

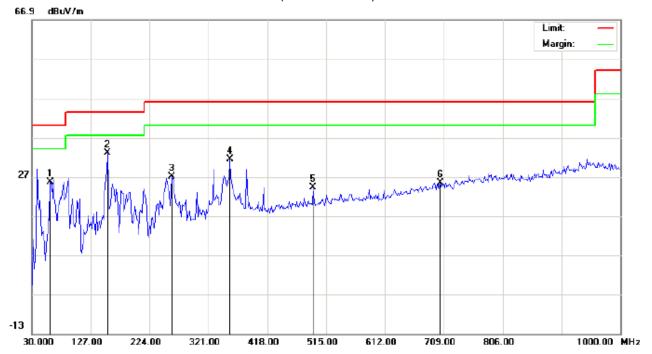

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		60.7167	17.81	7.87	25.68	40.00	-14.32	peak			
2	*	154.4833	17.76	15.29	33.05	43.50	-10.45	peak			
3		261.1833	12.83	14.24	27.07	46.00	-18.93	peak			
4		356.5667	12.71	18.78	31.49	46.00	-14.51	peak			
5		493.9833	3.15	21.07	24.22	46.00	-21.78	peak			
6		702.5333	0.15	25.26	25.41	46.00	-20.59	peak			

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 19 of 49

#### **RADIATED EMISSION ABOVE 1GHZ**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

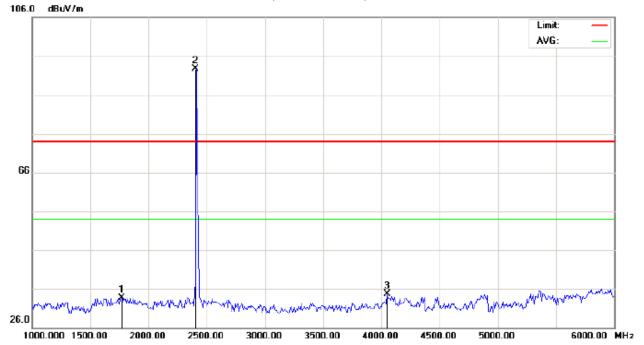

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:


M/N: Zoca D42z Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1766.667	46.23	-12.57	33.66	74.00	-40.34	peak			
2	*	2402.000	102.33	-9.68	92.65	74.00	18.65	peak			
3		4050.000	39.27	-4.64	34.63	74.00	-39.37	peak			

Page 20 of 49

## RADIATED EMISSION TEST-(ABOVE 1GHZ)-LOW CHANNEL-VERTICAL

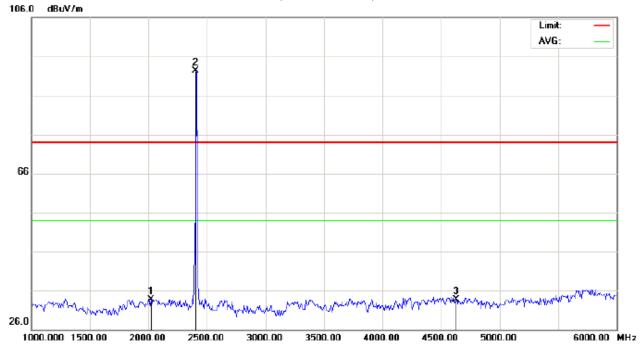

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:


M/N: Zoca D42z Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2025.000	43.85	-10.09	33.76	74.00	-40.24	peak			
2	*	2402.000	102.08	-9.68	92.40	74.00	18.40	peak			
3		4633.333	36.47	-2.76	33.71	74.00	-40.29	peak			

Page 21 of 49

## RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

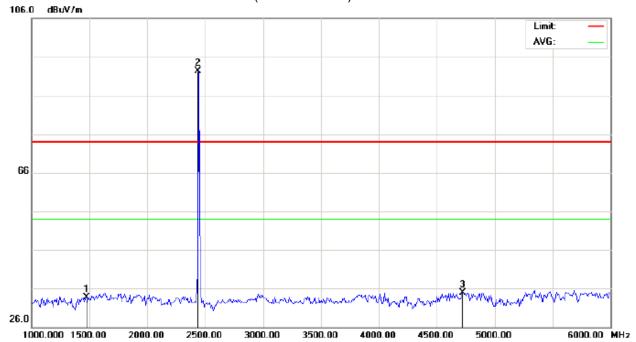

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1475.000	49.05	-15.39	33.66	74.00	-40.34	peak			
2	*	2440.000	101.88	-9.64	92.24	74.00	18.24	peak			
3		4725.000	37.52	-2.52	35.00	74.00	-39.00	peak			

Page 22 of 49

## RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-VERTICAL

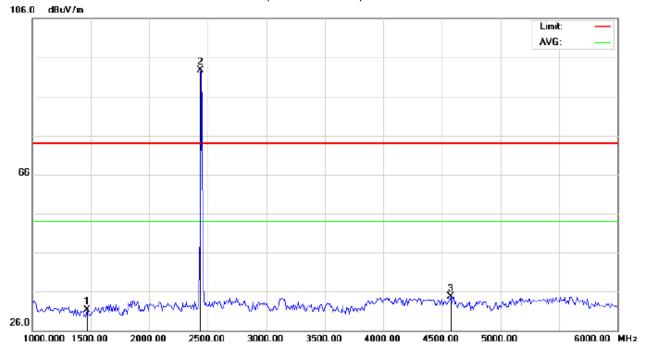

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		1466.667	46.67	-15.39	31.28	74.00	-42.72	peak			
2	*	2440.000	102.31	-9.64	92.67	74.00	18.67	peak			
3		4575.000	37.60	-2.91	34.69	74.00	-39.31	peak			

Page 23 of 49

## RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

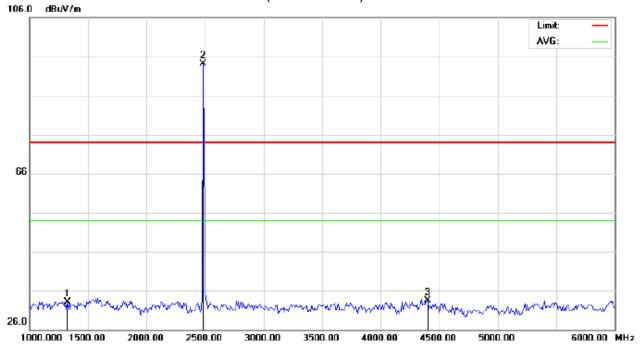

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1325.000	48.51	-15.45	33.06	74.00	-40.94	peak			
2	*	2480.000	103.67	-9.59	94.08	74.00	20.08	peak			
3		4400.000	36.92	-3.45	33.47	74.00	-40.53	peak			

Page 24 of 49

## RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-VERTICAL

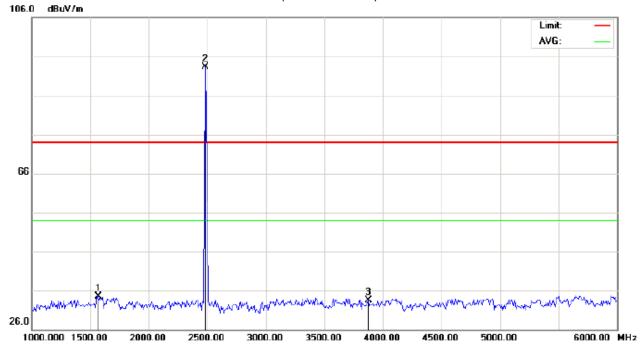

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		1566.667	49.27	-14.68	34.59	74.00	-39.41	peak			
2	*	2480.000	102.88	-9.59	93.29	74.00	19.29	peak			
3		3875.000	39.15	-5.58	33.57	74.00	-40.43	peak			

## **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 25 of 49

#### 8. BAND EDGE EMISSION

#### **8.1. MEASUREMENT PROCEDURE**

1)Radiated restricted band edge measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

- 2)Conducted Emissions at the bang edge
  - a)The transmitter output was connected to the spectrum analyzer
  - b)Set RBW=100kHz,VBW=300kHz
  - c)Suitable frequency span including 100kHz bandwidth from band edge

#### 8.2. TEST SET-UP

Radiated same as 6.2


Conducted set up



Page 26 of 49

#### 8.3. Radiated Test Result

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

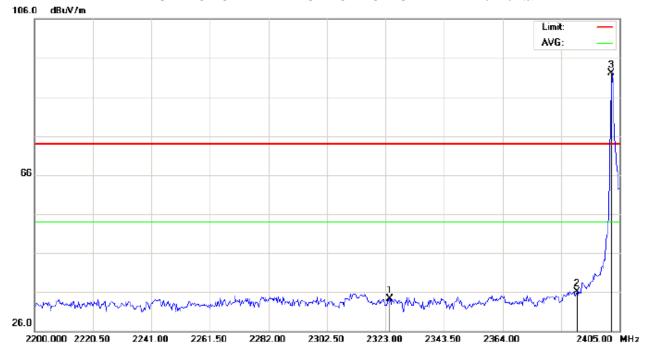

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2324.367	44.10	-9.76	34.34	74.00	-39.66	peak			
2		2390.000	45.71	-9.69	36.02	74.00	-37.98	peak			
3	*	2402.000	101.74	-9.68	92.06	74.00	18.06	peak			

Page 27 of 49

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2331.883	44.12	-9.75	34.37	74.00	-39.63	peak			
2		2390.000	45.84	-9.69	36.15	74.00	-37.85	peak			
3	*	2402.000	101.99	-9.68	92.31	74.00	18.31	peak			

Page 28 of 49

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal



Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment	
	-	MHz	dBu∀	dB/m	dBu\//m	dBu√/m	dB		cm	degree		
1	*	2480.000	102.96	-9.59	93.37	74.00	19.37	peak				
2		2483.500	47.56	-9.59	37.97	74.00	-36.03	peak				
3		2489.147	44.98	-9.58	35.40	74.00	-38.60	peak				

Page 29 of 49

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

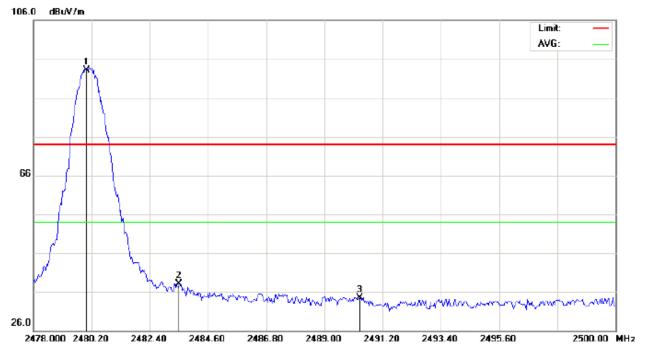

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone Distance:

M/N: Zoca D42z

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment	
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree		
1	*	2480.000	102.76	-9.59	93.17	74.00	19.17	peak				
2		2483.500	47.62	-9.59	38.03	74.00	-35.97	peak				
3		2490.320	44.08	-9.58	34.50	74.00	-39.50	peak				

#### **RESULT: PASS**


Note: The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 30 of 49

#### 8.4. Conducted Test Result

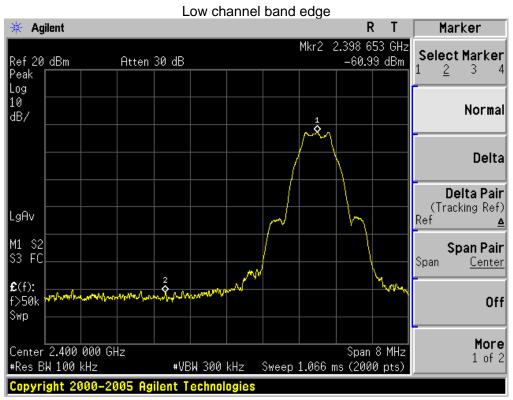

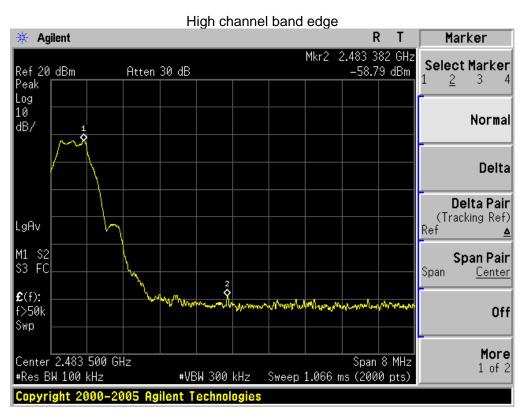

Page 31 of 49

#### 9. 6DB BANDWIDTH

## 9.1. TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	07/25/2014	07/24/2015
RECEIVER ANTENNA	ETS	2175	57337	07/25/2014	07/24/2015


#### 9.2. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### 9.3. SUMMARY OF TEST RESULTS/PLOTS


Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	694.068		Pass
Middle	695.305	500KHz	Pass
High	697.833		Pass



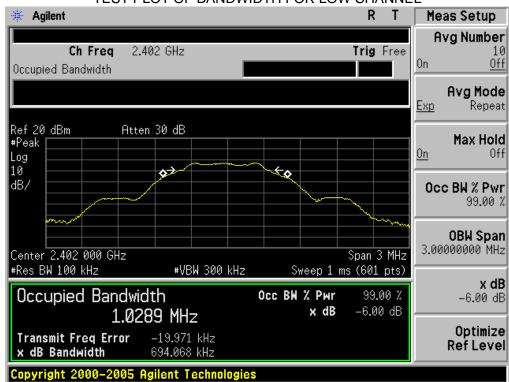

Page 32 of 49

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

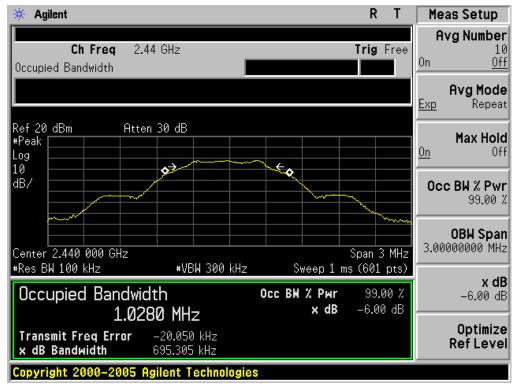

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Page 33 of 49

#### 10. CONDUCTED OUTPUT POWER

## **10.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:

Set the RBW ≥ DTS bandwidth

Set the VBW  $\geq$  3 x RBW

Set the span  $\geq$  3 x RBW

Detector = peak


Sweep time = auto couple

Trace mode = max hold

- 4. Allow the trace to stabilize. Use peak marker function to determine the peak amplitude level
- 5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

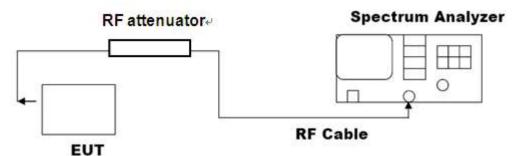


#### 10.3. LIMITS AND MEASUREMENT RESULT


Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-2.04	20	Pass
Middle Channel	-1.34	20	Pass
High Channel	-1.37	20	Pass

Page 34 of 49


The Low Channel Result

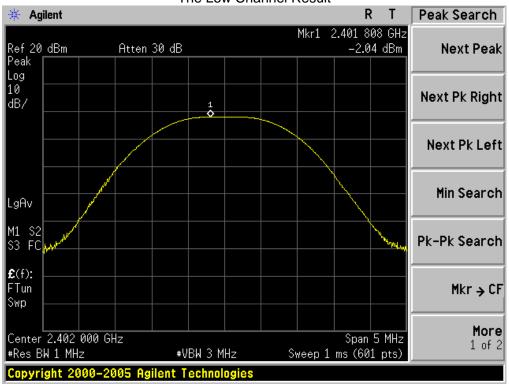

The Middle Channel Result

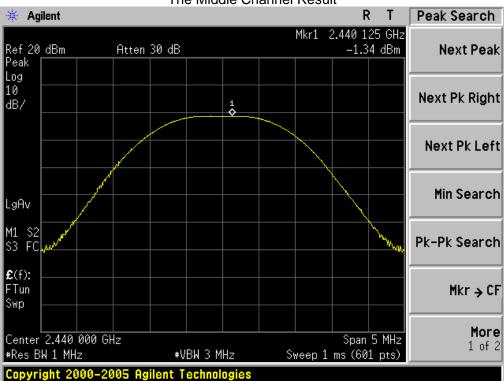

Page 35 of 49

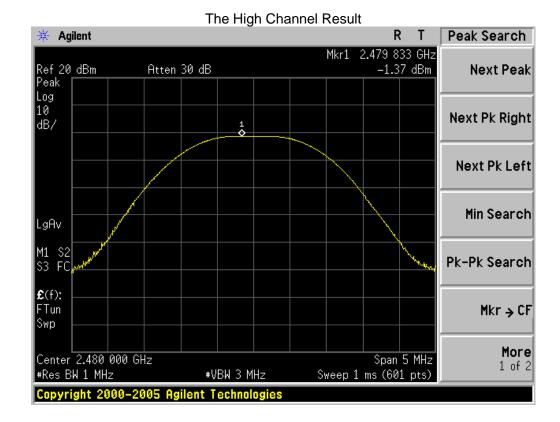


Page 36 of 49

## 11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

## 11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

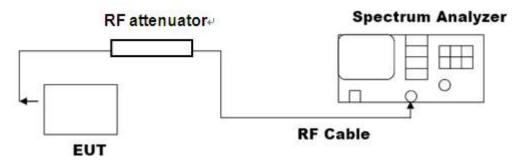

#### 11.3 MEASUREMENT EQUIPMENT USED


Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	07/25/2014	07/24/2015
RECEIVER ANTENNA	ETS	2175	57337	07/25/2014	07/24/2015

#### 11.4 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-17.43	8	Pass
Middle Channel	-16.75	8	Pass
High Channel	-16.76	8	Pass

Page 37 of 49

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

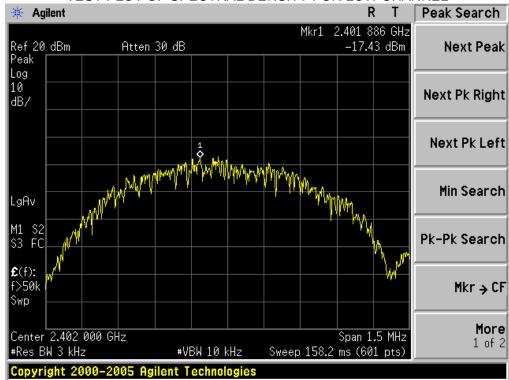


#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

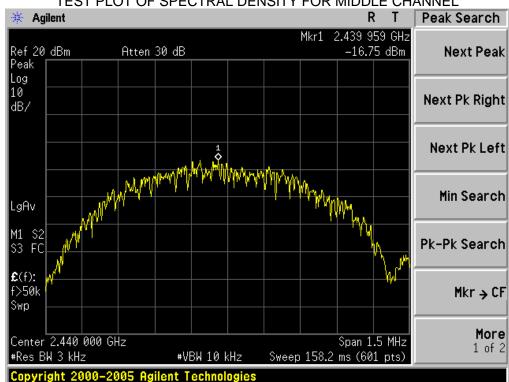

Page 38 of 49

## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

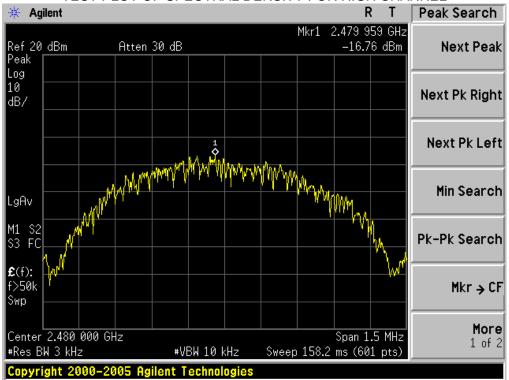

Page 39 of 49


# 12. FCC LINE CONDUCTED EMISSION TEST

# **12.1 LIMITS**

Eroguenov	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

<sup>\*\*</sup>Note: 1. The lower limit shall apply at the transition frequency.

# **12.2 TEST SETUP**

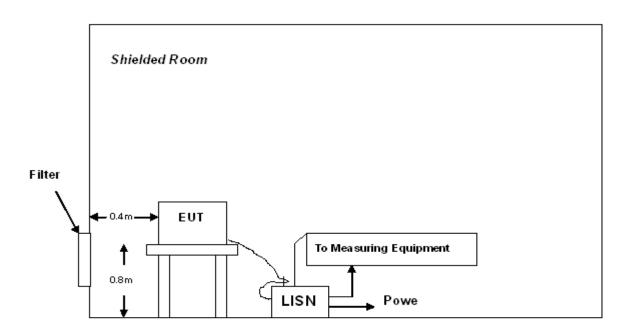

A: Powered through filter

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 40 of 49

#### 12.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### **12.4 FINAL TEST PROCEDURE**


- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 41 of 49

## 12.5 TEST RESULT OF POWER LINE

## Line Conducted Emission Test Line 1-L

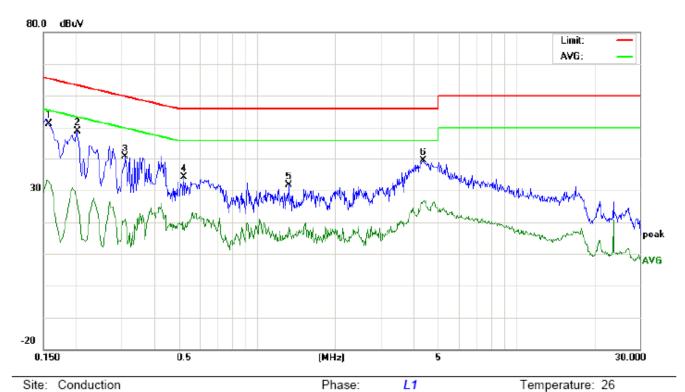

Limit: FCC Class B Conduction(QP)

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z

Mode: Normal Operating(BT)

Note:


No.	Freq.	Reading_Level (dBuV)			Correct Measurement Factor (dBuV)				Limit (dBuV)		Margin (dB)		P/F	Comment
(M	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1590	41.57		19.23	10.17	51.74		29.40	65.51	55.51	-13.77	-26.11	Р	
2	0.2020	38.66		16.78	10.22	48.88		27.00	63.52	53.52	-14.64	-26.52	Р	
3	0.3100	30.31		10.60	10.29	40.60		20.89	59.97	49.97	-19.37	-29.08	Р	
4	0.5220	23.68		8.54	10.38	34.06		18.92	56.00	46.00	-21.94	-27.08	Р	
5	1.3300	21.32		8.00	10.38	31.70		18.38	56.00	46.00	-24.30	-27.62	Р	
6	4.3820	29.02		16.47	10.26	39.28		26.73	56.00	46.00	-16.72	-19.27	Р	

Power:

AC 120V/60Hz

Page 42 of 49

## Line Conducted Emission Test Line 1-N

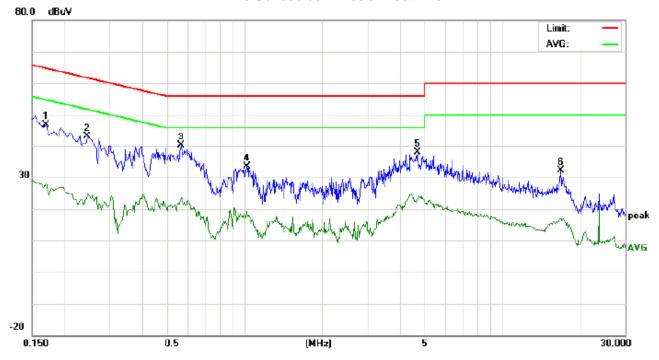

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 4 inch Zoca D42Z 3G android phone

M/N: Zoca D42z

Mode: Normal Operating(BT)

Note:

IINO I	Freq.	Reading_Level (dBuV)			Correct Measurement Factor (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	•	
1	0.1700	36.79		17.59	10.18	46.97		27.77	64.96	54.96	-17.99	-27.19	Р	
2	0.2460	32.88		14.77	10.27	43.15		25.04	61.89	51.89	-18.74	-26.85	Р	
3	0.5700	29.74		13.20	10.34	40.08		23.54	56.00	46.00	-15.92	-22.46	Р	
4	1.0220	23.02		8.79	10.37	33.39		19.16	56.00	46.00	-22.61	-26.84	Р	
5	4.7140	27.70		12.94	10.22	37.92		23.16	56.00	46.00	-18.08	-22.84	Р	
6	16.8779	21.92		6.73	10.13	32.05		16.86	60.00	50.00	-27.95	-33.14	Р	


Page 43 of 49

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP





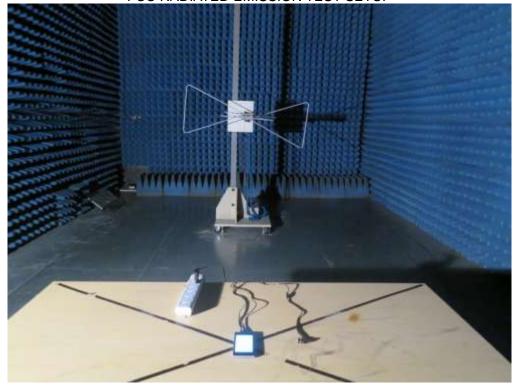


Page 44 of 49

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT

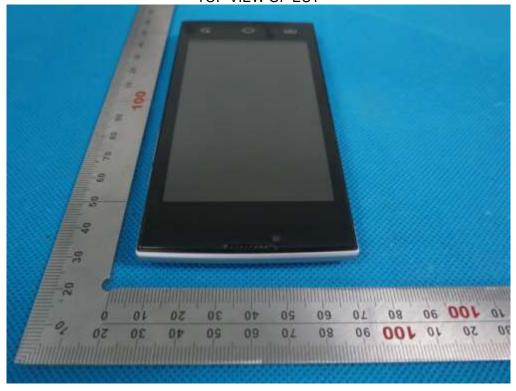

Page 45 of 49









Page 46 of 49










Page 47 of 49




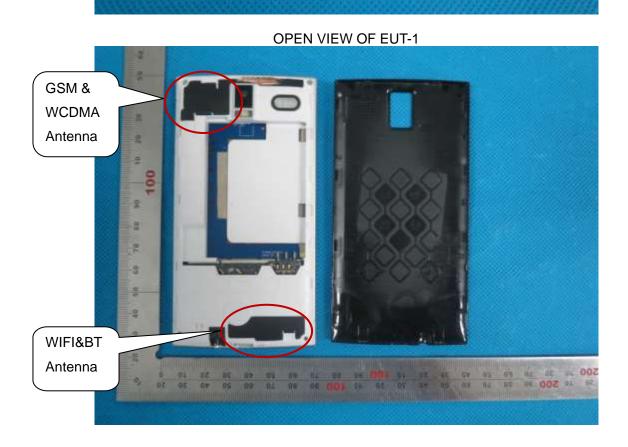

10 400 80

Page 48 of 49



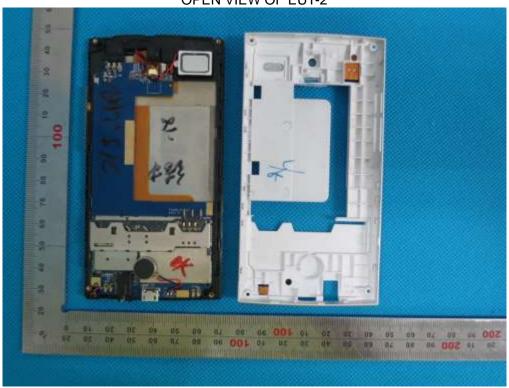


**OPEN VIEW OF EUT-3** 



Page 49 of 49



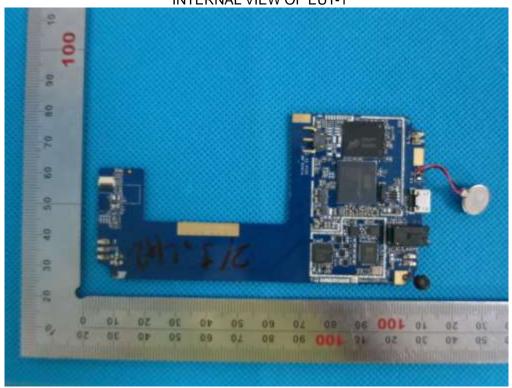

**INTERNAL VIEW OF EUT-2** 



----END OF REPORT----