

TEST REPORT

Reference No..... : WTS17S0169025-3E V1
FCC ID : 2AC88-G1611
Applicant..... : HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED
Address..... : Unit D.16F.chenknang plaza 250 Hennessy Road, Wanchai
Hongkong
Manufacturer : Shenzhen uCloudlink Network Technology, Co., Ltd
Address..... : 3rd Floor, A Part of Building 1, Shenzhen Software Industry Base,
nanshan district xuefu Road, Post Code 518057, Shenzhen City,
Guangdong Province, P.R.China
Product Name..... : 4G Wireless Data Terminal
Model No..... : G1611
Brand..... : GlocalMe
Standards..... : FCC CFR47 Part 22 Subpart H: 2016
FCC CFR47 Part 24 Subpart E: 2016
FCC CFR47 Part 27 Subpart L: 2016
Date of Receipt sample : Jan. 05, 2017
Date of Test : Jan. 06 ~ Mar. 12, 2017
Date of Issue..... : Apr. 05, 2017
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services Test Group Ltd is a professional third-party testing and certification organization with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by CNAS (China National Accreditation Service for Conformity Assessment) AQSIQ, CMA and IECEE for CBTL. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc.



Waltek Services Test Group Ltd. is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen and have branches in Foshan, Dongguan, Zhongshan, Suzhou, Ningbo and Hong Kong, Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), reliability and energy performance, Chemical test. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION	2
3 CONTENTS	3
4 REVISION HISTORY	5
5 GENERAL INFORMATION.....	6
5.1 GENERAL DESCRIPTION OF E.U.T.	6
5.2 DETAILS OF E.U.T.	6
5.3 TEST MODE	9
5.4 TEST FACILITY.....	9
6 TEST SUMMARY	10
7 EQUIPMENT USED DURING TEST	11
7.1 EQUIPMENTS LIST	11
7.2 MEASUREMENT UNCERTAINTY	12
7.3 TEST EQUIPMENT CALIBRATION	12
8 RF OUTPUT POWER	13
8.1 EUT OPERATION.....	13
8.2 TEST PROCEDURE	13
8.3 TEST RESULT	14
9 PEAK-TO-AVERAGE RATIO.....	26
9.1 EUT OPERATION.....	26
9.2 TEST PROCEDURE	26
9.3 TEST RESULT	27
10 BANDWIDTH.....	33
10.1 EUT OPERATION.....	33
10.2 TEST PROCEDURE.....	33
10.3 TEST RESULT	34
11 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	54
11.1 EUT OPERATION.....	54
11.2 TEST PROCEDURE.....	54
11.3 TEST RESULT	55
12 SPURIOUS RADIATED EMISSIONS.....	81
12.1 EUT OPERATION.....	81
12.2 TEST SETUP	81
12.3 SPECTRUM ANALYZER SETUP	82
12.4 TEST PROCEDURE.....	83
12.5 SUMMARY OF TEST RESULTS	84
13 BAND EDGE MEASUREMENT	86
13.1 EUT OPERATION.....	86
13.2 TEST PROCEDURE.....	86
13.3 TEST RESULT	87
14 FREQUENCY STABILITY.....	113
14.1 EUT OPERATION.....	113
14.2 TEST PROCEDURE.....	113

14.3 TEST RESULT 114

15 RF EXPOSURE.....130

16 PHOTOGRAPHS OF TEST SETUP AND EUT.....131

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0169025-3E	Jan.05, 2017	Jan.06 ~ Mar.12, 2017	Mar.13, 2017	original	-	Replaced
WTS17S0169025-3E V1	Jan.05, 2017	Jan.06 ~ Mar.12, 2017	Apr. 05, 2017	Version 1	Updated	Valid

5 General Information

5.1 General Description of E.U.T.

Product Name:	4G Wireless Data Terminal
Model No.:	G1611
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
CDMA2000 Band(s):	BC0/ BC1
WCDMA Band(s):	FDD Band I/II/IV/V/VIII
LTE Band(s):	FDD Band 2/4/5/17/41
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	G3 VER.B
Software Version:	G3_HTSV1.1.001.003.170112
storage location:	Internal Storage
Test Exercise:	The EUT was operated in a normal mode.
Note:	Main board(Modem1): The EUT Main board support GSM850/900/DCS1800/PCS1900, WCDMA Band 1/2/4/5/8, CDMA2000 BC0/BC1, LTE Band 2/4/5/17/41 function. It is intended for speech, Multimedia Message Service (MMS) transmission and 4G free roaming hotspot. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900, GPS,Bluetooth and Wi-Fi functions. For more information see the following datasheet.
	Vice board(Modem2): The EUT Vice board support GSM850/900/DCS1800/PCS1900, WCDMA Band 1/2/4/5/8, CDMA2000 BC0/BC1,. It is intended for system localization. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900

5.2 Details of E.U.T.

Operation Frequency:	GPRS/EDGE 850: 824~849MHz
	GPRS/EDGE 1900: 1850~1910MHz
	CDMA2000 BC0: 824.70~848.31MHz
	CDMA2000 BC1: 1851.25~1908.75MHz
	WCDMA Band II: 1850~1910MHz
	WCDMA Band IV: 1710~1755MHz
	WCDMA Band V: 824~849MHz
	LTE Band 2: 1850~1910MHz
	LTE Band 4: 1710~1755MHz

	LTE Band 5: 823~850MHz
	LTE Band 17: 704~716MHz
	LTE Band 41: 2498~2688MHz
	WiFi:
	802.11b/g/n HT20: 2412~2462MHz
	Bluetooth: 2402~2480MHz
Max. RF output power:	Main Board:
	GSM 850: 32.83dBm
	PCS1900:30.09dBm
	WCDMA Band II: 22.29dBm
	WCDMA Band IV: 22.54dBm
	WCDMA Band V: 22.21dBm
	CDMA2000 BC 0: 24.82dBm
	CDMA2000 BC 1: 24.59dBm
	LTE Band 2: 22.99dBm
	LTE Band 4: 23.52dBm
	LTE Band 5: 22.66dBm
	LTE Band 17: 22.68dBm
	LTE Band 41: 23.80dBm
	Vice Board:
	GSM 850: 32.89dBm
	PCS1900:30.05dBm
	WCDMA Band II: 22.78dBm
	WCDMA Band V: 22.46dBm
	WCDMA Band IV: 22.56dBm
	CDMA2000 BC 0: 24.65dBm
	CDMA2000 BC 1: 24.44dBm
	WiFi(2.4G): 9.41dBm
	Bluetooth: 7.73dBm
Type of Modulation:	GPRS: GMSK
	EDGE: GMSK, 8PSK
	CDMA2000:QPSK, 8PSK
	WCDMA: BPSK, 16QAM
	LTE: QPSK, 16QAM
	WiFi: CCK, OFDM
	Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation:	GSM/WCDMA/CDMA2000/LTE: internal permanent antenna
	WiFi/Bluetooth: internal permanent antenna
Antenna Gain	GSM 850: 3.47dBi
(Main board same as	PCS1900: 1.77dBi
vice board):	CDMA2000 BC0: -0.3dBi

	CDMA2000 BC1: -1.9dBi
	WCDMA Band II: 1.77dBi
	WCDMA Band V: 3.47dBi
	WCDMA Band IV: 2.2dBi
	LTE Band 2: 1.77dBi
	LTE Band 4: 2.2dBi
	LTE Band 5: 3.47dBi
	LTE Band 17: 5.20dBi
	LTE Band 41: 0.75dBi
	WiFi(2.4G): 1.4dBi
	Bluetooth: 1.4dBi
Technical Data:	Input: DC 3.8V, 5350mWh by battery, or DC 5V, 1.0A by USB port
	Output: 5V 1.0A by USB port
Type of Emission:	Main Board: GPRS850: 246KGXW, EGPRS850: 243KG7W GPRS1900: 243KGXW, EGPRS1900: 244KG7W WCDMA850: 4M13F9W, WCDMA1900: 4M16F9W, WCDMA1700: 4M17F9W Vice Board: GPRS850: 242KGXW, EGPRS850: 240KG7W GPRS1900: 247KGXW, EGPRS1900: 241KG7W WCDMA850: 4M16F9W, WCDMA1900: 4M16F9W, WCDMA1700: 4M17F9W

5.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Support Band	Test Mode	Channel Frequency	Channel Number
GSM 850	GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band V	WCDMA/HSUPA/HSDPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band II	WCDMA/HSUPA/HSDPA	1852.4MHz	9262
		1880.0MHz	9400
		1907.6MHz	9538
WCDMA Band IV	WCDMA/HSUPA/HSDPA	1712.4MHz	1313
		1732.6MHz	1413
		1752.6MHz	1512
Remark: All mode(s) were tested and the worst data was recorded.			

5.4 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

6 Test Summary

Test Items	Test Requirement	Result
RF Output Power	2.1046 22.913 (a) 24.232 (c) 27.50(c) 27.50(d)	PASS
Peak-to-Average Ratio	24.232 (d) 27.50(d)	PASS
Bandwidth	2.1049 22.905 22.917 24.238 27.53(a)	PASS
Spurious Emissions at Antenna Terminal	2.1051 22.917 (a) 24.238 (a) 27.53(h)	PASS
Field Strength of Spurious Radiation	2.1053 22.917 (a) 24.238 (a) 27.53(h)	PASS
Out of band emission, Band Edge	22.917 (a) 24.238 (a) 27.53(h)	PASS
Frequency Stability	2.1055 22.355 24.235 27.5(h) 27.54	PASS
Maximum Permissible Exposure (SAR)	1.1307 2.1093	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12,2016	Sep.11,2017
2.	LISN	R&S	ENV216	101215	Sep.12,2016	Sep.11,2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12,2016	Sep.11,2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12,2016	Sep.11,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12,2016	Sep.11,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12,2016	Sep.11,2017
4.	Cable	LARGE	RF300	-	Sep.12,2016	Sep.11,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2016	Apr.28, 2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Apr.09,2016	Apr.08,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.09,2016	Apr.08,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12,2016	Sep.11,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09,2016	Apr.08,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09,2016	Apr.08,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13,2016	Apr.12,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.13,2016	Apr.12,2017
9	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.13,2016	Apr.12,2017
10	Signal Generator	R&S	SMR20	100046	Sep.12,2016	Sep.11,2017
11	Smart Antenna	SCHWARZBECK	HA08	-	Apr.09,2016	Apr.08,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date

1	Test Receiver	R&S	ESCI	101296	Apr.13,2016	Apr.12,2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09,2016	Apr.08,2017
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13,2016	Apr.12,2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13,2016	Apr.12,2017
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12,2016	Sep.11,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12,2016	Sep.11,2017
3.	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.13,2016	Apr.12,2017
4	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12,2016	Sep.11,2017

7.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 RF OUTPUT POWER

Test Requirement:	FCC Part 2.1046, 22.913 (a), 24.232 (c), 27.50(c.10); 27.50(d.4)
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v02r02
Test Mode:	TX transmitting

8.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

8.2 Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

1. The setup of EUT is according with per TIA/EIA Standard 603D measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

8.3 Test Result

Modem 1

Conducted Power

GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GPRS (1 slot)	32.66	32.80	32.83	29.55	30.02	30.90
GPRS (2 slots)	31.48	31.69	31.47	28.59	28.69	28.47
GPRS (3 slots)	30.49	30.24	30.17	27.18	27.49	27.34
GPRS (4 slots)	29.35	29.09	29.18	26.51	26.20	26.42
EGPRS (1 slot)	26.66	26.75	27.02	25.46	25.67	25.92
EGPRS (2 slots)	25.78	25.74	25.62	24.37	24.41	24.44
EGPRS (3 slots)	24.67	24.59	24.61	23.33	23.41	23.50
EGPRS (4 slots)	23.35	23.41	23.47	22.37	22.42	22.49

WCDMA - Average Power (dBm)									
Band	WCDMA Band II			WCDMA Band V			WCDMA Band IV		
Channel	9262	9400	9538	4132	4183	4233	1313	1413	1512
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.6	846.6	1712.4	1732.6	1752.6
RMC 12.2k	22.13	22.29	22.19	22.21	22.19	22.20	22.47	22.45	22.54
HSDPA Subtest-1	21.34	21.37	21.24	21.12	21.16	21.22	21.20	21.19	21.18
HSDPA Subtest-2	21.34	21.09	21.18	21.06	21.3.4	21.15	21.18	21.10	21.11
HSDPA Subtest-3	21.29	21.47	21.28	21.58	21.49	21.67	21.13	21.17	21.20
HSDPA Subtest-4	21.33	21.31	21.26	21.34	21.10	21.30	21.15	21.08	21.14
HSUPA Subtest-1	21.31	21.28	21.20	21.08	21.17	21.29	21.21	21.73	21.51
HSUPA Subtest-2	21.54	21.64	21.36	21.47	21.23	21.15	21.15	21.10	21.11
HSUPA Subtest-3	21.21	21.23	21.24	21.17	21.27	21.31	21.13	21.12	21.18
HSUPA Subtest-4	21.19	21.38	21.16	21.09	21.47	21.52	21.08	21.11	21.12
HSUPA Subtest-5	21.24	21.43	21.15	21.67	21.78	21.80	21.14	21.09	21.15

Modem 2

Conducted Power

GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GPRS (1 slot)	32.89	32.75	32.87	30.05	29.93	30.01
GPRS (2 slots)	31.59	31.47	31.58	28.56	28.47	28.59
GPRS (3 slots)	30.25	30.58	30.54	27.32	27.48	27.65
GPRS (4 slots)	29.65	29.31	29.58	27.59	27.65	27.58
EGPRS (1 slot)	27.09	26.87	26.71	26.25	25.91	25.20
EGPRS (2 slots)	25.36	25.89	25.48	24.65	24.78	24.39
EGPRS (3 slots)	24.65	24.78	24.32	23.65	23.47	23.69
EGPRS (4 slots)	23.69	23.65	23.48	22.58	22.36	22.45

WCDMA - Average Power (dBm)									
Band	WCDMA Band II			WCDMA Band V			WCDMA Band IV		
Channel	9262	9400	9538	4132	4183	4233	1313	1413	1512
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.6	846.6	1712.4	1732.6	1752.6
RMC 12.2k	22.02	22.37	22.47	22.18	22.08	22.16	22.38	22.42	22.35
HSDPA Subtest-1	21.10	21.20	21.27	21.37	21.13	21.20	21.35	21.17	21.46
HSDPA Subtest-2	21.67	21.47	21.25	21.48	21.47	21.65	21.22	21.13	21.24
HSDPA Subtest-3	21.36	21.21	21.34	21.35	21.47	21.58	21.15	21.17	21.20
HSDPA Subtest-4	21.35	21.14	21.58	21.47	21.65	21.35	21.20	21.11	21.24
HSUPA Subtest-1	21.11	21.26	21.38	21.30	21.16	21.22	21.35	21.25	21.43
HSUPA Subtest-2	21.47	21.59	21.35	21.47	21.35	21.48	21.18	21.33	21.23
HSUPA Subtest-3	21.47	21.36	21.47	21.35	21.36	21.47	21.13	21.12	21.09
HSUPA Subtest-4	21.52	21.31	21.17	21.58	21.36	21.31	21.14	21.10	21.11
HSUPA Subtest-5	21.47	21.58	21.47	21.29	21.24	21.37	21.13	21.14	21.08

Radiated Power

Modem 1

ERP and EIRP

Cellular Band 850 (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 850 Channel 128										
824.20	93.95	252	1.1	H	26.92	0.20	0.00	26.72	38.45	-11.73
824.20	97.92	277	1.4	V	30.82	0.20	0.00	30.62	38.45	-7.83
GPRS 850 Channel 190										
836.60	90.17	258	2.2	H	23.14	0.20	0.00	22.94	38.45	-15.51
836.60	97.16	243	2.3	V	30.06	0.20	0.00	29.86	38.45	-8.59
GPRS 850 Channel 251										
848.80	90.79	184	2.4	H	23.76	0.20	0.00	23.56	38.45	-14.89
848.80	97.89	22	1.3	V	30.79	0.20	0.00	30.59	38.45	-7.86
EGPRS 850 Channel 128										
824.20	87.06	173	1.9	H	20.03	0.20	0.00	19.83	38.45	-18.62
824.20	92.42	103	1.6	V	25.32	0.20	0.00	25.12	38.45	-13.33
EGPRS 850 Channel 190										
836.60	86.20	200	2.2	H	19.17	0.20	0.00	18.97	38.45	-19.48
836.60	92.51	326	1.8	V	25.41	0.20	0.00	25.21	38.45	-13.24
EGPRS 850 Channel 251										
848.80	86.33	170	1.1	H	19.30	0.20	0.00	19.10	38.45	-19.35
848.80	92.03	154	1.9	V	24.93	0.20	0.00	24.73	38.45	-13.72

Cellular Band 1900 (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 24E	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 1900 Channel 512										
1850.20	87.55	207	1.8	H	13.58	0.31	10.40	23.67	33	-9.33
1850.20	92.87	103	1.1	V	19.59	0.31	10.40	29.68	33	-3.32
GPRS 1900 Channel 661										
1880.00	86.42	246	1.2	H	12.57	0.31	10.40	22.66	33	-10.34
1880.00	92.84	204	1.4	V	19.72	0.31	10.40	29.81	33	-3.19
GPRS 1900 Channel 810										
1909.80	85.95	57	2.5	H	12.22	0.32	10.40	22.30	33	-10.70
1909.80	92.17	207	1.2	V	19.21	0.32	10.40	29.29	33	-3.71
EGPRS 1900 Channel 512										
1850.20	82.93	319	1.8	H	8.96	0.31	10.40	19.05	33	-13.95
1850.20	88.23	97	1.1	V	14.95	0.31	10.40	25.04	33	-7.96
EGPRS 1900 Channel 661										
1880.00	84.67	56	1.9	H	10.82	0.31	10.40	20.91	33	-12.09
1880.00	88.23	91	1.9	V	15.11	0.31	10.40	25.20	33	-7.80
EGPRS 1900 Channel 810										
1909.80	82.08	266	2.3	H	8.35	0.32	10.40	18.43	33	-14.57
1909.80	88.65	195	1.4	V	15.69	0.32	10.40	25.77	33	-7.23

WCDMA Band V (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band V RMC 12.2k Channel 4132										
826.40	76.08	15	2.3	H	9.05	0.20	0.00	8.85	38.45	-29.60
826.40	84.17	25	1.1	V	17.07	0.20	0.00	16.87	38.45	-21.58
WCDMA Band V RMC 12.2k Channel 4183										
836.60	76.93	205	1.5	H	9.90	0.20	0.00	9.70	38.45	-28.75
836.60	84.03	179	1.2	V	16.93	0.20	0.00	16.73	38.45	-21.72
WCDMA Band V RMC 12.2k Channel 4233										
846.60	77.00	114	2.4	H	9.97	0.20	0.00	9.77	38.45	-28.68
846.60	84.25	14	1.8	V	17.15	0.20	0.00	16.95	38.45	-21.50
WCDMA Band V HSDPA Channel 4132										
826.40	76.74	286	1.8	H	9.71	0.20	0.00	9.51	38.45	-28.94
826.40	84.56	296	1.3	V	17.46	0.20	0.00	17.26	38.45	-21.19
WCDMA Band V HSDPA Channel 4183										
836.60	79.01	14	1.0	H	11.98	0.20	0.00	11.78	38.45	-26.67
836.60	84.38	54	1.1	V	17.28	0.20	0.00	17.08	38.45	-21.37
WCDMA Band V HSDPA Channel 4233										
846.60	78.67	35	1.2	H	11.64	0.20	0.00	11.44	38.45	-27.01
846.60	84.88	128	1.1	V	17.78	0.20	0.00	17.58	38.45	-20.87
WCDMA Band V HSUPA Channel 4132										
826.40	78.80	135	1.2	H	11.77	0.20	0.00	11.57	38.45	-26.88
826.40	84.45	139	1.7	V	17.35	0.20	0.00	17.15	38.45	-21.30
WCDMA Band V HSUPA Channel 4183										
836.60	79.61	319	1.3	H	12.58	0.20	0.00	12.38	38.45	-26.07
836.60	84.09	145	1.5	V	16.99	0.20	0.00	16.79	38.45	-21.66
WCDMA Band V HSUPA Channel 4233										
846.60	77.01	211	1.8	H	9.98	0.20	0.00	9.78	38.45	-28.67
846.60	84.57	295	2.0	V	17.47	0.20	0.00	17.27	38.45	-21.18

WCDMA Band II (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 24E	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band II RMC 12.2k Channel 9262										
1852.40	77.59	97	1.3	H	3.62	0.31	10.40	13.71	33	-19.29
1852.40	84.76	47	1.6	V	11.48	0.31	10.40	21.57	33	-11.43
WCDMA Band II RMC 12.2k Channel 9400										
1880.00	76.73	261	1.4	H	2.88	0.31	10.40	12.97	33	-20.03
1880.00	84.90	126	2.3	V	11.78	0.31	10.40	21.87	33	-11.13
WCDMA Band II RMC 12.2k Channel 9538										
1907.60	79.96	81	1.1	H	6.23	0.32	10.40	16.31	33	-16.69
1907.60	84.89	175	1.5	V	11.93	0.32	10.40	22.01	33	-10.99
WCDMA Band II HSDPA Channel 9262										
1852.40	79.80	43	1.9	H	5.83	0.31	10.40	15.92	33	-17.08
1852.40	84.93	205	2.1	V	11.65	0.31	10.40	21.74	33	-11.26
WCDMA Band II HSDPA Channel 9400										
1880.00	77.27	180	2.1	H	3.42	0.31	10.40	13.51	33	-19.49
1880.00	84.44	264	2.5	V	11.32	0.31	10.40	21.41	33	-11.59
WCDMA Band II HSDPA Channel 9538										
1907.60	76.24	146	2.2	H	2.51	0.32	10.40	12.59	33	-20.41
1907.60	84.92	22	1.7	V	11.96	0.32	10.40	22.04	33	-10.96
WCDMA Band II HSUPA Channel 9262										
1852.40	76.77	190	1.8	H	2.80	0.31	10.40	12.89	33	-20.11
1852.40	84.78	272	2.2	V	11.50	0.31	10.40	21.59	33	-11.41
WCDMA Band II HSUPA Channel 9400										
1880.00	79.29	318	1.9	H	5.44	0.31	10.40	15.53	33	-17.47
1880.00	84.48	277	1.4	V	11.36	0.31	10.40	21.45	33	-11.55
WCDMA Band II HSUPA Channel 9538										
1907.60	77.77	354	1.8	H	4.04	0.32	10.40	14.12	33	-18.88
1907.60	84.04	87	1.9	V	11.08	0.32	10.40	21.16	33	-11.84

WCDMA Band IV (Part 27)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 27	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band IV RMC 12.2k Channel 1313										
1712.40	76.51	132	1.9	H	2.98	0.30	9.40	12.08	30	-17.92
1712.40	84.22	87	1.6	V	10.74	0.30	9.40	19.84	30	-10.16
WCDMA Band IV RMC 12.2k Channel 1413										
1732.60	78.54	307	1.7	H	5.04	0.30	9.40	14.14	30	-15.86
1732.60	84.18	213	1.4	V	10.72	0.30	9.40	19.82	30	-10.18
WCDMA Band IV RMC 12.2k Channel 1512										
1752.60	77.34	25	2.2	H	3.85	0.30	9.40	12.95	30	-17.05
1752.60	84.29	128	1.1	V	10.84	0.30	9.40	19.94	30	-10.06
WCDMA Band IV HSDPA Channel 1313										
1712.40	77.59	309	1.4	H	4.06	0.30	9.40	13.16	30	-16.84
1712.40	84.52	20	2.1	V	11.04	0.30	9.40	20.14	30	-9.86
WCDMA Band IV HSDPA Channel 1413										
1732.60	76.30	126	1.1	H	2.80	0.30	9.40	11.90	30	-18.10
1732.60	84.18	32	2.0	V	10.72	0.30	9.40	19.82	30	-10.18
WCDMA Band IV HSDPA Channel 1512										
1752.60	77.43	51	1.1	H	3.94	0.30	9.40	13.04	30	-16.96
1752.60	84.73	6	1.2	V	11.28	0.30	9.40	20.38	30	-9.62
WCDMA Band IV HSUPA Channel 1313										
1712.40	79.37	320	1.9	H	5.84	0.30	9.40	14.94	30	-15.06
1712.40	84.07	251	1.3	V	10.59	0.30	9.40	19.69	30	-10.31
WCDMA Band IV HSUPA Channel 1413										
1732.60	78.47	352	1.8	H	4.97	0.30	9.40	14.07	30	-15.93
1732.60	84.01	180	2.3	V	10.55	0.30	9.40	19.65	30	-10.35
WCDMA Band IV HSUPA Channel 1512										
1752.60	79.20	201	1.8	H	5.71	0.30	9.40	14.81	30	-15.19
1752.60	84.39	332	2.3	V	10.94	0.30	9.40	20.04	30	-9.96

Radiated Power

Modem 2

ERP and EIRP

Cellular Band 850 (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 850 Channel 128										
824.20	86.18	214	2.4	H	19.15	0.20	0.00	18.95	38.45	-19.50
824.20	92.31	280	1.9	V	25.21	0.20	0.00	25.01	38.45	-13.44
GPRS 850 Channel 190										
836.60	88.05	121	2.0	H	21.02	0.20	0.00	20.82	38.45	-17.63
836.60	92.48	304	2.2	V	25.38	0.20	0.00	25.18	38.45	-13.27
GPRS 850 Channel 251										
848.80	87.42	95	2.4	H	20.39	0.20	0.00	20.19	38.45	-18.26
848.80	92.32	65	1.6	V	25.22	0.20	0.00	25.02	38.45	-13.43
EGPRS 850 Channel 128										
824.20	87.06	173	1.9	H	20.03	0.20	0.00	19.83	38.45	-18.62
824.20	92.42	103	1.6	V	25.32	0.20	0.00	25.12	38.45	-13.33
EGPRS 850 Channel 190										
836.60	86.20	200	2.2	H	19.17	0.20	0.00	18.97	38.45	-19.48
836.60	92.51	326	1.8	V	25.41	0.20	0.00	25.21	38.45	-13.24
EGPRS 850 Channel 251										
848.80	86.33	170	1.1	H	19.30	0.20	0.00	19.10	38.45	-19.35
848.80	92.03	154	1.9	V	24.93	0.20	0.00	24.73	38.45	-13.72

Cellular Band 1900 (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 24E	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 1900 Channel 512										
1850.20	83.85	59	2.2	H	9.88	0.31	10.40	19.97	33	-13.03
1850.20	88.83	300	1.7	V	15.55	0.31	10.40	25.64	33	-7.36
GPRS 1900 Channel 661										
1880.00	85.73	24	2.4	H	11.88	0.31	10.40	21.97	33	-11.03
1880.00	88.26	245	2.1	V	15.14	0.31	10.40	25.23	33	-7.77
GPRS 1900 Channel 810										
1909.80	83.90	43	1.7	H	10.17	0.32	10.40	20.25	33	-12.75
1909.80	88.83	136	2.2	V	15.87	0.32	10.40	25.95	33	-7.05
EGPRS 1900 Channel 512										
1850.20	82.93	319	1.8	H	8.96	0.31	10.40	19.05	33	-13.95
1850.20	88.23	97	1.1	V	14.95	0.31	10.40	25.04	33	-7.96
EGPRS 1900 Channel 661										
1880.00	84.67	56	1.9	H	10.82	0.31	10.40	20.91	33	-12.09
1880.00	88.23	91	1.9	V	15.11	0.31	10.40	25.20	33	-7.80
EGPRS 1900 Channel 810										
1909.80	82.08	266	2.3	H	8.35	0.32	10.40	18.43	33	-14.57
1909.80	88.65	195	1.4	V	15.69	0.32	10.40	25.77	33	-7.23

WCDMA Band V (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band V RMC 12.2k Channel 4132										
826.40	78.88	229	1.6	H	11.85	0.20	0.00	11.65	38.45	-26.80
826.40	84.97	194	1.6	V	17.87	0.20	0.00	17.67	38.45	-20.78
WCDMA Band V RMC 12.2k Channel 4183										
836.60	79.55	298	1.2	H	12.52	0.20	0.00	12.32	38.45	-26.13
836.60	84.70	175	1.2	V	17.60	0.20	0.00	17.40	38.45	-21.05
WCDMA Band V RMC 12.2k Channel 4233										
846.60	78.46	210	1.4	H	11.43	0.20	0.00	11.23	38.45	-27.22
846.60	84.72	42	2.5	V	17.62	0.20	0.00	17.42	38.45	-21.03
WCDMA Band V HSDPA Channel 4132										
826.40	77.78	236	2.4	H	10.75	0.20	0.00	10.55	38.45	-27.90
826.40	84.51	164	2.4	V	17.41	0.20	0.00	17.21	38.45	-21.24
WCDMA Band V HSDPA Channel 4183										
836.60	76.02	69	1.7	H	8.99	0.20	0.00	8.79	38.45	-29.66
836.60	84.03	210	2.2	V	16.93	0.20	0.00	16.73	38.45	-21.72
WCDMA Band V HSDPA Channel 4233										
846.60	77.56	193	1.1	H	10.53	0.20	0.00	10.33	38.45	-28.12
846.60	84.11	66	2.1	V	17.01	0.20	0.00	16.81	38.45	-21.64
WCDMA Band V HSUPA Channel 4132										
826.40	78.94	132	1.9	H	11.91	0.20	0.00	11.71	38.45	-26.74
826.40	84.33	6	2.2	V	17.23	0.20	0.00	17.03	38.45	-21.42
WCDMA Band V HSUPA Channel 4183										
836.60	78.42	206	1.6	H	11.39	0.20	0.00	11.19	38.45	-27.26
836.60	84.41	215	2.3	V	17.31	0.20	0.00	17.11	38.45	-21.34
WCDMA Band V HSUPA Channel 4233										
846.60	79.23	90	2.3	H	12.20	0.20	0.00	12.00	38.45	-26.45
846.60	84.34	15	2.4	V	17.24	0.20	0.00	17.04	38.45	-21.41

WCDMA Band II (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 24E	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band II RMC 12.2k Channel 9262										
1852.40	76.23	345	1.0	H	2.26	0.31	10.40	12.35	33	-20.65
1852.40	84.05	292	1.7	V	10.77	0.31	10.40	20.86	33	-12.14
WCDMA Band II RMC 12.2k Channel 9400										
1880.00	76.71	299	1.3	H	2.86	0.31	10.40	12.95	33	-20.05
1880.00	84.35	155	1.3	V	11.23	0.31	10.40	21.32	33	-11.68
WCDMA Band II RMC 12.2k Channel 9538										
1907.60	77.42	121	1.6	H	3.69	0.32	10.40	13.77	33	-19.23
1907.60	84.07	253	1.1	V	11.11	0.32	10.40	21.19	33	-11.81
WCDMA Band II HSDPA Channel 9262										
1852.40	79.36	353	1.7	H	5.39	0.31	10.40	15.48	33	-17.52
1852.40	84.90	56	1.9	V	11.62	0.31	10.40	21.71	33	-11.29
WCDMA Band II HSDPA Channel 9400										
1880.00	79.92	170	1.0	H	6.07	0.31	10.40	16.16	33	-16.84
1880.00	84.29	249	1.2	V	11.17	0.31	10.40	21.26	33	-11.74
WCDMA Band II HSDPA Channel 9538										
1907.60	76.12	123	2.1	H	2.39	0.32	10.40	12.47	33	-20.53
1907.60	84.83	121	2.2	V	11.87	0.32	10.40	21.95	33	-11.05
WCDMA Band II HSUPA Channel 9262										
1852.40	78.55	238	2.5	H	4.58	0.31	10.40	14.67	33	-18.33
1852.40	84.76	345	1.3	V	11.48	0.31	10.40	21.57	33	-11.43
WCDMA Band II HSUPA Channel 9400										
1880.00	78.49	258	2.4	H	4.64	0.31	10.40	14.73	33	-18.27
1880.00	84.04	278	2.1	V	10.92	0.31	10.40	21.01	33	-11.99
WCDMA Band II HSUPA Channel 9538										
1907.60	76.27	239	1.3	H	2.54	0.32	10.40	12.62	33	-20.38
1907.60	84.71	276	1.0	V	11.75	0.32	10.40	21.83	33	-11.17

WCDMA Band IV (Part 27)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 27	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band IV RMC 12.2k Channel 1313										
1712.40	77.73	195	1.7	H	3.76	0.30	9.40	12.86	30	-17.14
1712.40	84.24	197	1.7	V	9.96	0.30	9.40	19.06	30	-10.94
WCDMA Band IV RMC 12.2k Channel 1413										
1732.60	76.08	139	2.2	H	2.23	0.30	9.40	11.33	30	-18.67
1732.60	84.22	340	1.6	V	10.10	0.30	9.40	19.20	30	-10.80
WCDMA Band IV RMC 12.2k Channel 1512										
1752.60	78.92	22	2.3	H	5.19	0.30	9.40	14.29	30	-15.71
1752.60	84.94	114	2.5	V	9.98	0.30	9.40	19.08	30	-10.92
WCDMA Band IV HSDPA Channel 1313										
1712.40	77.62	202	2.1	H	3.65	0.30	9.40	12.75	30	-17.25
1712.40	84.61	36	2.2	V	10.33	0.30	9.40	19.43	30	-10.57
WCDMA Band IV HSDPA Channel 1413										
1732.60	78.01	243	2.0	H	4.16	0.30	9.40	13.26	30	-16.74
1732.60	84.20	225	2.4	V	10.08	0.30	9.40	19.18	30	-10.82
WCDMA Band IV HSDPA Channel 1512										
1752.60	78.70	217	1.9	H	4.97	0.30	9.40	14.07	30	-15.93
1752.60	84.89	345	1.5	V	9.93	0.30	9.40	19.03	30	-10.97
WCDMA Band IV HSUPA Channel 1313										
1712.40	78.50	300	1.0	H	4.53	0.30	9.40	13.63	30	-16.37
1712.40	84.75	347	2.2	V	10.47	0.30	9.40	19.57	30	-10.43
WCDMA Band IV HSUPA Channel 1413										
1732.60	78.47	352	1.8	H	4.97	0.30	9.40	14.07	30	-15.93
1732.60	84.01	180	2.3	V	10.55	0.30	9.40	19.65	30	-10.35
WCDMA Band IV HSUPA Channel 1512										
1752.60	76.96	41	2.1	H	3.23	0.30	9.40	12.33	30	-17.67
1752.60	84.30	207	2.4	V	9.34	0.30	9.40	18.44	30	-11.56

9 Peak-to-Average Ratio

Test Requirement:	24.232 (d), 27.50(d)
Test Method:	N/A
Test Mode:	TX transmitting


9.1 EUT Operation

Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

9.2 Test Procedure

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

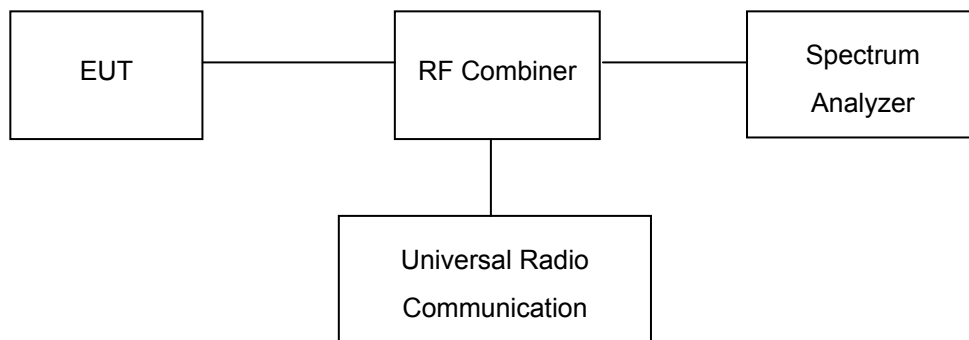

9.3 Test Result

Remark: Only the worst case (middle channel mode) were reported

Modem 1

Cellular Band (Part 24E)

Mode	GPRS 1900			EDGE 1900			Limit (dB)
Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8	
Peak-to-Average Ratio (dB)	9.86	10.20	9.97	12.16	12.33	12.26	13

Mode	WCDMA Band II			WCDMA Band IV			Limit (dB)
Channel	9262	9400	9538	1313	1413	1512	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	
Peak-to-Average Ratio (dB)	2.74	2.87	2.69	2.65	2.74	2.59	13

Test Plots (Part 24E)

GPRS 1900 Middle Channel



EDGE 1900 Middle Channel



WCDMA Band II Middle Channel



WCDMA Band IV Middle Channel



Modem 2

Cellular Band (Part 24E)

Mode	GPRS 1900			EDGE 1900			Limit (dB)
Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8	
Peak-to-Average Ratio (dB)	9.67	9.71	9.64	12.36	12.58	12.47	13

Mode	WCDMA Band II			WCDMA Band IV			Limit (dB)
Channel	9262	9400	9538	1313	1413	1512	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	
Peak-to-Average Ratio (dB)	2.76	2.80	2.62	2.95	2.98	2.86	13

Test Plots (Part 24E)


GPRS 1900 Middle Channel




EDGE 1900 Middle Channel



WCDMA Band II Middle Channel

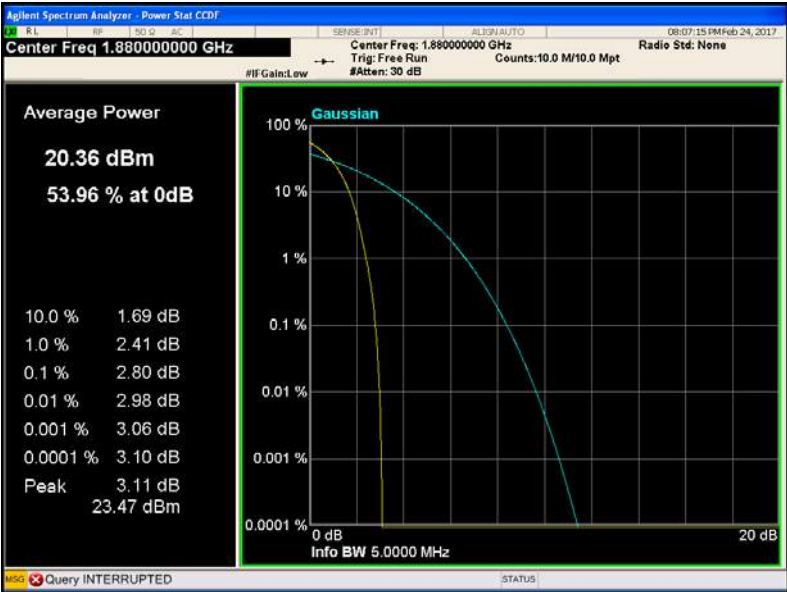

WCDMA Band IV Middle Channel

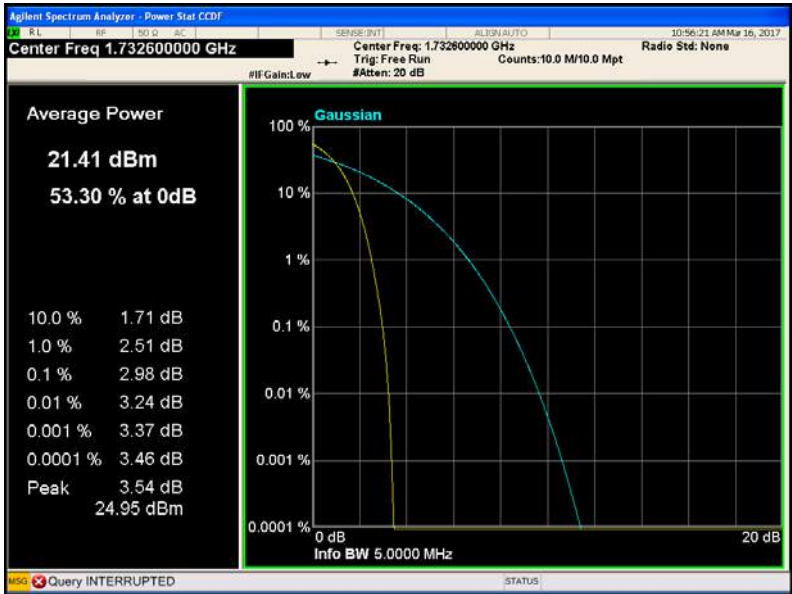

10 BANDWIDTH

Test Requirement:	FCC Part 2.1049, 22.917, 22.905, 24.238, 27.53(a)
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v02r02
Test Mode:	TX transmitting

10.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

10.2 Test Procedure

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set in the range of 1 to 5 % of the anticipated OBW (Cellular /PCS) and the 26 dB & 99%bandwidth was recorded.

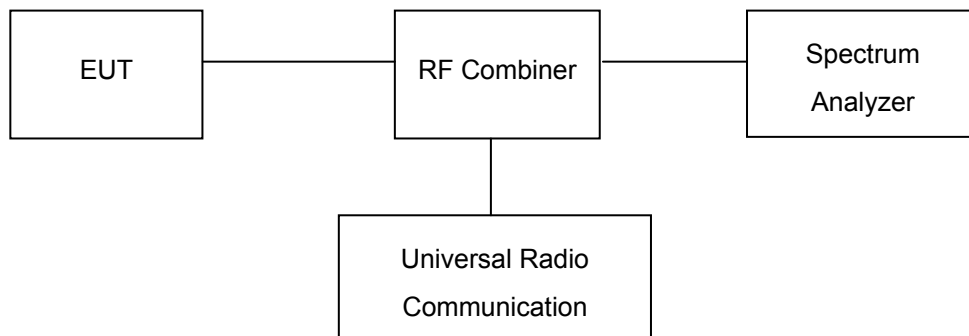

10.3 Test Result

Remark: Only the worst case (middle channel mode) were reported

Modem 1

Cellular Band (Part 22H)

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 850	128	824.2	245.58	314.24
	190	836.6	245.71	314.40
	251	848.8	245.71	314.37
EGPRS 850	128	824.2	243.21	306.99
	190	836.6	243.36	307.00
	251	848.8	243.23	306.89

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band V	RMC12.2k	4132	826.4	4.11
		4183	836.6	4.12
		4233	846.6	4.07
	HSDPA(16QAM)	4132	826.4	4.03
		4183	836.6	4.13
		4233	846.6	3.98
	HSUPA(BPSK)	4132	826.4	3.99
		4183	836.6	4.13
		4233	846.6	4.08
		4132	826.4	4.11
		4183	836.6	4.12
		4233	846.6	4.07

Cellular Band (Part 24E)

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 1900	512	1850.2	242.62	308.06
	661	1880.0	242.66	308.20
	810	1909.8	242.56	308.12
EGPRS 1900	512	1850.2	244.32	309.25
	661	1880.0	244.46	309.30
	810	1909.8	244.34	309.15

Test Mode		Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band II	RMC12.2k	9262	1852.4	4.15	4.72
		9400	1880.0	4.16	4.72
		9538	1907.6	4.15	4.71
	HSDPA(16QAM)	9262	1852.4	4.14	4.70
		9400	1880.0	4.15	4.71
		9538	1907.6	4.15	4.70
	HSUPA(BPSK)	9262	1852.4	4.16	4.70
		9400	1880.0	4.16	4.71
		9538	1907.6	4.14	4.70


Cellular Band (Part 27)

Test Mode		Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band IV	RMC12.2k	1313	1712.6	4.10	4.70
		1413	1732.6	4.17	4.74
		1512	1752.4	4.17	4.66
	HSDPA	1313	1712.6	4.03	4.68
		1413	1732.6	4.15	4.74
		1512	1752.4	4.00	4.60
	HSUPA	1313	1712.6	4.14	4.70
		1413	1732.6	4.16	4.75
		1512	1752.4	4.15	4.74


Test Plots (worst case)

Cellular Band (Part 22H)

GPRS 850

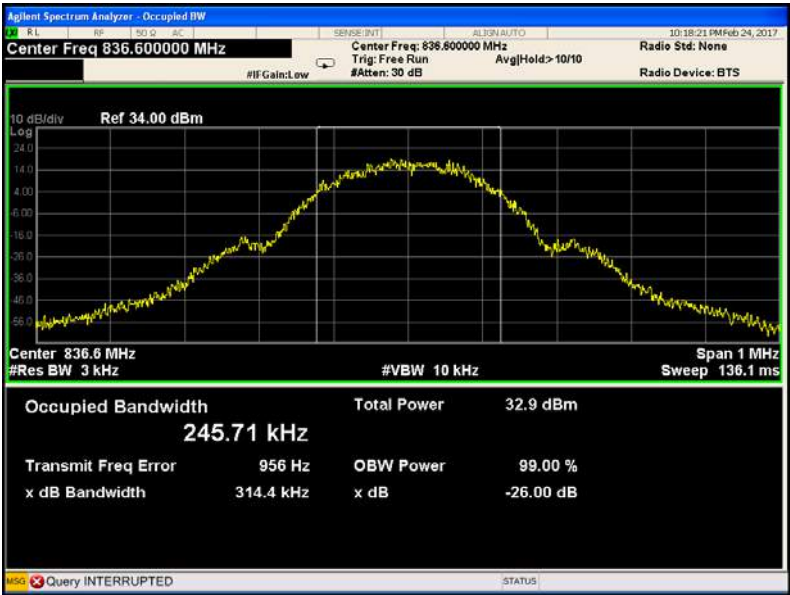


EGPRS 850

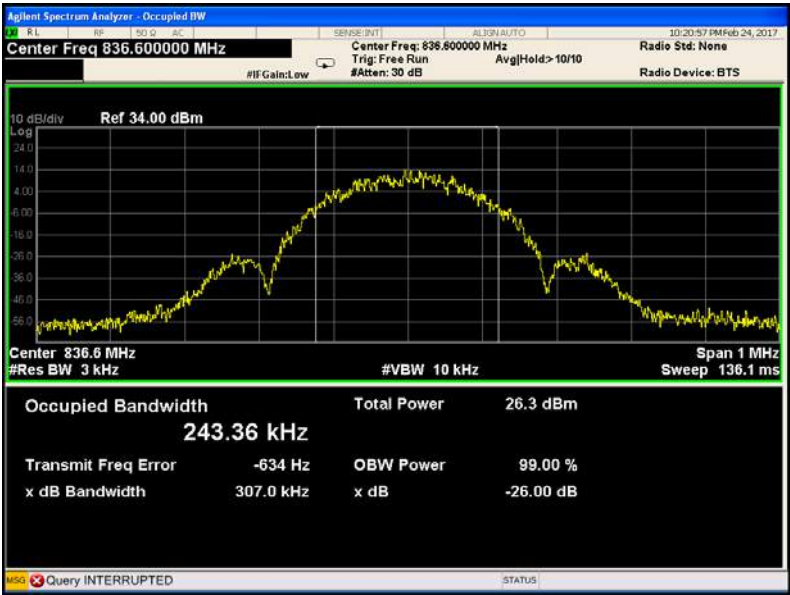

WCDMA band V


RMC12.2k

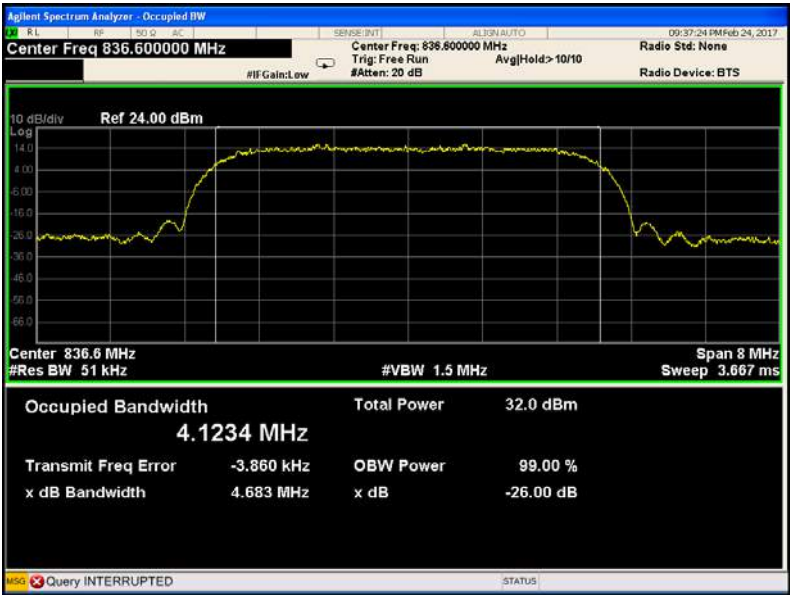

HSDPA




HSUPA

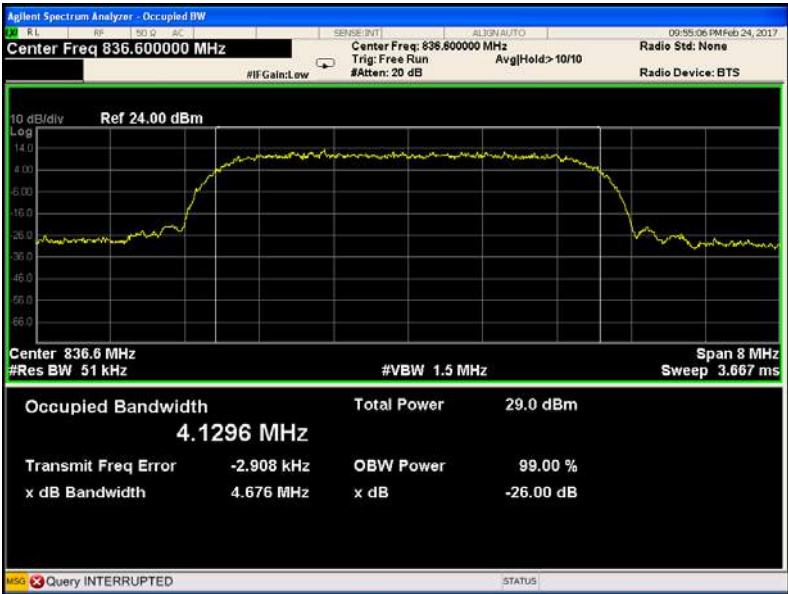


Cellular Band (Part 24E)

GPRS 1900

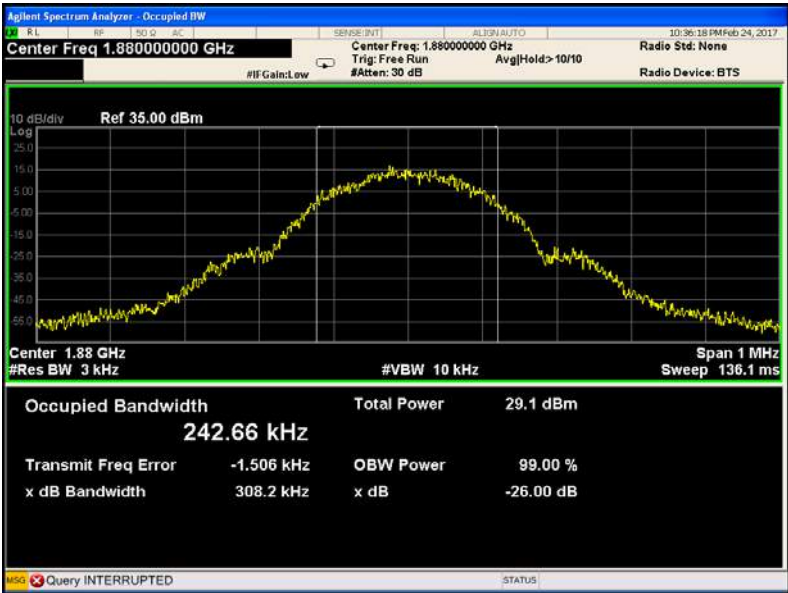


EGPRS 1900

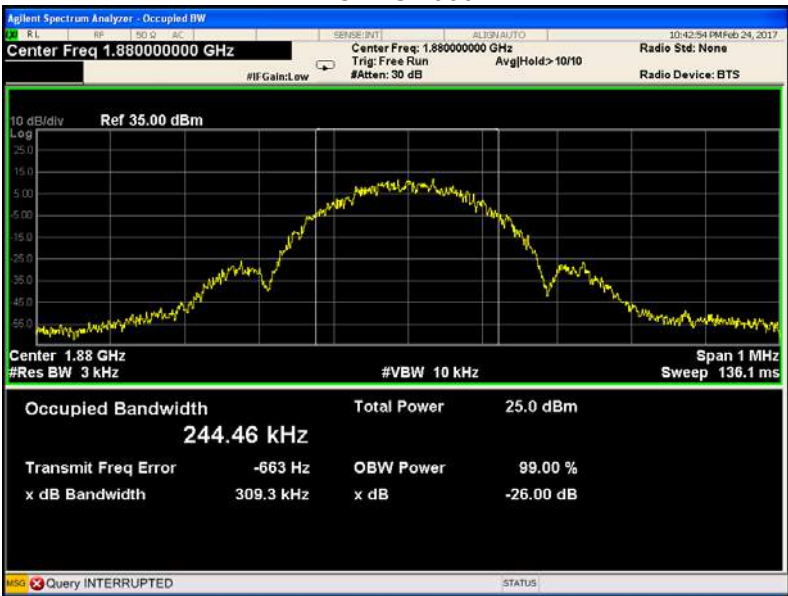


WCDMA band II


RMC12.2k

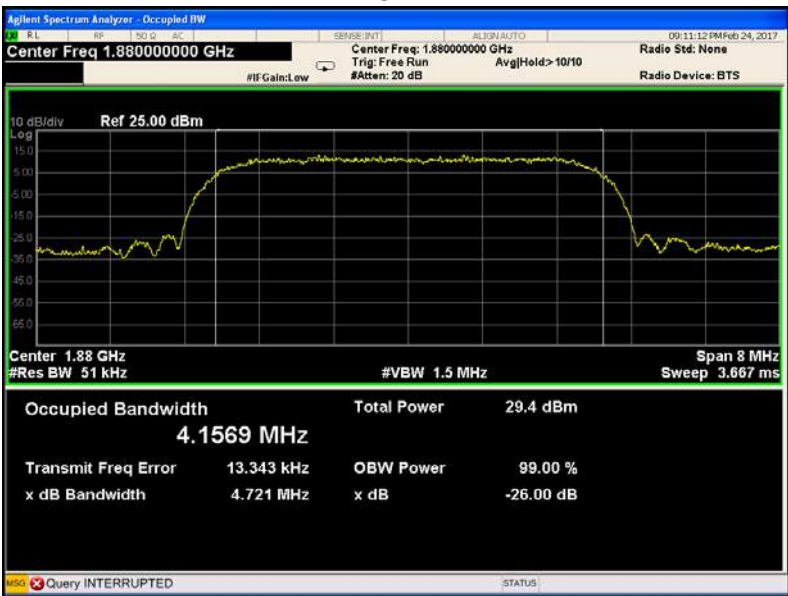


HSDPA

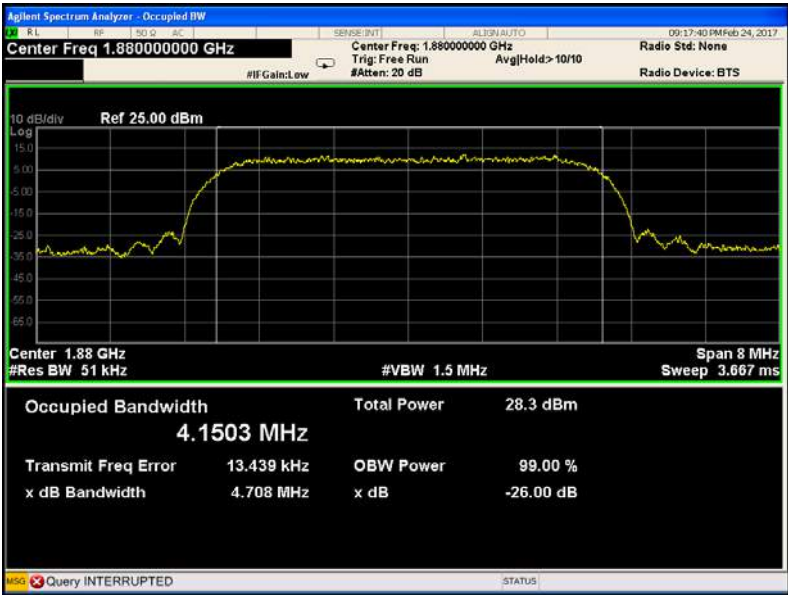


HSUPA

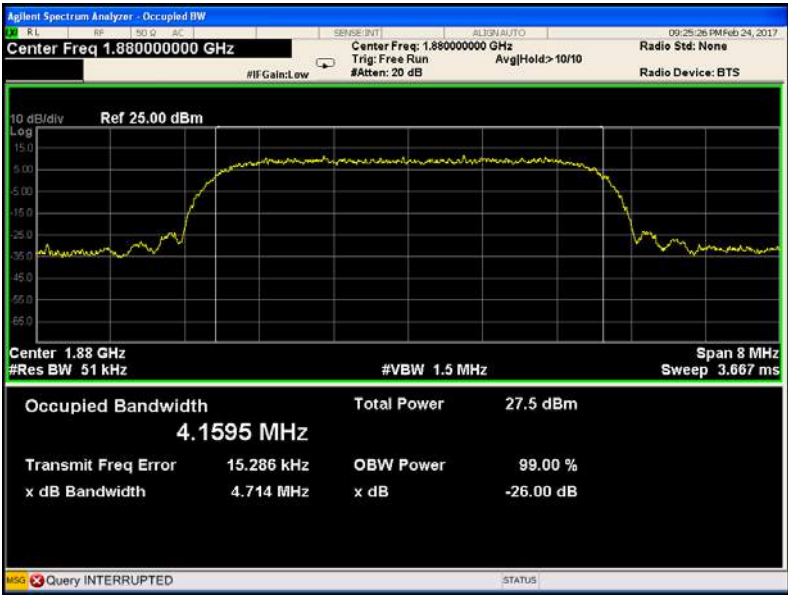

(Part 27)
WCDMA band IV
RMC12.2k

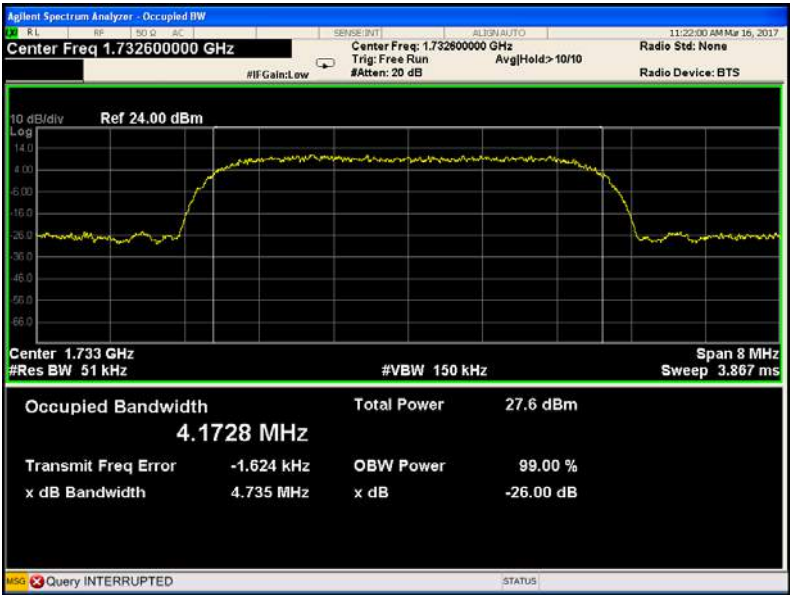

HSDPA

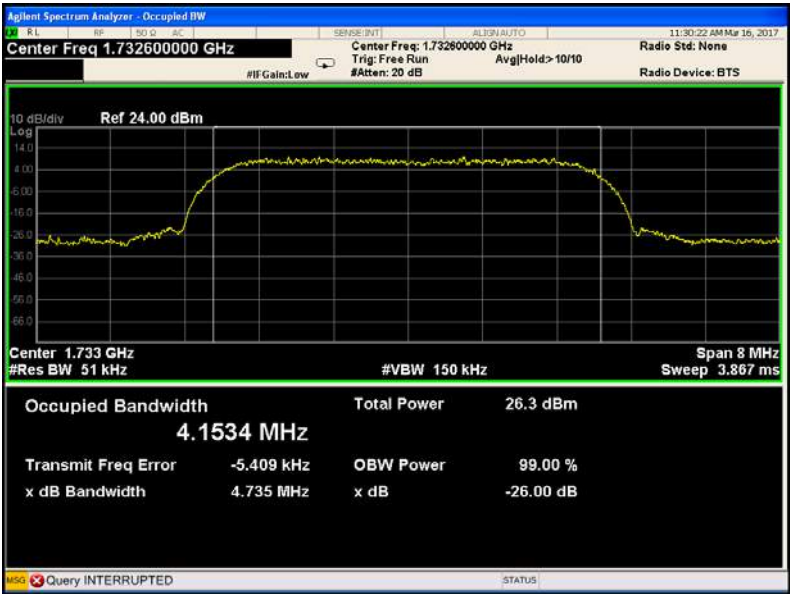

HSUPA



Modem 2

Cellular Band (Part 22H)

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 850	128	824.2	242.23	312.97
	190	836.6	242.30	313.00
	251	848.8	242.29	312.92
EGPRS 850	128	824.2	239.48	309.65
	190	836.6	239.58	309.70
	251	848.8	239.52	309.62

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band V	RMC12.2k	4132	826.4	4.06
		4183	836.6	4.14
		4233	846.6	4.13
	HSDPA(16QAM)	4132	826.4	4.02
		4183	836.6	4.15
		4233	846.6	4.05
	HSUPA(BPSK)	4132	826.4	4.06
		4183	836.6	4.16
		4233	846.6	4.04

Cellular Band (Part 24E)

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 1900	512	1850.2	246.66	311.59
	661	1880.0	246.73	311.60
	810	1909.8	246.58	311.45
EGPRS 1900	512	1850.2	241.30	307.42
	661	1880.0	241.34	307.50
	810	1909.8	241.28	307.36

Test Mode		Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band II	RMC12.2k	9262	1852.4	4.07	4.67
		9400	1880.0	4.16	4.71
		9538	1907.6	4.06	4.66
	HSDPA(16QAM)	9262	1852.4	4.03	4.68
		9400	1880.0	4.16	4.70
		9538	1907.6	4.16	4.66
	HSUPA(BPSK)	9262	1852.4	4.15	4.65
		9400	1880.0	4.16	4.70
		9538	1907.6	4.16	4.66


Cellular Band (Part 27)

Test Mode		Channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)	26 dB Emission Bandwidth(MHz)
WCDMA Band IV	RMC12.2k	1313	1712.6	4.15	4.60
		1413	1732.6	4.16	4.71
		1512	1752.4	4.15	4.55
	HSDPA	1313	1712.6	4.05	4.62
		1413	1732.6	4.17	4.70
		1512	1752.4	4.03	4.58
	HSUPA	1313	1712.6	4.02	4.67
		1413	1732.6	4.16	4.71
		1512	1752.4	4.04	4.70


Test Plots (worst case)

Cellular Band (Part 22H)

GPRS 850

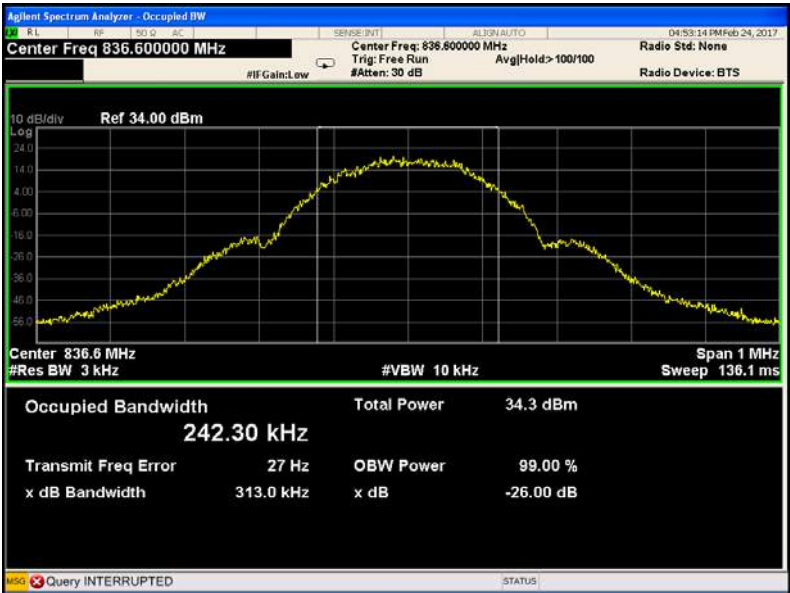

EGPRS 850

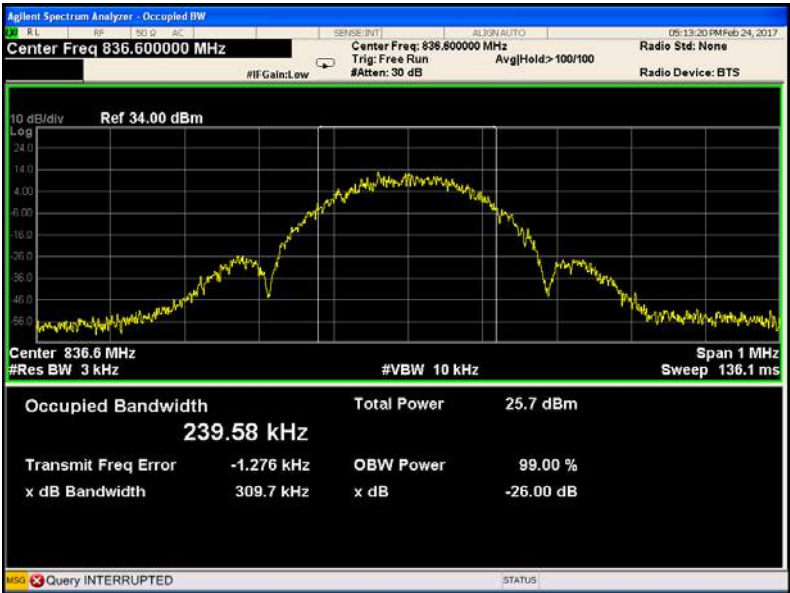


WCDMA band V


RMC12.2k



HSDPA

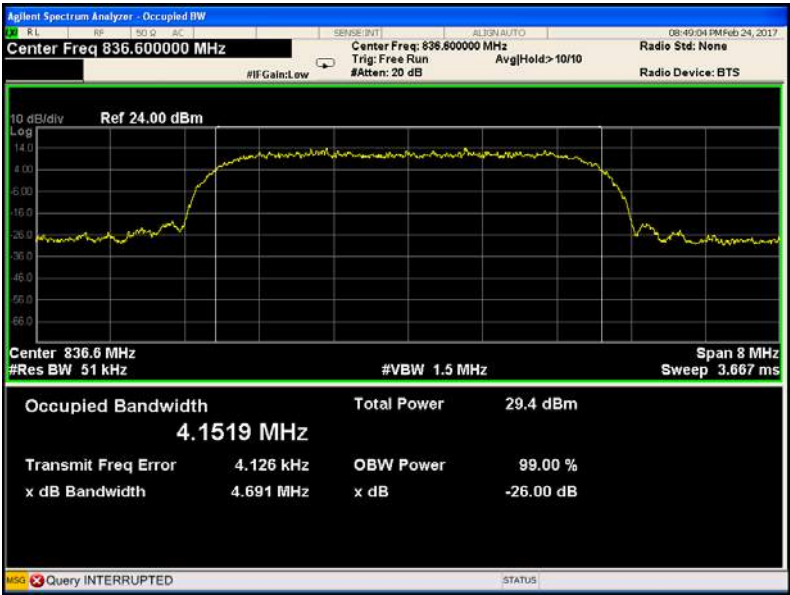


HSUPA

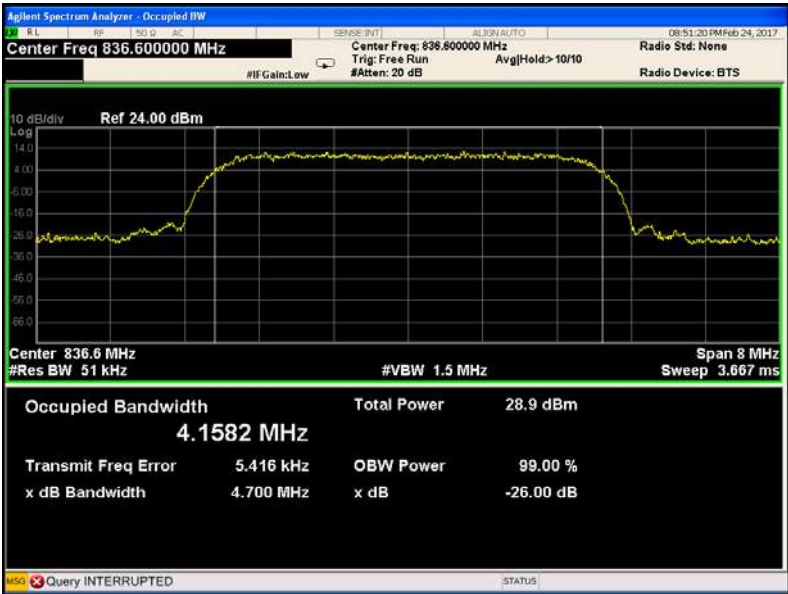


Cellular Band (Part 24E)

GPRS 1900

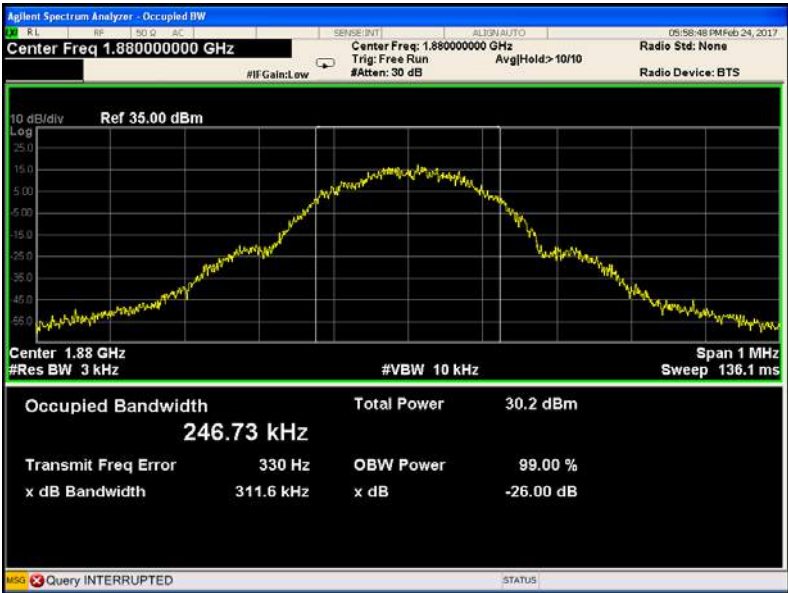


EGPRS 1900

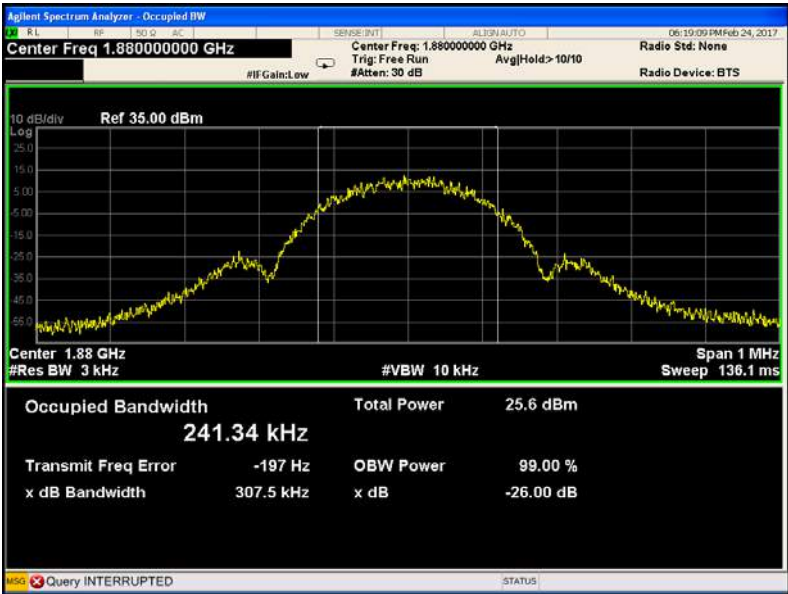


WCDMA band II


RMC12.2k

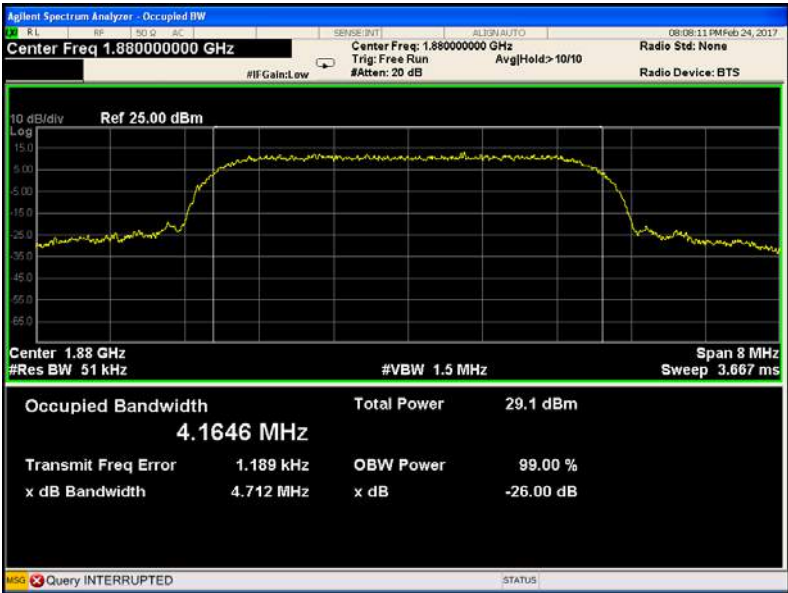


HSDPA

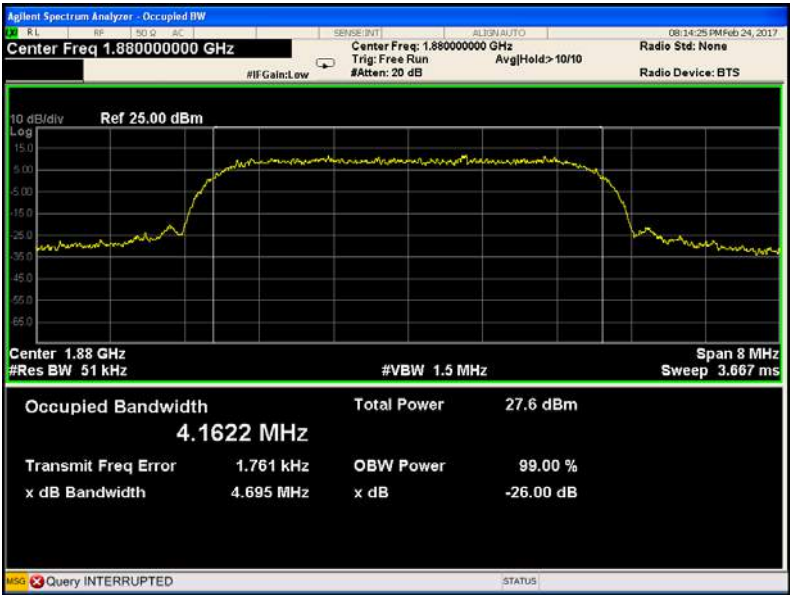


HSUPA

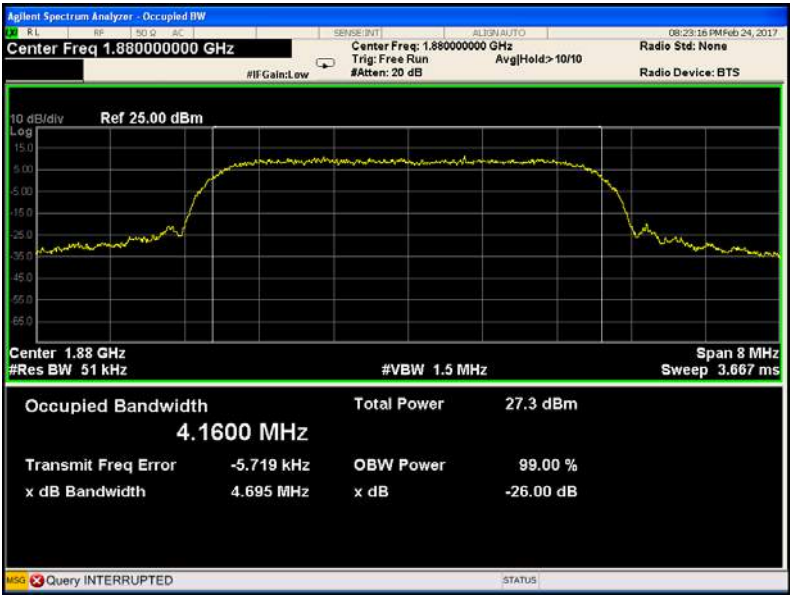


(Part 27)
WCDMA band IV
RMC12.2k

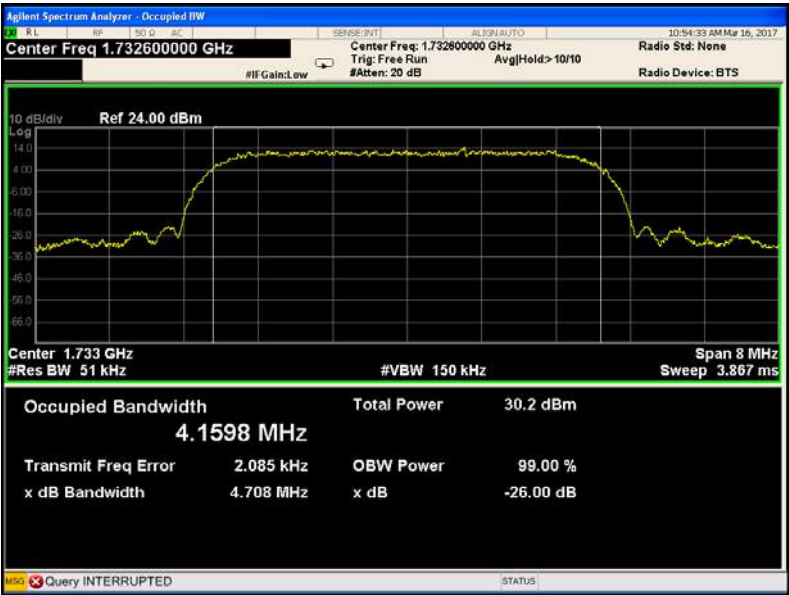

HSDPA

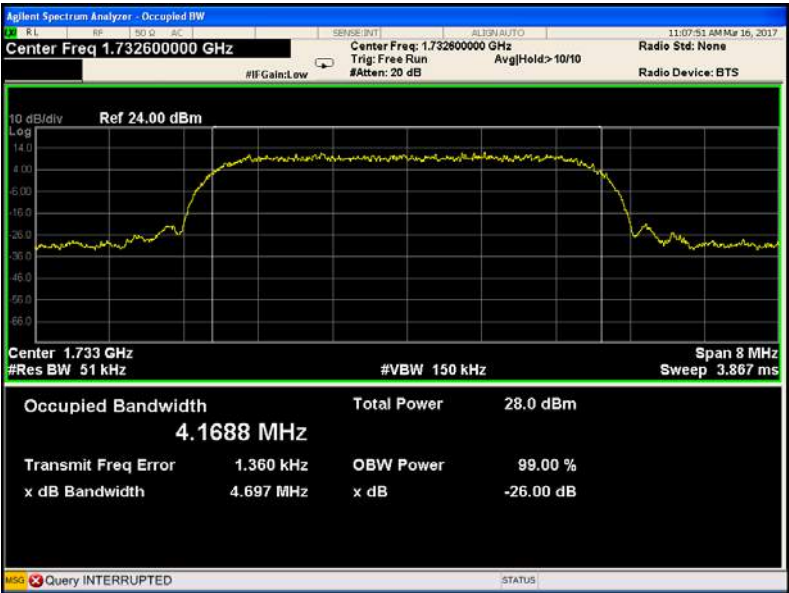

HSUPA

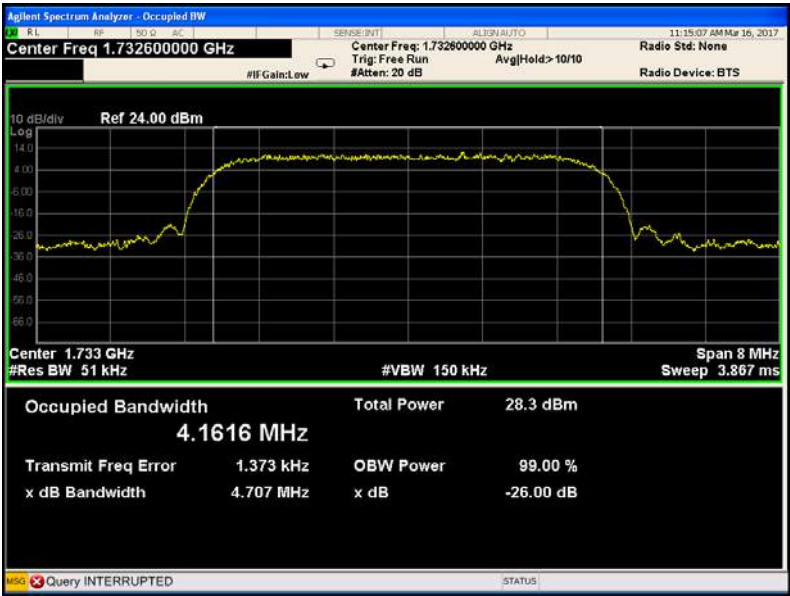

11 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement:	FCC Part 2.1051, 22.917(a), 24.238(a), 27.53(h)
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v02r02
Test Mode:	TX transmitting


11.1 EUT Operation

Operating Environment :

Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.3kPa

11.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

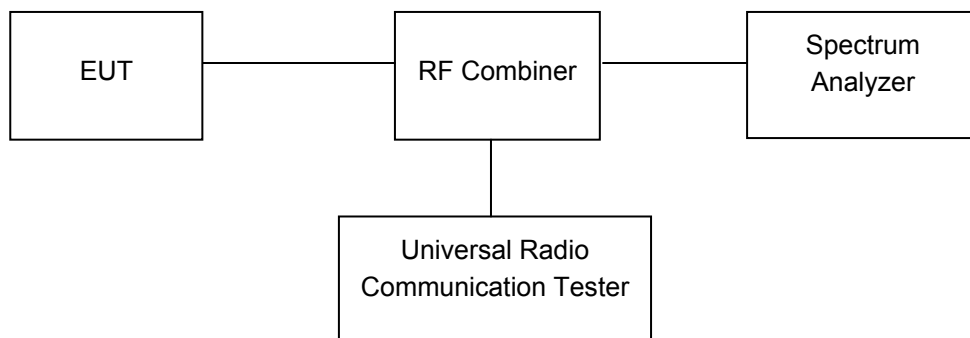

11.3 Test Result


Remark: only the worst data were recorded.

Modem 1

Cellular Band (Part 22H)

GPRS 850 - channel 128

30MHz-1GHz

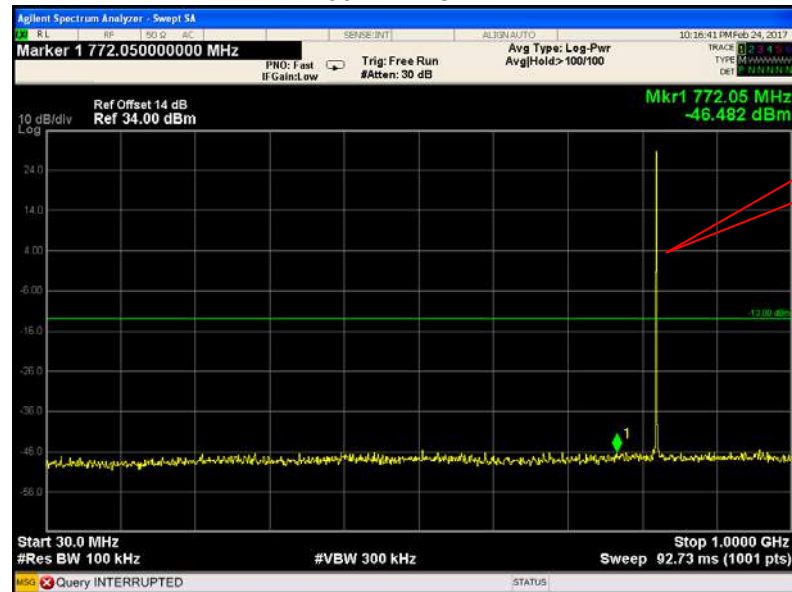


Fundamental

Above 1GHz




Cellular Band (Part 22H)
EGPRS 850 - channel 128
30MHz-1GHz

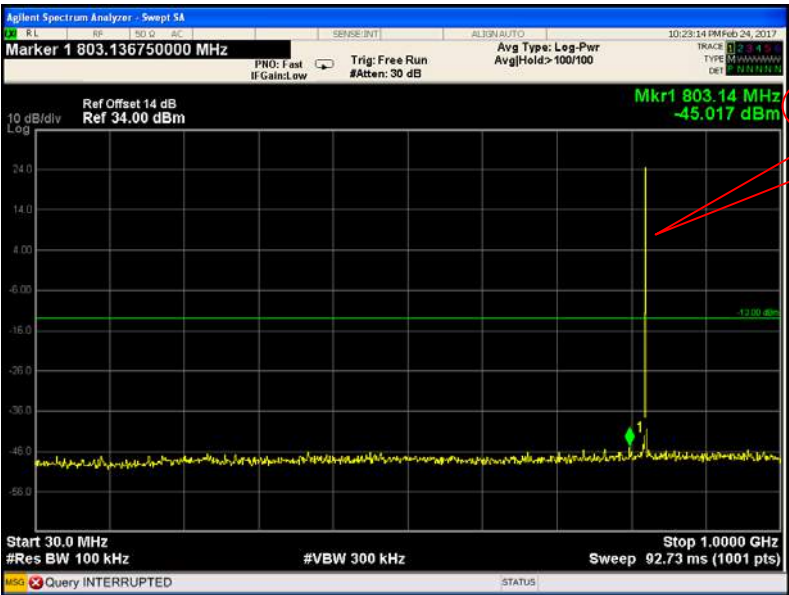


Fundamental

Above 1GHz

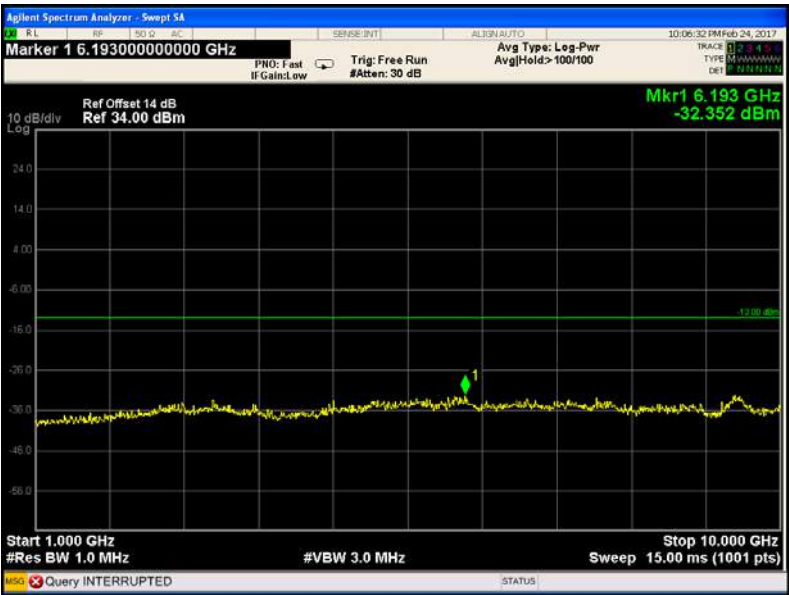


WCDMA band V - channel 4233

30MHz-1GHz

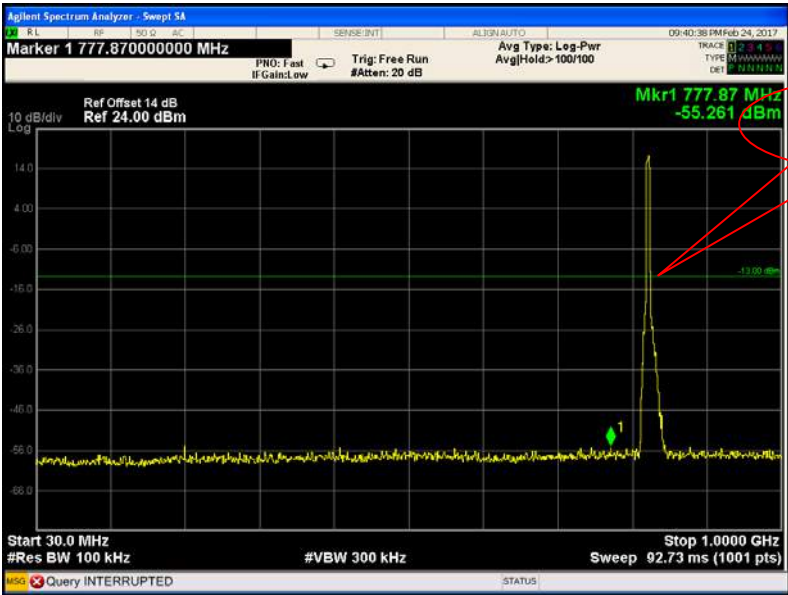


Above 1GHz

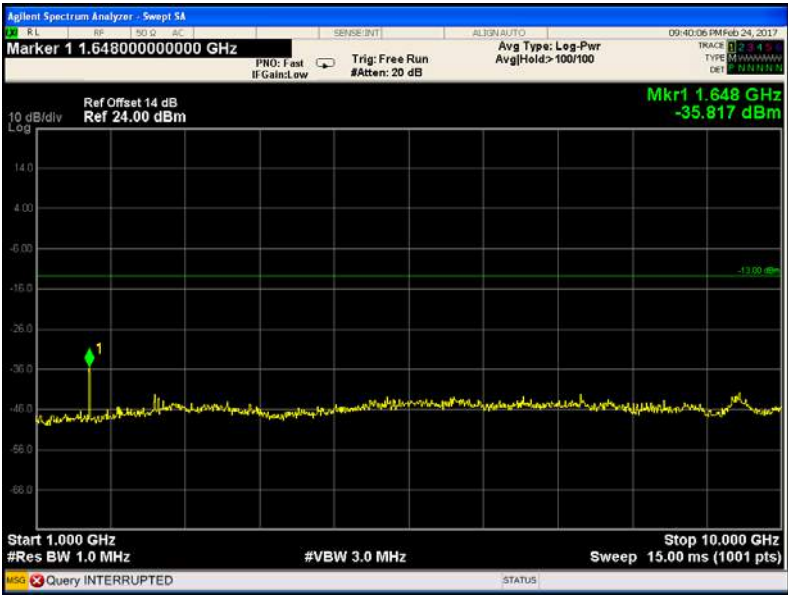

WCDMA band V - channel 4233 (HSDPA)

30MHz-1GHz

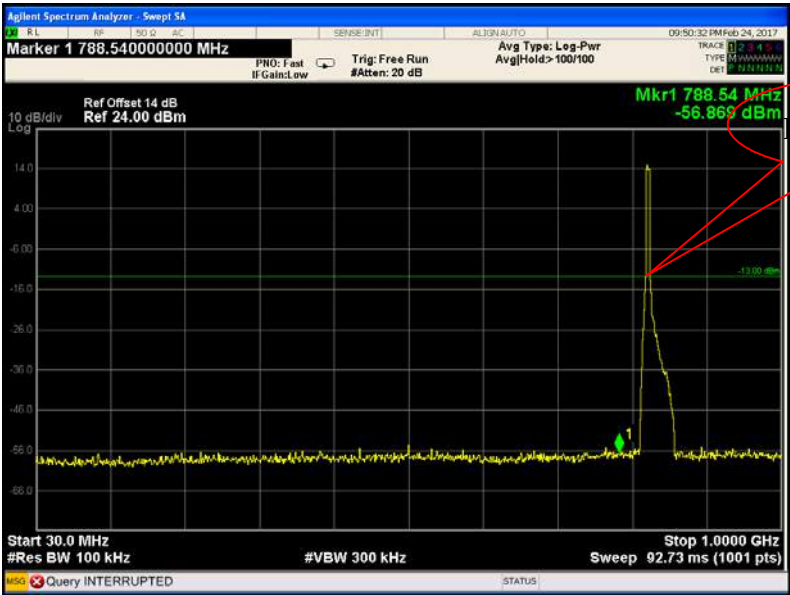


Above 1GHz




WCDMA band V - channel 4233 (HSUPA)


30MHz-1GHz

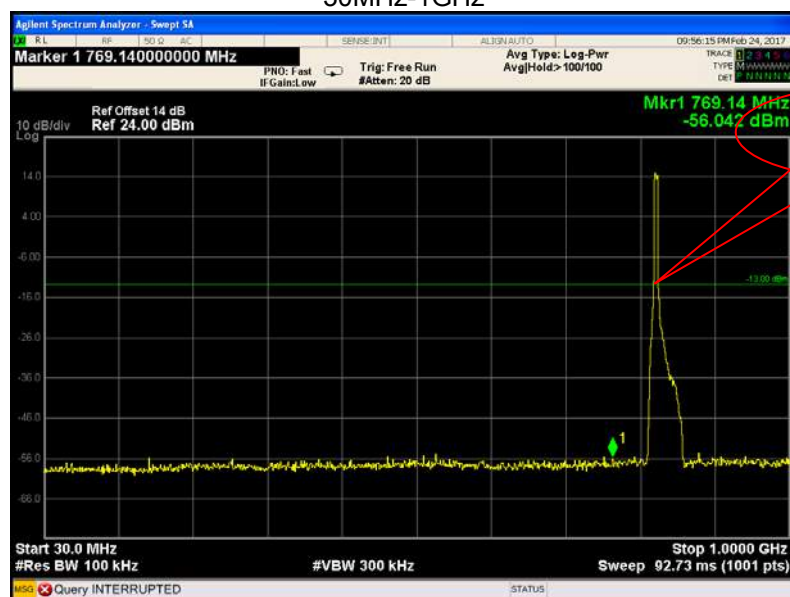

Above 1GHz

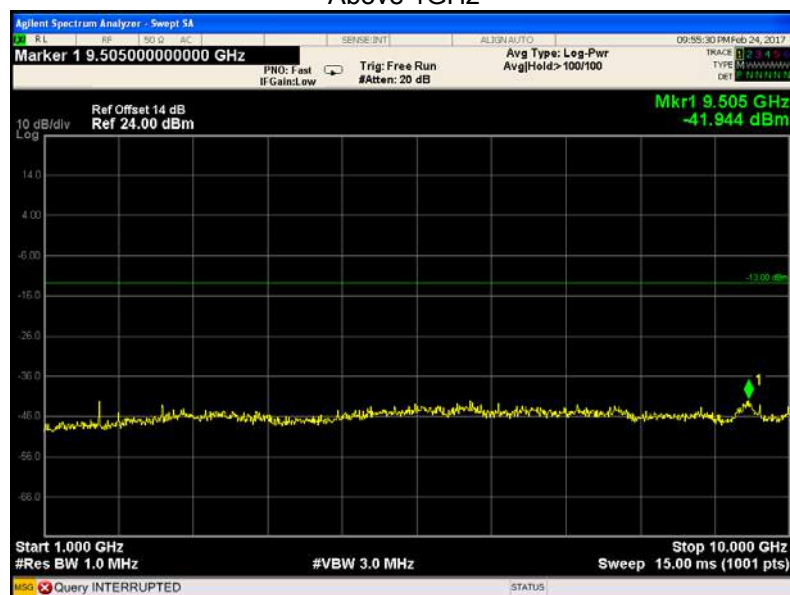


Cellular Band (Part 24E)
GPRS 1900 - channel 512
30MHz-1GHz

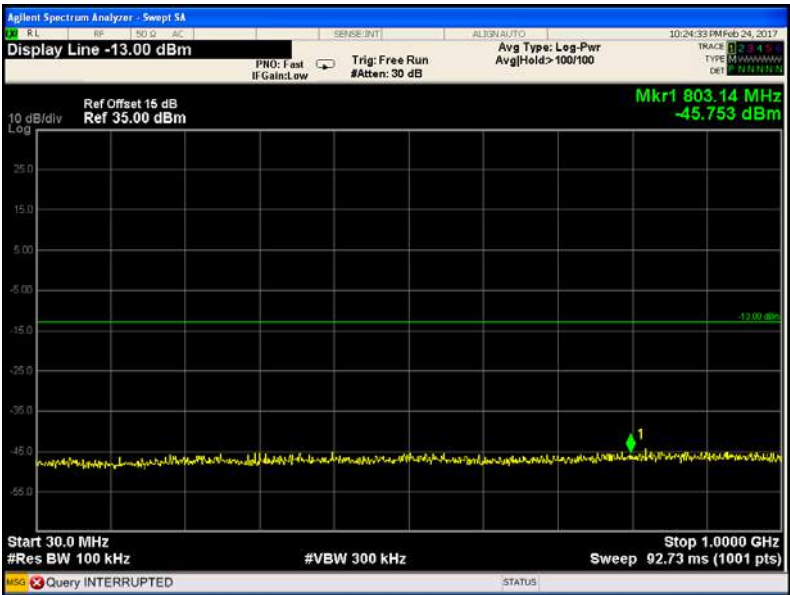

Above 1GHz


Fundamental

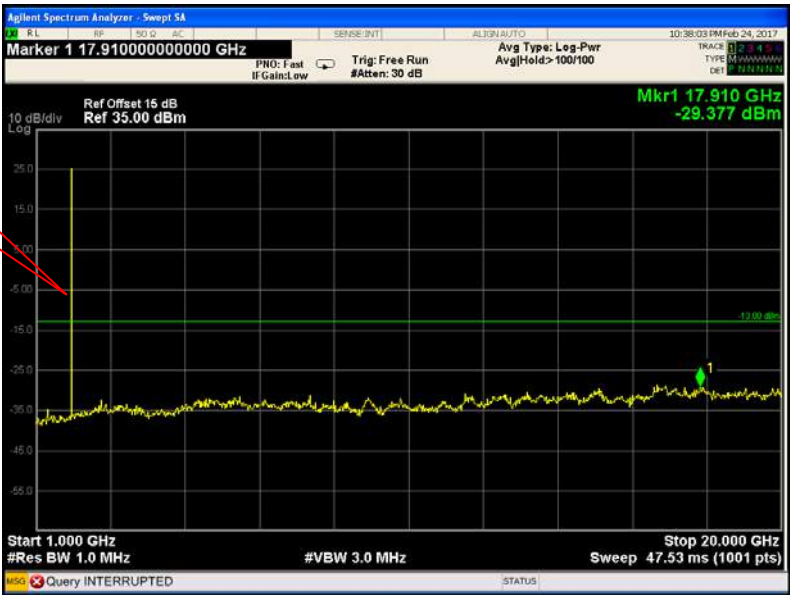

Cellular Band (Part 24E)


EGPRS 1900 - channel 512

30MHz-1GHz

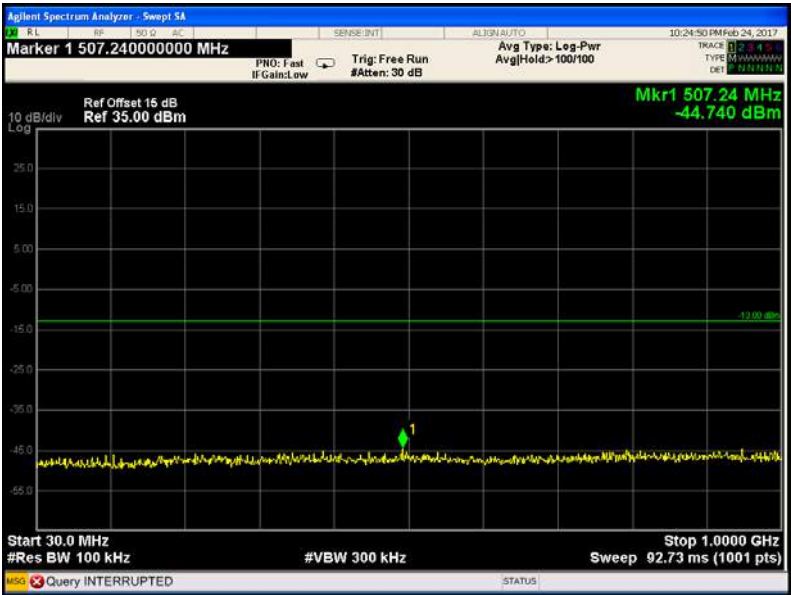


Above 1GHz

Fundamental

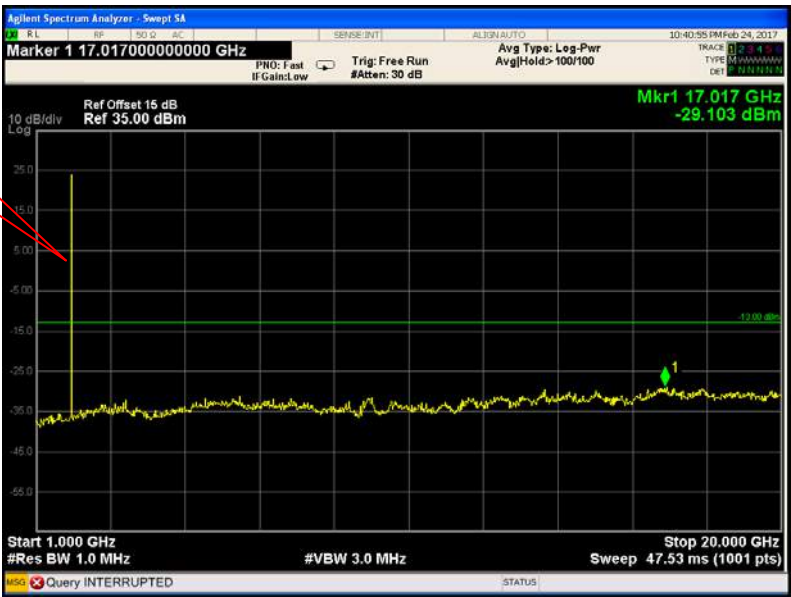


WCDMA band II - channel 9400

30MHz-1GHz

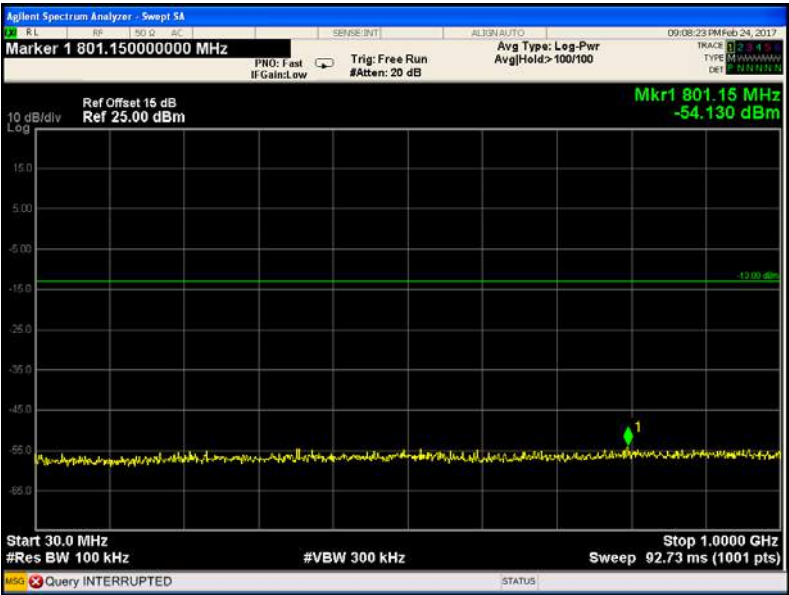


Above 1GHz

Fundamental

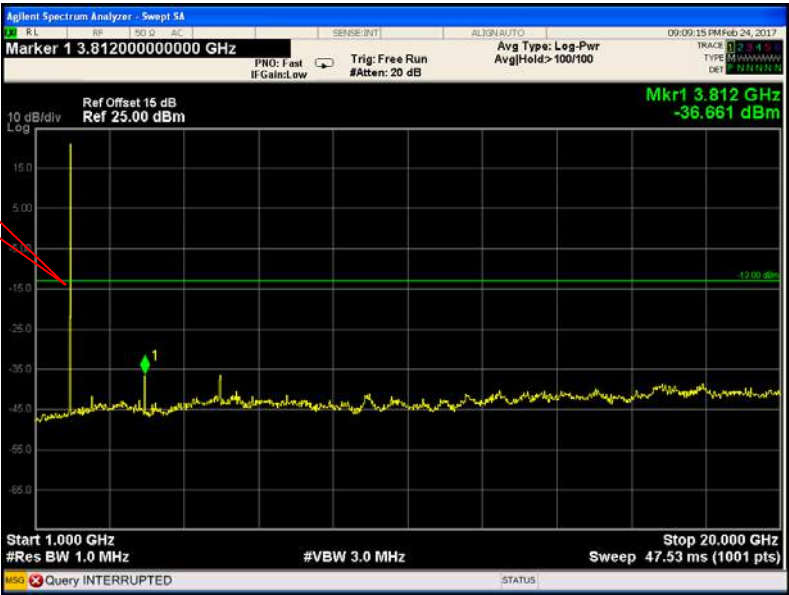


WCDMA band II - channel 9400 (HSDPA)

30MHz-1GHz

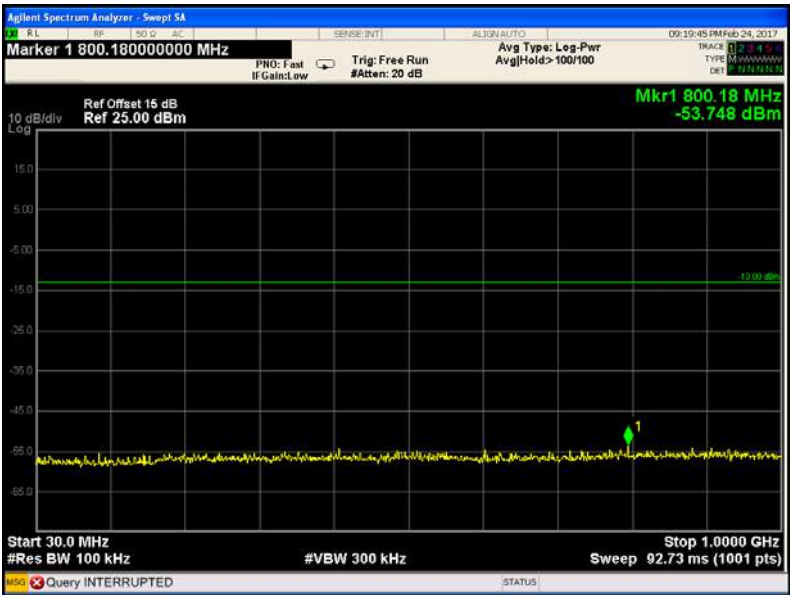


Above 1GHz

Fundamental

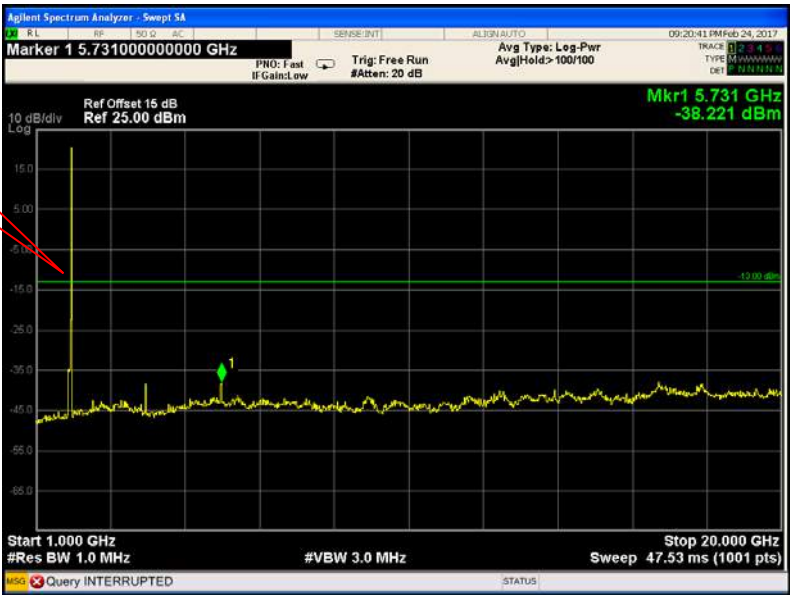


WCDMA band II - channel 9400 (HSUPA)

30MHz-1GHz

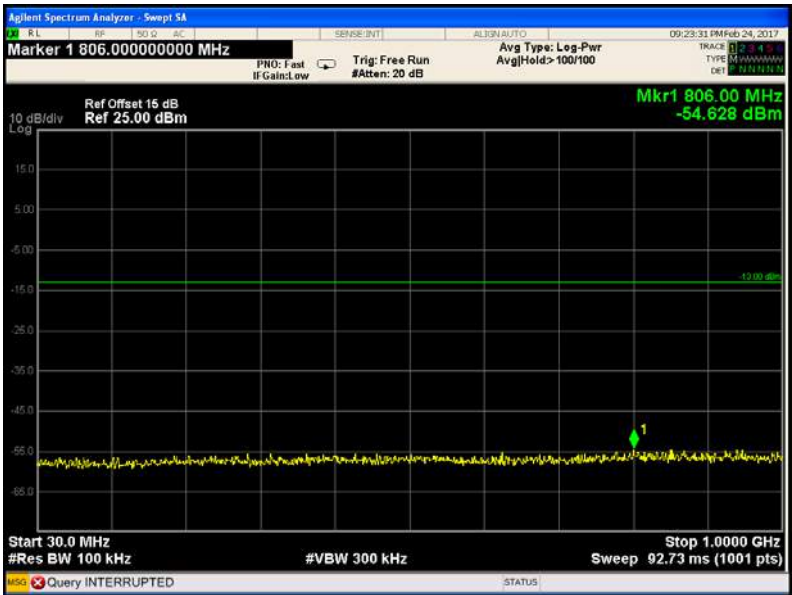

Above 1GHz


Fundamental

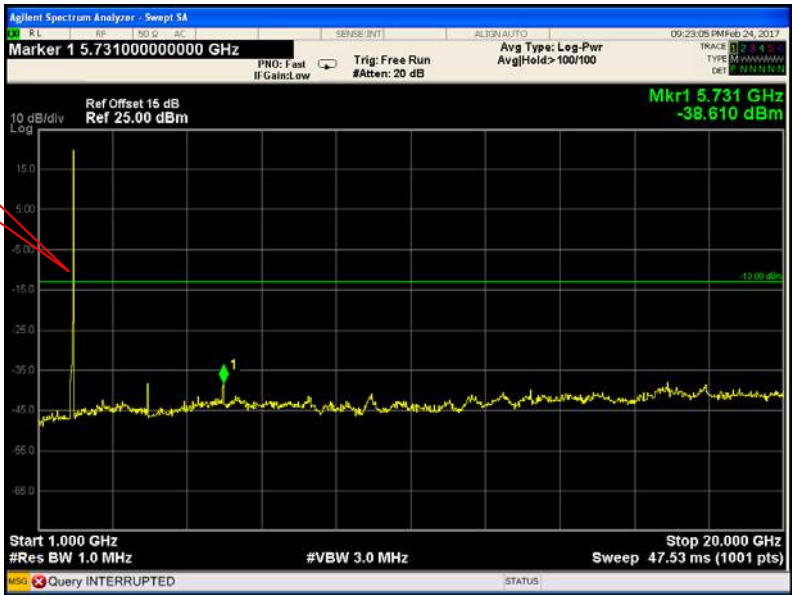

(Part 27)

WCDMA band IV - channel 1313

30MHz-1GHz

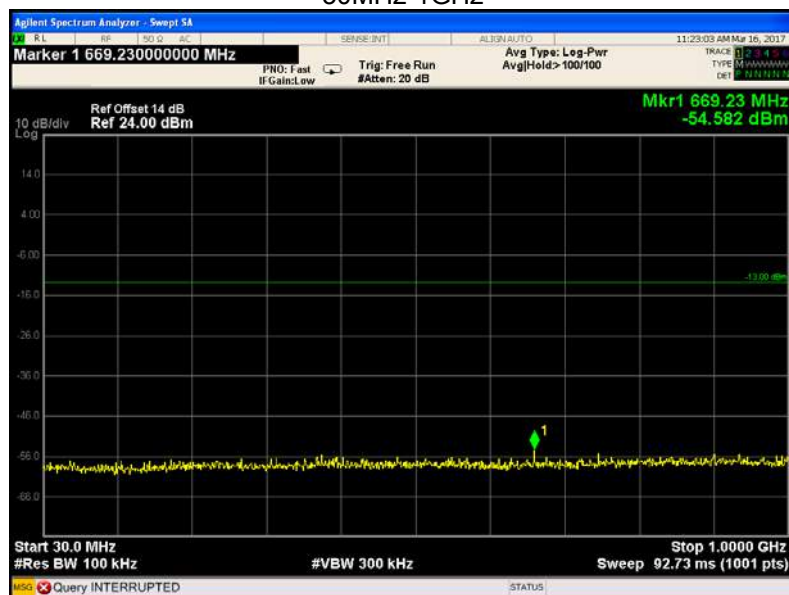


Above 1GHz

Fundamental




WCDMA band IV - channel 1313 (HSDPA)

30MHz-1GHz

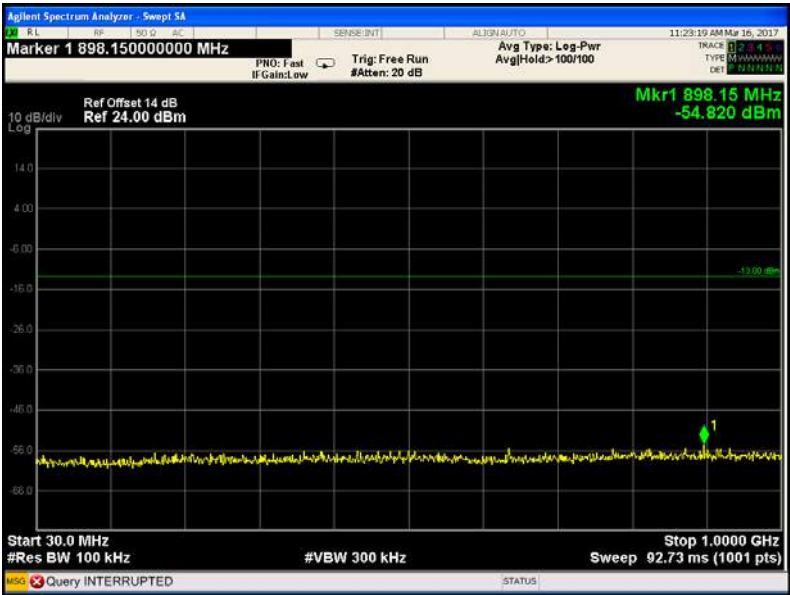


Above 1GHz

Fundamental

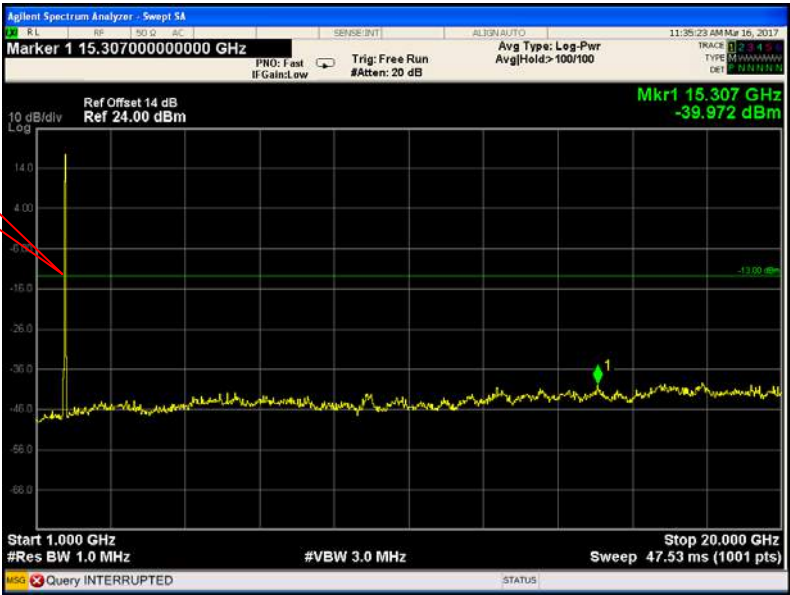

WCDMA band IV - channel 1313 (HSUPA)

30MHz-1GHz

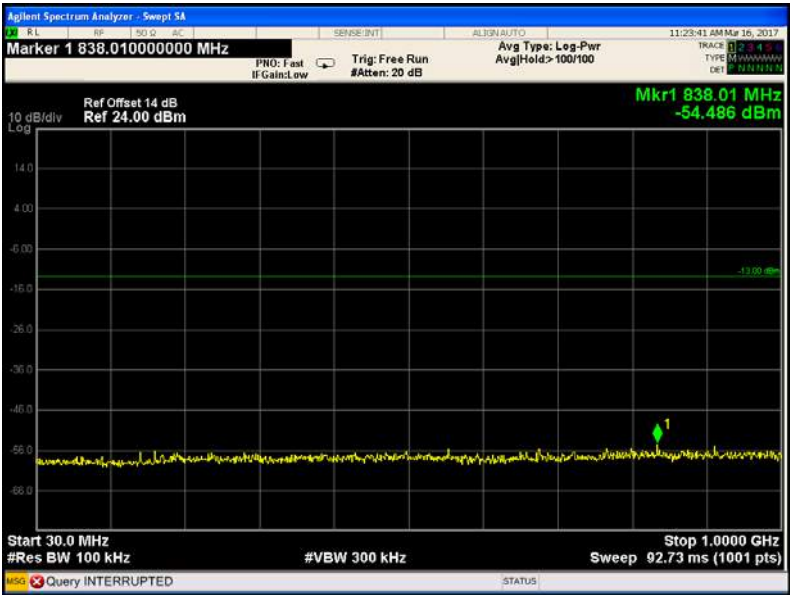


Above 1GHz


Fundamental



Modem 2
Cellular Band (Part 22H)
GPRS 850 - channel 128
30MHz-1GHz

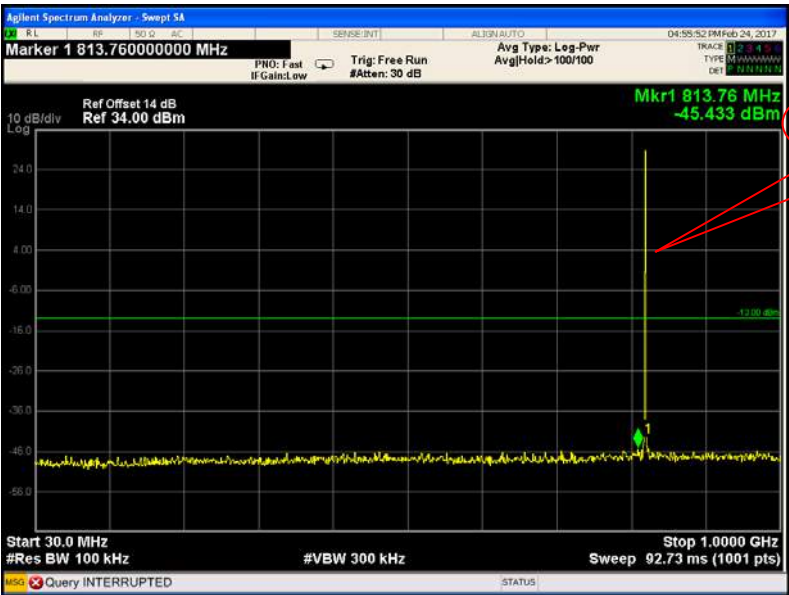


Above 1GHz

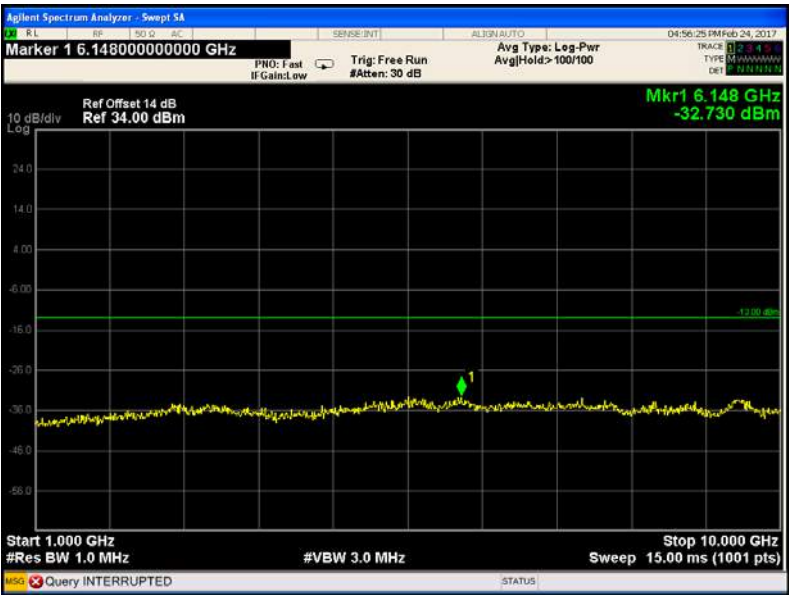


Cellular Band (Part 22H)

EGPRS 850 - channel 128

30MHz-1GHz

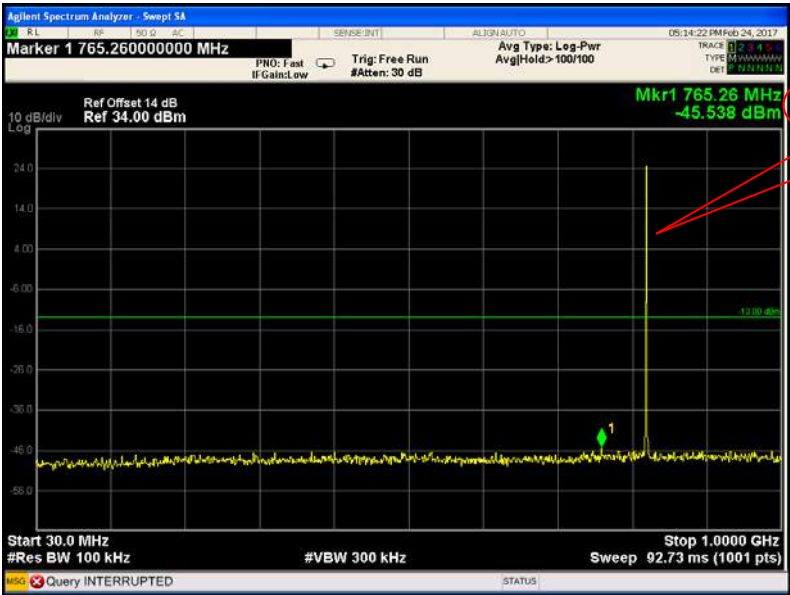


Above 1GHz

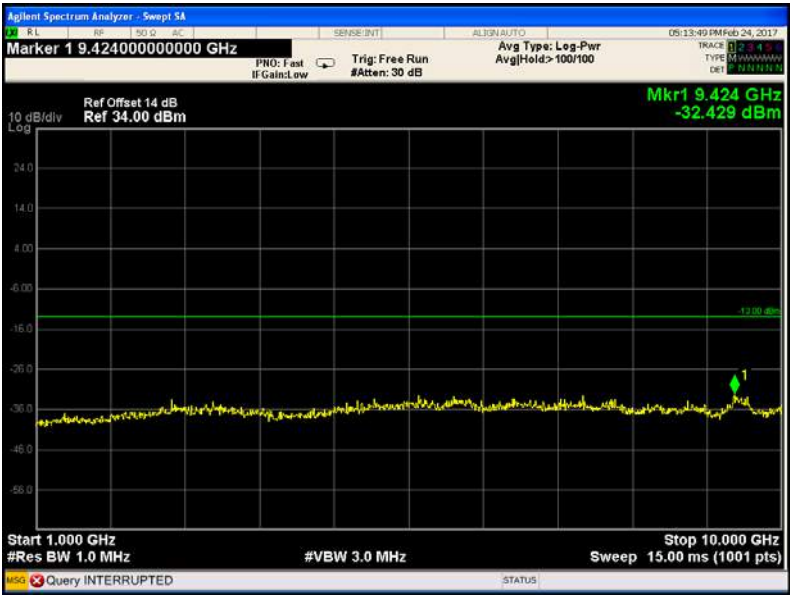


WCDMA band V - channel 4233

30MHz-1GHz

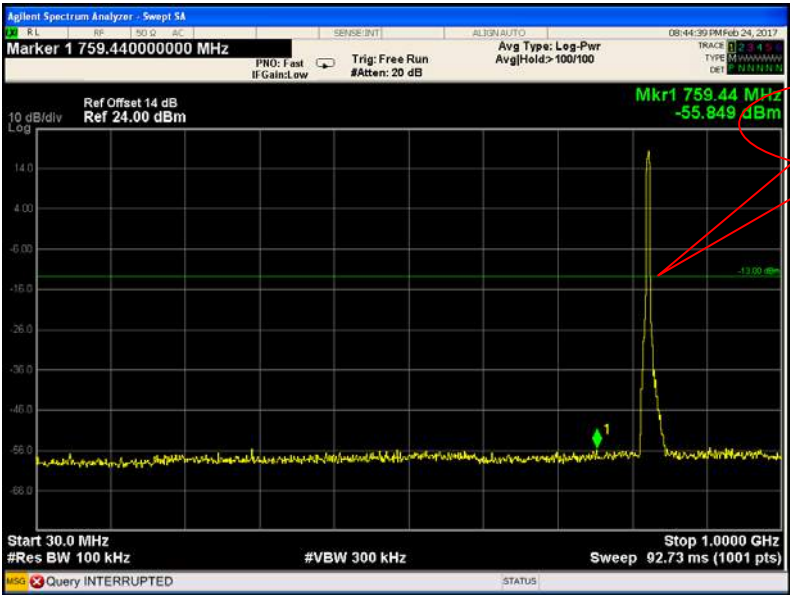


Above 1GHz

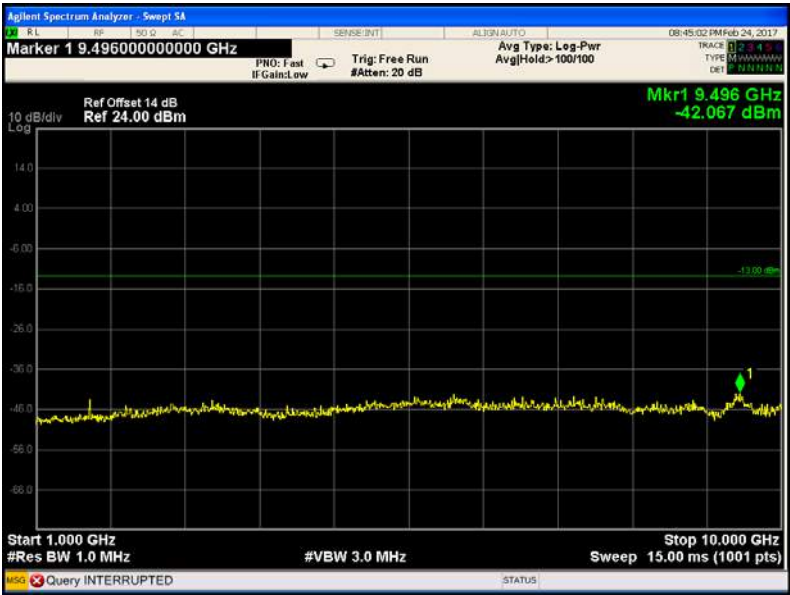


WCDMA band V - channel 4233 (HSDPA)

30MHz-1GHz

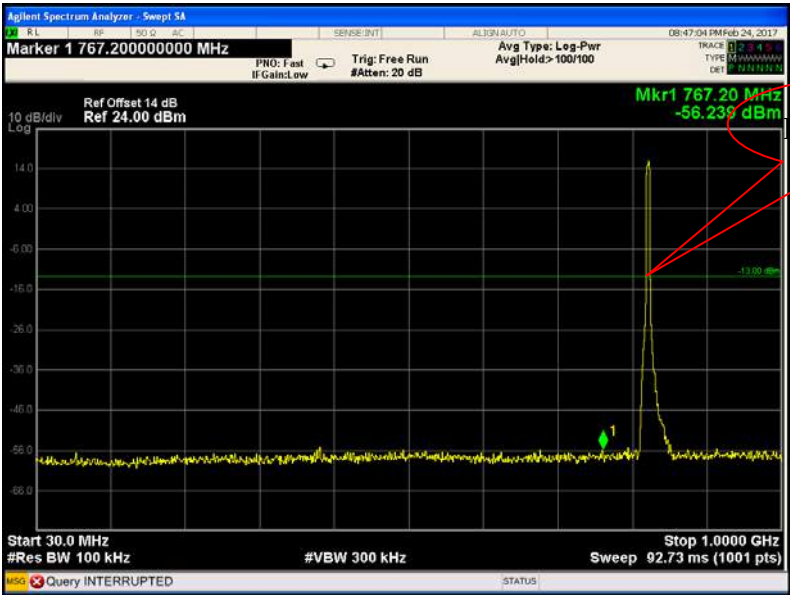


Above 1GHz

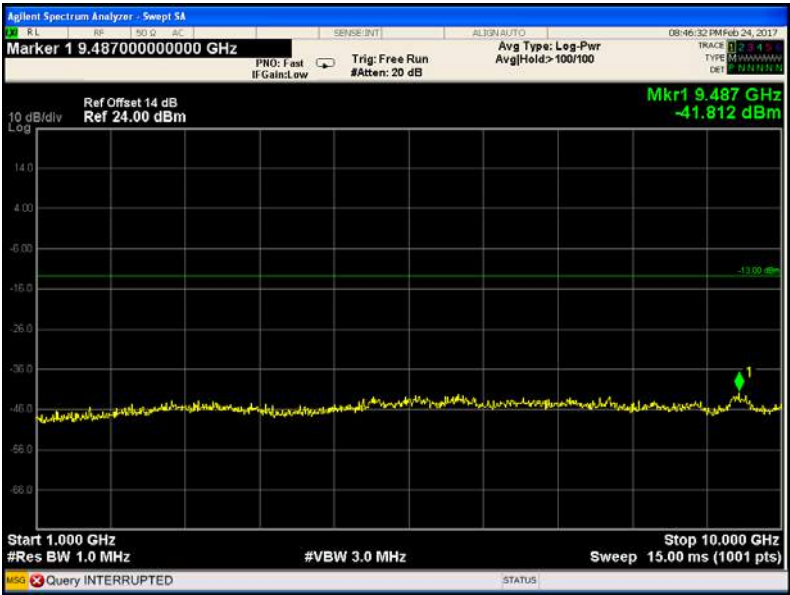

WCDMA band V - channel 4233 (HSUPA)

30MHz-1GHz

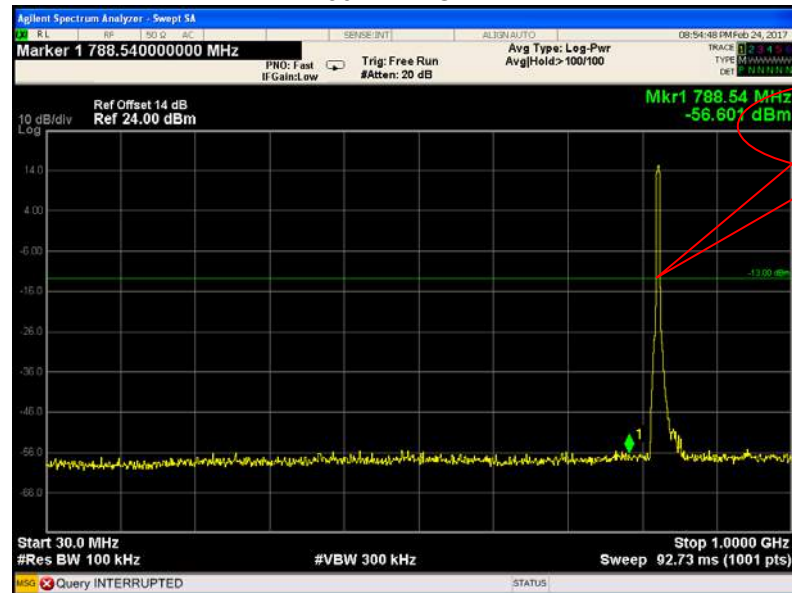


Above 1GHz



Cellular Band (Part 24E)
GPRS 1900 - channel 512

30MHz-1GHz

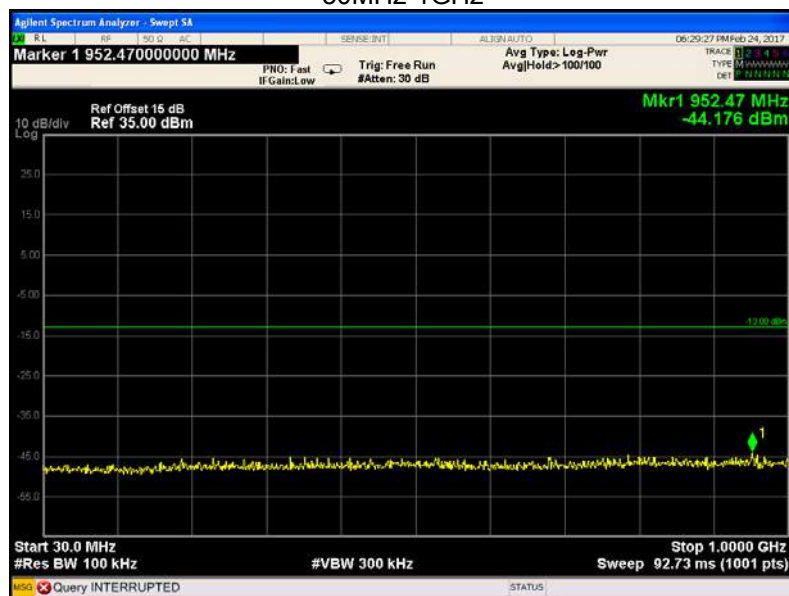


Above 1GHz

Fundamental



Cellular Band (Part 24E)
EGPRS 1900 - channel 512
30MHz-1GHz

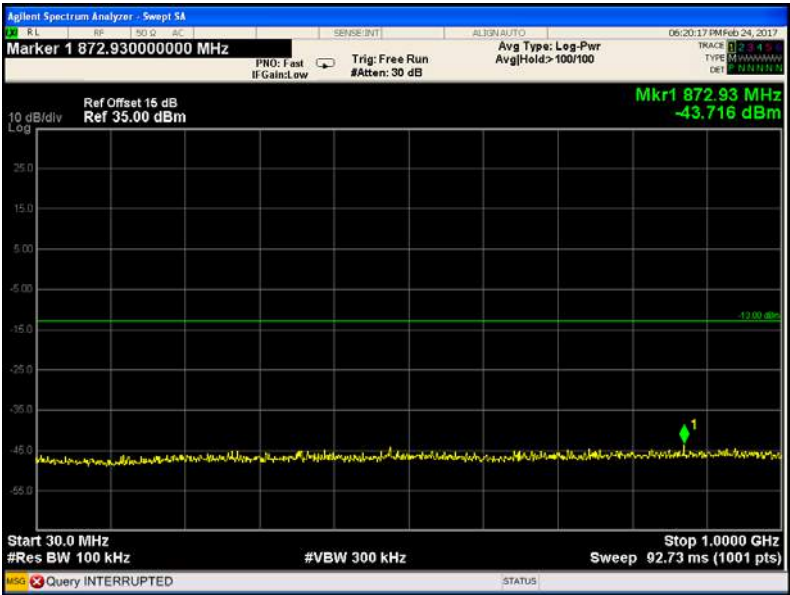


Above 1GHz

Fundamental




WCDMA band II - channel 9400

30MHz-1GHz

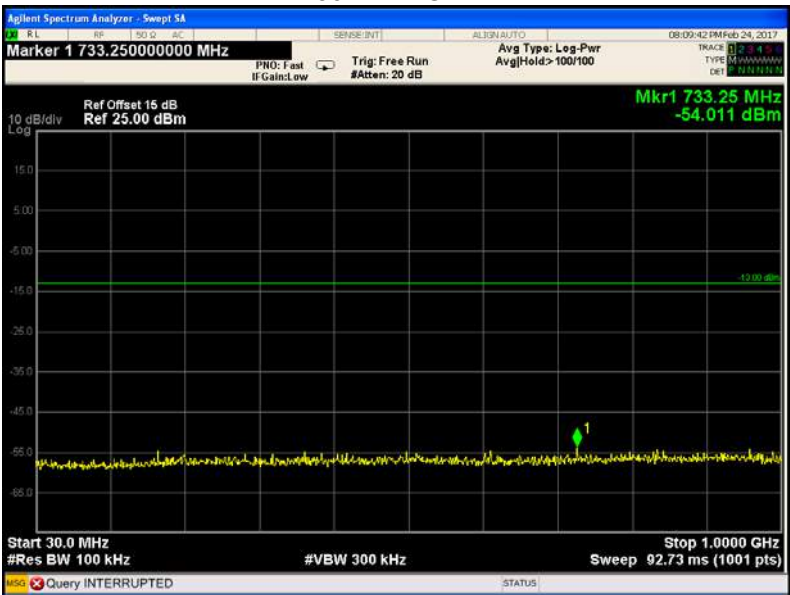


Above 1GHz

Fundamental

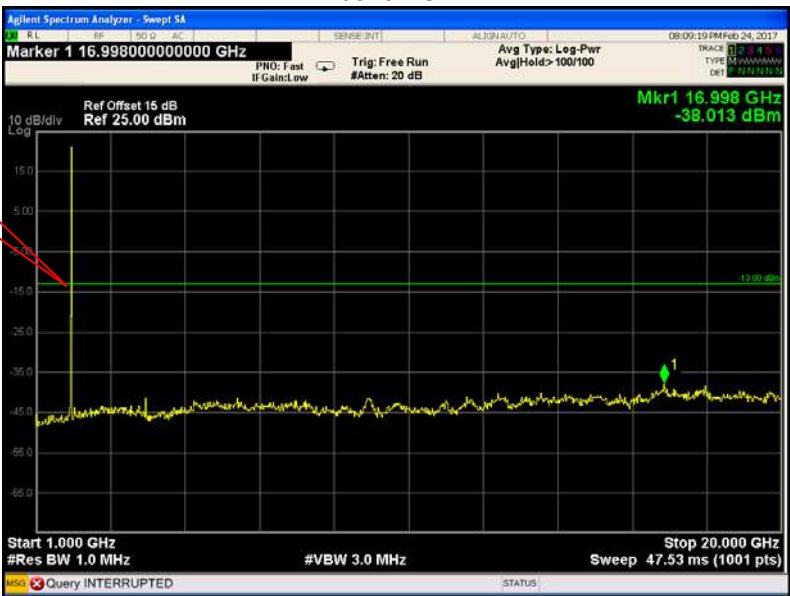


WCDMA band II - channel 9400 (HSDPA)

30MHz-1GHz

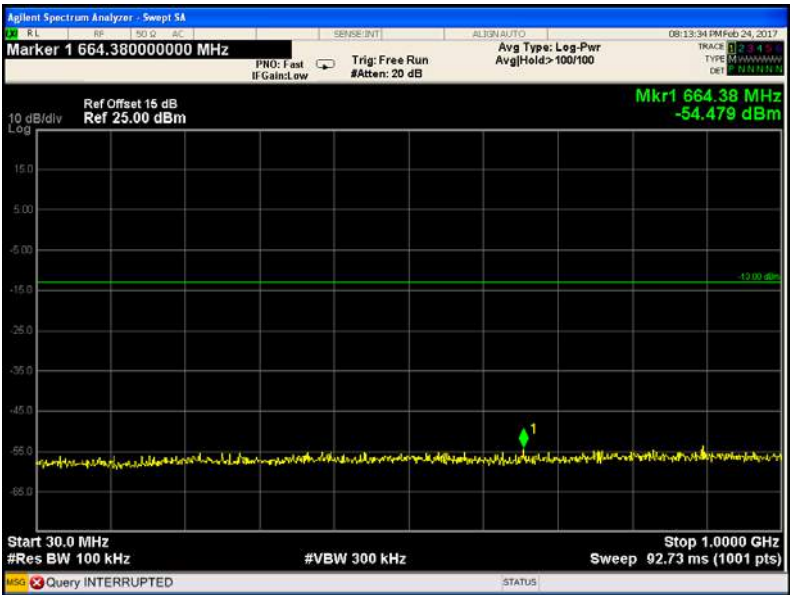


Above 1GHz

Fundamental

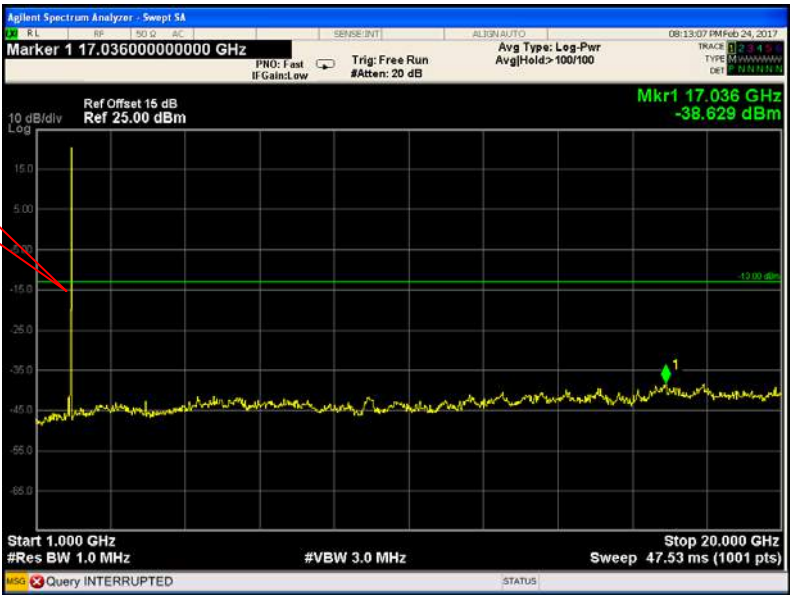


WCDMA band II - channel 9400 (HSUPA)

30MHz-1GHz

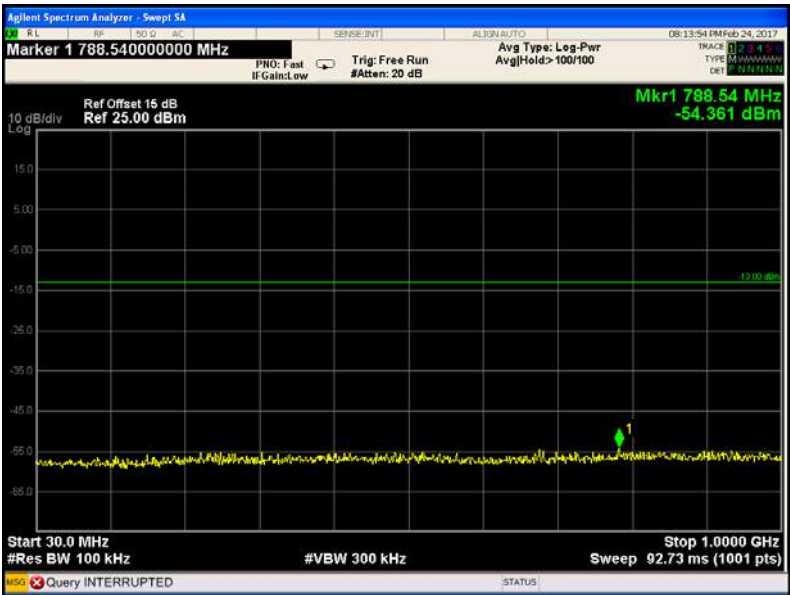


Above 1GHz

Fundamental

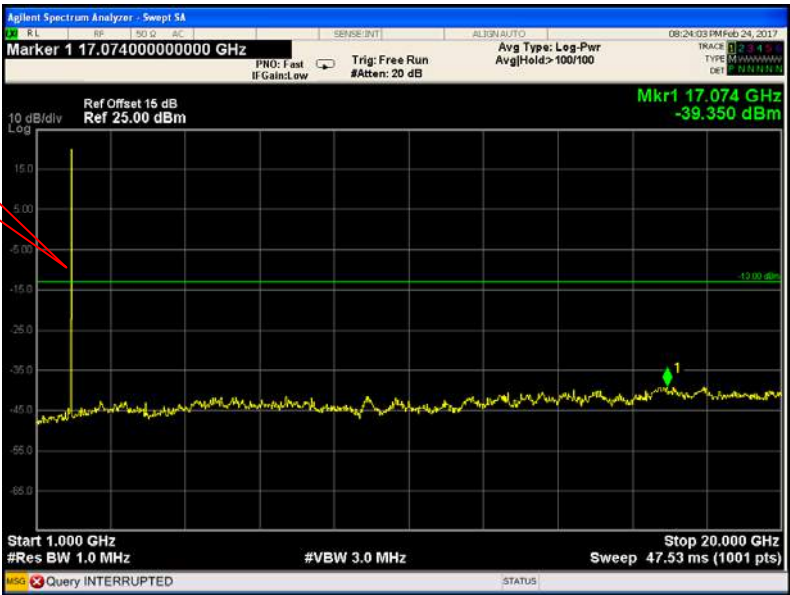


(Part 27)
WCDMA band IV - channel 1313
30MHz-1GHz

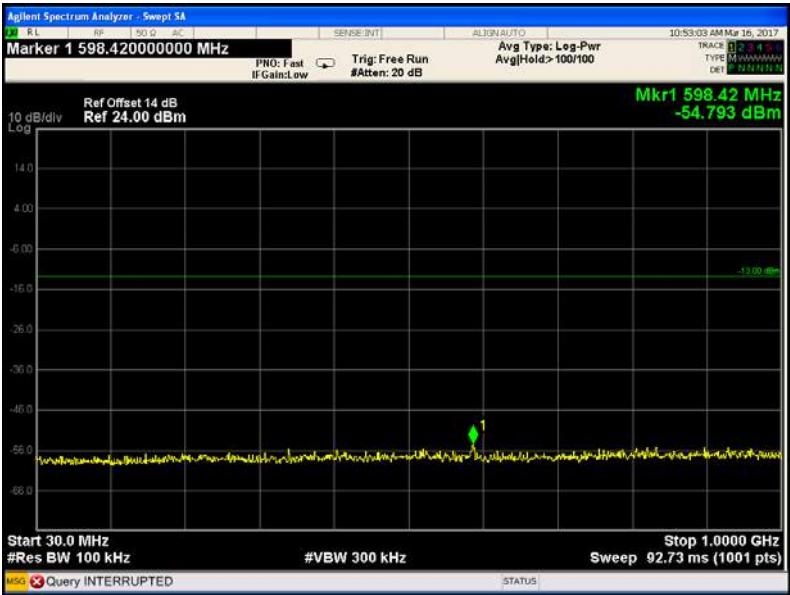


Above 1GHz

Fundamental

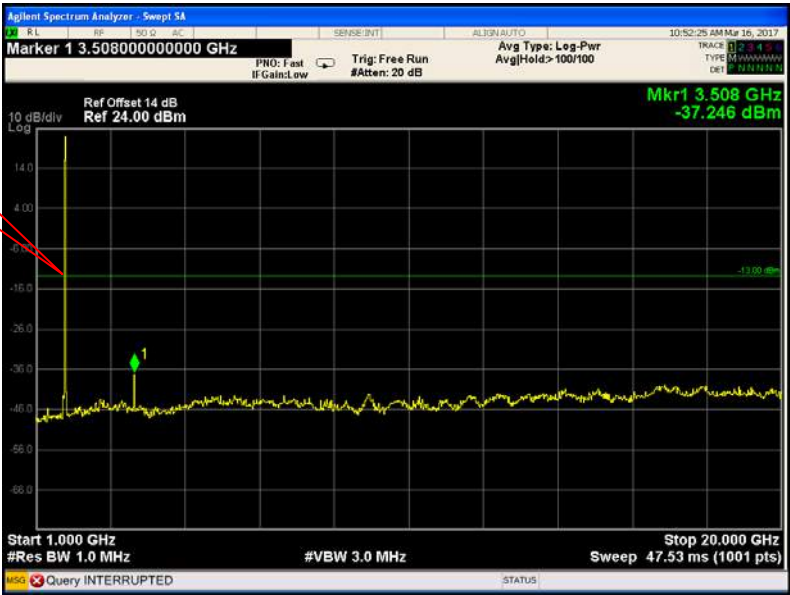

WCDMA band IV - channel 1313 (HSDPA)

30MHz-1GHz

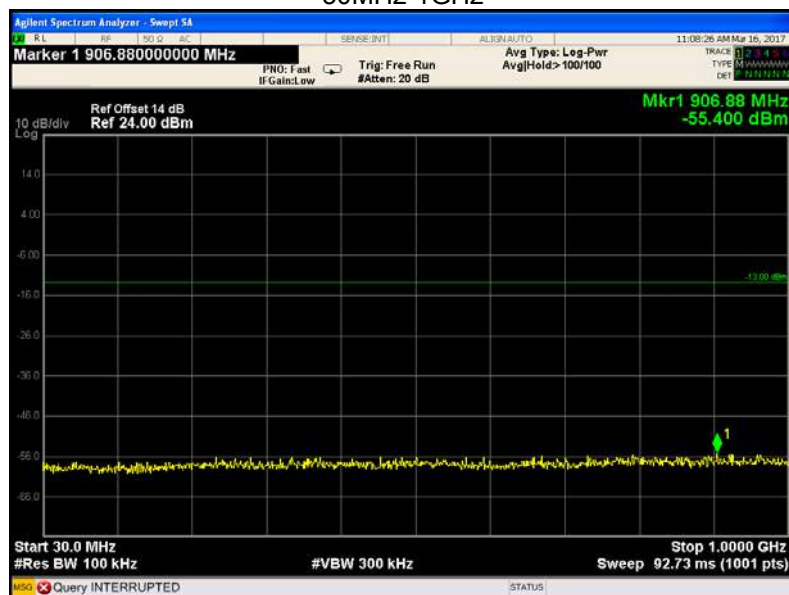


Above 1GHz

Fundamental



WCDMA band IV - channel 1313 (HSUPA)

30MHz-1GHz

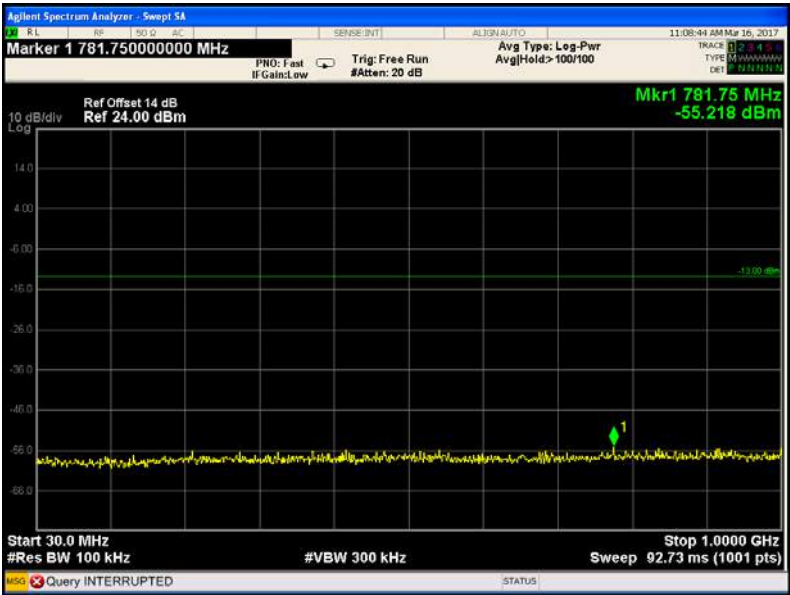

Above 1GHz

Fundamental



12 SPURIOUS RADIATED EMISSIONS

Test Requirement: FCC Part 2.1053, 22.917, 24.238, 27.53(h)

Test Method: TIA/EIA-603-D:2010

KDB971168 D01 v02r02

Test Mode: TX transmitting

12.1 EUT Operation

Operating Environment :


Temperature: 23.5 °C

Humidity: 52.1 % RH


Atmospheric Pressure: 101.2kPa

12.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the test setup for emission measurement from 30 MHz to 1 GHz.

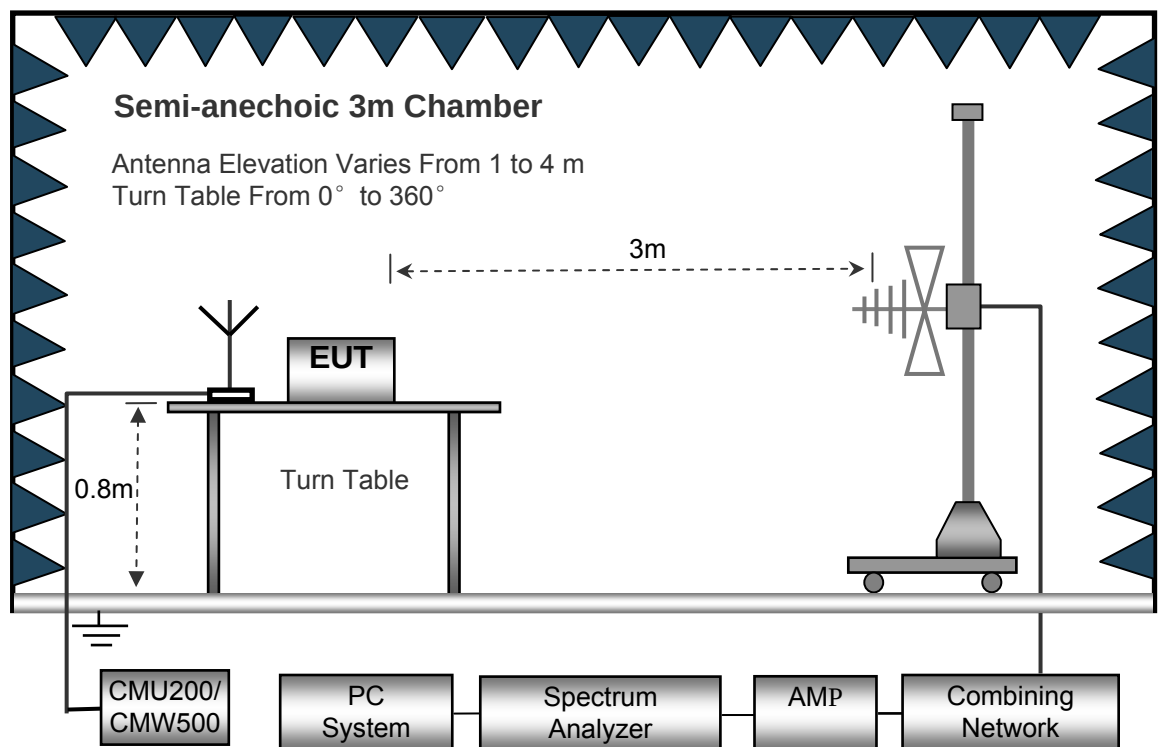

The test setup for emission measurement above 1 GHz.

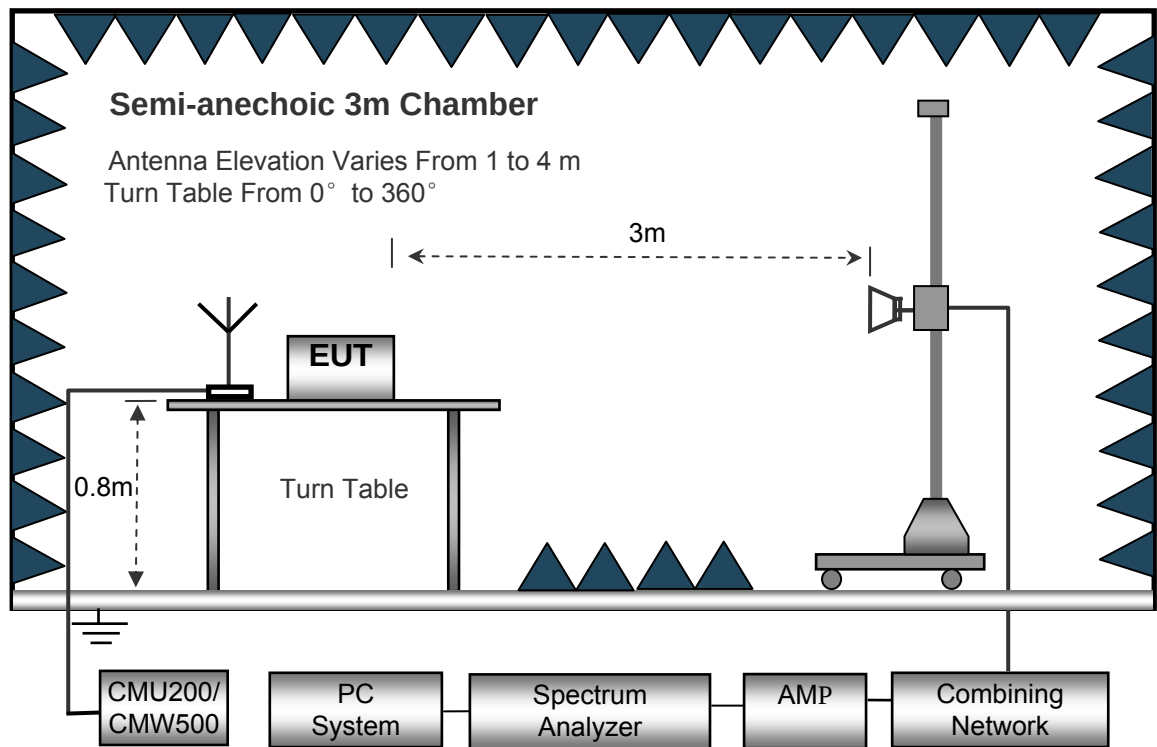

12.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

12.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from 30MHz up to the tenth harmonic of the highest fundamental frequency.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.
7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level
Spurious attenuation limit in dB = $43 + 10 \lg (\text{power out in Watts})$
8. Repeat above procedures until the measurements for all frequencies are completed.

12.5 Summary of Test Results

For 26MHz~30MHz,

The measurements were more than 20 dB below the limit and not reported.

Remark: Test performed from 30MHz to 10th harmonics with low/middle/high channels, only the worst data were recorded.

Cellular Band (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band V Channel 4233										
216.37	40.88	205	1.2	H	-69.63	0.15	0.00	-69.78	-13.00	-56.78
216.37	43.70	135	1.7	V	-63.89	0.15	0.00	-64.04	-13.00	-51.04
1652.80	58.42	185	1.0	H	-55.55	0.30	9.40	-46.45	-13.00	-33.45
1652.80	49.10	253	2.2	V	-64.43	0.30	9.40	-55.33	-13.00	-42.33
2479.20	51.05	335	1.9	H	-62.95	0.43	10.60	-52.78	-13.00	-39.78
2479.20	40.07	74	1.4	V	-70.21	0.43	10.60	-60.04	-13.00	-47.04

Cellular Band (Part 24E/27)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
WCDMA Band II Channel 9400										
201.36	46.99	185	1.1	H	-63.52	0.15	0.00	-63.67	-13.00	-50.67
201.36	39.84	211	1.5	V	-67.75	0.15	0.00	-67.90	-13.00	-54.90
3815.20	59.80	168	1.5	H	-51.74	2.37	12.50	-41.61	-13.00	-28.61
3815.20	53.39	170	1.6	V	-56.42	2.37	12.50	-46.29	-13.00	-33.29
5722.80	47.54	252	1.2	H	-62.07	2.86	12.90	-52.03	-13.00	-39.03
5722.80	38.02	310	1.7	V	-70.86	2.86	12.90	-60.82	-13.00	-47.82
WCDMA Band IV Channel 1313										
201.36	46.92	48	2.1	H	-63.59	0.15	0.00	-63.74	-13.00	-50.74
201.36	41.07	82	1.9	V	-66.52	0.15	0.00	-66.67	-13.00	-53.67
3424.80	58.66	8	1.7	H	-52.88	2.34	12.40	-42.82	-13.00	-29.82
3424.80	53.57	249	1.8	V	-56.24	2.34	12.40	-46.18	-13.00	-33.18
5137.20	47.56	312	1.7	H	-62.05	2.79	12.70	-52.14	-13.00	-39.14
5137.20	37.38	51	1.6	V	-71.50	2.79	12.70	-61.59	-13.00	-48.59

Note: 1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Absolute Level - Limit

13 Band Edge Measurement

Test Requirement:	FCC Part 2.1051, 22.917(a), 24.238(a), 27.53(h)
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v02r02
Test Mode:	TX transmitting

13.1 EUT Operation

Operating Environment :	
Temperature:	23.5 °C
Humidity:	52.3 % RH
Atmospheric Pressure:	101.3kPa

13.2 Test Procedure


The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

According to FCC Part 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC Part 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC Part 27.53(h), Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

The center of the spectrum analyzer was set to block edge frequency

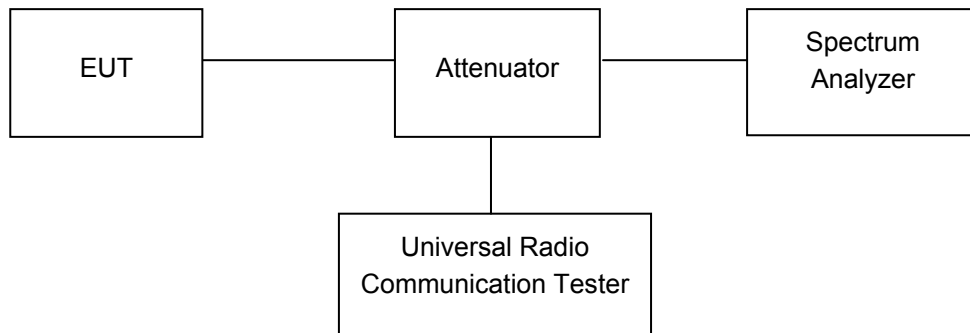

13.3 Test Result

Test plots

Modem 1

Cellular Band (Part 22H)


GPRS 850 band edge-left side



GPRS 850 band edge-right side




EGPRS 850 band edge-left side

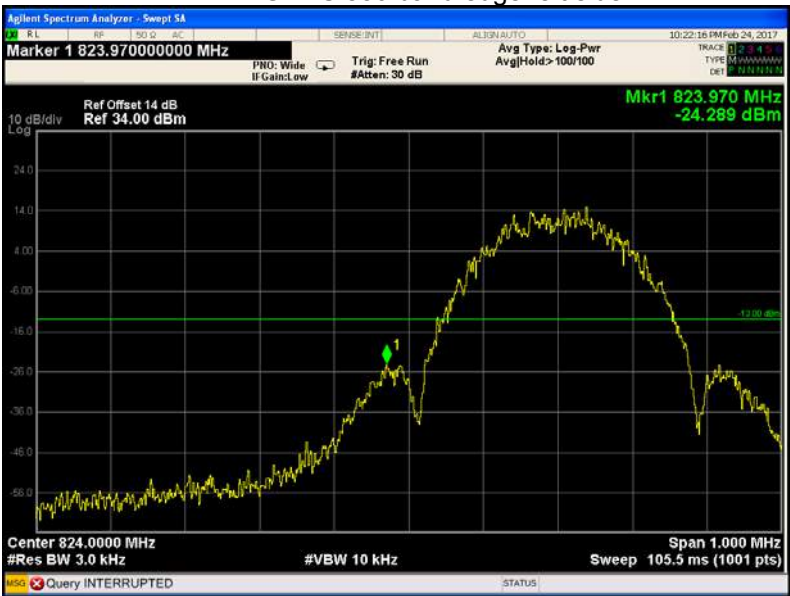

EGPRS 850 band edge-right side



WCDMA band V band edge-left side

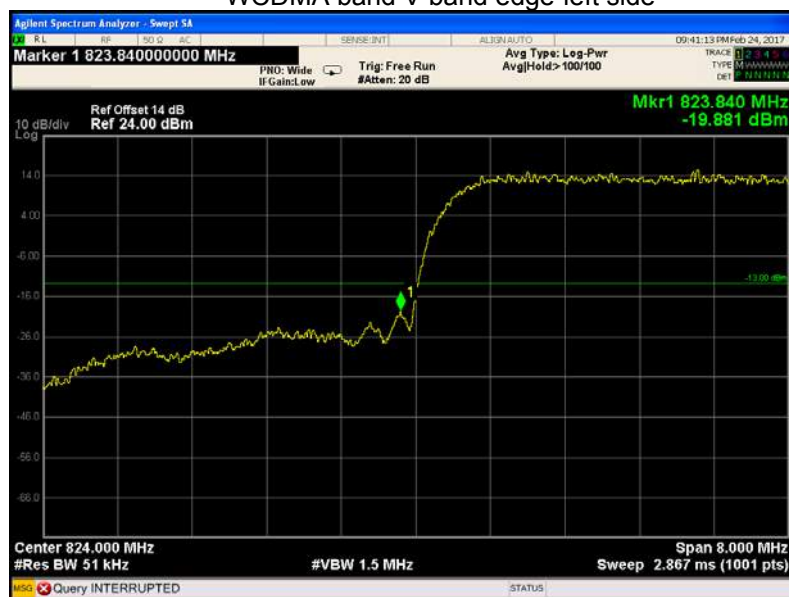

WCDMA band V band edge-right side



WCDMA band V band edge-left side (HSDPA)



WCDMA band V band edge-right side (HSDPA)



WCDMA band V band edge-left side (HSUPA)



WCDMA band V band edge-right side (HSUPA)



Cellular Band (Part 24E)


GPRS 1900 band edge-left side



GPRS 1900 band edge-right side




EGPRS 1900 band edge-left side

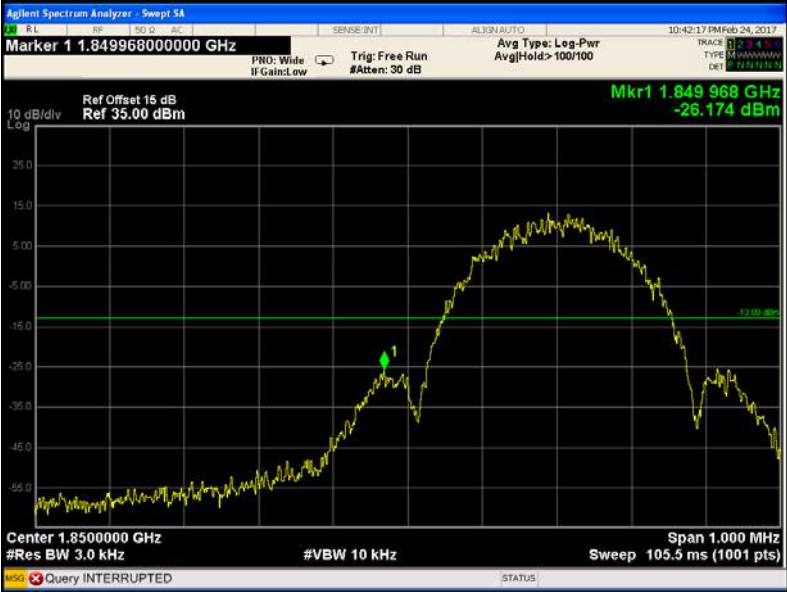

EGPRS 1900 band edge-right side



WCDMA band II band edge-left side

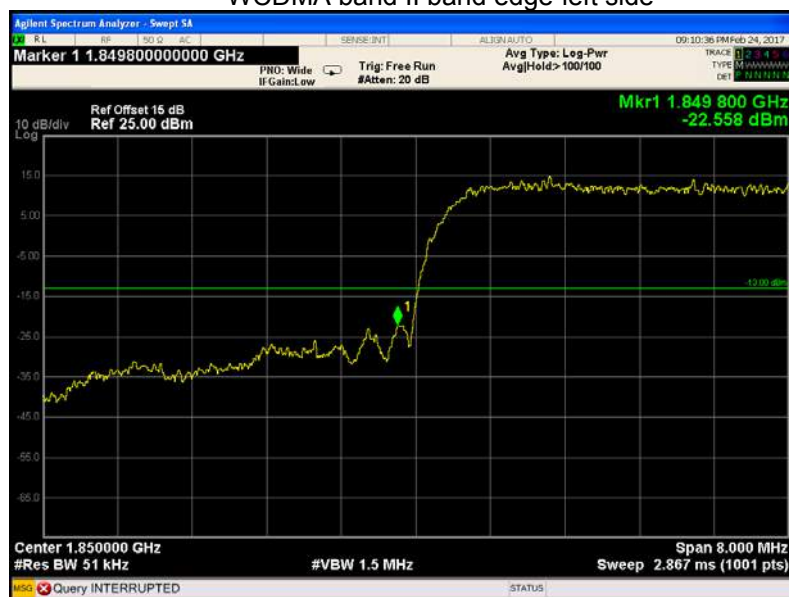

WCDMA band II band edge-right side




WCDMA band II band edge-left side (HSDPA)



WCDMA band II band edge-right side (HSDPA)



WCDMA band II band edge-left side (HSUPA)

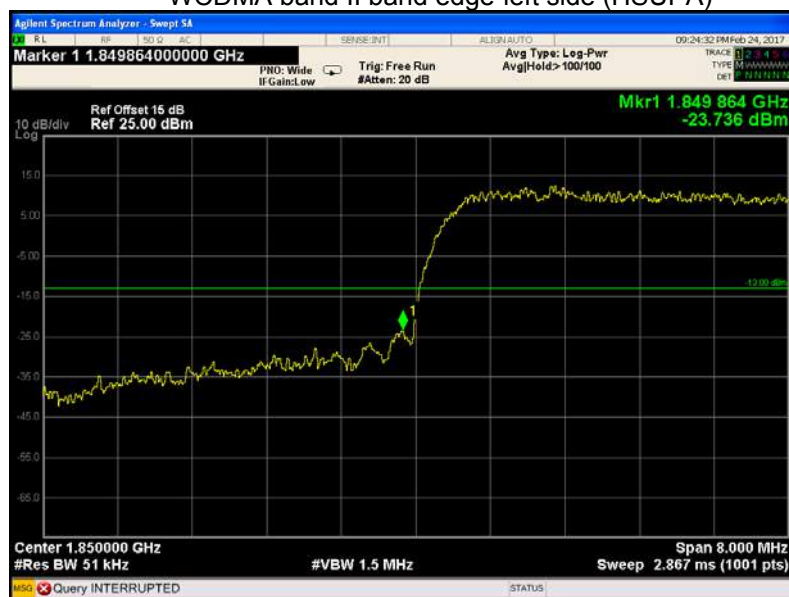

WCDMA band II band edge-right side (HSUPA)



Part 27

WCDMA band IV band edge-left side



WCDMA band IV band edge-right side




WCDMA band IV band edge-left side (HSDPA)



WCDMA band IV band edge-right side (HSDPA)



WCDMA band IV band edge-left side (HSUPA)

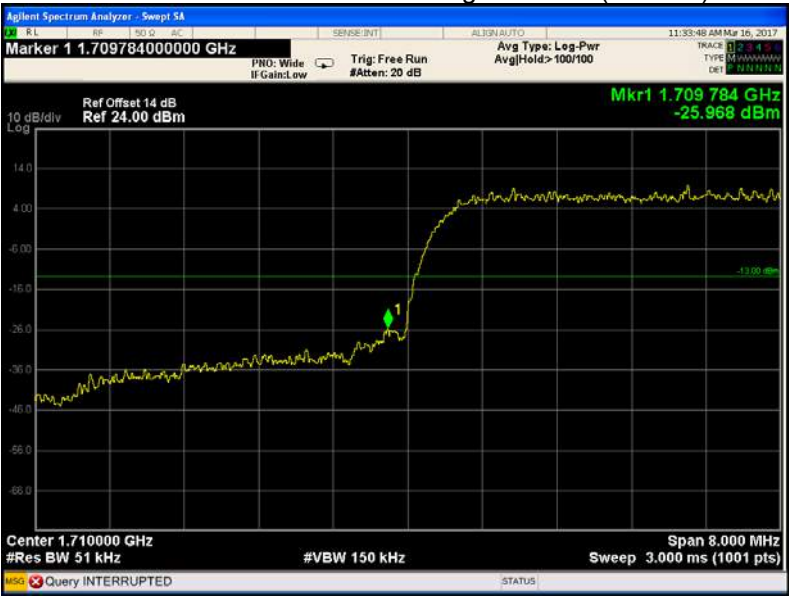


WCDMA band IV band edge-right side (HSUPA)



Modem 2

Cellular Band (Part 22H)


GPRS 850 band edge-left side

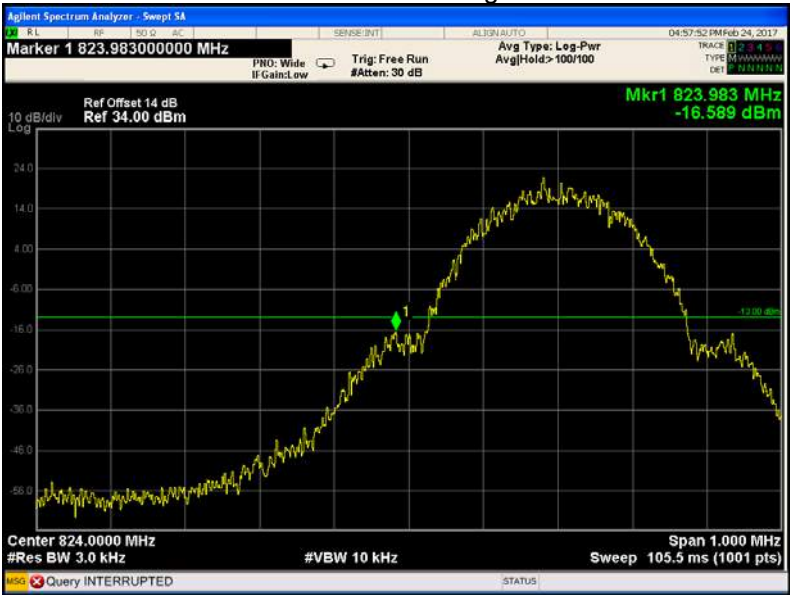

GPRS 850 band edge-right side



EGPRS 850 band edge-left side

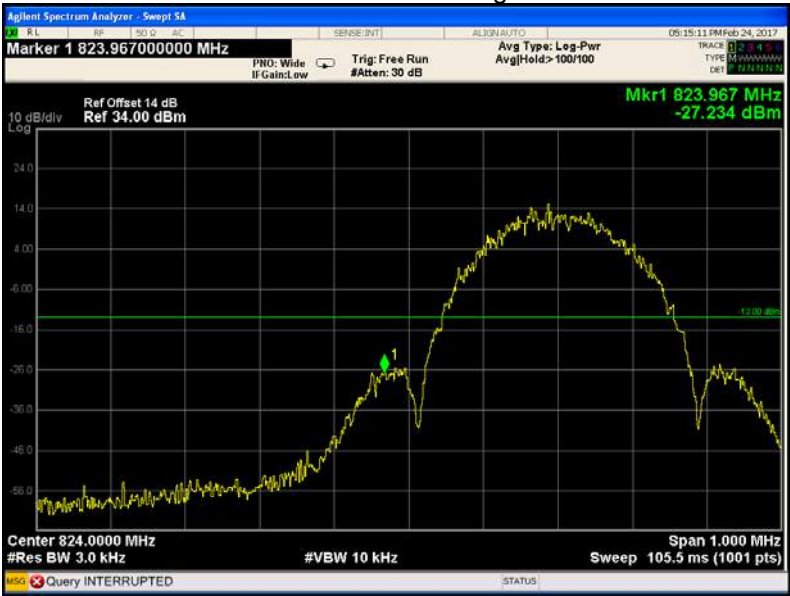

EGPRS 850 band edge-right side



WCDMA band V band edge-left side



WCDMA band V band edge-right side



WCDMA band V band edge-left side (HSDPA)



WCDMA band V band edge-right side (HSDPA)



WCDMA band V band edge-left side (HSUPA)



WCDMA band V band edge-right side (HSUPA)



Cellular Band (Part 24E)

GPRS 1900 band edge-left side



GPRS 1900 band edge-right side



EGPRS 1900 band edge-left side



EGPRS 1900 band edge-right side



WCDMA band II band edge-left side



WCDMA band II band edge-right side




WCDMA band II band edge-left side (HSDPA)



WCDMA band II band edge-right side (HSDPA)



WCDMA band II band edge-left side (HSUPA)

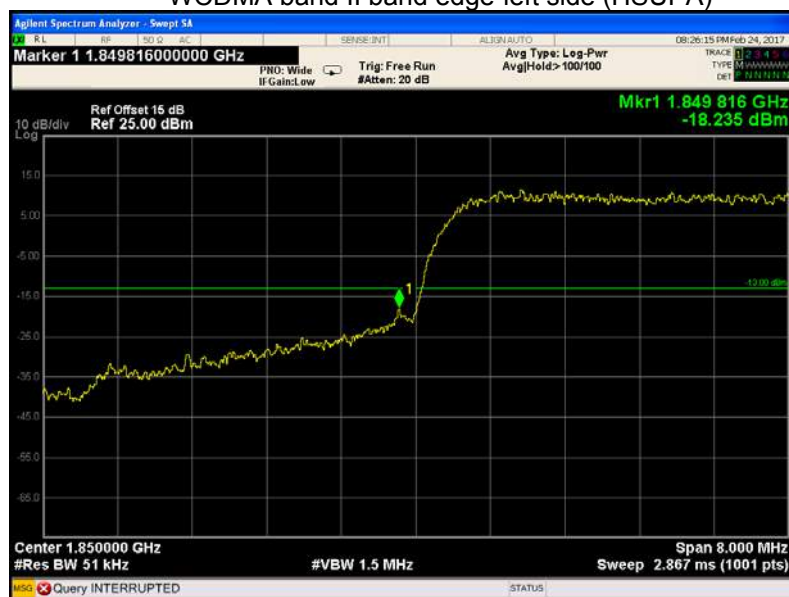

WCDMA band II band edge-right side (HSUPA)



Part 27


WCDMA band IV band edge-left side



WCDMA band IV band edge-right side



WCDMA band IV band edge-left side (HSDPA)

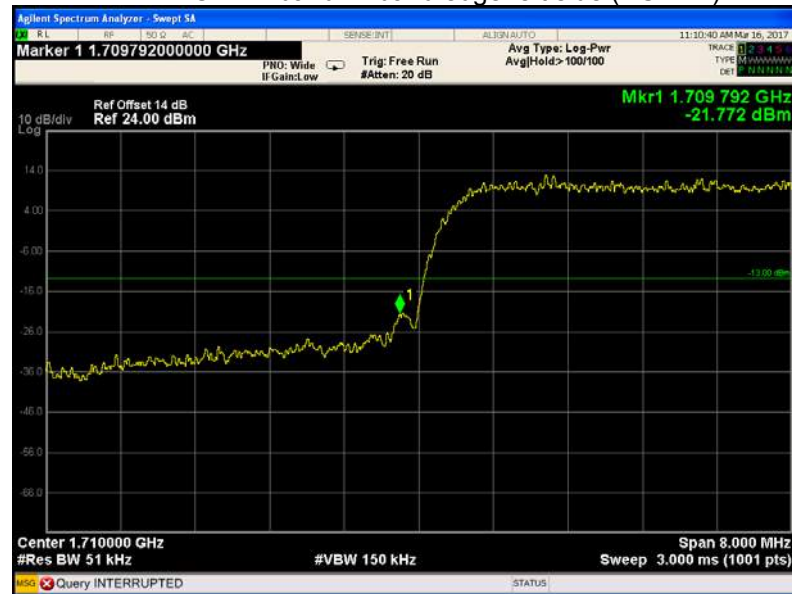

WCDMA band IV band edge-right side (HSDPA)



WCDMA band IV band edge-left side (HSUPA)



WCDMA band IV band edge-right side (HSUPA)



14 FREQUENCY STABILITY

Test Requirement:	FCC Part 2.1055, 22.355, 24.235, 27.5(h),27.54
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v02r02
Test Mode:	TX transmitting

14.1 EUT Operation


Operating Environment :	
Temperature:	22.9 °C
Humidity:	52.0 % RH
Atmospheric Pressure:	101.3kPa

14.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

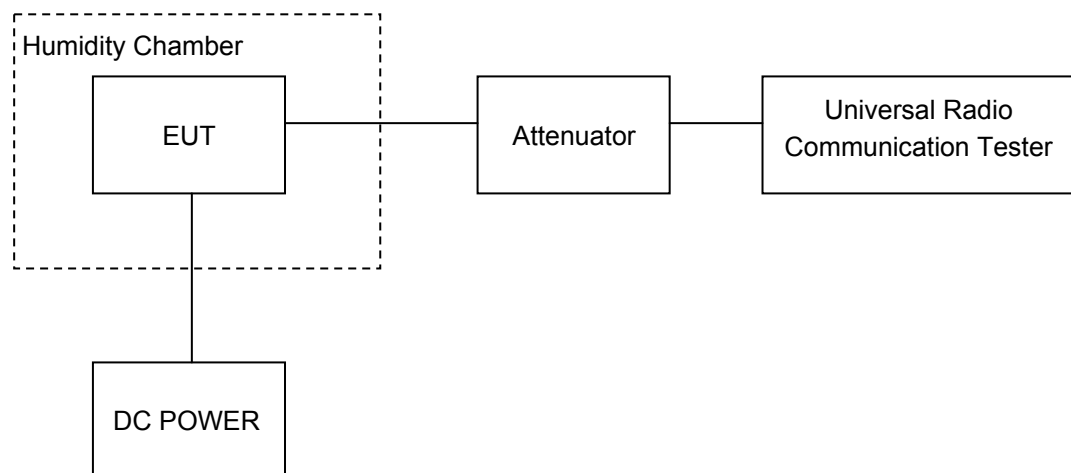

14.3 Test Result

Modem 1

Cellular Band (Part 22H)

GPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	5	0.0060	2.5
40		15	0.0179	2.5
30		8	0.0096	2.5
20		13	0.0155	2.5
10		17	0.0203	2.5
0		18	0.0215	2.5
-10		20	0.0239	2.5
-20		18	0.0215	2.5
-30		5	0.0060	2.5
20	3.3	10	0.0120	2.5
20	4.2	19	0.0227	2.5

EGPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	3	0.0036	2.5
40		10	0.0120	2.5
30		3	0.0036	2.5
20		6	0.0072	2.5
10		8	0.0096	2.5
0		0	0.0000	2.5
-10		-1	-0.0012	2.5
-20		2	0.0024	2.5
-30		1	0.0012	2.5
20	3.3	8	0.0096	2.5
20	4.2	10	0.0120	2.5

WCDMA Band V Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-7	-0.0037	2.5
40		1	0.0005	2.5
30		3	0.0016	2.5
20		-2	-0.0011	2.5
10		-5	-0.0027	2.5
0		4	0.0021	2.5
-10		-6	-0.0032	2.5
-20		2	0.0011	2.5
-30		-4	-0.0021	2.5
20	3.3	-5	-0.0027	2.5
20	4.2	-3	-0.0016	2.5

WCDMA Band V Test Frequency:836.6MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-7	-0.0084	2.5
40		-8	-0.0096	2.5
30		-10	-0.0120	2.5
20		-2	-0.0024	2.5
10		6	0.0072	2.5
0		-7	-0.0084	2.5
-10		-9	-0.0108	2.5
-20		-4	-0.0048	2.5
-30		7	0.0084	2.5
20	3.3	-1	-0.0012	2.5
20	4.2	-9	-0.0108	2.5

WCDMA Band V Test Frequency:836.6MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0024	2.5
40		-11	-0.0132	2.5
30		-2	-0.0024	2.5
20		-4	-0.0048	2.5
10		-4	-0.0048	2.5
0		-6	-0.0072	2.5
-10		-11	-0.0132	2.5
-20		3	0.0036	2.5
-30		-9	-0.0108	2.5
20	3.3	-5	-0.0060	2.5
20	4.2	3	0.0036	2.5

PCS Band (Part 24E)

GPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	1	0.0005	2.5
40		-1	-0.0005	2.5
30		8	0.0043	2.5
20		5	0.0027	2.5
10		0	0.0000	2.5
0		9	0.0048	2.5
-10		-3	-0.0016	2.5
-20		6	0.0032	2.5
-30		12	0.0064	2.5
20	3.3	3	0.0016	2.5
20	4.2	1	0.0005	2.5

EGPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	5	0.0027	2.5
40		17	0.0090	2.5
30		5	0.0027	2.5
20		8	0.0043	2.5
10		2	0.0011	2.5
0		-1	-0.0005	2.5
-10		17	0.0090	2.5
-20		13	0.0069	2.5
-30		2	0.0011	2.5
20	3.3	4	0.0021	2.5
20	4.2	3	0.0016	2.5

WCDMA Band II Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	5	0.0027	2.5
40		-9	-0.0048	2.5
30		3	0.0016	2.5
20		-1	-0.0005	2.5
10		-3	-0.0016	2.5
0		6	0.0032	2.5
-10		6	0.0032	2.5
-20		5	0.0027	2.5
-30		7	0.0037	2.5
20	3.3	-8	-0.0043	2.5
20	4.2	-8	-0.0043	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-1	-0.0005	2.5
40		5	0.0027	2.5
30		-3	-0.0016	2.5
20		-3	-0.0016	2.5
10		3	0.0016	2.5
0		-5	-0.0027	2.5
-10		1	0.0005	2.5
-20		-3	-0.0016	2.5
-30		2	0.0011	2.5
20	3.3	3	0.0016	2.5
20	4.2	-11	-0.0059	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	1	0.0005	2.5
40		8	0.0043	2.5
30		-1	-0.0005	2.5
20		-1	-0.0005	2.5
10		-9	-0.0048	2.5
0		5	0.0027	2.5
-10		-7	-0.0037	2.5
-20		-6	-0.0032	2.5
-30		-7	-0.0037	2.5
20	3.3	7	0.0037	2.5
20	4.2	0	0.0000	2.5

Part 27

WCDMA Band IV Test Frequency:1732.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0023	2.5
40		-4	-0.0023	2.5
30		-4	-0.0023	2.5
20		-1	-0.0006	2.5
10		2	0.0012	2.5
0		-10	-0.0058	2.5
-10		-3	-0.0017	2.5
-20		7	0.0040	2.5
-30		-4	-0.0023	2.5
20	3.3	0	0.0000	2.5
20	4.2	-5	-0.0029	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	8	0.0046	2.5
40		6	0.0035	2.5
30		7	0.0040	2.5
20		1	0.0006	2.5
10		-2	-0.0012	2.5
0		5	0.0029	2.5
-10		-4	-0.0023	2.5
-20		-7	-0.0040	2.5
-30		-7	-0.0040	2.5
20	3.3	-4	-0.0023	2.5
20	4.2	4	0.0023	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-4	-0.0023	2.5
40		-7	-0.0040	2.5
30		3	0.0017	2.5
20		1	0.0006	2.5
10		5	0.0029	2.5
0		-3	-0.0017	2.5
-10		0	0.0000	2.5
-20		-1	-0.0006	2.5
-30		1	0.0006	2.5
20	3.3	-1	-0.0006	2.5
20	4.2	6	0.0035	2.5

Modem 2

Cellular Band (Part 22H)

GPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	26	0.0311	2.5
40		17	0.0203	2.5
30		29	0.0347	2.5
20		22	0.0263	2.5
10		29	0.0347	2.5
0		26	0.0311	2.5
-10		31	0.0371	2.5
-20		21	0.0251	2.5
-30		20	0.0239	2.5
20	3.3	24	0.0287	2.5
20	4.2	22	0.0263	2.5

EGPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	14	0.0167	2.5
40		17	0.0203	2.5
30		16	0.0191	2.5
20		16	0.0191	2.5
10		18	0.0215	2.5
0		19	0.0227	2.5
-10		17	0.0203	2.5
-20		15	0.0179	2.5
-30		24	0.0287	2.5
20	3.3	10	0.0120	2.5
20	4.2	17	0.0203	2.5

WCDMA Band V Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0023	2.5
40		-4	-0.0023	2.5
30		-4	-0.0023	2.5
20		-1	-0.0006	2.5
10		5	0.0029	2.5
0		-1	-0.0006	2.5
-10		7	0.0040	2.5
-20		-5	-0.0029	2.5
-30		-5	-0.0029	2.5
20	3.3	-4	-0.0023	2.5
20	4.2	-5	-0.0029	2.5

WCDMA Band V Test Frequency:836.6MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		2	0.0012	2.5
30		-3	-0.0017	2.5
20		-5	-0.0029	2.5
10		-9	-0.0052	2.5
0		0	0.0000	2.5
-10		-1	-0.0006	2.5
-20		-13	-0.0075	2.5
-30		-14	-0.0081	2.5
20	3.3	-10	-0.0058	2.5
20	4.2	-5	-0.0029	2.5

WCDMA Band V Test Frequency:836.6MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-12	-0.0069	2.5
40		0	0.0000	2.5
30		-1	-0.0006	2.5
20		-4	-0.0023	2.5
10		2	0.0012	2.5
0		-9	-0.0052	2.5
-10		-4	-0.0023	2.5
-20		-4	-0.0023	2.5
-30		2	0.0012	2.5
20	3.3	5	0.0029	2.5
20	4.2	4	0.0023	2.5

PCS Band (Part 24E)

GPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	17	0.0090	2.5
40		8	0.0043	2.5
30		12	0.0064	2.5
20		8	0.0043	2.5
10		12	0.0064	2.5
0		10	0.0053	2.5
-10		6	0.0032	2.5
-20		1	0.0005	2.5
-30		6	0.0032	2.5
20	3.3	6	0.0032	2.5
20	4.2	3	0.0016	2.5

EGPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	4	0.0021	2.5
40		-3	-0.0016	2.5
30		0	0.0000	2.5
20		5	0.0027	2.5
10		1	0.0005	2.5
0		11	0.0059	2.5
-10		10	0.0053	2.5
-20		1	0.0005	2.5
-30		10	0.0053	2.5
20	3.3	1	0.0005	2.5
20	4.2	-2	-0.0011	2.5

WCDMA Band II Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	7	0.0037	2.5
40		-4	-0.0021	2.5
30		-8	-0.0043	2.5
20		1	0.0005	2.5
10		7	0.0037	2.5
0		-7	-0.0037	2.5
-10		-1	-0.0005	2.5
-20		10	0.0053	2.5
-30		-2	-0.0011	2.5
20	3.3	-7	-0.0037	2.5
20	4.2	4	0.0021	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-1	-0.0005	2.5
40		5	0.0027	2.5
30		-3	-0.0016	2.5
20		-3	-0.0016	2.5
10		3	0.0016	2.5
0		-5	-0.0027	2.5
-10		1	0.0005	2.5
-20		-3	-0.0016	2.5
-30		2	0.0011	2.5
20	3.3	3	0.0016	2.5
20	4.2	-11	-0.0059	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	5	0.0027	2.5
40		-7	-0.0037	2.5
30		3	0.0016	2.5
20		-2	-0.0011	2.5
10		-9	-0.0048	2.5
0		-6	-0.0032	2.5
-10		-2	-0.0011	2.5
-20		-3	-0.0016	2.5
-30		1	0.0005	2.5
20	3.3	-8	-0.0043	2.5
20	4.2	4	0.0021	2.5

Part 27

WCDMA Band IV Test Frequency:1732.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		-12	-0.0069	2.5
30		-5	-0.0029	2.5
20		-5	-0.0029	2.5
10		0	0.0000	2.5
0		-12	-0.0069	2.5
-10		0	0.0000	2.5
-20		-3	-0.0017	2.5
-30		-12	-0.0069	2.5
20	3.3	-12	-0.0069	2.5
20	4.2	-3	-0.0017	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-5	-0.0029	2.5
40		1	0.0006	2.5
30		8	0.0046	2.5
20		0	0.0000	2.5
10		-9	-0.0052	2.5
0		-6	-0.0035	2.5
-10		0	0.0000	2.5
-20		3	0.0017	2.5
-30		6	0.0035	2.5
20	3.3	-7	-0.0040	2.5
20	4.2	-7	-0.0040	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-14	-0.0081	2.5
40		1	0.0006	2.5
30		2	0.0012	2.5
20		-7	-0.0040	2.5
10		-1	-0.0006	2.5
0		-12	-0.0069	2.5
-10		-4	-0.0023	2.5
-20		-13	-0.0075	2.5
-30		-10	-0.0058	2.5
20	3.3	1	0.0006	2.5
20	4.2	-15	-0.0087	2.5

15 RF Exposure

Remark: refer to SAR test report: WTS17S0169022E.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS17S0169025E_Photo.

===== End of Report =====