



FCC PART 15 B


TEST REPORT

For

UNISTAR TELECOM CO., LIMITED

7A01, Tianjing Building, Tian'an High-tech Plaza, Futian District, Shenzhen, China

FCC ID: 2AC9P-M3

Report Type: Original Report	Product Type: 3G mobile phone
Test Engineer: <u>Sevin Li</u> 	
Report Number: <u>RDG141226004-00D</u>	
Report Date: <u>2015-01-21</u>	
Reviewed By: <u>Sula Huang</u>  <u>RF Engineer</u>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION (FCC §15.27).....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
CONFIGURATION OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC§15.107 - CONDUCTED EMISSIONS.....	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST RESULTS SUMMARY.....	10
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS.....	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	14
TEST PROCEDURE	15
TEST EQUIPMENT LIST AND DETAILS.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY.....	16
TEST DATA	16
DECLARATION LETTER.....	21

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *UNISTAR TELECOM CO., LIMITED*'s product, model number: *M3 (FCC ID: 2AC9P-M3)* (or the "EUT") in this report was a *3G mobile phone*, named *M3* by applicant, which was measured approximately: 15 cm (L) x 7.5 cm (W) x 0.8 cm (H), rated input voltage: DC3.8V rechargeable Li-ion battery or DC5V charging from adapter.

Adapter information:

Model: HSA050100U

Input: AC100-240V, 50/60Hz, 0.2A

Output: DC5.0V, 1000mA

Manufacturer: Dongguan HESI Charger CO.,LTD

Note: The series product, model M3, M3U, M3BS, M3CA, X55, UTTA X55, UNISTAR X55, L55 are electrically identical, the difference between them is just the model name, we selected M3 for fully testing, the detail was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 84000803286 (Assigned by Applicant). The EUT was received on 2014-12-26.*

Objective

This test report is prepared on behalf of *UNISTAR TELECOM CO., LIMITED* in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION (FCC §15.27)

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

The exercise software “Withrax” was used during test.

Equipment Modifications

No modification was made to the EUT tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	Yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	Yes	No	1.0	USB Port of Laptop	EUT
Earphone Cable	No	No	0.9	Earphone port of EUT	Earphone

Configuration of Test Setup

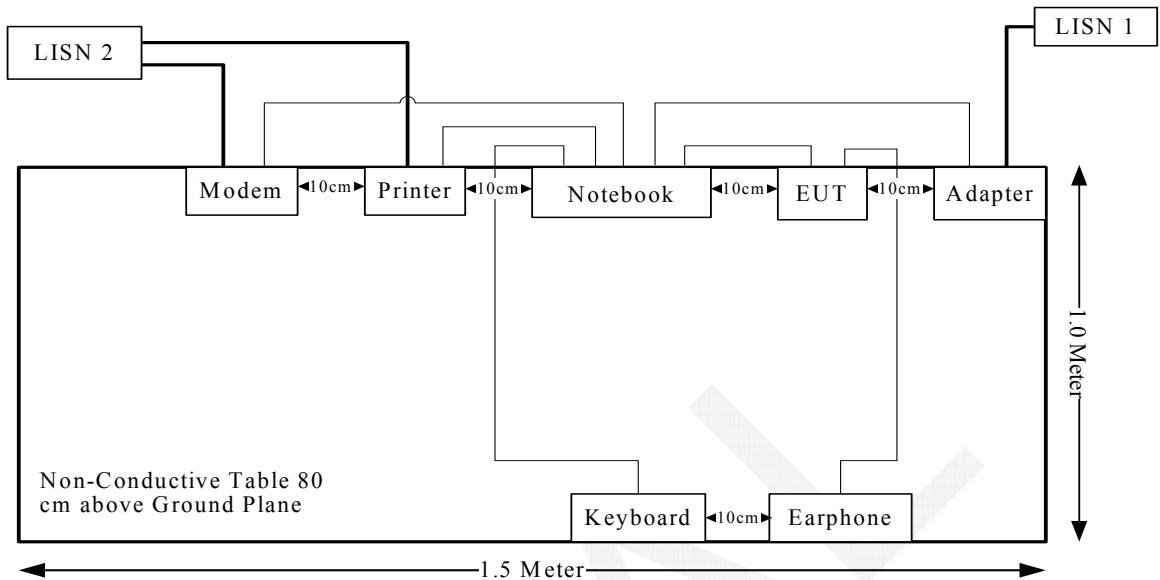

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FINAL

FCC§15.107 - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are Receiver, cable loss, and LISN.

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

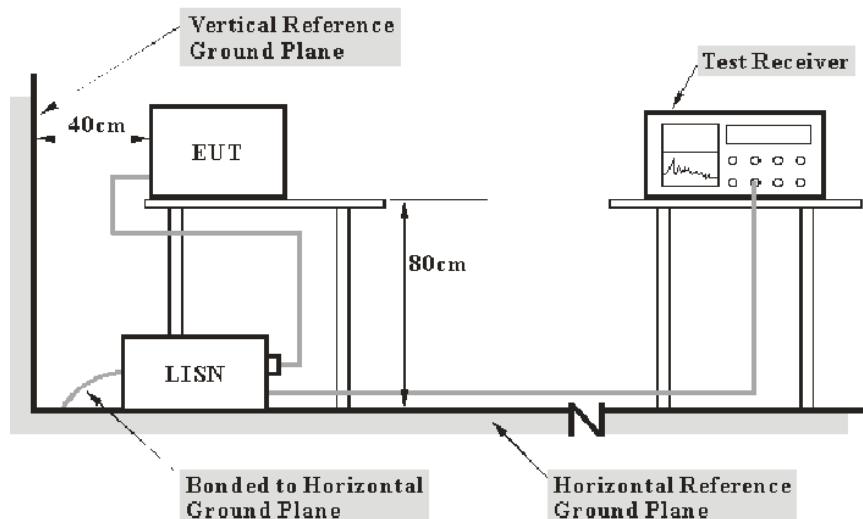

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter of laptop was connected to a 120V/60Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

7.8 dB at 10.150000 MHz in the Line conducted mode


Test Data

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	37 %
ATM Pressure:	101.8kPa

The testing was performed by Sevin Li on 2014-12-29.


Test Mode: Downloading
AC120V, 60Hz, Line:

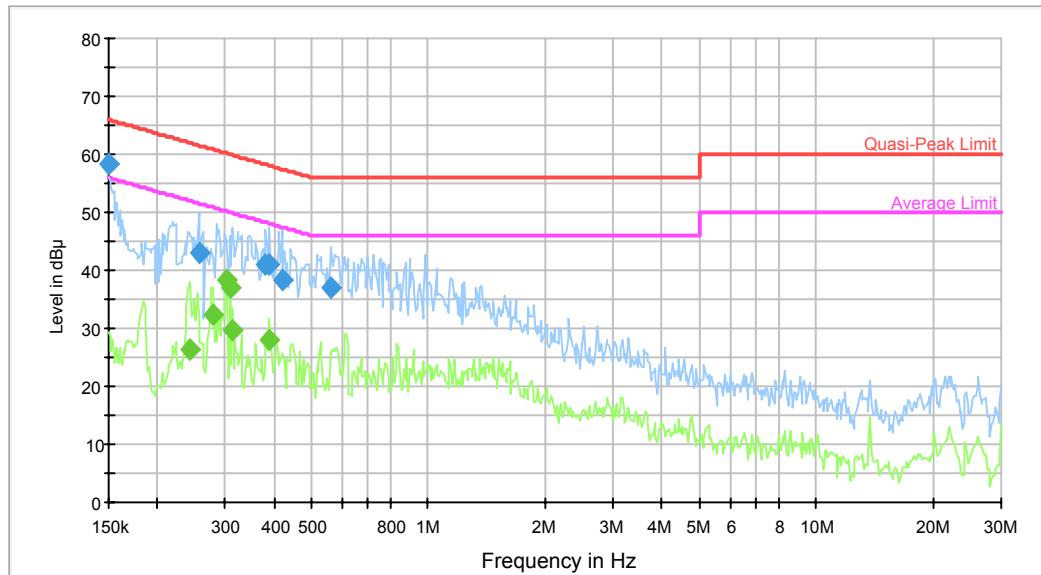

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	58.2	9.000	L1	10.0	7.8	66.0	Compliance
0.255827	43.2	9.000	L1	10.7	18.4	61.6	Compliance
0.381043	41.0	9.000	L1	10.6	17.2	58.3	Compliance
0.390261	41.0	9.000	L1	10.6	17.1	58.1	Compliance
0.419276	38.3	9.000	L1	10.5	19.1	57.5	Compliance
0.563041	37.1	9.000	L1	10.4	18.9	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.243884	26.4	9.000	L1	10.7	25.6	52.0	Compliance
0.279263	32.2	9.000	L1	10.7	18.6	50.8	Compliance
0.302425	38.3	9.000	L1	10.7	11.9	50.2	Compliance
0.307284	36.9	9.000	L1	10.7	13.2	50.0	Compliance
0.312220	29.8	9.000	L1	10.7	20.1	49.9	Compliance
0.390261	28.0	9.000	L1	10.6	20.0	48.1	Compliance

AC120V, 60Hz, Neutral:

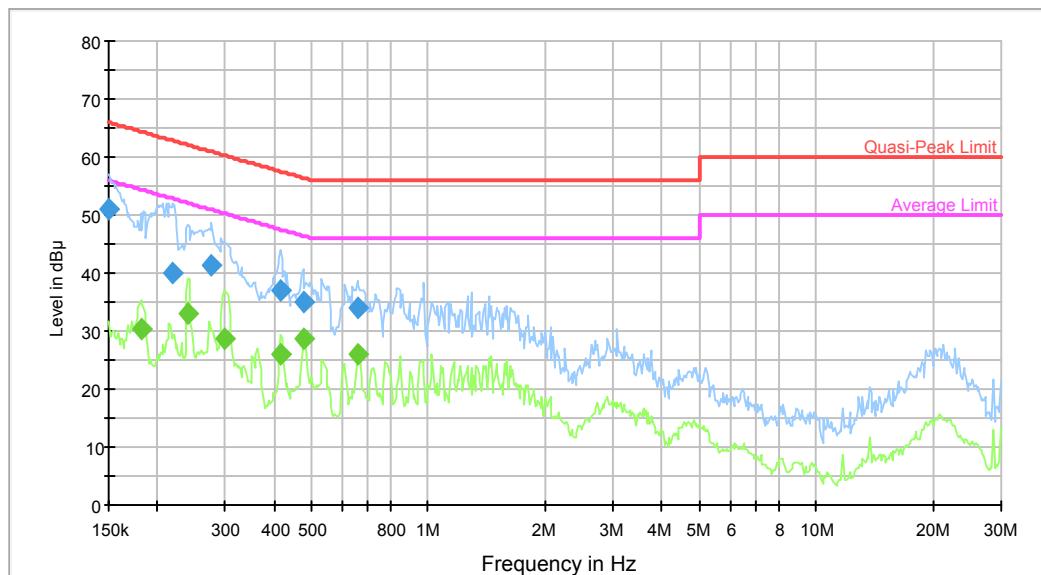

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	51.0	9.000	N	10.2	15.0	66.0	Compliance
0.219886	40.1	9.000	N	11.3	22.8	62.8	Compliance
0.277046	41.5	9.000	N	11.2	19.4	60.9	Compliance
0.415949	37.1	9.000	N	10.7	20.5	57.5	Compliance
0.476287	34.9	9.000	N	10.4	21.5	56.4	Compliance
0.655073	34.0	9.000	N	10.6	22.0	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.181612	30.2	9.000	N	10.9	24.2	54.4	Compliance
0.240029	32.8	9.000	N	11.2	19.3	52.1	Compliance
0.297644	28.6	9.000	N	11.1	21.8	50.3	Compliance
0.415949	26.1	9.000	N	10.7	21.4	47.5	Compliance
0.480097	28.5	9.000	N	10.4	17.8	46.3	Compliance
0.660314	25.9	9.000	N	10.6	20.1	46.0	Compliance

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}_{\text{pr}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}_{\text{pr}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{pr}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{pr}})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 5.0 dB; 200M~1GHz: 6.2 dB; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 1 – Values of $U_{\text{cisp}}_{\text{pr}}$


Measurement		$U_{\text{cisp}}_{\text{pr}}$
Radiated disturbance (electric field strength at an OATS or in a SAC)	(30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR)	(1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR)	(6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

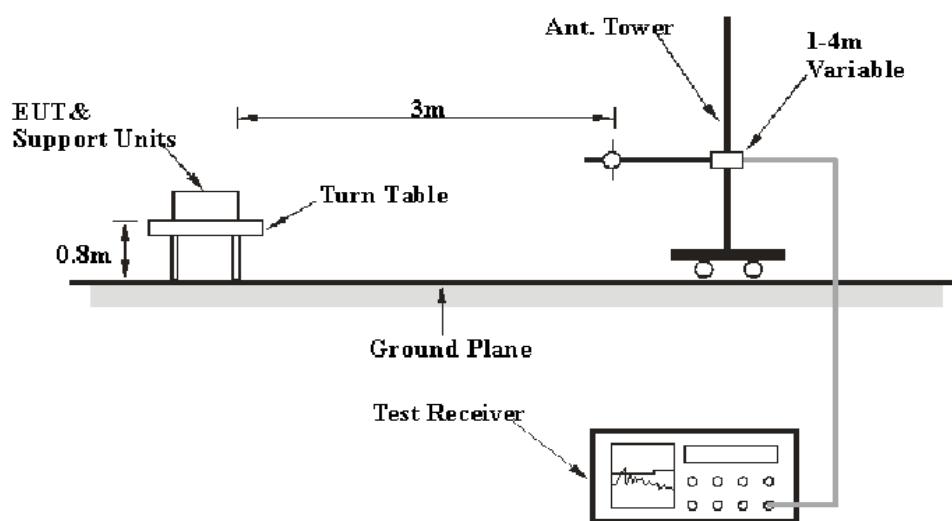

Above 1GHz:

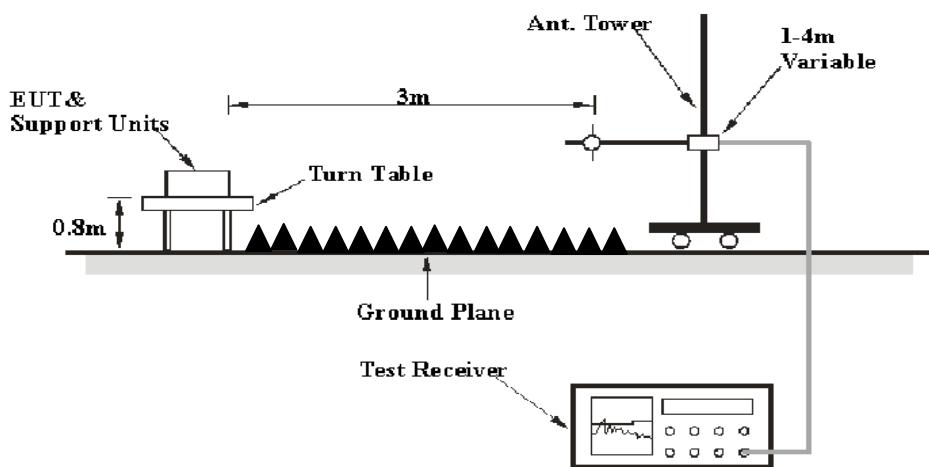

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120V/60Hz AC power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

7.50 dB at 239.5200 MHz in the **Horizontal** polarization

Test Data

Environmental Conditions

Temperature:	19.9 °C
Relative Humidity:	36 %
ATM Pressure:	101.5 kPa


The testing was performed by Sevin Li on 2014-12-30.

Test Result: Compliance


Test Mode: Downloading

1) Below 1G:

Horizontal

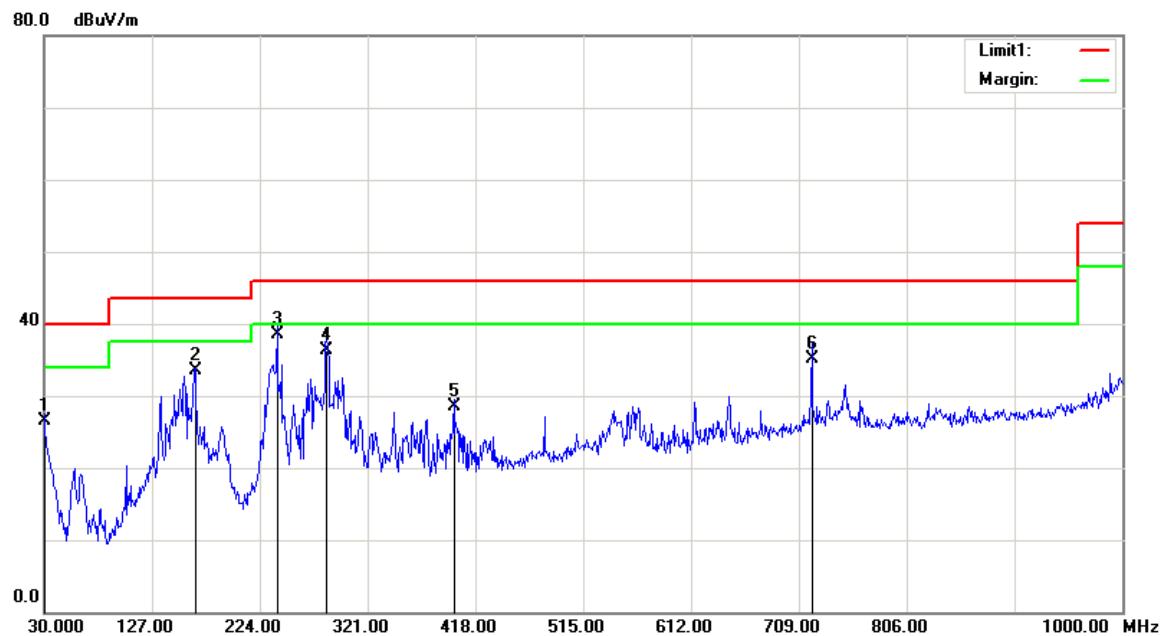


Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	23.12	QP	3.38	26.50	40.00	13.50
165.8000	41.38	QP	-7.78	33.60	43.50	9.90
239.5200	46.47	QP	-7.97	38.50	46.00	7.50
284.1400	42.49	QP	-6.09	36.40	46.00	9.60
398.6000	32.36	QP	-3.76	28.60	46.00	17.40
720.6400	33.58	QP	1.52	35.10	46.00	10.90

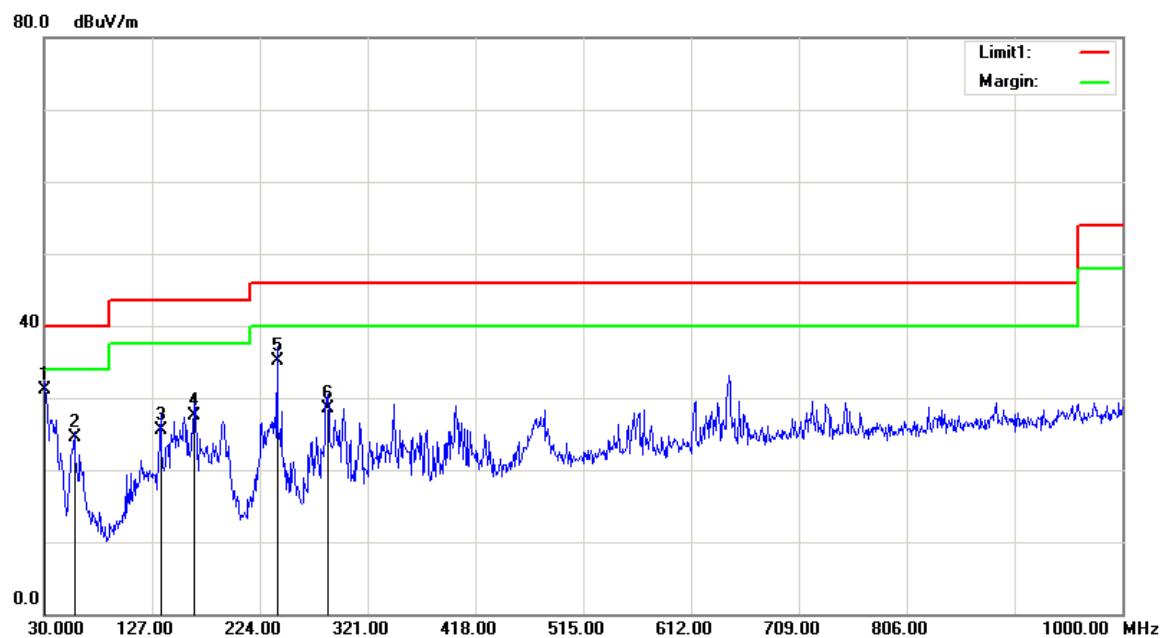Vertical


Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.9700	28.88	QP	2.22	31.10	40.00	8.90
57.1600	37.70	QP	-13.10	24.60	40.00	15.40
134.7600	31.71	QP	-6.11	25.60	43.50	17.90
164.8300	35.30	QP	-7.80	27.50	43.50	16.00
239.5200	43.17	QP	-7.97	35.20	46.00	10.80
285.1100	34.69	QP	-6.09	28.60	46.00	17.40

2) Above 1G:

Horizontal

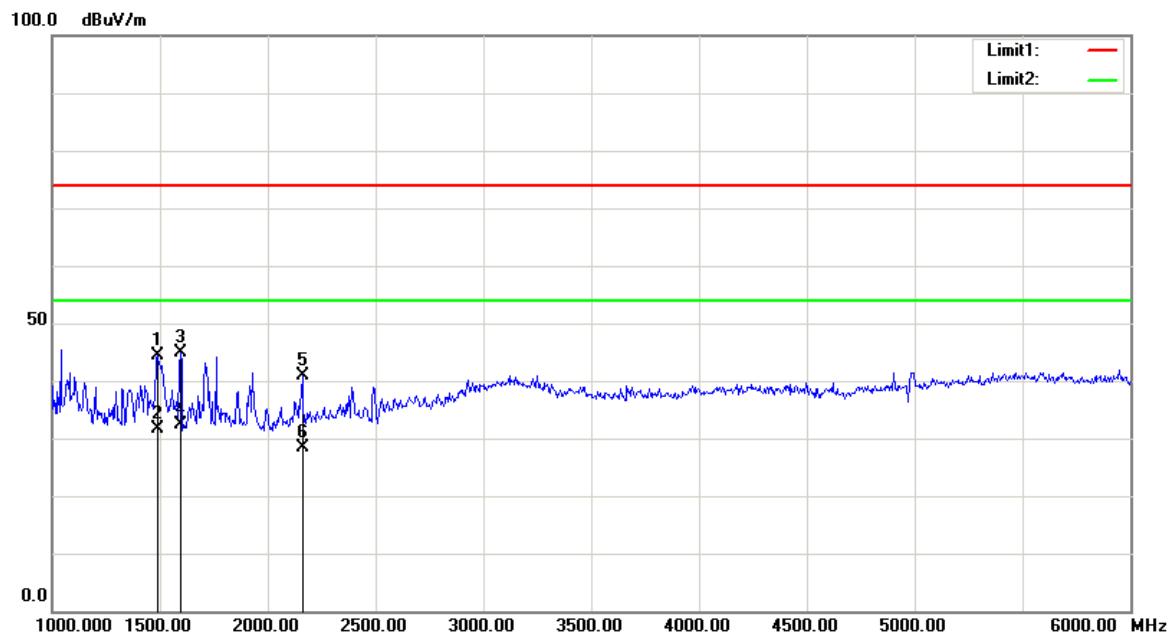

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1492.500	45.60	peak	-1.16	44.44	74.00	29.56
1492.500	32.81	AVG	-1.16	31.65	54.00	22.35
1595.000	46.33	peak	-1.45	44.88	74.00	29.12
1595.000	33.92	AVG	-1.45	32.47	54.00	21.53
2160.000	39.92	peak	0.88	40.80	74.00	33.20
2160.000	27.46	AVG	0.88	28.34	54.00	25.66

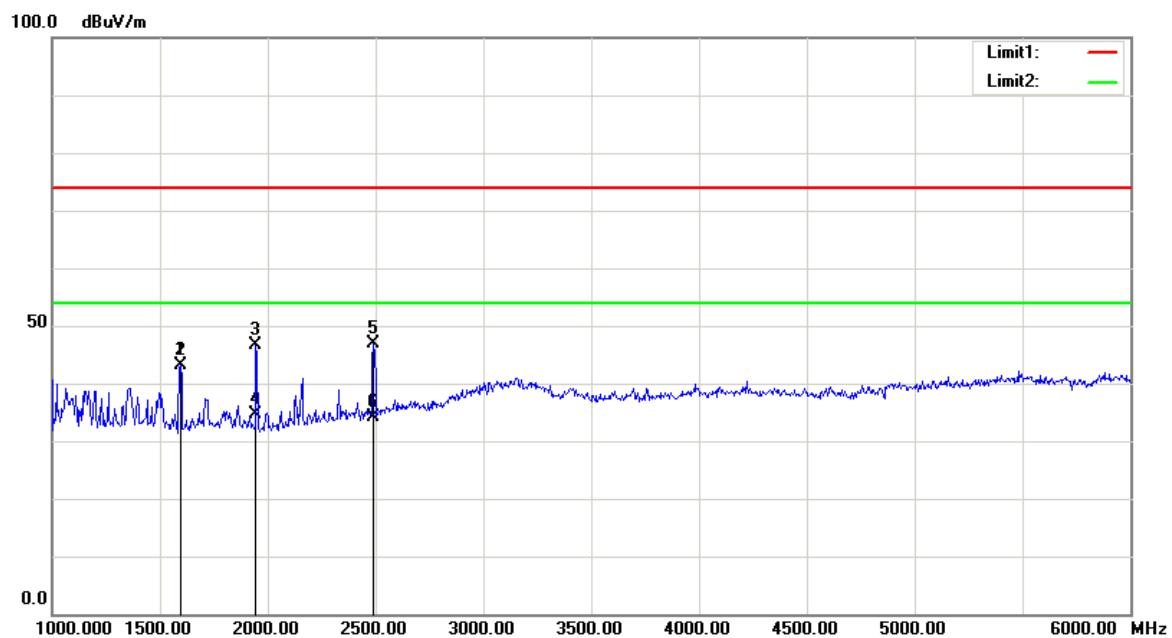Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1595.000	44.67	peak	-1.45	43.22	74.00	30.78
1595.000	44.67	AVG	-1.45	43.22	54.00	10.78
1947.500	46.54	peak	-0.02	46.52	74.00	27.48
1947.500	34.66	AVG	-0.02	34.64	54.00	19.36
2492.500	44.65	peak	2.15	46.80	74.00	27.20
2492.500	32.10	AVG	2.15	34.25	54.00	19.75

DECLARATION LETTER

UNISTAR TELECOM CO.,LIMITED
7A01,Tianjing Building,Tian'an High-tech Plaza,Futian District, Shenzhen, China
Telephone Number: (86) 755-83580970 Fax Number: (86) 755-83580970

Product Similarity Declaration

Date: 2015-01-07

To Whom It May Concern,

We, UNISTAR TELECOM CO.,LIMITED, hereby declare that our product M3, Model Number: M3, M3U, M3BS, M3CA, X55, UTTA X55, UNISTAR X55, L55 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. Model Numbers: M3U, M3BS, M3CA, X55, UTTA X55, UNISTAR X55, L55 are electrically identical with the Model Number: M3 that was certified by BACL. Their only difference is the model name.

The rest are the same.

Please contact me if you have any question.

Signature: *Rachel Du*

Rachel Du

Business Manager

*******END OF REPORT*******