

BSM Wireless	SFM7000
	SFM7000 Backend
USER INSTRUCTION	Revision: AA 12/14/14
	Page 1 Of 12

1.0 Authorization

Engineering	Engineering Manager	Manufacturing Manager	Quality Manager

2.0 Procedure Revision History

Revision	Date	Detail of Change	Changed by
AA	Dec 14 2014	Initial Release	Isaac Kuruvilla

IC : 12427A-TXQ

This device complies with Industry Canada licence - exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter (IC : 12427A-TXQ) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC : 12427A-TXQ) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

BSM Wireless	SFM7000		
	SFM7000 Backend		
	USER INSTRUCTION	Revision: AA 12/14/14	Page 2 Of 11

Antenna Specification

Model: ANT-2.4-CW-RAH

Center Frequency: 2.45GHz

Recom. Freq. Range: 2.35-2.60GHz

Wavelength: ¼-wave

VSWR: ≤ 2.0 typical at center

Peak Gain: 1.6dBi

Impedance: 50-ohms

Connector: RP-SMA

Oper. Temp. Range: -40° to +90°C

*Electrical specifications and plots measured on 10.16 cm x
10.16 cm (4.00" x 4.00") reference ground plane*

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

BSM Wireless	SFM7000	
	SFM7000 Backend	
	USER INSTRUCTION	Revision: AA 12/14/14
		Page 3 Of 11

FCC ID : 2AC9T-TXQ

This device complies with Part 15 of the FCC Rules -exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This product contains a radio transmitter with 802.11b/g/n technology which has been tested and found to be compliant with the applicable regulations governing a radio transmitter in the 2.400 GHz to 2.4835 GHz frequency range.

NOTE: *This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.*

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The TXQ RF Module complies with Part 15 of the FCC rules and regulations. Compliance with the labeling requirements, FCC notices and antenna usage guidelines is required.

To fulfill FCC Certification, We must comply with the following regulations:

1. The system integrator must ensure that the text on the external label provided with this device is placed on the outside of the final product
2. TXQ RF Module may only be used with antennas that have been tested and approved for use with this module [refer to the antenna specification].

BSM Wireless	SFM7000	
	SFM7000 Backend	
	USER INSTRUCTION	Revision: AA 12/14/14

Modifications not expressly approved by BSM Wireless could void the user's authority to operate the equipment.

IMPORTANT: We must test final product to comply with unintentional radiators (FCC section 15.107 & 15.109) before declaring compliance of their final product to Part 15 of the FCC Rules.

IMPORTANT: The RF Module has been certified for remote and base radio application only.

RF Exposure



WARNING: To satisfy IC RF exposure requirements for mobile transmitting devices, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during device operation. To ensure compliance, operations at closer than this distance are not recommended. The antenna used for this transmitter must not be co-located in conjunction with any other antenna or transmitter.

THIS DOCUMENT IS PROVIDED "AS IS" WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

BSM WIRELESS DISCLAIMS ALL LIABILITY, INCLUDING LIABILITY FOR INFRINGEMENT OF ANY PROPRIETARY RIGHTS, RELATING TO USE OF INFORMATION IN THIS DOCUMENT. NO LICENSE, EXPRESSED OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED HEREIN.

***THIRD-PARTY BRANDS, NAMES, AND TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS.**

BSM Wireless	SFM7000		
	SFM7000 Backend		
	USER INSTRUCTION	Revision: AA 12/14/14	Page 5 Of 11

3.0 PURPOSE

3.1 This document provides specific instructions on the assembly for the SFM7000.

4.0 SCOPE

4.1 Shall cover the TxQ WLAN module assembly on to the SFM7000 board.

FCC ID: **2AC9T-TXQ**

IC: **12427A-TXQ**

5.0 RECORDS

5.1 Addition(s) to this work instruction must be approved by authorization in section one.

6.0 ASSOCIATED DOCUMENTS

6.1 N/A at this time.

7.0 DEFINITIONS

7.1 N/A: Not Applicable.

7.2 TBD: To Be Determined.

8.0 RESPONSIBILITY

Name	Responsibilities
Management	Shall ensure operator(s) read and understand procedure(s) and to ensure operator(s) are following set procedure(s).
Supervisor	Ensure work instructions are followed
Process Engineering	Shall maintain set procedure(s). Any change(s) to set procedures shall be communicated to appropriate team member(s) by process engineering
Operator	Shall adhere to this procedure(s)
Maintenance	Shall understand set procedure(s)

9.0 SAFETY REQUIREMENTS

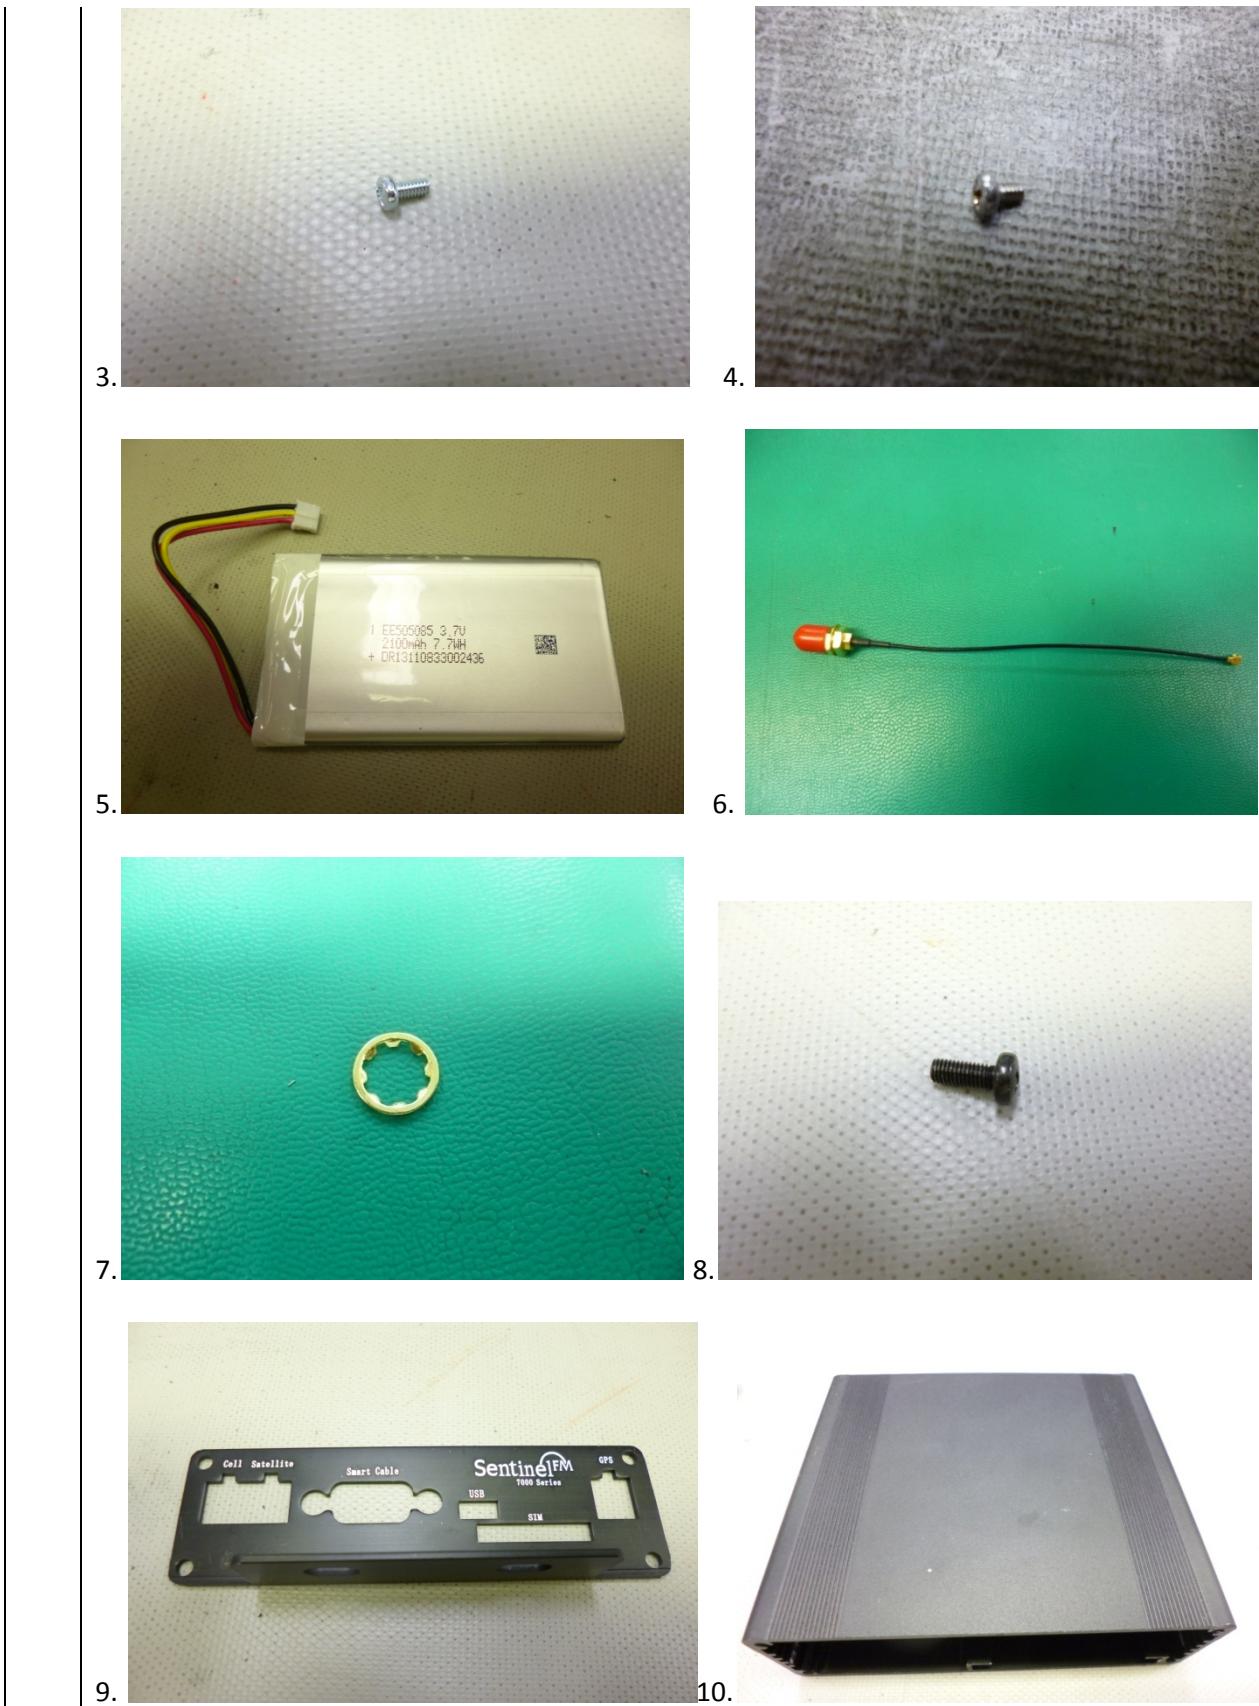
9.1 Only trained personnel to perform this operation.

BSM Wireless	SFM7000		
	SFM7000 Backend		
	USER INSTRUCTION	Revision: AA 12/14/14	Page 6 Of 11

10.0 INSTRUCTIONS

No.	Trailer Detector Board
A	<p>Pick the following parts for assembly:</p> <ol style="list-style-type: none"> 1. PCBA SFM7000 (qty 1pc) 2. Wifi PCBA TxQ Module MODTXQ (qty 1pc) 3. Sliver screws (qty 2 pcs) 4. Smaller sliver screws (qty 2pcs) 5. Battery (qty 1pc) 6. Antenna Cable (qty 1pc) 7. Washer (1pc) 8. Black screws (qty 8pcs) 9. Aluminum Chassis (qty 1pc) 10. Front cover plate (qty 1pc) 11. Back cover plate (qty 1pc) 12. Wifi Antenna (1pc)
	<p>1.</p>  <p>2.</p> 

BSM Wireless	SFM7000		
	SFM7000 Backend		
USER INSTRUCTION		Revision: AA	Page 7 Of 11
		12/14/14	



BSM Wireless		SFM7000	
		SFM7000 Backend	
USER INSTRUCTION		Revision: AA 12/14/14	
		Page 8 Of 11	




11.



12.

B	Assembly parts from process step A as shown in picture below.
---	---



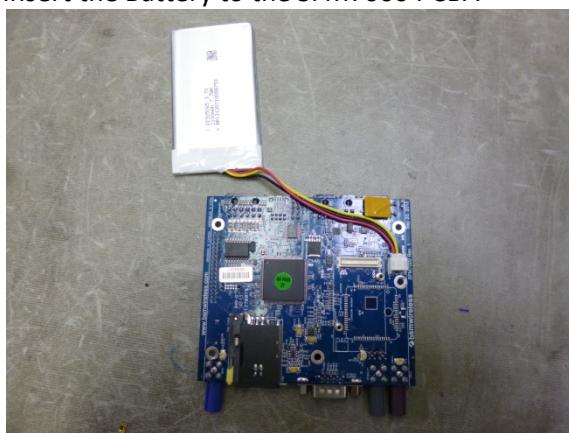
Insert the Battery to the SFM7000 PCBA



Route the battery cables (follow pic below)



BSM Wireless 	SFM7000 SFM7000 Backend USER INSTRUCTION Revision: AA 12/14/14 Page 9 Of 11
--	---

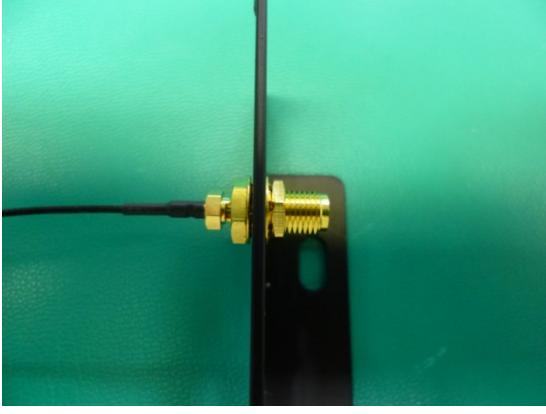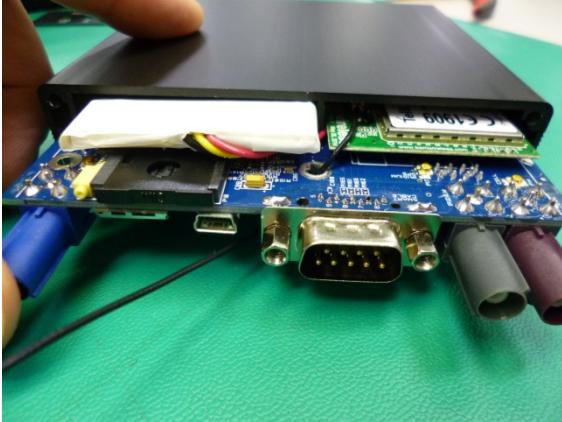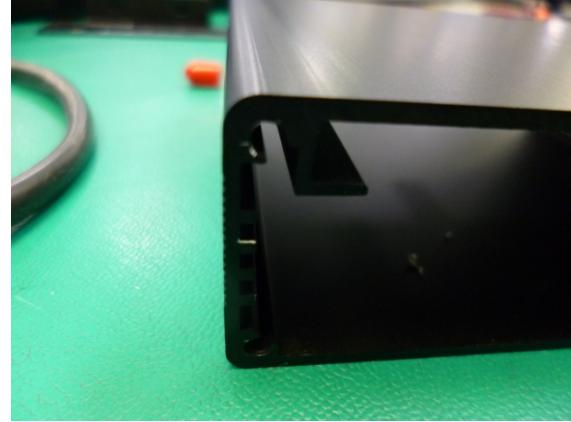C	Assembly parts from process step A as shown in picture below.
	<p>Assy antenna cable (qty 1pc) & washer (qty 1pc) to Front cover plate (qty 1pc).</p>  <p>Insert antenna cable (qty 1pc) to PCIe wireless PCBA (before installing wire through the board need to drill mounting hole with a 0.128" bit).</p> 
	<p>Insert PCBA / Assy into Aluminum Chassis. Before assy remove box ID label from PCBA</p>  <p>PCBA needs to be inserted on top slot. Battery wires and antenna wires need to be clear from chassis.</p> 

BSM Wireless	SFM7000	
	SFM7000 Backend	
	USER INSTRUCTION	Revision: AA 12/14/14
		Page 10 Of 11

Use black screws (4pcs) to secure plate to chassis.

Side note: SIM Card slot need to move freely



Apply glue to PCBA /chassis in area highlighted in red.



Use black screws (4pcs) to secure plate to chassis. Install wifi Antenna.



BSM Wireless		SFM7000		
		SFM7000 Backend		
		USER INSTRUCTION		Revision: AA 12/14/14
				Page 11 Of 11

D

Print & place IC/FCC label. Use BOX ID label to print the correct label to the unit.

FCC ID: 2AC9T-TXQ and IC: 12427A-TXQ will be printed in the RED Highlighted box.

The top of the label is placed starting from end of the Antenna endplate on the flat smooth aluminum surface of the chassis. All components are contained within this aluminum chassis. More detailed pictures are available on the Internal and External photo document.



E

Antenna Electrical Specifications

Model: ANT-2.4-CW-RAH

Center Frequency: 2.45GHz

Recom. Freq. Range: 2.35-2.60GHz

Wavelength: $\frac{1}{4}$ -wave

VSWR: ≤ 2.0 typical at center

Peak Gain: 1.6dBi

Impedance: 50-ohms

Connector: RP-SMA

Oper. Temp. Range: -40° to $+90^{\circ}$ C

Electrical specifications and plots measured on 10.16 cm x 10.16 cm (4.00" x 4.00") reference ground plane