

FCC Radio Test Report

FCC ID: 2AC9W-CMC3703

This report concerns (check one): ⊠Original Grant □Class II Change

Project No. : 1407C151

Equipment : Electronic Shelf Label

Model Name : CMC3703

Applicant : FUTAIHUA INDUSTRIAL (SHENZHEN) CO.,LTD. Address : B District, Foxconn Technology Park, Guanlan Town,

Baoan, Shenzhen, GuangDong, China

Date of Receipt : Jul. 21, 2014

Date of Test : Jul. 21, 2014~ Sep. 03, 2014 | Sep. 05, 2014 | Tested by : BTL Inc.

Testing Engineer

Technical Manager

Authorized Signatory

(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China. TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FCCP-1-1407C151 Page 1 of 52



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-1-1407C151 Page 2 of 52



Table of Contents F	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTER	O 11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION 4.1.2 TEST PROCEDURE	12 12
4.1.2 TEST PROCEDURE 4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS 4.1.7 TEST RESULTS	13 13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE 4.2.3 DEVIATION FROM TEST STANDARD	15 15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS 4.2.7 TEST RESULTS (BELOW 30MHz)	17 17
4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHz)	17
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	18
5 . BANDWIDTH TEST	19
5.1 TEST PROCEDURE	19
5.2 DEVIATION FROM STANDARD 5.3 TEST SETUP	19 19
5.4 EUT OPERATION CONDITIONS	19
5.5 EUT TEST CONDITIONS	19
5.6 TEST RESULTS	19
6 . ANTENNA CONDUCTED SPURIOUS EMISSION	20
6.1 APPLIED PROCEDURES / LIMIT	20

Report No.: BTL-FCCP-1-1407C151 Page 3 of 52



Table of Contents	Page
6.2 TEST PROCEDURE	20
6.3 DEVIATION FROM STANDARD	20
6.4 TEST SETUP	20
6.5 EUT OPERATION CONDITIONS	21
6.6 EUT TEST CONDITIONS	21
6.7 TEST RESULTS	21
7 . MEASUREMENT INSTRUMENTS LIST AND SETTING	22
8 . EUT TEST PHOTO	23
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B - RADIATED EMISSION (9KHZ to 30MHZ)	27
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	29
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	36
ATTACHMENT E - BANDWIDTH	49
ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION	52

Report No.: BTL-FCCP-1-1407C151 Page 4 of 52



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1407C151	Original Issue.	Sep. 05, 2014

Report No.: BTL-FCCP-1-1407C151 Page 5 of 52



1. CERTIFICATION

Equipment : Electronic Shelf Label

Brand Name : CMCID Model Name : CMC3703

Applicant : FUTAIHUA INDUSTRIAL (SHENZHEN) CO.,LTD. Manufacturer : FUTAIHUA INDUSTRIAL (SHENZHEN) CO.,LTD.

Address : B District, Foxconn Technology Park, Guanlan Town, Baoan, Shenzhen,

GuangDong,China

Factory: FUTAIHUA INDUSTRIAL (SHENZHEN) CO.,LTD.

Address : B District, Foxconn Technology Park, Guanlan Town, Baoan, Shenzhen,

GuangDong,China

Date of Test : Jul, 21. 2014~ Sep, 03. 2014

Test Sample : Engineering Sample

Standard(s) : FCC Part15, Subpart C(15.249)/ ANSI C63.4-2009

RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1407C151) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-1-1407C151 Page 6 of 52



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.249)				
StandardSection	Test Item	Judgment	Remark	
15.207	Conducted Emission	N/A		
15.209 15.249	Radiated Spurious Emission	PASS		

NOTE:

(1)"N/A" denotes test is not applicable in this test report.

Report No.: BTL-FCCP-1-1407C151 Page 7 of 52



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-CB03** at the location of No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement y \pm U,where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2,providing a level of confidence of approximately 95 %.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	NOTE
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Н	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.60	
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	3.86	
DG-CB03	CISEIX	200MHz ~ 1,000MHz	Н	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Н	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Н	4.14	

Report No.: BTL-FCCP-1-1407C151 Page 8 of 52



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Electronic Shelf Label		
Brand Name	CMCID		
Model Name	CMC3703		
Model Difference	N/A		
	Operation Frequency	2401~2445 MHz	
Product Description	Modulation Technology	CESK(2Mbps)	
Troduct Description	Data rate	GFSK(2Mbps)	
	Field Strength	71.54dBuV/m(AV Max)	
Power Source	Supplied from battery		
Power Rating	DC 3V		
Connecting I/O Port(s)	Please refer to the User's Manual		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
01	2401
02	2408
03	2414
04	2421
05	2427
06	2433
07	2439
08	2445

3. Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Printed	N/A	5.0	-

Report No.: BTL-FCCP-1-1407C151 Page 9 of 52



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Low Channel
Mode 2	TX Middle Channel
Mode 3	TX High Channel

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX Low Channel	
Mode 2	TX Middle Channel	
Mode 3	TX High Channel	

Note:

(1) The measurements are performed at the high, middle, low available channels.

Report No.: BTL-FCCP-1-1407C151 Page 10 of 52



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED EUT 3.4 DESCRIPTION OF SUPPORT UNITS The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests. Item Equipment Mfr/Brand Model/Type No. FCC ID Series No. Note Item Shielded Type Ferrite Core Length Note

Report No.: BTL-FCCP-1-1407C151 Page 11 of 52



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: BTL-FCCP-1-1407C151 Page 12 of 52



4.1.4 TEST SETUP

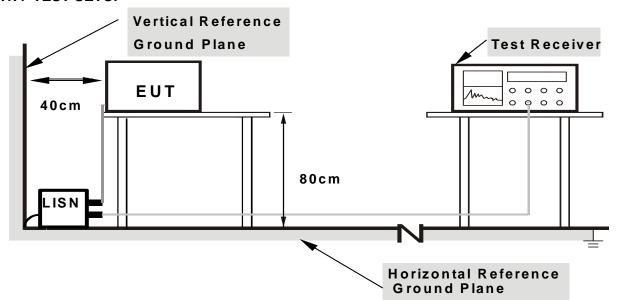

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: N/A

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

Report No.: BTL-FCCP-1-1407C151 Page 13 of 52



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

FREQUENCY (MHz)	(dBuV/m) (at 3m)		
FREQUENCY (MHZ)	PEAK	AVERAGE	
Above 1000	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC Part 15.249)

FCC Part15 (15.249) , Subpart C			
Limit Frequency Range (MHz)			
Field strength of fundamental 50000 μV/m (94 dBμV/m) @ 3 m	2400-2483.5		
Field strength of harmonics 500 μV/m (54 dBμV/m) @ 3 m	Above 2483.5		

Report No.: BTL-FCCP-1-1407C151 Page 14 of 52



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz for PK/AVG detector
Start ~ Stop Frequency	90kHz~110kHz for QP detector
Start ~ Stop Frequency	110kHz~490kHz for PK/AVG detector
Start ~ Stop Frequency	490kHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AV detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FCCP-1-1407C151 Page 15 of 52




4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

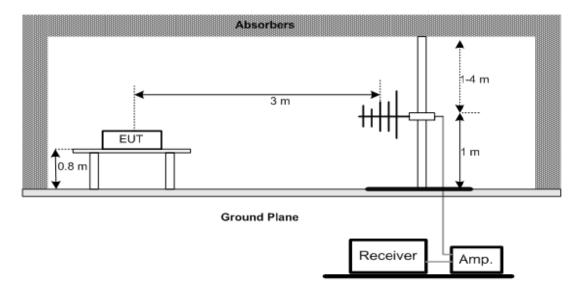


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

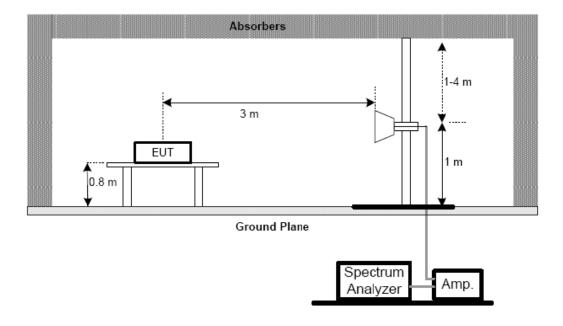

Report No.: BTL-FCCP-1-1407C151 Page 16 of 52



(C) For radiated emissions below 30MHz

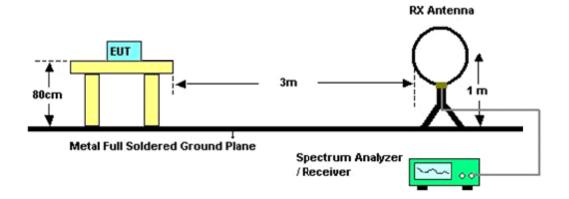

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3V

4.2.7 TEST RESULTS (BELOW 30MHz)

Please refer to the Attachment B.

Remark

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);.
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor..

4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHz)

Please refer to the Attachment C

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission.

Report No.: BTL-FCCP-1-1407C151 Page 17 of 52



4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (5) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (6) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (7) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) ,Final AV=PK-19.49

Report No.: BTL-FCCP-1-1407C151 Page 18 of 52



5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.2 DEVIATION FROM STANDARD

No deviation.

5.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3V

5.6 TEST RESULTS

Please refer to the Attachment E

Report No.: BTL-FCCP-1-1407C151 Page 19 of 52



6. ANTENNA CONDUCTED SPURIOUS EMISSION

6.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = 10 ms.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

Report No.: BTL-FCCP-1-1407C151 Page 20 of 52



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3V

6.7 TEST RESULTS

Please refer to the Attachment F

Report No.: BTL-FCCP-1-1407C151 Page 21 of 52



7. MEASUREMENT INSTRUMENTS LIST AND SETTING

	Radiated Emission Measurement								
Item	em Kind of Equipment Manufacturer Type No. Serial No. Calibrated until								
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015				
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015				
3	Test Receiver	R&S	ESCI	100382	Mar. 29, 2015				
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015				
5	Antenna	ETS	3115	00075789	Mar. 29, 2015				
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015				
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09, 2014				
8	Test Cable	HUBER+SUHNER	C-45	N/A	Jan. 14, 2015				
9	Controller	СТ	SC100	N/A	N/A				
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015				
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015				
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014				

	Bandwidth					
Item Kind of Equipment Manufacturer Type No. Serial No. Calibrated un						
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014	

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FCCP-1-1407C151 Page 22 of 52



8. EUT TEST PHOTO

Radiated Measurement Photos

9KHz to 30MHz





Report No.: BTL-FCCP-1-1407C151 Page 23 of 52



Radiated Measurement Photos

30MHz to 1000MHz






Report No.: BTL-FCCP-1-1407C151 Page 24 of 52



Radiated Measurement Photos

Above 1000MHz

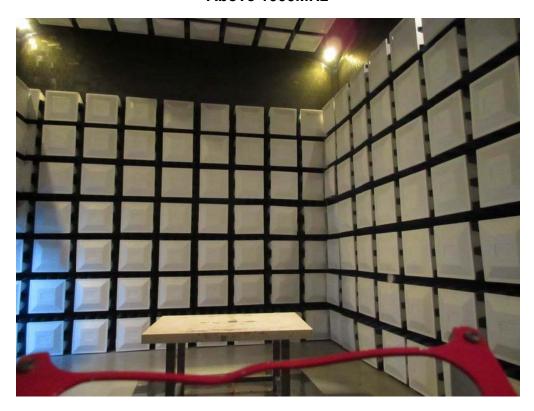



Report No.: BTL-FCCP-1-1407C151 Page 25 of 52



ATTACHMENT A - CONDUCTED EMISSION

Test Mode: N/A

Note: "N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-1-1407C151 Page 26 of 52



ATTACH	IMENT B - RADIATED	EMISSION (9KHZ to 30MHZ)	

Report No.: BTL-FCCP-1-1407C151 Page 27 of 52



Test Mode:	TX Mode

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	0°/90°	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOLE
0.0156	0°	14.35	24.58	38.93	103.74	-64.81	AVG
0.0156	0°	13.22	24.58	37.80	123.74	-85.94	PEAK
0.0311	0°	8.14	23.60	31.74	97.75	-66.01	AVG
0.0311	0°	6.72	23.60	30.32	117.75	-87.43	PEAK
0.0385	0°	5.62	23.13	28.75	95.90	-67.15	AVG
0.0385	0°	3.28	23.13	26.41	115.90	-89.49	PEAK
0.0470	0°	2.51	22.59	25.10	94.16	-69.06	AVG
0.0470	0°	0.95	22.59	23.54	114.16	-90.62	PEAK
2.0604	0°	30.19	19.46	49.65	69.54	-19.89	QP
3.3738	0°	21.45	18.94	40.39	69.54	-29.15	QP


Freq.	Freq. Ant. Reading(RA)		Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz) 0°/90° (dBuV)		(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOLE	
0.0147	90°	14.21	24.30	38.51	124.26	-85.75	AVG
0.0147	90°	13.13	24.30	37.43	144.26	-106.83	PEAK
0.0313	13 90° 8.14 2		23.58	31.72	117.69	-85.97	AVG
0.0313	90° 6.66		23.58	30.24	137.69	-107.45	PEAK
0.0372	90°	5.52	23.21	28.73	116.19	-87.46	AVG
0.0372	90°	0° 3.14 23.21		26.35	136.19	-109.84	PEAK
0.0465	90°	2.35	22.62	24.97	114.26	-89.28	AVG
0.0650	90°	0.98	22.62	23.60	134.26	-110.65	PEAK
2.0523	90°	30.11	19.47	49.58	69.54	-19.96	QP
3.2562	2562 90° 21.68 18.93		40.61	69.54	-28.93	QP	

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.


Report No.: BTL-FCCP-1-1407C151 Page 28 of 52



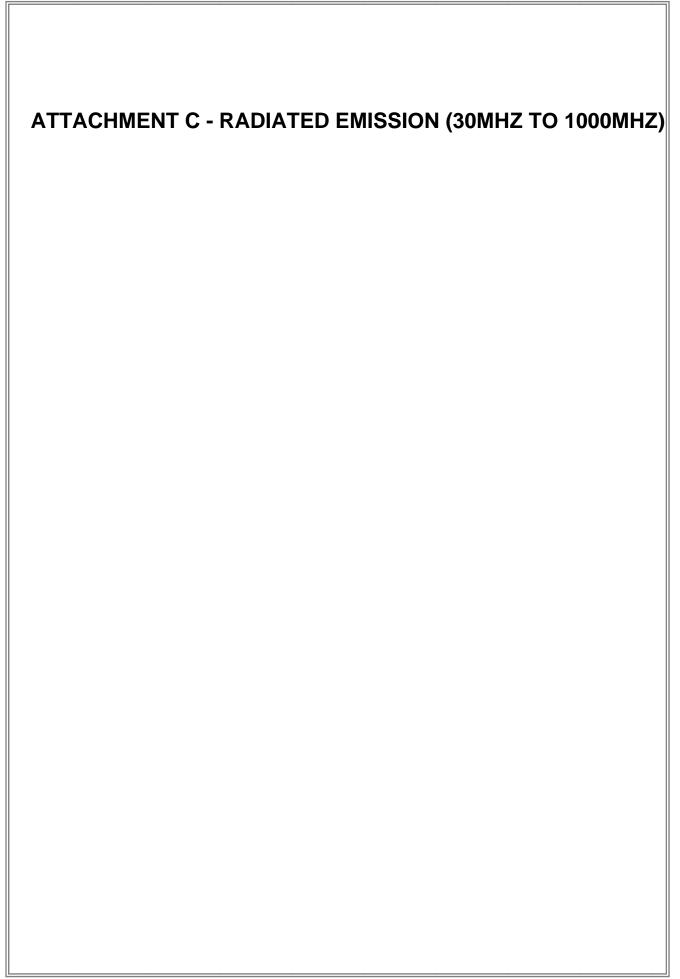

Report No.: BTL-FCCP-1-1407C151 Page 29 of 52



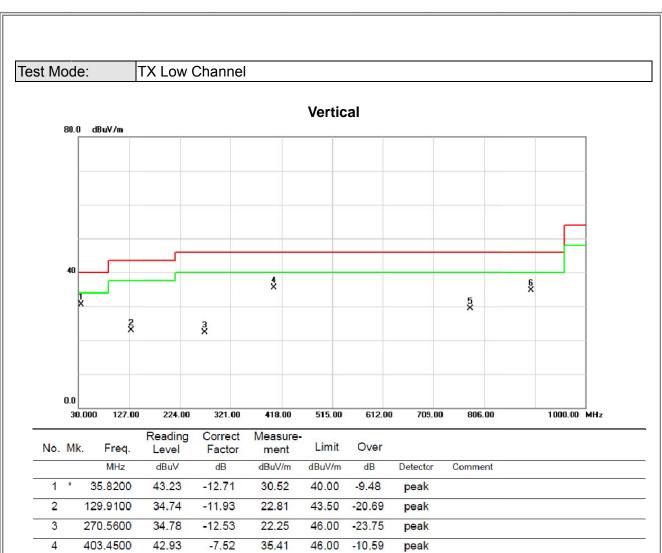

778.8400

896.2100

5

6

28.65

31.06

0.59

3.57

29.24

34.63

46.00

46.00

-16.76

-11.37


peak

peak






Horizontal

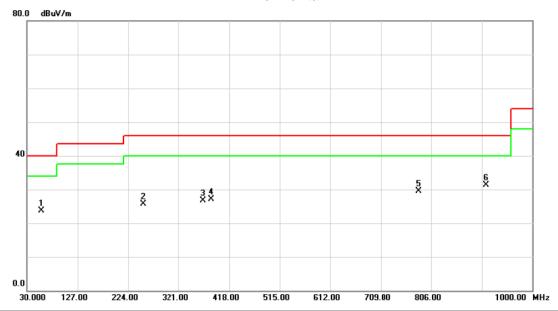

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		57.1600	36.33	-12.65	23.68	40.00	-16.32	peak	
2		253.1000	38.96	-13.24	25.72	46.00	-20.28	peak	
3		367.5600	35.90	-9.19	26.71	46.00	-19.29	peak	
4		384.0500	35.44	-8.40	27.04	46.00	-18.96	peak	
5		781.7500	28.65	0.76	29.41	46.00	-16.59	peak	
6	*	910.7600	27.58	3.65	31.23	46.00	-14.77	peak	


Report No.: BTL-FCCP-1-1407C151 Page 31 of 52



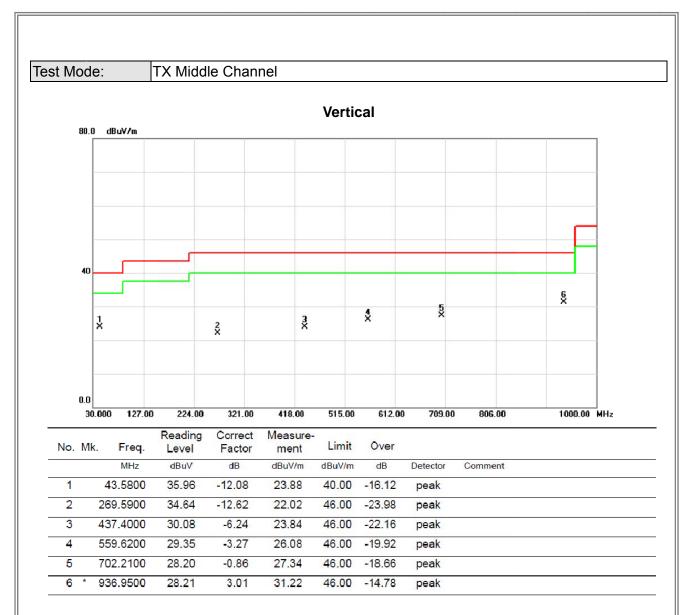






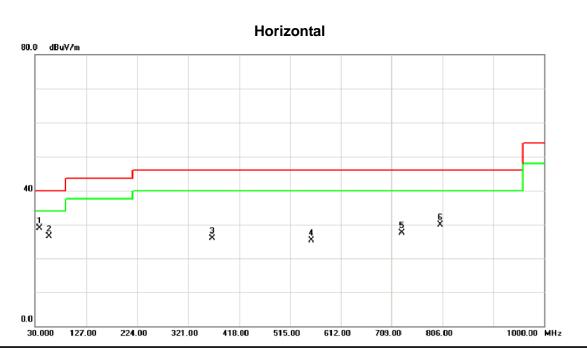


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	37.7600	41.55	-12.59	28.96	40.00	-11.04	peak	
2		56.1900	38.98	-12.55	26.43	40.00	-13.57	peak	
3	(366.5900	35.15	-9.24	25.91	46.00	-20.09	peak	
4	į	555.7400	28.50	-3.10	25.40	46.00	-20.60	peak	
5	-	729.3700	28.54	-1.00	27.54	46.00	-18.46	peak	
6	8	301.1500	28.20	1.78	29.98	46.00	-16.02	peak	

Report No.: BTL-FCCP-1-1407C151 Page 33 of 52



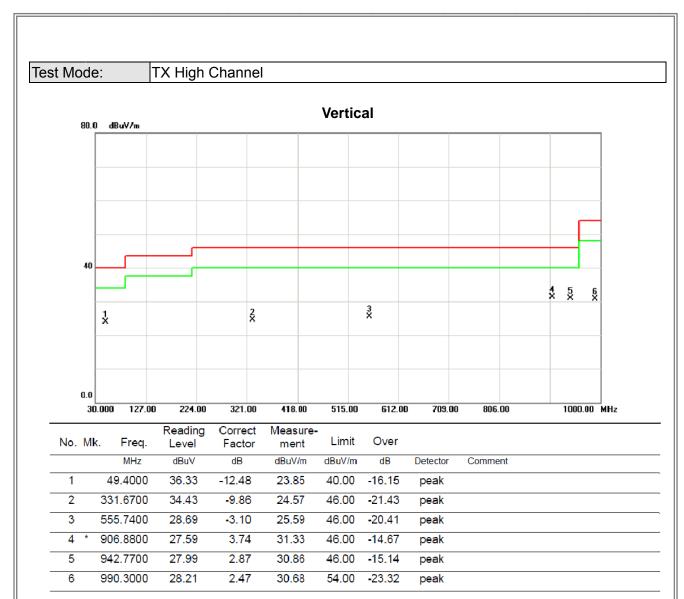



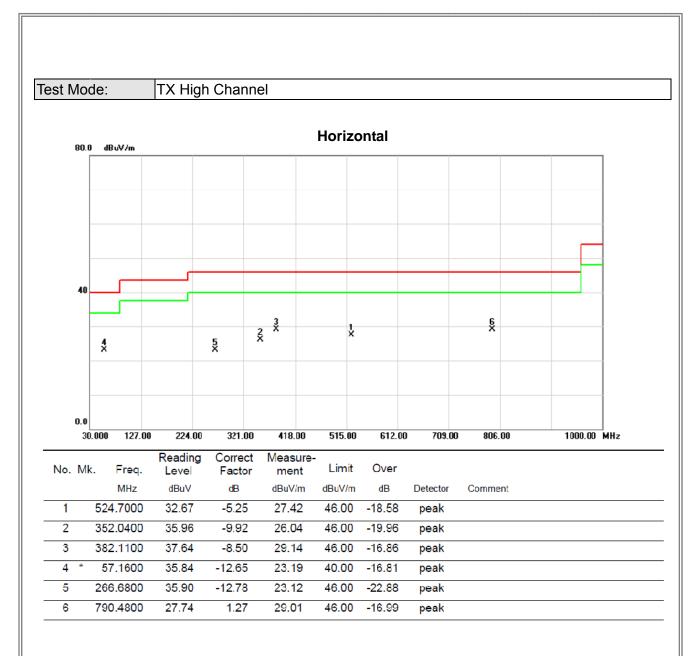

Report No.: BTL-FCCP-1-1407C151 Page 35 of 52






Report No.: BTL-FCCP-1-1407C151 Page 36 of 52



Orthogonal Axis: X
Test Mode: TX Low Channel

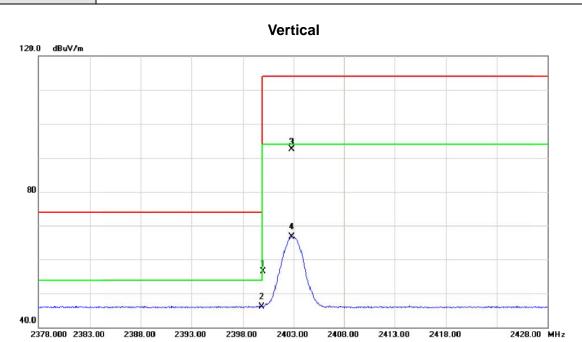


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2400.000	22.87	33.55	56.42	74.00	-17.58	peak	
2	×	2400.000	12.63	33.55	46.18	54.00	- 7.82	AVG	
3		2402.850	58.92	33.55	92.47	114.0	-21.53	peak	
4		2402.850	33.25	33.55	66.80	94.00	-27.20	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 37 of 52



Orthogonal Axis: X
Test Mode: TX Low Channel

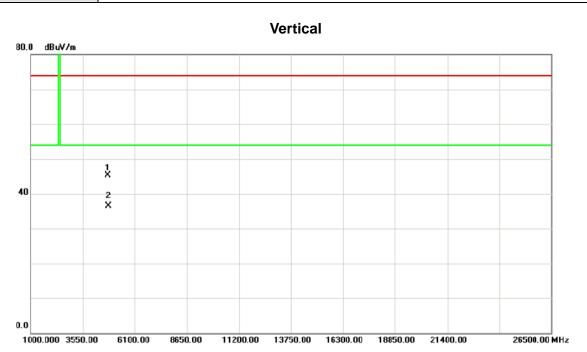


No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4806.100	38.95	6.38	45.33	74.00	-28.67	peak	
2	*	4806.100	30.18	6.38	36.56	54.00	-17.44	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 38 of 52



Orthogonal Axis: X
Test Mode: TX Low Channel

Horizontal

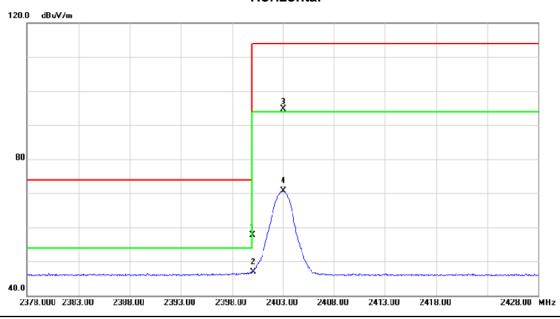


	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
-	1		2400.000	24.18	33.55	57.73	74.00	-16.27	peak	
-	2	*	2400.000	13.39	33.55	46.94	54.00	-7.06	AVG	
-	3		2403.000	61.16	33.55	94.71	114.0	-19.29	peak	
	4		2403.000	37.17	33.55	70.72		-23.28	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 39 of 52



Test Mode : TX Low Channel

Horizontal

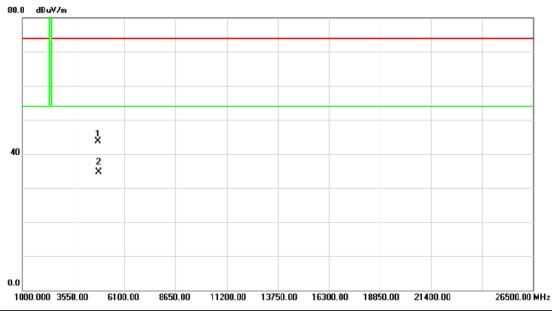


No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4806.040	37.23	6.38	43.61	74.00	-30.39	peak	
2	*	4806.040	28.28	6.38	34.66	54.00	-19.34	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 40 of 52



Orthogonal Axis: X
Test Mode: TX Middle Channel

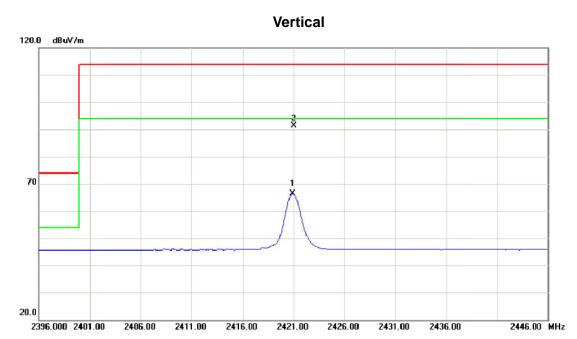


No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2420.900	34.48	31.92	66.40	94.00	-27.60	AVG	
2	*	2421.000	59.41	31.92	91.33	114.0	-22.67	peak	

Report No.: BTL-FCCP-1-1407C151 Page 41 of 52



Orthogonal Axis: X
Test Mode: TX Middle Channel

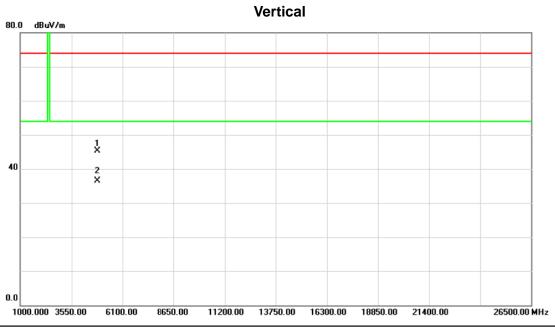


No.	Mk	. Freq.	Reading Level		Measure- ment		Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4842.600	38.84	6.49	45.33	74.00	-28.67	peak	
2	*	4842.600	30.07	6.49	36.56	54.00	-17.44	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 42 of 52



Orthogonal Axis: X Test Mode: TX Middle Channel

Horizontal

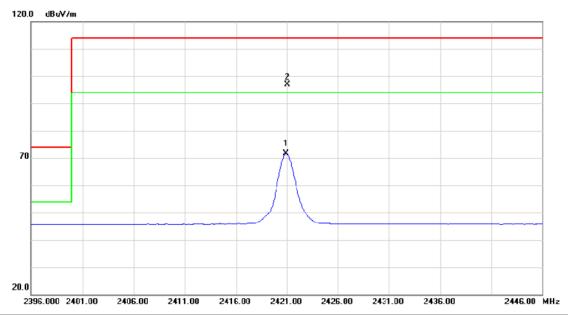

No.	Mk	c. Freq.			Measure- ment		Over		
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2420.900	39.62	31.92	71.54	94.00	-22.46	AVG	
2	*	2421.000	64.92	31.92	96.84	114.0	-17.16	peak	

Report No.: BTL-FCCP-1-1407C151 Page 43 of 52



Test Mode : TX Middle Channel

Horizontal




No.	Mł	k. Freq.			Measure- ment		Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4842.200	37.12	6.49	43.61	74.00	-30.39	peak	
2	*	4842.200	28.17	6.49	34.66	54.00	-19.34	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 44 of 52



Orthogonal Axis: X
Test Mode: TX High Channel

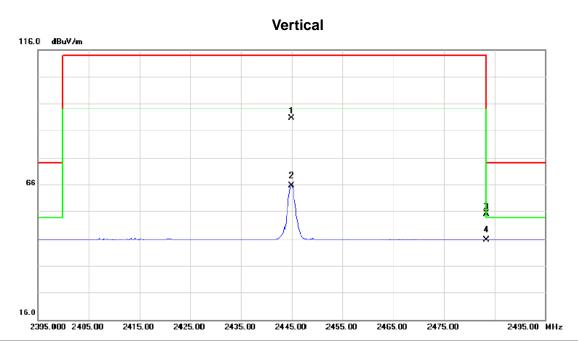


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	d₿	dBuV/m	dBuV/m	dB	Detector	Comment
1		2444.900	58.57	31.96	90.53	114.0	-23.47	peak	
2		2444.900	33.59	31.96	65.55	94.00	-28.45	AVG	
3		2483.500	23.19	32.01	55.20	74.00	-18.80	peak	
4	*	2483.500	13.63	32.01	45.64	54.00	-8.36	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 45 of 52



Test Mode : TX High Channel

Vertical

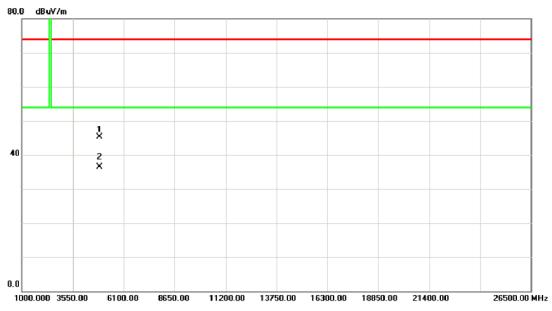


No.	Mi	k. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4890.060	38.69	6.64	45.33	74.00	- 28.67	peak	
2	*	4890.060	29.92	6.64	36.56	54.00	-17.44	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 46 of 52



Test Mode: TX High Channel

Horizontal

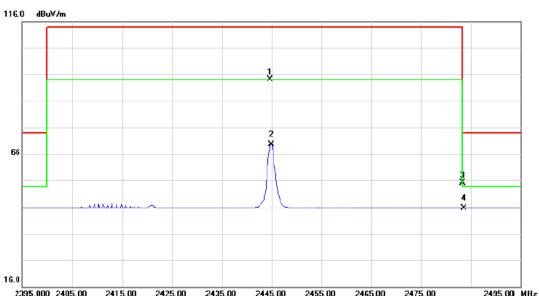


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2444.700	62.22	31.96	94.18	114.0	-19.82	peak	
2		2444.900	37.66	31.96	69.62	94.00	-24.38	AVG	
3		2483.500	23.03	32.01	55.04	74.00	-18.96	peak	
4	*	2483.500	13.60	32.01	45.61	54.00	-8.39	AVG	
	1 2 3	1 2 3	MHz 1 2444.700 2 2444.900 3 2483.500	No. Mk. Freq. Level MHz dBuV 1 2444.700 62.22 2 2444.900 37.66 3 2483.500 23.03	No. Mk. Freq. Level Factor MHz dBuV dB 1 2444.700 62.22 31.96 2 2444.900 37.66 31.96 3 2483.500 23.03 32.01	No. Mk. Freq. Level Factor ment MHz dBuV dB dBuV/m 1 2444.700 62.22 31.96 94.18 2 2444.900 37.66 31.96 69.62 3 2483.500 23.03 32.01 55.04	No. Mk. Freq. Level Factor ment Limit MHz dBuV dB dBuV/m dBuV/m 1 2444.700 62.22 31.96 94.18 114.0 2 2444.900 37.66 31.96 69.62 94.00 3 2483.500 23.03 32.01 55.04 74.00	No. Mk. Freq. Level Factor ment Limit Over MHz	No. Mk. Freq. Level Factor ment Limit Over MHz

Report No.: BTL-FCCP-1-1407C151 Page 47 of 52



Orthogonal Axis: X
Test Mode: TX High Channel

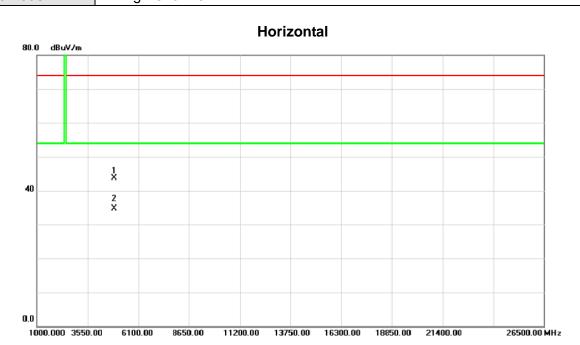

No.	MŁ	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4890.120	36.97	6.64	43.61	74.00	-30.39	peak	
2	*	4890.120	28.02	6.64	34.66	54.00	-19.34	AVG	

Report No.: BTL-FCCP-1-1407C151 Page 48 of 52




ATTACHMENT E - BANDWIDTH	

Report No.: BTL-FCCP-1-1407C151 Page 49 of 52






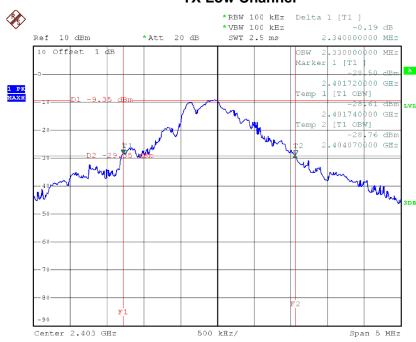

Date: 30.AUG.2014 10:48:42



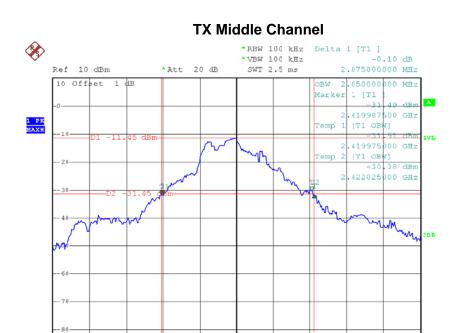

Span 5 MHz

Date: 7.AUG.2014 14:59:08

Center 2.421 GHz

Date: 7.AUG.2014 14:54:31



ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode: N/A

Note: "N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-1-1407C151 Page 52 of 52