FCC Test Report

Report No.: AGC00068140905FE02

FCC ID : 2AC9XSIMPLEONE

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: 2G GSM MOBILE PHONE

BRAND NAME : NDROIS

MODEL NAME : Simple ONE

CLIENT : China America Ltd.

DATE OF ISSUE : Oct.10, 2014

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 64

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct.10, 2014	Valid	Original Report

TABLE OF CONTENTS

1. GENERAL INFORMATION	7
1.1 PRODUCT DESCRIPTION	7
1.2 RELATED SUBMITTAL(S) / GRANT (S)	8
1.3 TEST METHODOLOGY	9
1.4 TEST FACILITY	9
1.5 MEASUREMENT INSTRUMENTS	9
1.6 SPECIAL ACCESSORIES	10
1.7 EQUIPMENT MODIFICATIONS	10
2. SYSTEM TEST CONFIGURATION	11
2.1 EUT CONFIGURATION	11
2.2 EUT EXERCISE	11
2.3 GENERAL TECHNICAL REQUIREMENTS	11
2.4 CONFIGURATION OF EUT SYSTEM	12
3. SUMMARY OF TEST RESULTS	13
4. DESCRIPTION OF TEST MODES	13
5. OUTPUT POWER	14
5.1 CONDUCTED OUTPUT POWER	14
5.2 RADIATED OUTPUT POWER	17
6. PEAK-TO-AVERAGE RATIO	21
6.1 MEASUREMENT METHOD	21
6.2 PROVISIONS APPLICABLE	21
6.3 MEASUREMENT RESULT	22
7. SPURIOUS EMISSION	23
7.1 CONDUCTED SPURIOUS EMISSION	23
7.2 RADIATED SPURIOUS EMISSION	25
8. MAINS CONDUCTED EMISSION	29

8.1 MEASUREMENT METHOD	29
8.2 PROVISIONS APPLICABLE	29
8.3 MEASUREMENT RESULT	30
9. FREQUENCY STABILITY	32
9.1 MEASUREMENT METHOD	32
9.2 PROVISIONS APPLICABLE	32
9.3 MEASUREMENT RESULT (WORST TEST)	33
10. OCCUPIED BANDWIDTH	35
10.1 MEASUREMENT METHOD	35
10.2 PROVISIONS APPLICABLE	35
10.3 MEASUREMENT RESULT	35
11. EMISSION BANDWIDTH	36
11.1 MEASUREMENT METHOD	36
11.2 PROVISIONS APPLICABLE	36
11.3 MEASUREMENT RESULT	36
12. BAND EDGE	37
12.1 MEASUREMENT METHOD	37
12.2 PROVISIONS APPLICABLE	37
12.3 MEASUREMENT RESULT	37
APPENDIX I	38
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	38
APPENDIX II	48
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	48
EMISSION BANDWIDTH (-26DBC)	
APPENDIX III	
TEST PLOTS FOR BAND EDGES	52

Page 5 of 64

APPENDIX IV	55
PHOTOGRAPHS OF TEST SETUP	55
APPENDIX V	58
PHOTOGRAPHS OF EUT	59
FNOTOGRAFNS OF EUT	30

Page 6 of 64

VERIFICATION OF COMPLIANCE

Applicant	China America Ltd.
Address	Suite 08, 20 Floor One International Finance Centre No.1 Harbour View Street, Central HK
Manufacturer	China America Ltd.
Address	Suite 08, 20 Floor One International Finance Centre No.1 Harbour View Street, Central HK
Product Designation	2G GSM MOBILE PHONE
Brand name	NDROIS
Test Model	Simple ONE
Date of Test	Oct.08, 2014 to Oct.10, 2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-2.5G/RF

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E. The test results of this report relate only to the tested sample identified in this report.

Tested By :	East	The
	Bart Xie	Oct.10, 2014
Reviewed By :	kill	1 tony
	Kidd Yang	Oct.10, 2014
Approved By:	ssyer.	zhang
	Solger Zhang	Oct.10, 2014

Page 7 of 64

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	2G GSM MOBILE PHONE			
Hardware Version:	H228_MB_V1.0			
Software Version:	N/A			
Frequency Bands:	⊠GSM 850 ⊠PCS 1900 (U.S. Bands)			
Trequency Bands.	⊠GSM 900 ⊠DCS 1800 (Non-U.S. Bands)			
Antenna:	PIFA Antenna			
Antenna gain:	-1.0dBi			
Battery parameter:	DC3.7V/1000 mAh			
Adapter Input:	AC100-240V 50/60Hz,0.15A			
Adapter Output:	5V/500mA			
	30.78 dBm Maximum ERP measured for GSM 850			
Outrat Barrer	31.95 dBm Maximum Average Burst Power for GSM 850			
Output Power:	27.62 dBm Maximum EIRP measured for PCS 1900			
	28.79 dBm Maximum Average Burst Power for PCS 1900			
Dual SIM Card:	The result for SIM1 is the worst case which was only recorded			
GPRS Class:	12			
Extreme Vol. Limits:	DC 3.4 V to DC4.2 V (Nominal DC 3.7 V)			
Extreme Temp. Tolerance:	-10℃ to +50℃			

^{**} Note: The High Voltage DC 4.2V and Low Voltage DC 3.4V were declared by manufacturer, The EUT could not operate normally with higher or lower voltage.

Other functions have been performed according to verification procedure except for MS function. SIM1 can't transmit with SIM2 simultaneously.

Page 8 of 64

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AC9XSIMPLEONE** filing to comply with the FCC Part 22H and 24E requirements.

Page 9 of 64

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	July 25, 2014	July 24, 2015
TEST RECEIVER	R&S	ESCI	100694	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	AGILENT	8960	122500087	Oct.21, 2013	Oct.20, 2014
COMMUNICATION TESTER	R&S	CMU200	122500166	Feb.27,2014	Feb.26,2015
SIGNAL GENERATOR	AGILENT	E4438C	MY44260051	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	8389791009	July 25, 2014	July 24, 2015
CLIMATE CHAMBER	ALBATROSS			July 25, 2014	July 24, 2015
Loop Antenna	A.H.	SAS-562B	SEL0097	July 25, 2014	July 24, 2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	June 6, 2014	June 5, 2015
Substitution Antenna	EMCO	3142C		June 6, 2014	June 5, 2015
Substitution Antenna	EM	EM-AH-10180	69	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	67	Apr.19, 2014	Apr.18, 2015
Horn Antenna	A.H. Systems Inc.	SAS-574		June 6, 2014	June 5, 2015
Radiation Cable 1	Sat	RE1	R003	June 4, 2014	June 3, 2015
Radiation Cable 2	Sat	RE2	R002	June 4, 2014	June 3, 2015
Conduction Cable	Sat	CE1	C001	June 4, 2014	June 3, 2015

Page 10 of 64

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 11 of 64

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	lte	FCC Rules		
4	Output Dower	Conducted	22.913(a) / 24.232 (b)	
1	Output Power	Radiated		
2	Peak-to-Average	Dook to Average Datio	24.232(d)	
2	Ratio	Peak-to-Average Ratio		
2	Spurious	Conducted Spurious Emission	2 1051 / 22 017 / 24 229	
3	Emission	Radiated Spurious Emission	2.1051 / 22.917 / 24.238	
4	Mains Conducted Emission		15.107 / 15.207	
5	Frequency Stability		2.1055 /24.235	
6	Occupied Bandwidth		2.1049 (h)(i)	
7	Emission Bandwidth		22.917(b) / 24.238 (b)	
8	Band Edge		22.917(b) / 24.238 (b)	

Page 12 of 64

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	2G GSM MOBILE PHONE	Simple ONE	FCC ID: 2AC9XSIMPLEONE	EUT
2	Adapter	Adapter AC-DC	DC5V / 500mA	Accessory
3	Battery	BP-4L	DC3.7V/ 1000 mAh	Accessory
4	Earphone	Simple ONE	N/A	Accessory
5	USB Cable	Simple ONE	N/A	Accessory

Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 13 of 64

3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
4	Output Dower	Conducted Output Power	22.042(a) / 24.222 (b)	Doos
1	Output Power	Radiated Output Power	22.913(a) / 24.232 (b)	Pass
0	Peak-to-Average	Dook to Avenue Detic	24.222(4)	Pass
2	Ratio	Peak-to-Average Ratio	24.232(d)	
3	Spurious Emission	Conducted Spurious Emission	2.4054/22.047/.24.220	Pass
3		Radiated Spurious Emission	2.1051/22.917/ 24.238	
4	Mains Conducted Emission		15.107 / 15.207	Pass
5	Frequency Stability		2.1055 /24.235	Pass
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
8	Band Edge		22.917(b) / 24.238 (b)	Pass

4. DESCRIPTION OF TEST MODES

During the testing, the EUT (Quad-band GSM / GPRS Mobile Phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

Note: GSM and GPRS modes have been tested during the test. The worst condition (GSM) be recorded in the test report if no other modes test data.

Page 14 of 64

5. OUTPUT POWER

5.1 CONDUCTED OUTPUT POWER

5.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

5.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHz					
Mode Power Step Nominal Peak Power Tolerance(dE					
GSM	5	33 dBm (2W)	-2		
GPRS	3	33 dBm (2W)	-2		

Conducted Output Power Limits for PCS 1900 MHz				
Mode Power Step Nominal Peak Power Tolerance(dB)				
GSM	0	30 dBm (1W)	-2	
GPRS	3	30 dBm (1W)	-2	

Page 15 of 64

5.1.3 MEASUREMENT RESULT

Test Result of Conducted Output Power for GSM 850 MHZ (SIM1)

Modo	Frequency	Reference	Peak	Tolorones	Avg.Burst	Duty cycle	Frame
Mode	(MHz)	Power	Power	Power Tolerance	Power	Factor(dB)	Power(dBm)
	824.2	33	32.66	-0.34	31.95	-9	22.95
GSM(SIM1)	836.6	33	32.45	-0.55	31.81	-9	22.81
	848.8	33	32.39	-0.61	31.72	-9	22.72
GPRS850	824.2	33	32.36	-0.64	31.67	-9	22.67
(1 Slot)	836.6	33	32.32	-0.68	31.55	-9	22.55
	848.8	33	32.27	-0.73	31.48	-9	22.48
GPRS850	824.2	30	29.63	-0.37	28.87	-6	22.87
(2 Slot)	836.6	30	29.68	-0.32	28.76	-6	22.76
	848.8	30	29.57	-0.43	28.68	-6	22.68
GPRS850	824.2	28.23	27.66	-0.57	26.94	-4.26	22.68
(3 Slot)	836.6	28.23	27.54	-0.69	26.85	-4.26	22.59
	848.8	28.23	27.46	-0.77	26.74	-4.26	22.48
GPRS850	824.2	27	26.52	-0.48	25.78	-3	22.78
(4 Slot)	836.6	27	26.46	-0.54	25.67	-3	22.67
	848.8	27	26.41	-0.59	25.72	-3	22.72

Report No.: AGC00068140905FE02 Page 16 of 64

Test Result of Conducted Output Power for PCS 1900 MHZ (SIM1)

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.44	-0.56	28.73	-9	19.73
GSM(SIM1)	1880	30	29.48	-0.52	28.79	-9	19.79
	1909.8	30	29.38	-0.62	28.64	-9	19.64
CDDC1000	1850.2	30	29.36	-0.64	28.58	-9	19.58
GPRS1900	1880	30	29.41	-0.59	28.67	-9	19.67
(1 Slot)	1909.8	30	29.31	-0.69	28.62	-9	19.62
CDDC1000	1850.2	27	26.54	-0.46	25.83	-6	19.83
GPRS1900	1880	27	26.52	-0.48	25.87	-6	19.87
(2 Slot)	1909.8	27	26.57	-0.43	25.75	-6	19.75
GPRS1900	1850.2	25.23	24.64	-0.59	23.83	-4.26	19.57
	1880	25.23	24.67	-0.56	23.88	-4.26	19.62
(3 Slot)	1909.8	25.23	24.56	-0.67	23.71	-4.26	19.45
CDDC1000	1850.2	24	23.53	-0.47	22.79	-3	19.79
GPRS1900	1880	24	23.57	-0.43	22.74	-3	19.74
(4 Slot)	1909.8	24	23.49	-0.51	22.62	-3	19.62

Test Result	Test Result of Conducted Output Power for GSM 850 MHZ and PCS 1900 MHz(SIM 2)					
Mode	Maximum Conducted Power(dBm)	Average Burst Power(dBm)	Duty cycle Factor (dB)	Frame Power (dBm)		
GSM 850 MHZ for (SIM2)	32.25	31.59	-9	22.59		
PCS 1900 MHZ for (SIM2)	29.09	28.34	-9	19.34		

Page 17 of 64

5.2 RADIATED OUTPUT POWER

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Report No.: AGC00068140905FE02 Page 18 of 64

Radiated Power Limits for GSM 850 MHZ (ERP)				
Mode Power Step Nominal Peak Power				
GSM	5	<=38.45 dBm (7W)		
GPRS 3 <=38.45 dBm (7W)				

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)				
Mode Power Step Nominal Peak Power				
GSM	0	<=33 dBm (2W)		
GPRS	3	<=33 dBm (2W)		

Report No.: AGC00068140905FE02 Page 19 of 64

5.2.3 MEASUREMENT RESULT

	Radiated Power (ERP) for GSM 850 MHZ				
			Res	ult	
Mode	Frequency	Power Step	Max. Peak ERP	Polarization	Conclusion
			(dBm)	Of Max. ERP	
	824.2	5	30.78	Horizontal	Pass
GSM	836.6	5	30.56	Horizontal	Pass
	848.8	5	30.44	Horizontal	Pass
GPRS	824.2	3	30.52	Horizontal	Pass
	836.6	3	30.46	Horizontal	Pass
1 SIOL	1 slot 848.8	3	30.41	Horizontal	Pass
GPRS	824.2	3		Horizontal	Pass
2 slots	836.6	3		Horizontal	Pass
2 51015	848.8	3		Horizontal	Pass
CDDC	824.2	2	l aga than	Horizontal	Pass
GPRS 3 slots	836.6	2	Less than	Horizontal	Pass
3 51015	848.8	2	- 27 dBm	Horizontal	Pass
CDDC	824.2	2		Horizontal	Pass
GPRS	836.6	2		Horizontal	Pass
4 slots	848.8	2		Horizontal	Pass

	Radiated Power (E.I.R.P) for PCS 1900 MHZ				
			R	esult	
Mode	Frequency	Power Step	Max. Peak	Polarization	Conclusion
			E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	0	27.46	Horizontal	Pass
GSM	1880.0	0	27.62	Horizontal	Pass
	1909.8	0	27.57	Horizontal	Pass
GPRS	1850.2	3	27.35	Horizontal	Pass
	1880.0 3 1909.8 3	27.45	Horizontal	Pass	
15101		3	27.43	Horizontal	Pass
GPRS	1850.2	3		Horizontal	Pass
2 slots	1880.0	3		Horizontal	Pass
2 51015	1909.8	3		Horizontal	Pass
GPRS	1850.2	2	Loop than	Horizontal	Pass
3 slots	1880.0	2	Less than 27 dBm	Horizontal	Pass
3 51015	1909.8	2	27 GBIII	Horizontal	Pass
GPRS	1850.2	2		Horizontal	Pass
	1880.0	2		Horizontal	Pass
4 51015	4 slots 1909.8 2		Horizontal	Pass	

Page 21 of 64

6. PEAK-TO-AVERAGE RATIO

6.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Page 22 of 64

6.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
Gildillici	(Low)	(Mid)	(High)
Frequency	824.2	836.6	848.8
(MHz)	024.2	030.0	040.0
Peak-To-Average Ratio (dB)/GSM	0.71	0.64	0.67

Modes	PCS 1900 (GSM)		
Channel	512	661	810
Gildillici	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)	1030.2	1000	1909.0
Peak-To-Average Ratio (dB)/GSM	0.71	0.69	0.74

Page 23 of 64

7. SPURIOUS EMISSION

7.1 CONDUCTED SPURIOUS EMISSION

7.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz			
Channel	Frequency (MHz)		
128	824.2		
190	836.6		
251	848.8		

Typical Channels for testing of PCS 1900 MHz			
Channel	Frequency (MHz)		
512	1850.2		
661	1880.0		
810	1909.8		

7.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Page 24 of 64

7.1.3 MEASUREMENT RESULT

	Conducted Spurious Emission for GSM 850 MHz										
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)					
2	1648.4	B.I.N.F	1673.2	B.I.N.F	1697.6	B.I.N.F					
3	2472.6	B.I.N.F	2509.8	B.I.N.F	2546.4	B.I.N.F					
4	3296.8	B.I.N.F	3346.4	B.I.N.F	3395.2	B.I.N.F					
5	4121	B.I.N.F	4183	B.I.N.F	4244	B.I.N.F					
6	4945.2	B.I.N.F	5019.6	B.I.N.F	5092.8	B.I.N.F					
7	5769.4	B.I.N.F	5856.2	B.I.N.F	5941.6	B.I.N.F					
8	6593.6	B.I.N.F	6692.8	B.I.N.F	6790.4	B.I.N.F					
9	7417.8	B.I.N.F	7529.4	B.I.N.F	7639.2	B.I.N.F					
10	8242	B.I.N.F	8366	B.I.N.F	8488	B.I.N.F					
B.I.N.F	: Below Instrument	ts Noise flo	or								

	Conducted Spurious Emission for PCS 1900 MHz										
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)					
2	3700.4	B.I.N.F	3760	B.I.N.F	3819.6	B.I.N.F					
3	5550.6	B.I.N.F	5640	B.I.N.F	5729.4	B.I.N.F					
4	7400.8	B.I.N.F	7520	B.I.N.F	7639.2	B.I.N.F					
5	9251.0	B.I.N.F	9400	B.I.N.F	9549.0	B.I.N.F					
6	11101.2	B.I.N.F	11280	B.I.N.F	11458.8	B.I.N.F					
7	12951.4	B.I.N.F	13160	B.I.N.F	13368.6	B.I.N.F					
8	14801.6	B.I.N.F	15040	B.I.N.F	15278.4	B.I.N.F					
9	16651.8	B.I.N.F	16920	B.I.N.F	17188.2	B.I.N.F					
10	18502.0	B.I.N.F	18800	B.I.N.F	19098.0	B.I.N.F					
B.I.N.F	: Below Instrument	ts Noise flo	or								

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 25 of 64


7.2 RADIATED SPURIOUS EMISSION

7.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

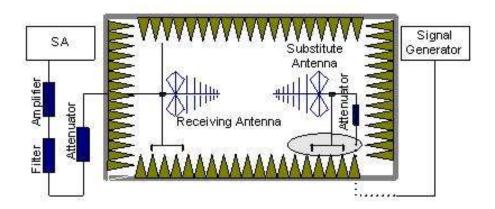

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Page 26 of 64

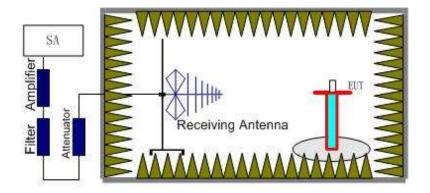

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

7.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a IMOBOnsee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Page 27 of 64

7.2.3 MEASUREMENT RESULT

The Worst Test Results for Channel 128 / 824.2 MHz									
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity				
1648.00	-43.47	-5.01	-48.48	-13.00	Horizontal				
1752.00	-45.45	-2.18	-47.63	-13.00	Vertical				
2472.00	-46.61	3.46	-43.15	-13.00	Horizontal				
9086.00	-44.37	2.79	-41.58	-13.00	Horizontal				

The Worst Test Results for Channel 190/836.6 MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity			
1673.00	-45.48	-3.22	-48.70	-13.00	Horizontal			
1903.00	-46.55	-0.24	-46.79	-13.00	Vertical			
9089.00	-47.62	3.98	-43.64	-13.00	Vertical			

The Worst Test Results for Channel 251/848.8 MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity			
1698.00	-46.64	-2.26	-48.90	-13.00	Horizontal			
1888.50	-47.71	-3.12	-50.83	-13.00	Vertical			
2131.00	-48.39	-1.74	-50.13	-13.00	Vertical			
9089.00	-45.44	8.46	-36.98	-13.00	Horizontal			

The Worst Test Results for Channel 512/1850.2 MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity			
1999.00	-53.25	-1.5	-54.75	-13.00	Horizontal			
3700.00	-57.38	8.74	-48.64	-13.00	Horizontal			
12950.40	-55.71	11.56	-44.15	-13.00	Vertical			
17919.60	-52.52	17.89	-34.63	-13.00	Vertical			

Page 28 of 64

	The Worst Test Results for Channel 661/1880.0 MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity				
2000.50	-53.38	2.7	-50.68	-13.00	Vertical				
9399.00	-53.45	11.6	-41.85	-13.00	Vertical				
13160.40	-54.49	14.89	-39.60	-13.00	Horizontal				
15039.60	-54.41	13.87	-40.54	-13.00	Vertical				
17941.20	-55.72	19.76	-35.96	-13.00	Horizontal				
	The Worst Tes	t Results for	Channel 810/	1909.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity				
2000.00	-56.26	2.32	-53.94	-13.00	Vertical				
9548.50	-55.46	11.3	-44.16	-13.00	Horizontal				
13367.40	-54.62	12.4	-42.22	-13.00	Horizontal				
15277.80	-56.77	15.03	-41.74	-13.00	Vertical				
17931.60	-54.83	19	-35.83	-13.00	Horizontal				

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 29 of 64

8. MAINS CONDUCTED EMISSION

8.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

8.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)			
	Quasi-Peak	Average		
0.15 – 0.5	66 to 56 *	56 to 46 *		
0.5 – 5	56	46		
5 – 30	60	50		


^{*}Decreases with the logarithm of the frequency.

^{*}The lower limit shall apply at the transition frequency.

Page 30 of 64

8.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L1

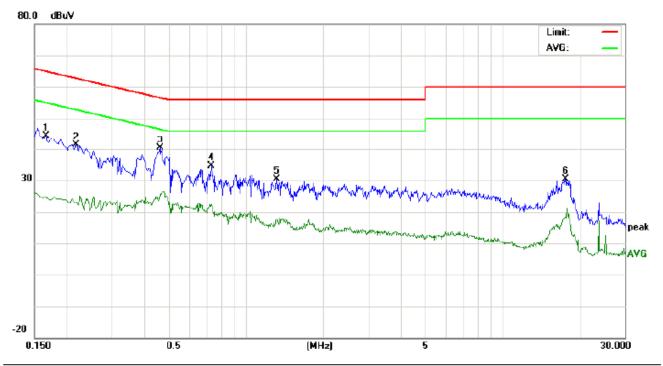

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 2G GSM MOBILE PHONE

M/N: Simple ONE Mode: Call

17.6340 20.25

8.26

10.12

30.37


Note:

No.	Freq.	Reading_Level (dBuV)		Correct Factor	Measurement (dBuV)		Limit Margin (dBuV) (dB)			P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	34.16		14.65	10.18	44.34		24.83	65.15	55.15	-20.81	-30.32	Р	
2	0.2180	31.06		12.88	10.23	41.29		23.11	62.89	52.89	-21.60	-29.78	Р	
3	0.4620	29.89		15.26	10.37	40.26		25.63	56.66	46.66	-16.40	-21.03	Р	
4	0.7340	24.27		12.07	10.33	34.60		22.40	56.00	46.00	-21.40	-23.60	Р	
5	1.3220	20.10		7.17	10.38	30.48		17.55	56.00	46.00	-25.52	-28.45	Р	

18.38 60.00 50.00 -29.63 -31.62

Page 31 of 64

LINE CONDUCTED EMISSION - N

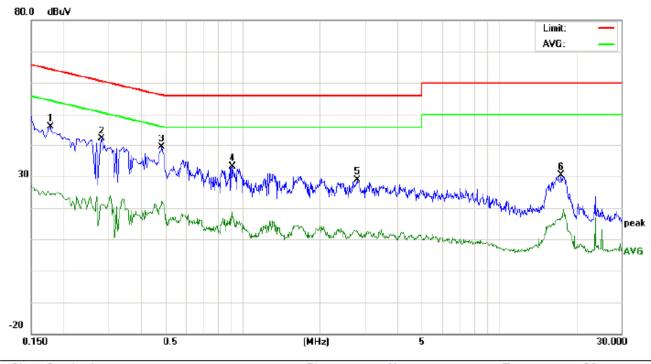

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: 2G GSM MOBILE PHONE

M/N: Simple ONE Mode: Call Note:

No.	No. Freq.		Reading_Level (dBuV)		Correct Factor	Measurement (dBuV)				Margin (dB)		Comment		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	P/F	
1	0.1780	35.85		14.04	10.19	46.04		24.23	64.57	54.57	-18.53	-30.34	Р	
2	0.2819	31.72		10.90	10.28	42.00		21.18	60.76	50.76	-18.76	-29.58	Р	
3	0.4860	29.11		11.64	10.39	39.50		22.03	56.24	46.24	-16.74	-24.21	Р	
4	0.9180	22.81		7.58	10.40	33.21		17.98	56.00	46.00	-22.79	-28.02	Р	
5	2.8020	18.37		1.78	10.50	28.87		12.28	56.00	46.00	-27.13	-33.72	Р	
6	17.4940	20.29		6.59	10.12	30.41		16.71	60.00	50.00	-29.59	-33.29	Р	

Note: The GSM850 mode is the worst condition.

Page 32 of 64

9. FREQUENCY STABILITY

9.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10 $^{\circ}$ C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5° C during the measurement procedure.

9.2 PROVISIONS APPLICABLE

9.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 33 of 64

9.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

9.3 MEASUREMENT RESULT (WORST TEST)

Frequency Error Against Voltage for GSM 850 MHz (Test Channel 190)								
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)						
3.4	19	0.023						
3.7	16	0.019						
4.2	17	0.020						

Frequency Error Against Temperature for GSM 850 MHz (Test Channel 190)								
Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)						
-10	22	0.026						
0	23	0.028						
10	21	0.025						
20	26	0.031						
30	22	0.026						
40	25	0.030						
50	27	0.032						

Note: The EUT doesn't work below -10°C

Page 34 of 64

Frequency Error Against Voltage for PCS 1900 MHz(Test Channel 661)		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	23	0.012
3.7	24	0.013
4.2	25	0.013

Frequency Error Against Temperature for PCS 1900 MHz(Test Channel 661)		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	24	0.013
0	22	0.012
10	21	0.011
20	25	0.013
30	26	0.014
40	27	0.014
50	23	0.012

Note: The EUT doesn't work below -10℃

Page 35 of 64

10. OCCUPIED BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

10.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	246.86
Middle Channel	836.6	248.27
High Channel	848.8	247.60

Occupied Bandwidth (99%) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	244.55
Middle Channel	1880.0	247.84
High Channel	1909.8	245.59

Page 36 of 64

11. EMISSION BANDWIDTH

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

11.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM 850 MHz		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	312.19
Middle Channel	836.6	317.39
High Channel	848.8	311.53

Emission Bandwidth (-26dBc) for PCS 1900 MHz		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	299.11
Middle Channel	1880.0	310.52
High Channel	1909.8	311.09

Page 37 of 64

12. BAND EDGE

12.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

12.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

12.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges.


Page 38 of 64

APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz - 1GHz

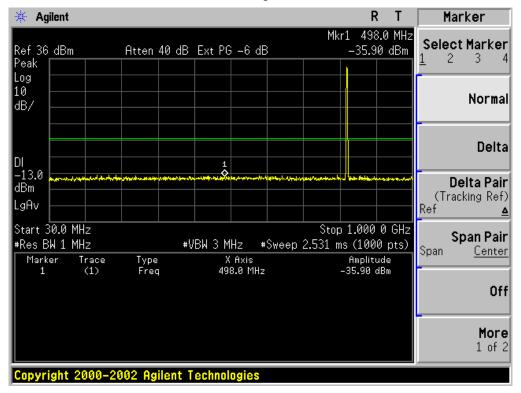


Conducted Emission Transmitting Mode CH 128 1GHz - 9GHz

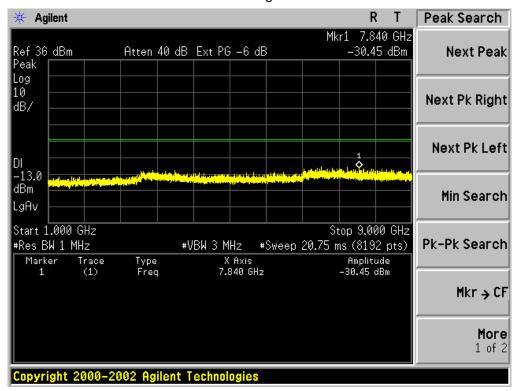


Page 40 of 64


Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

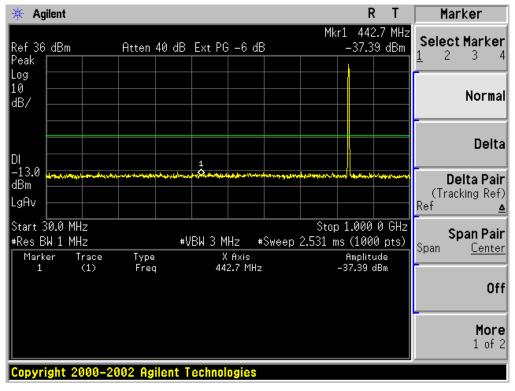


Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

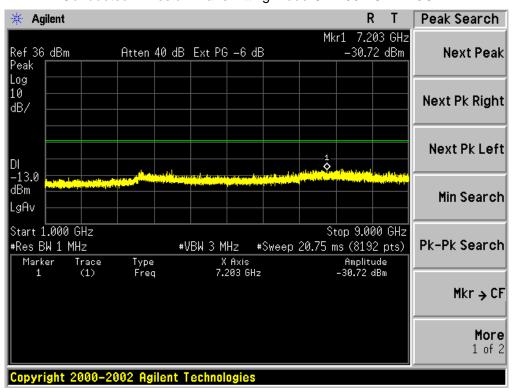

Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

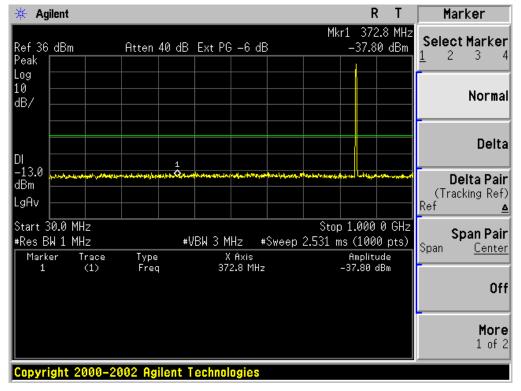


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

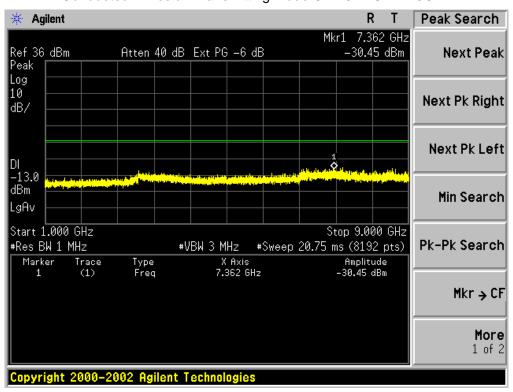


Page 42 of 64

CONDUCTED EMISSION IN PCS1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz - 1GHz

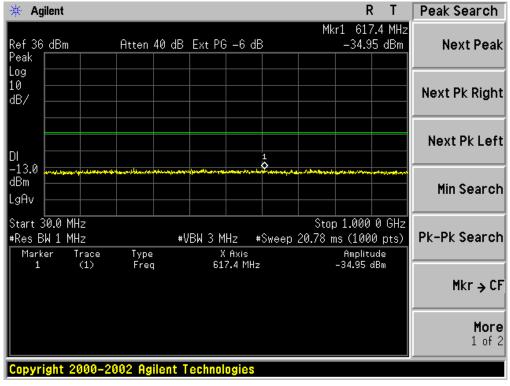


Conducted Emission Transmitting Mode CH 512 1GHz - 7GHz

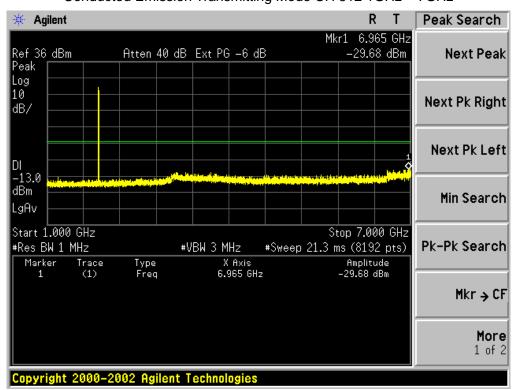


Conducted Emission Transmitting Mode CH 512 7GHz - 13.6GHz

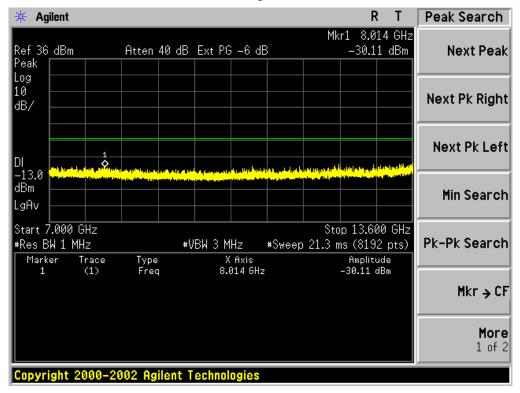


Conducted Emission Transmitting Mode CH 512 13.6GHz - 20GHz

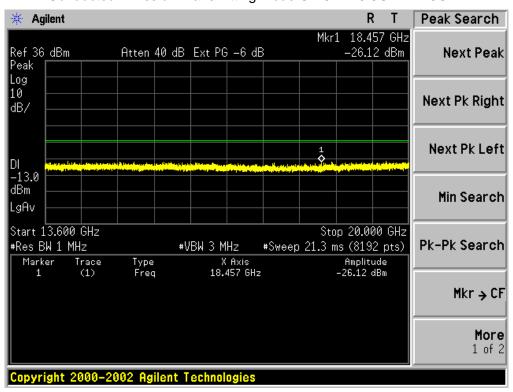


Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

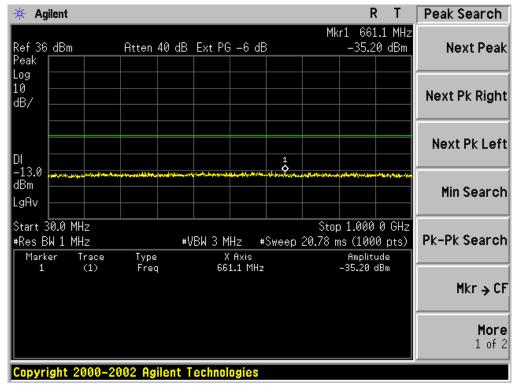


Conducted Emission Transmitting Mode CH 661 1GHz – 7GHz

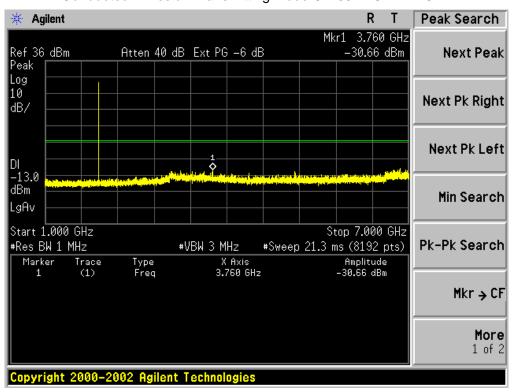

Conducted Emission Transmitting Mode CH 661 7GHz - 13.6GHz

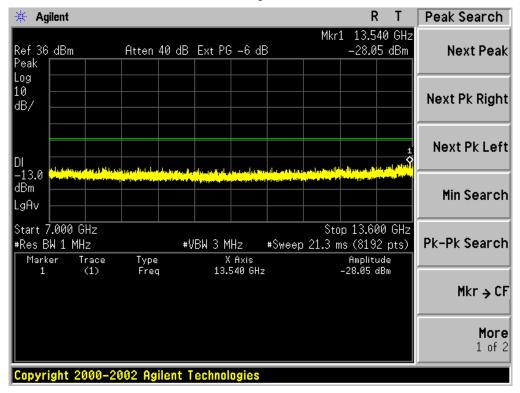


Conducted Emission Transmitting Mode CH 661 13.6GHz - 20GHz

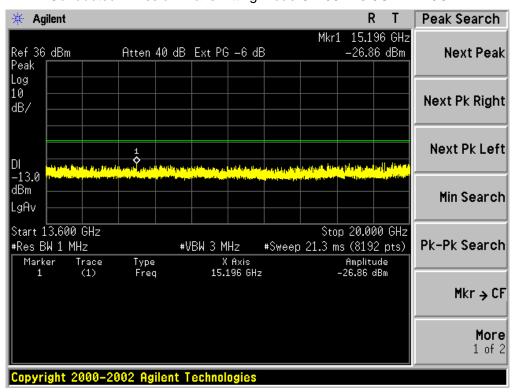


Page 46 of 64


Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

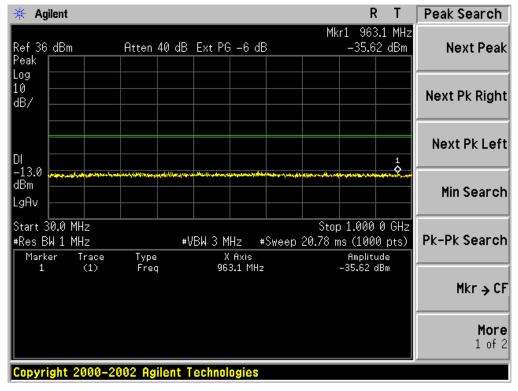


Conducted Emission Transmitting Mode CH 810 1GHz – 7GHz

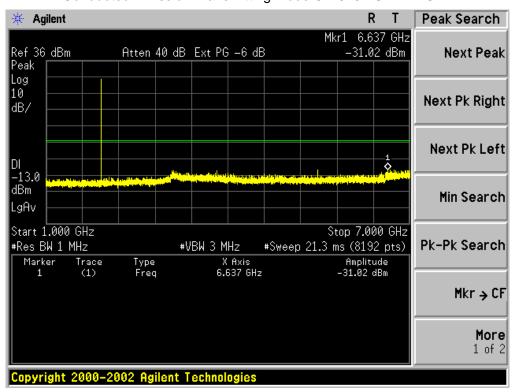

Conducted Emission Transmitting Mode CH 810 7GHz - 13.6GHz

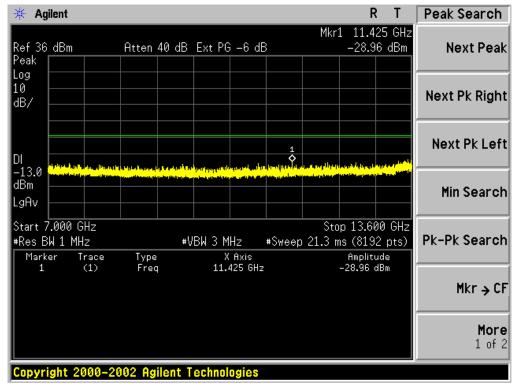

Conducted Emission Transmitting Mode CH 810 13.6GHz - 20GHz

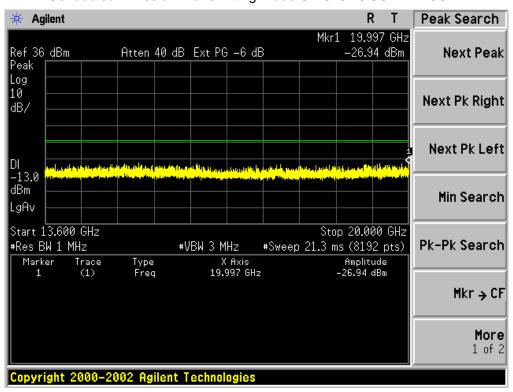


Page 48 of 64

APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

Page 49 of 64

Occupied Bandwidth (99%) GSM 850 BAND CH 128

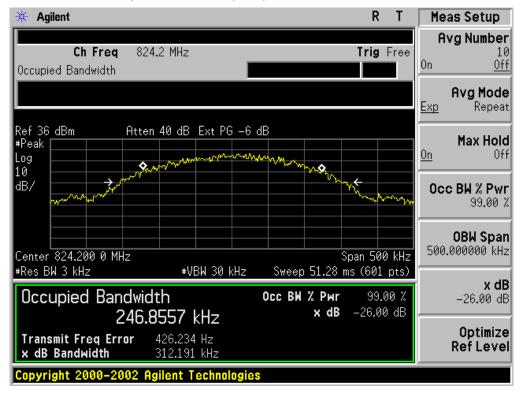


Occupied Bandwidth (99%) GSM 850 BAND CH 190

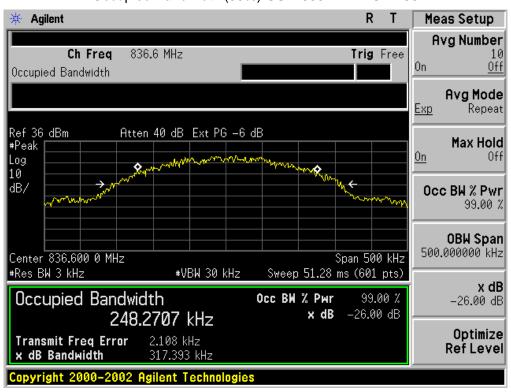


Page 50 of 64

Occupied Bandwidth (99%) GSM 850 BAND CH 251

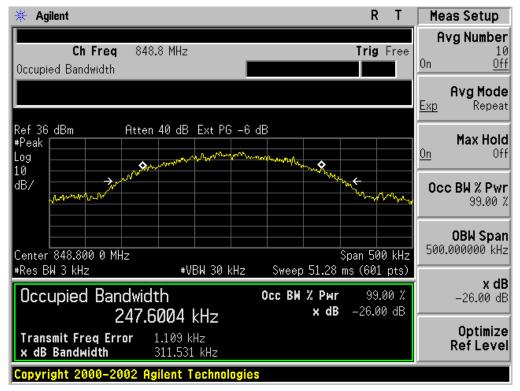


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

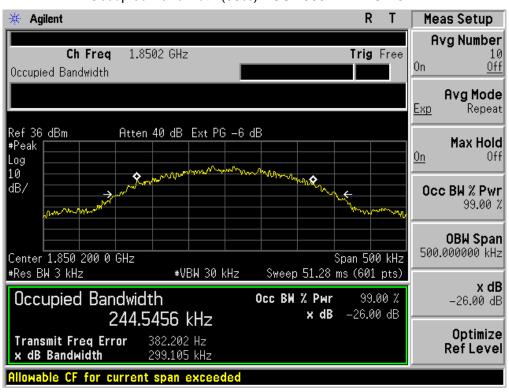


Page 51 of 64

Occupied Bandwidth (99%) PCS 1900 BAND CH 661

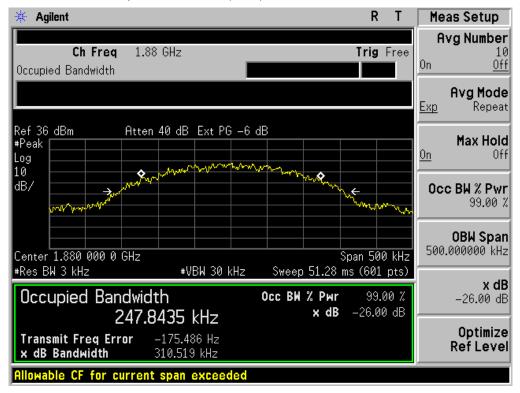

Occupied Bandwidth (99%) PCS 1900 BAND CH 810

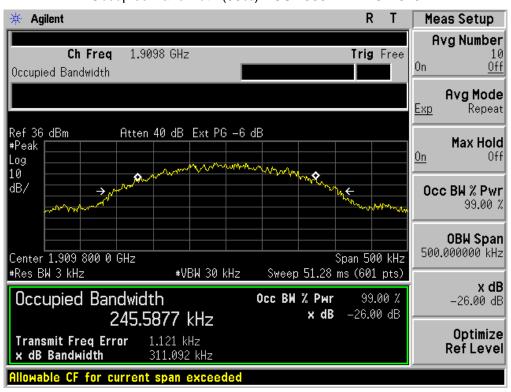


Page 52 of 64


APPENDIX III

TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

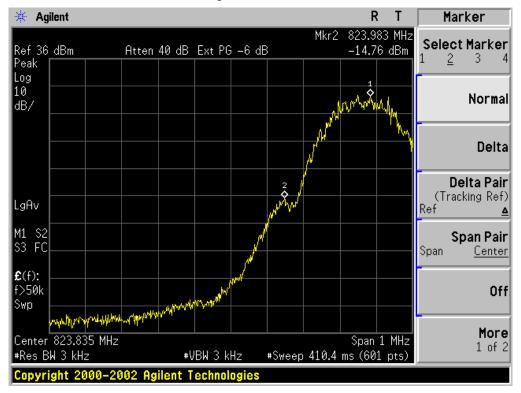


High Band Edge GSM 850 BAND CH 251

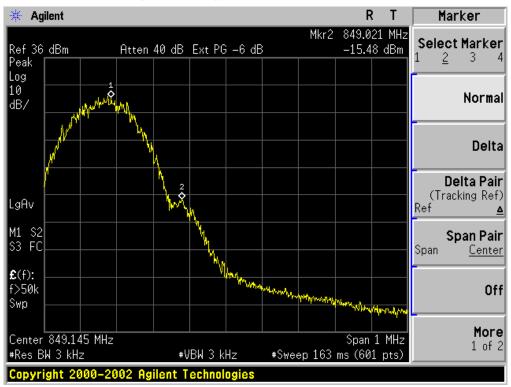

Low Band Edge PCS 1900 BAND CH 512

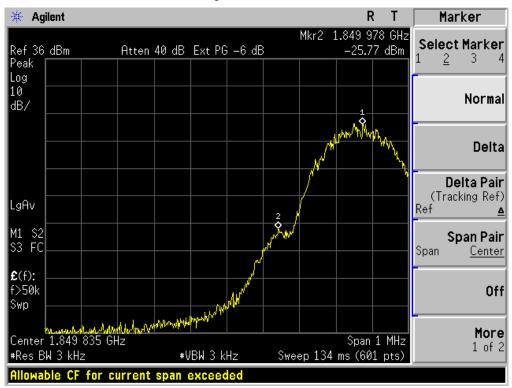

High Band Edge PCS 1900 BAND CH 810

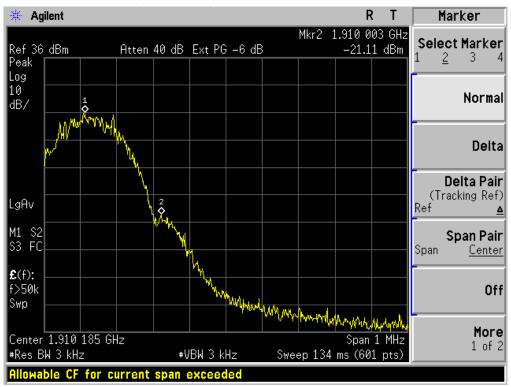

Page 55 of 64


APPENDIX IV

PHOTOGRAPHS OF TEST SETUP






RADIATED SPURIOUS EMISSION

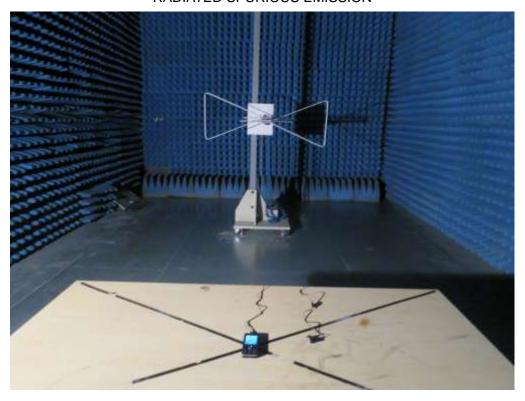

Report No.: AGC00068140905FE02 Page 57 of 64

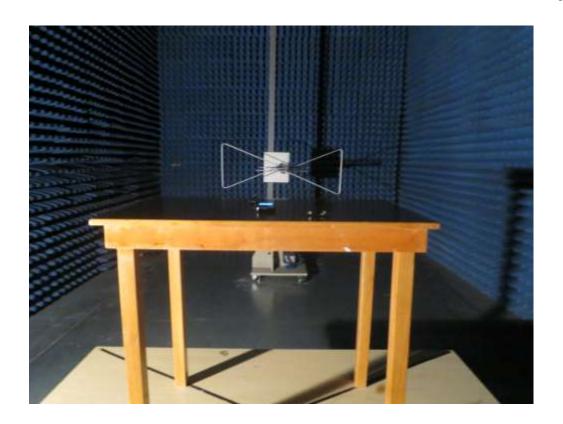

Page 58 of 64

APPENDIX V

PHOTOGRAPHS OF EUT

Page 59 of 64

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



Report No.: AGC00068140905FE02 Page 62 of 64

RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



Report No.: AGC00068140905FE02 Page 63 of 64

OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3




Report No.: AGC00068140905FE02 Page 64 of 64

INTERNAL VIEW OF EUT-1

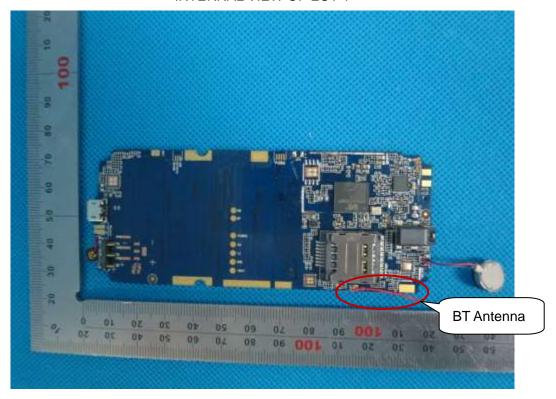

INTERNAL VIEW OF EUT-2

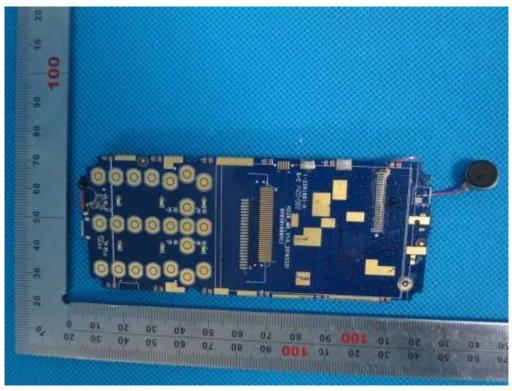

----END OF REPORT----