SAR Test Report

Report No.: AGC00068140905FH01

FCC ID : 2AC9XSIMPLEONE

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: 2G GSM MOBILE PHONE

BRAND NAME: NDROIS

MODEL NAME : Simple ONE

CLIENT: China America Ltd.

DATE OF ISSUE: Oct. 08,2014

IEEE Std. 1528:2003;

STANDARD(S) : 47CFR § 2.1093

IEEE/ANSI C95.1

REPORT VERSION: V1.01

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 110

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.01	/	Oct. 08,2014	Valid	Original Report

The test plans were performed in accordance with IEEE Std. 1528:2003; 47CFR \S 2.1093; IEEE/ANSI C95.1 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v05r02
- KDB 648474 D04 SAR Handsets Multi Xmiter and Ant v01
- KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

Page 3 of 110

Test Report Certification				
Applicant Name	China America Ltd.			
Applicant Address	Suite 08, 20 Floor One International Finance Centre No.1 Harbour View Street Central HK			
Manufacturer Name	China America Ltd.			
Manufacturer Address	Suite 08, 20 Floor One International Finance Centre No.1 Harbour View Street Central HK			
Product Designation	2G GSM MOBILE PHONE			
Brand Name	NDROIS			
Model Name	Simple ONE			
Different Description	N/A			
EUT Voltage	DC3.7V by battery			
Applicable Standard	IEEE Std. 1528:2003 47CFR § 2.1093 IEEE/ANSI C95.1			
Test Date	Sep. 29,2014			
	Attestation of Global Compliance(Shenzhen) Co., Ltd.			
Performed Location	2 F, Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen, China			
Report Template	AGCRT-US-2.5G/SAR (2014-04-01)			

Tested By

Eric Zhou

Oct. 08,2014

in Thou

Checked By

Angela Li

Oct. 08,2014

Authorized By

Solger Zhang

Oct. 08,2014

TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION	6
2.1. EUT DESCRIPTION	6
2.2. Test Procedure	
2.3. TEST ENVIRONMENT	
3. SAR MEASUREMENT SYSTEM	
3.1. SPECIFIC ABSORPTION RATE (SAR)	
3.2. SAR MEASUREMENT PROCEDURE	
3.3. COMOSAR System Description	
3.4. COMOSAR E-FIELD PROBE	
3.6. ROBOT	
3.7. VIDEO POSITIONING SYSTEM	
3.8. DEVICE HOLDER	
4. TISSUE SIMULATING LIQUID	
4.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	
4.2. TISSUE CALIBRATION RESULT	17
4.3. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	
5. SAR MEASUREMENT PROCEDURE	19
5.1. SAR SYSTEM VALIDATION PROCEDURES	
5.2. SAR SYSTEM VALIDATION	
6. EUT TEST POSITION	
6.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET	
6.3. TITLE POSITION	
6.4. Body Worn Position	
7. SAR EXPOSURE LIMITS	25
8. TEST EQUIPMENT LIST	26
9. MEASUREMENT UNCERTAINTY	27
10. CONDUCTED POWER MEASUREMENT	28
11. TEST RESULTS	30
11.1. SAR TEST RESULTS SUMMARY	30
APPENDIX A. SAR SYSTEM VALIDATION DATA	35
APPENDIX B. SAR MEASUREMENT DATA	43
APPENDIX C. TEST SETUP PHOTOGRAPHS & EUT PHOTOGRAPHS	71
APPENDIX D. PROBE CALIBRATION DATA	81
APPENDIX F. DIPOLE CALIBRATION DATA	91

Page 5 of 110

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Highest tested and scaled SAR Summary

Exposure Position	Frequency Band	Highest Tested 1g-SAR(W/Kg)	Highest Scaled Maximum SAR(W/Kg)
Hood	GSM 850	0.134	0.169
Head	PCS 1900	0.290	0.365
Pody worn	GSM 850	0.582	0.733
Body- worn	PCS 1900	0.275	0.346

Highest Simultaneous transmission SAR Summary

Exposure Position	Frequency Band	Highest Simultaneous SAR(W/Kg)
Head	GSM 850+Bluetooth	0.235
	PCS 1900+Bluetooth	0.431
Pody worn	GSM 850+Bluetooth	0.766
Body- worn	PCS 1900+Bluetooth	0.379

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1, and had been tested in accordance with measurement methods and procedures specified in IEEE 1528-2003 and the relevant KDB files like KDB 941225 D01, KDB 941225 D03, KDB 865664 D02....etc.

Page 6 of 110

2. GENERAL INFORMATION

2.1. EUT Description

2.1. EUT Description				
General Information	neral information			
Product Designation	2G GSM MOBILE PHONE			
Test Model	Simple ONE			
Hardware Version	H228_MB_V1.0			
Software Version	N/A			
Device Category	Portable			
RF Exposure Environment	Uncontrolled			
Antenna Type	Internal			
GSM and GPRS				
Support Band				
GPRS Type	Class B			
GPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)			
TX Frequency Range	GSM 850 : 824.2~848.8MHz; PCS 1900: 1850.2~1909.8MHz;			
RX Frequency Range	GSM 850 : 869~894MHz PCS 1900: 1930~1990MHz			
Release Version	R99			
Type of modulation	GMSK for GSM/GPRS			
Antenna Gain	-1.0dBi			
Max. Average Power (Max. Peak Power)	GSM850: 31.95dBm(32.66dBm- Peak Power) PCS1900: 28.79dBm(29.48dBm-Peak Power)			
Bluetooth				
Bluetooth Version	□V2.0 □V2.1 ⊠V2.1+EDR □V3.0 □V3.0+HS □V4.0			
Operation Frequency	2402~2480MHz			
Type of modulation	⊠GFSK ⊠∏/4-DQPSK ⊠8-DPSK			
Avg. Burst Power	1.64dBm			
Antenna Gain	0.8dBi			

Page 7 of 110

EUT Description (Continue)

Accessories					
Battery	Brand name: NDROIS Model No.: BP-4L Voltage and Capacitance: 3.7 V & 1000mAh				
Adapter	Brand name: NDROIS Model No. : Adapter AC-DC Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5V, 500mA				
Earphone	Brand name: N/A Model No. : N/A				

Note: CMU200 can measure the average power and Peak power at the same time

Product	Type		
Product	□ Production unit	☐ Identical Prototype	

2.2. Test Procedure

		1. 100t1 1000aa10	
1 Setup the EUT and simulators as shown on above.			
2 Turn on the power of all equipment.			
	3	EUT Communicate with 8960, and test them respectively at U.S. bands	

2.3. Test Environment

Ambient conditions in the laboratory:

Items	Required	Actual	
Temperature (°C)	18-25	21± 2	
Humidity (%RH)	30-70	55±2	

Page 8 of 110


2.4. Test Configuration and setting

The EUT is a model of GSM Portable Mobile Station (MS). It supports GSM/GPRS and BT.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between

The device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

Antenna Location:

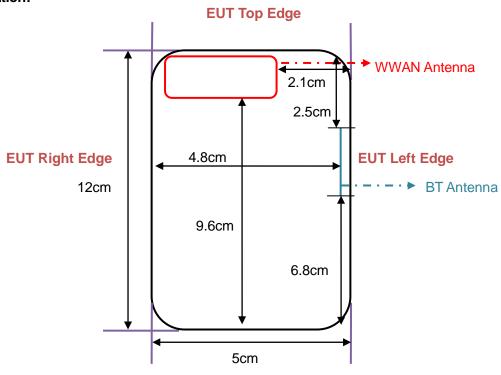

The separation distance for antenna to edge:

The department distance for anterma to dage.					
Antenna	To Top Side(cm)	To Bottom Side(cm)	To Left Side(cm)	To Right Side(cm)	
WWAN	0.2	9.6	2.1	0.2	
BT	2.5	6.8	0.2	4.8	

EUT Bottom Edge

The simultaneous transmission possibilities are listed as below:

Simultaneous TX Combination	Configuration	Head	Body	Hotspot
1 GSM850(Voice)+ BT		Yes	Yes	No
2	PCS 1900(Voice)+ BT	Yes	Yes	No

Page 9 of 110

3. SAR MEASUREMENT SYSTEM

3.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume (dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg) SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \frac{dT}{dt}\Big|_{t=0}$$

Where

SAR is the specific absorption rate in watts per kilogram;

E is the r.m.s. value of the electric field strength in the tissue in volts per meter;

σ is the conductivity of the tissue in siemens per metre;

ρ is the density of the tissue in kilograms per cubic metre;

c_h is the heat capacity of the tissue in joules per kilogram and Kelvin;

 $\frac{dT}{dt}$ | t=0 is the initial time derivative of temperature in the tissue in kelvins per second

Page 10 of 110

3.2. SAR Measurement Procedure

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.


The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

When multiple peak SAR location were found during the same configuration or test mode, Zoom scan shall performed on each peak SAR location, only the peak point with maximum SAR value will be reported for the configuration or test mode.

Page 11 of 110

3.3. COMOSAR System Description

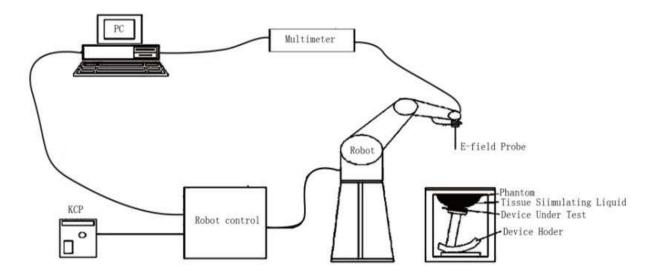

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- · The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

3.3.1. Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

Page 12 of 110

3.3.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

3.3.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 7x7x7 (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

3.3.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Post processor, COMOSAR allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$\begin{split} f_1(x,y,z) &= Ae^{-\frac{z}{2a}}\cos^2\left(\frac{\pi}{2}\frac{\sqrt{x'^2+y'^2}}{5a}\right) \\ f_2(x,y,z) &= Ae^{-\frac{z}{a}}\frac{a^2}{a^2+x'^2}\left(3-e^{-\frac{2z}{a}}\right)\cos^2\left(\frac{\pi}{2}\frac{y'}{3a}\right) \\ f_3(x,y,z) &= A\frac{a^2}{\frac{a^2}{4}+x'^2+y'^2}\left(e^{-\frac{2z}{a}}+\frac{a^2}{2(a+2z)^2}\right) \end{split}$$

Page 13 of 110

3.4. COMOSAR E-Field Probe

The SAR measurement is conducted with the dissymmetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dissymmetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN62209-1, IEC 62209, etc.) under ISO17025. The calibration data are in Appendix D.

3.5. Isotropic E-Field Probe Specification

3.3. ISOHOPIC L	z-rielu Probe Specification	
Model	SSE5	
Manufacture	SATIMO	
Frequency	0.3GHz-3GHz Linearity:±0.09dB(300MHz-3GHz)	5/15/5
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.09dB	77555
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
Application	High precision dosimetric measurements in any exp (e.g., very strong gradient fields). Only probe which compliance testing for frequencies up to 3 GHz with 30%.	enables

3.6. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used. The XL robot series have many features that are important for our application: High precision (repeatability 0.02 mm) High reliability (industrial design) Jerk-free straight movements Low ELF interference (the closed metallic construction shields against motor control fields) 6-axis controller	
--	--


Page 14 of 110

3.7. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.

During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



3.8. Device Holder

The COMOSAR device holder is designed to cope with

different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ϵr =3 and loss tangent δ = 0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Page 15 of 110

3.9. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

□ Left head

□ Right head

☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

Page 16 of 110

4. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 4.2

4.1. The composition of the tissue simulating liquid

Ingredient	redient 835MHz		1900MHz	1900MHz	
(% Weight)	Head	Body	Head	Body	
Water	40.45	52.4	54.90	40.5	
Salt	1.42	1.40	0.18	0.50	
Sugar	57.6	45.0	0.00	58.0	
HEC	0.40	1.00	0.00	0.50	
Preventol	0.10	0.20	0.00	0.50	
DGBE	0.00	0.00	44.92	0.00	

Page 17 of 110

4.2. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and R&S Network Analyzer ZVL6.

	Tissue Stimulant Measurement for 835MHz									
	Ch.		Dielectric Pa	rameters (±5%)						
Fr. (MHz)		hea	d	bo	dy	Tissue Temp	Test time			
		εr 41.5 39.425-43.575	δ[s/m] 0.90 0.855-0.945	εr 55.20 52.44-57-96	δ[s/m] 0.97 0.9215-1.0185	[°C]	rest time			
835	Low	41.39	0.90	55.44	0.97	21	Sep. 29,2014			
835	Mid	41.26	0.92	55.18	0.94	21	Sep. 29,2014			
835	High	41.57	0.89	55.62	0.96	21	Sep. 29,2014			

	Tissue Stimulant Measurement for 1900MHz										
			Dielectric Pa	rameters (±5%)							
Fr. (MHz)	Ch.	head	head body Tissue Temp Te		Test time						
		εr 40.00 38.00-42.00	δ[s/m] 1.40 1.33-1.47	εr 53.30 50.635-55.965	δ[s/m] 1.52 1.444-1.596	[°C]	iost airie				
1900	Low	40.18	1.38	53.11	1.50	21	Sep. 29,2014				
1900	Mid	40.72	1.42	53.63	1.49	21	Sep. 29,2014				
1900	High	40.35	1.40	53.14	1.52	21	Sep. 29,2014				

Page 18 of 110

4.3. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency	h	ead	bo	ody
(MHz)	εr	σ (S/m)	εr	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	1.01	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵr = relative permittivity, σ = conductivity and ρ = 1000 kg/m3)


Page 19 of 110


5. SAR MEASUREMENT PROCEDURE

5.1. SAR System Validation Procedures

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.


The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.



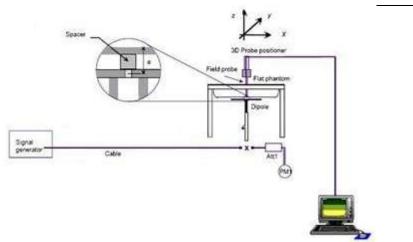

Page 20 of 110

5.2. SAR System Validation5.2.1. Validation Dipoles



The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical Specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
835/900 MHz	149.0	83.3	3.6
1900MHz	68	39.5	3.6

Report No.: AGC00068140905FH01 Page 21 of 110

5.2.2. Validation Result

System Performance Check at 835 MHz &1900MHz for Head										
Validation Kit: SN 46/11DIP 0G900-185 & SN 46/11DIP 1G900-187										
Frequency	Target Re			ce Result 0%)	Tested Value(W/Kg)		Tissue Temp.	Test time		
[MHz]	1g	10g	1g	10g	1g	10g	[°C]			
835	10.70	6.72	9.63-11.77	6.048-7.392	10.61	6.59	21	Sep. 29,2014		
1900	39.65	20.24	35.685-43.615	18.216-22.264	39.02	20.82	21	Sep. 29,2014		

System Perf	System Performance Check at 835 MHz &1900MHz for Body									
Validation Kit: SN 46/11DIP 0G900-185 & SN 46/11DIP 1G900-187										
Frequency	Target Value(W/Kg)		Reference Result (±10%)		Tested Value(W/Kg)		Tissue Temp.	Test time		
[MHz]	1g	10g	1g	1g	10g	[°C]				
835	11.27	7.18	10.143-12.397	6.462-7.898	10.85	6.73	21	Sep. 29,2014		
1900	40.74	21.43	36.666-44.814	19.287-23.573	38.63	19.73	21	Sep. 29,2014		


Page 22 of 110

6. EUT TEST POSITION

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

6.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width wt of the handset at the level of the acoustic output, and the midpoint of the width wb of the handset.
- (2)The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

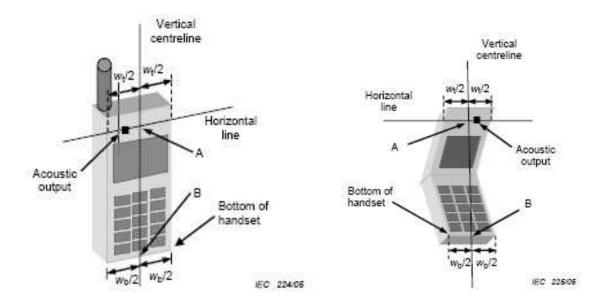

Page 23 of 110

6.2. Cheek Position

(1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center picec in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost








6.3. Title Position

- (1) To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.









Page 24 of 110

6.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to 10mm.





Page 25 of 110

7. SAR EXPOSURE LIMITS

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 "Uncontrolled Environments" limits. These limits apply to a location which is deemed as "Uncontrolled Environment" which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg

Page 26 of 110

8. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date	
SAR Probe	SATIMO	SN 22/12 EP159	01/12/2014	01/11/2015	
TISSUE Probe	SATIMO	SN 45/11 OCPG45	11/14/2013	11/13/2015	
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.	
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.	
Comm Tester	R&S - CMU200	069Y7-158-13-712	02/17/2014	02/16/2015	
Comm Tester	Agilent-8960	GB46310822	02/17/2014	02/16/2015	
Multimeter	Keithley 2000	1188656	02/17/2014	02/16/2015	
Dipole	SATIMO SID900	SN46/11 DIP 0G900-185	11/14/2013	11/13/2015	
Dipole	SATIMO SID1900	SN46/11 DIP 1G900-187	11/14/2013	11/13/2015	
Signal Generator	Agilent-E4438C	MY44260051	02/23/2014	02/22/2015	
Power Sensor	NRP-Z23	US38261498	02/17/2014	02/16/2015	
SPECTRUM ANALYZER	Agilent/E4440A	MY44303916	10/22/2013	10/21/2014	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/17/2014	02/16/2015	

Note: Per KDB 865664 Dipole SAR Validation Verification, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

- 1. There is no physical damage on the dipole;
- 2. System validation with specific dipole is within 10% of calibrated value;
- 3. Return-loss is within 20% of calibrated measurement;
- 4. Impedance is within 5Ω of calibrated measurement.

Report No.: AGC00068140905FH01 Page 27 of 110

9. MEASUREMENT UNCERTAINTY

9. WEASUREMENT UNCERTAINTT										
	SATIMO Uncertainty Measurement uncertainty for 300MHz to 3GHz averaged over 1 gram / 10 gram.									
Measu	rement un	certaint	ty for 30	OMHz to	3GHz averag	jed over 1 gra		Otal	l	
Error Description	Sec	Sec	Tol (±%)	Prob. Dist.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g) (±%)	Std. Unc. (10g)(±%)	(Vi) Veff	
Measurement System										
Probe Calibration	E.2.1	6	N	1	1	1	6	6	×	
Axial Isotropy	E.2.2	3	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.22474	1.22474	∞	
Hemispherical Isotropy	E.2.2	5	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.04124	2.04124	∞	
Boundary Effects	E.2.3	1	R	$\sqrt{3}$	1	1	0.57735	0.57735	∞	
Linearity	E.2.4	5	R	$\sqrt{3}$	1	1	2.88675	2.88675	∞	
System Detection Limits	E.2.5	1	R	$\sqrt{3}$	1	1	0.57735	0.57735	∞	
Readout Electronics	E.2.6	0.5	N	1	1	1	0.5	0.5	∞	
Response Time	E.2.7	0.2	R	$\sqrt{3}$	1	1	0.11547	0.11547	∞	
Integration Time	E.2.8	2	R	$\sqrt{3}$	1	1	1.1547	1.1547	∞	
RF Ambient Noise	E.6.1	3	R	$\sqrt{3}$	1	1	1.73205	1.73205	∞	
Probe Positioner Mechanical Tolerance	E.6.2	2	R	$\sqrt{3}$	1	1	1.1547	1.1547	∞	
Probe Positioning with Respect to Phantom Shell	E.6.3	1	R	$\sqrt{3}$	1	1	0.57735	0.57735	∞	
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5.2	1.5	R	$\sqrt{3}$	1	1	0.86603	0.86603	∞	
Dipole										
Device Positioning	8,E.4.2	1	Ν	$\sqrt{3}$	1	1	0.57735	0.57735	N-1	
Power Drift	8.6.6.2	2	R	$\sqrt{3}$	1	1	1.1547	1.1547	∞	
Phantom and Tissue Parameters										
Phantom Uncertainty	E.3.1	4	R	$\sqrt{3}$	1	1	2.3094	2.3094	∞	
Liquid Conductivity (target)	E.3.2	5	R	$\sqrt{3}$	0.64	0.43	1.84752	1.2413	∞	
Liquid Conductivity (meas.)	E.3.3	2.5	N	1	0.64	0.43	1.6	1.075	∞	
Liquid Permittivity (target)	E.3.2	3	R	$\sqrt{3}$	0.6	0.49	1.03923	0.8487	∞	
Liquid Permittivity (meas.)	E.3.3	2.5	N	1	0.6	0.49	1.5	1.225	M	
Combined Standard Uncertainty			RSS				8.09272	7.9296		
Expanded Uncertainty (95%CONFIDENCE INTERVAL)			k				16.18544	15.8592		

Page 28 of 110

10. CONDUCTED POWER MEASUREMENT GSM BAND

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1	>		,	, ,
	824.2	31.95	-9	22.95
GSM 850	836.6	31.81	-9	22.81
	848.8	31.72	-9	22.72
0000 050	824.2	31.67	-9	22.67
GPRS 850 (1 Slot)	836.6	31.55	-9	22.55
(1 3101)	848.8	31.48	-9	22.48
0000 050	824.2	28.87	-6	22.87
GPRS 850 (2 Slot)	836.6	28.76	-6	22.76
(2 3101)	848.8	28.68	-6	22.68
CDDC 050	824.2	26.94	-4.26	22.68
GPRS 850	836.6	26.85	-4.26	22.59
(3 Slot)	848.8	26.74	-4.26	22.48
0000 050	824.2	25.78	-3	22.78
GPRS 850 (4 Slot)	836.6	25.67	-3	22.67
(4 3101)	848.8	25.72	-3	22.72
	1850.2	28.73	-9	19.73
PCS1900	1880	28.79	-9	19.79
	1909.8	28.64	-9	19.64
00004000	1850.2	28.58	-9	19.58
GPRS1900 (1 Slot)	1880	28.67	-9	19.67
(1 3101)	1909.8	28.62	-9	19.62
ODD04000	1850.2	25.83	-6	19.83
GPRS1900 (2 Slot)	1880	25.87	-6	19.87
(2 3101)	1909.8	25.75	-6	19.75
CDDC4000	1850.2	23.83	-4.26	19.57
GPRS1900 (3 Slot)	1880	23.88	-4.26	19.62
(3 3101)	1909.8	23.71	-4.26	19.45
CDD 04000	1850.2	22.79	-3	19.79
GPRS1900 (4 Slot)	1880	22.74	-3	19.74
(+ Siut)	1909.8	22.62	-3	19.62
Maximum Power <2	>			
GSM 850	824.2	31.59	-9	22.59
PCS1900	1880	28.34	-9	19.34

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) -9 dB

Frame Power = Max burst power (2 Up Slot) - 6 dB

Frame Power = Max burst power (3 Up Slot) -4.26dB

Frame Power = Max burst power (4 Up Slot) - 3 dB

Report No.: AGC00068140905FH01 Page 29 of 110

Bluetooth

Modulation	Channel	Frequency(MHz)	Average Power (dBm)
	0	2402	1.26
GFSK	39	2441	1.64
	78	2480	1.59
	0	2402	0.55
π /4-DQPSK	39	2441	0.86
	78	2480	0.69
	0	2402	0.52
8-DPSK	39	2441	0.85
	78	2480	0.7

Page 30 of 110

11. TEST RESULTS

11.1. SAR Test Results Summary

11.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE1528, and Body SAR was performed with the device 10mm from the phantom.

11.1.2. Operation Mode

- According to KDB 447498 D01 v05r01 ,for each exposure position, if the highest 1-g SAR is \leq 0.8 W/kg, testing for low and high channel is optional.
- Per KDB 865664 D01 v01r01,for each frequency band, if the measured SAR is ≥0.8W/Kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
- (1) When the original highest measured SAR is ≥0.8W/Kg, repeat that measurement once.
- (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is ≥1.20 or when the original or repeated measurement is ≥1.45 W/Kg.
- (3) Perform a third repeated measurement only if the original, first and second repeated measurement is \geq 1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is \geq 1.20.
- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
- •Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
- Maximum Scaling SAR =tested SAR (Max.) \times [maximum turn-up power (mw)/ maximum measurement output power(mw)]

Page 31 of 110

11.1.3. Test Result

SAR MEASU	REMENT								
Ambient Temperature (°C) : 21 ± 2				Relative Humidity (%): 55					
Liquid Temperature (°C) : 21 ± 2				Depth of	Liquid (cr	n):>15			
Product: 2G (Product: 2G GSM MOBILE PHONE								
Test Mode: G	SM850 with GMSK mo								
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Turn-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Left Cheek	voice	190	836.6	0.36	0.130	32.81	31.81	0.164	1.6
Left Tilt	voice	190	836.6	0.28	0.094	32.81	31.81	0.118	1.6
Right Cheek	voice	190	836.6	0.64	0.134	32.81	31.81	0.169	1.6
Right Tilt	voice	190	836.6	0.22	0.111	32.81	31.81	0.140	1.6
Body back	voice	190	836.6	-0.33	0.582	32.81	31.81	0.733	1.6
Body front	voice	190	836.6	0.29	0.132	32.81	31.81	0.166	1.6
SIM 2 Card									
Right Cheek	voice	190	836.6	-0.67	0.129	32.81	31.81	0.162	1.6

Note:

[•] When the 1-g SAR is \leq 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 941225. • The test separation for body is 10mm of all above table.

[•]The worst mode is voice mode.

Page 32 of 110

SAR MEASU	REMENT								
Ambient Temperature (°C) : 21 ± 2				Relative Humidity (%): 55					
Liquid Temperature (°C): 21 ± 2				Depth of	Liquid (cn	n):>15			
Product: 2G (GSM MOBILE PHONE								
Test Mode: P	CS1900 with GMSK m								
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Turn-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Left Cheek	voice	661	1880.0	0.12	0.180	29.79	28.79	0.227	1.6
Left Tilt	voice	661	1880.0	0.61	0.256	29.79	28.79	0.322	1.6
Right Cheek	voice	661	1880.0	0.34	0.245	29.79	28.79	0.308	1.6
Right Tilt	voice	661	1880.0	-0.65	0.290	29.79	28.79	0.365	1.6
Body back	voice	661	1880.0	0.28	0.275	29.79	28.79	0.346	1.6
Body front	voice	661	1880.0	-0.37	0.135	29.79	28.79	0.170	1.6
SIM 2 Card									
Right Tilt	voice	661	1880.0	-0.21	0.286	29.79	28.79	0.360	1.6

Note:

- When the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 941225.
 The test separation for body is 10mm of all above table.
 The worst mode is voice mode.

Page 33 of 110

Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

NO	Simultaneous state	Po	ortable Hands	Note	
NO	Simultaneous state	Head	Body-worn	Hotspot	Note
1	GSM(voice)+Bluetooth(data)	Yes	Yes	-	-
2	WCDMA(voice)+Bluetooth(data)	-	-	-	-

NOTE:

- 1. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- 2. Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
- 3. Based upon KDB 447498 D01 v05, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR AND 5mm for body-worn SAR.
- 4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- 5. For minimum test separation distance \leq 50mm,Bluetooth standalone SAR is excluded according to [(max. power of channel, including tune-up tolerance, mW)/ (min. test separation distance, mm) $\cdot [\sqrt{f} (GHz)/x] \leq 3.0$ for 1-g SAR and \leq 7.5 for 10-g extremity SAR
- 6. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]· $[\sqrt{f} (GHz)/x]$ W/kg for test separation distances 50 mm; Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR			Maximum Average Power dBm mW		SAR exclusion threshold (mW)	SAR testing required (Yes/No)	Head (0mm gap)	Body (10mm gap)
ВТ	Head	2	1 F0F	0	10	NO	0.066	0.033
ы	Body	2	1.585	10	10	NO	W/kg	W/kg

Maximum test results (WWAN) with BT SAR:

BT: Head (0 cm gap): 0.066 W/kg and Body (1.0cm gap): 0.033 W/kg

Page 34 of 110

BT

Position	Max. WWAN SAR (W/Kg)	Max. Estimated SAR (W/Kg)	SAR Summation	Limit (W/kg)	SPLSR ≦0.04 (Yes/No)			
GSM850+BT								
Left Cheek	0.164	0.066	0.230	1.6	No			
Left Tilt	0.118	0.066	0.184	1.6	No			
Right Cheek	0.169	0.066	0.235	1.6	No			
Right Tilt	0.140	0.066	0.206	1.6	No			
Body back	0.733	0.033	0.766	1.6	No			
Body front	0.166	0.033	0.199	1.6	No			
PCS1900+BT								
Left Cheek	0.227	0.066	0.293	1.6	No			
Left Tilt	0.322	0.066	0.388	1.6	No			
Right Cheek	0.308	0.066	0.374	1.6	No			
Right Tilt	0.365	0.066	0.431	1.6	No			
Body back	0.346	0.033	0.379	1.6	No			
Body front	0.170	0.033	0.203	1.6	No			

Note:

- \bullet According to KDB 447498 D01 General RF Exposure Guidance v05, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Page 35 of 110

APPENDIX A. SAR SYSTEM VALIDATION DATA

Test Laboratory: AGC Lab Date: Sep. 29,2014

System Check Head 835 MHz

DUT: Dipole 900 MHz Type: SID 900

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.27 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.26$; $\rho = 1000$ kg/m³;


Phantom section: Flat Section; Input Power=10dBm Ambient temperature ($^{\circ}$ C): 21, Liquid temperature ($^{\circ}$ C): 21

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

- · Sensor-Surface: 4mm (Mechanical Surface Detection)
- · Phantom: Flat Phantom; Type: Elliptical Phantom
- · Measurement SW: OpenSAR V4_02_01

Configuration/System Check GSM 835 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check GSM 835 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

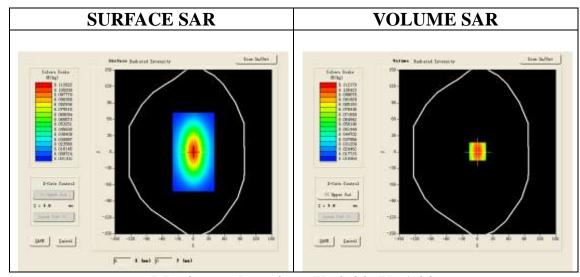


Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.065939
SAR 1g (W/Kg)	0.106148

Report No.: AGC00068140905FH01 Page 36 of 110

	.0000 SAR, Z	0.1121 Axis Sca	0.0698 an (X = 0,	0.0448 Y = 1)	0.0305
0. 11 - 0. 10 -	SAR, Z	Axis Sc	an (X = 0,	¥ = 1)	
0.10-					
80.0 €) (#/kg) 80.0 6		\longrightarrow			4
. 0. 04 0. 02 - 0. 0	0 2.5 5	5.0 7.5 10.0	12.5 15.0 17. Z (mm)	5 20.0 22.5 25	5.0

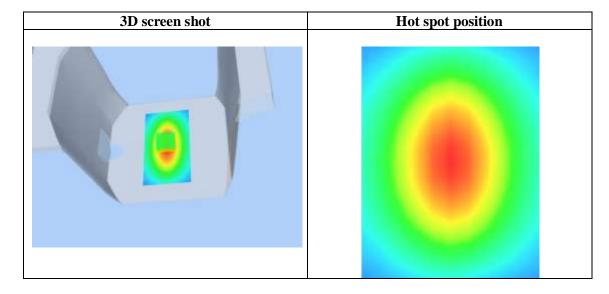

Date: Sep. 29,2014

Page 37 of 110

Test Laboratory: AGC Lab System Check Body 835 MHz

DUT: Dipole 900 MHz Type: SID 900

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.48 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 55.18$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=10dBm Ambient temperature ($^{\circ}$ C): 21, Liquid temperature ($^{\circ}$ C): 21

SATIMO Configuration:


Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/System Check GSM 835 Body/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check GSM 835 Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

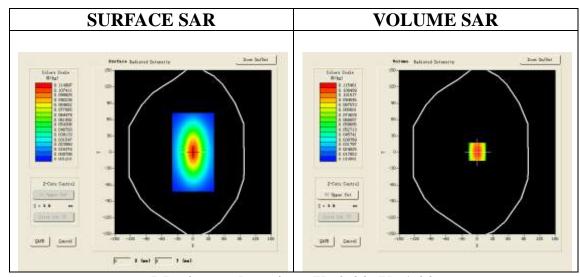


Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.067299
SAR 1g (W/Kg)	0.108547

Report No.: AGC00068140905FH01 Page 38 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1162	0.0741	0.0438	0.0325
	SAR, Z	Axis Sca	n (X = 0,	¥ = 1)	
0). 12 –				
C). 10-	\longrightarrow			-
(W/kg)). 08 –				
SAR ()). 06 -				
C	0. 04 -				-
C	0.02 - 0.0 2.5 5			5 20.0 22.5 25	5.0
			Z (mm)		

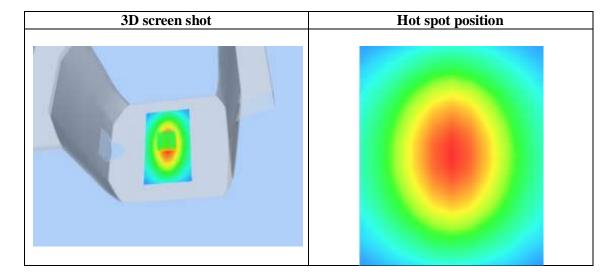

Page 39 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.51 Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon r = 40.72$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section: Input Power=10dBm Ambient temperature ($^{\circ}$ C): 21, Liquid temperature ($^{\circ}$ C): 21

SATIMO Configuration:


Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/System Check PCS1900 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check PCS1900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

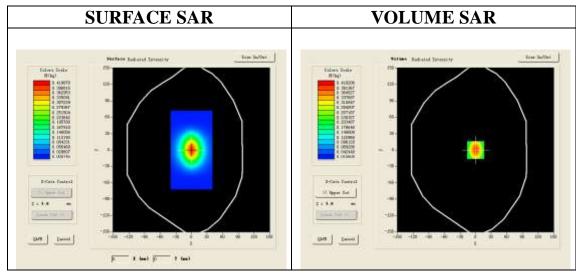


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	0.208245
SAR 1g (W/Kg)	0.390219

Report No.: AGC00068140905FH01 Page 40 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4192	0.2341	0.1367	0.0835
	SAR, Z	Axis Sca	$\mathbf{n} (X = 0,$	¥ = 0)	
0	. 42 –				
0	. 35 -	$\backslash\!\!\!\backslash\!$			
~ 0	. 30 -	+			-
(#/kg)	. 25 -				
å 0	. 20 -	 	+		-
, o	. 15 –	+			-
0	. 10 -	+			
0	. 05 -				
	0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0
			Z (mm)		

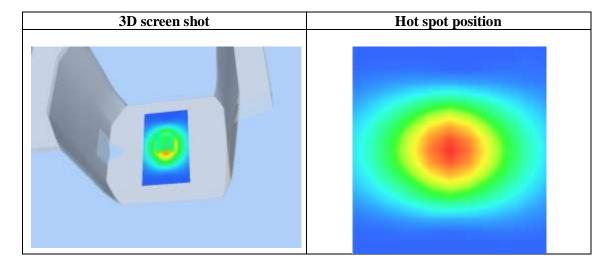

Date: Sep. 29,2014

Page 41 of 110

Test Laboratory: AGC Lab System Check Body 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.45 Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.49$ mho/m; $\epsilon r = 53.63$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=10dBm Ambient temperature ($^{\circ}$ C): 21, Liquid temperature ($^{\circ}$ C): 21

SATIMO Configuration:


Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/System Check PCS1900 Body/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check PCS1900 Body/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

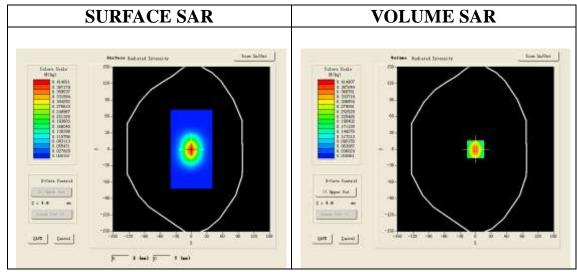


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	0.197315
SAR 1g (W/Kg)	0.386282

Report No.: AGC00068140905FH01 Page 42 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4159	0.2262	0.1228	0.0715
	SAR, Z	Axis Sca	$\mathbf{n} (X = 0,$	¥ = 0)	
0	0. 41 -				
0). 35 -	\longrightarrow			
~ 0). 30 –	+ $+$ $+$			-
(#/kg)). 25 -	+			-
g ⁰	1.20	++			-
23.0	. 15 -		\rightarrow		-
0). 10 -				
0	0.04-		+		-
	0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0
			Z (mm)		

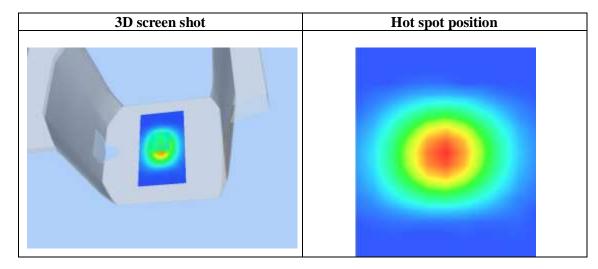

Page 43 of 110

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid-Touch-Left <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.27 Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon = 41.26$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 21.0, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/GSM 850 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Left head		
Device Position	Cheek		
Band	GSM 850		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

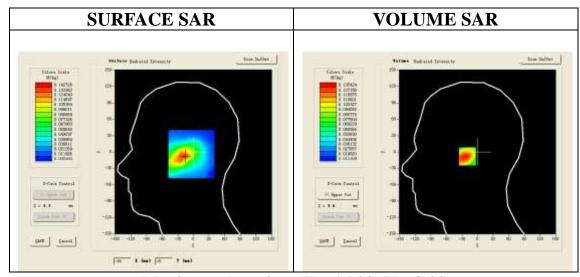


Maximum location: X=-16.00, Y=-8.00

SAR 10g (W/Kg)	0.082855
SAR 1g (W/Kg)	0.130365

Report No.: AGC00068140905FH01 Page 44 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1351	0.0896	0.0610	0.0434
	SAR, Z	Axis Scan	(X = -16,	A = -8)	
C). 14 –				
C). 12-				
(kg)	1. 10 -				
). 08 –	++	+		-
SAR). 06 –				
	0. 04 -				
). 03 -		10.5.15.0.17	F 00 0 00 F 0F	
	0.0 2.5 5		12.5 15.0 17.9 Z (mm)	5 20.0 22.5 25	0.0

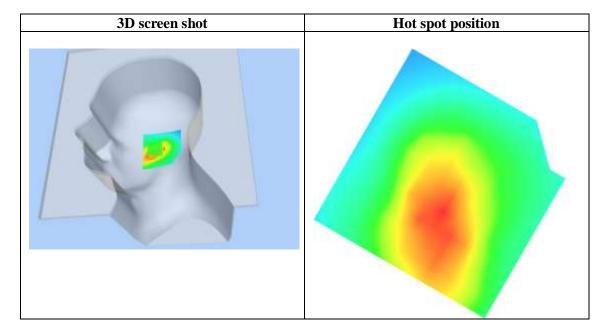

Page 45 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid-Tilt-Left <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.27;

Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.26$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature(°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/GSM 850 Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Left head			
Device Position	Tilt			
Band	GSM 850			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

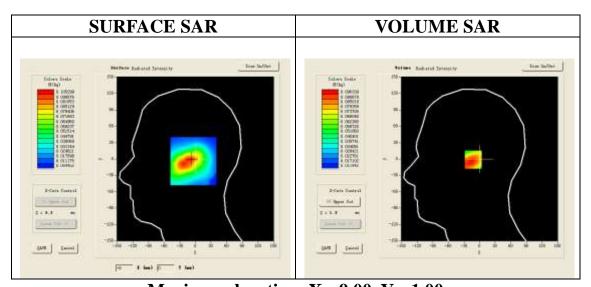


Maximum location: X=-9.00, Y=-1.00

SAR 10g (W/Kg)	0.065692
SAR 1g (W/Kg)	0.093721

Report No.: AGC00068140905FH01 Page 46 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0963	0.0771	0.0584	0.0411
	SAR, Z	Axis Scan	(X = -9,	∀ = −1)	
0). 10 –				
0	0.09-	$\overline{}$	++++		-
0	0.08-				
(%)). 07 -	++			
			\longrightarrow		
SAR). 05 –		$+$ λ		
C	0. 04 -				
c	0.00 2.5 5	5.0. 7.5. 10.0	12 5 15 0 17	5 20.0 22.5 25	-
	0.0 2.5 5		Z (mm)	J 20.0 22.3 23	,, 0

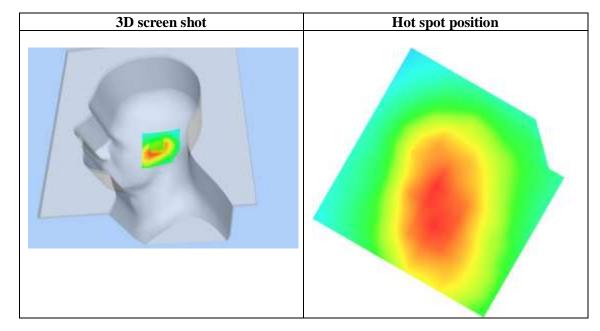

Page 47 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid-Touch-Right <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.27; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon = 41.26$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/GSM 850 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Cheek			
Band	GSM 850			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

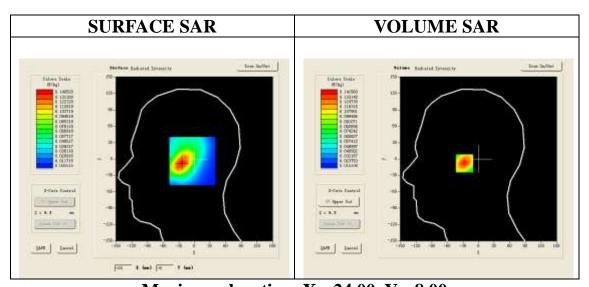


Maximum location: X=-24.00, Y=-8.00

SAR 10g (W/Kg)	0.089734
SAR 1g (W/Kg)	0.134291

Report No.: AGC00068140905FH01 Page 48 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00			
SAR (W/Kg)	0.0000	0.1416	0.1058	0.0773	0.0547			
	SAR, Z Axis Scan $(X = -24, Y = -8)$							
0	. 14 -				-			
0	. 12 -	$\downarrow\downarrow$						
(W/kg)	. 10 -	+						
	. 08 –							
	. 06 –		++					
C	0.0 2.5			5 20.0 22.5 25	5.0			
Z (mm)								

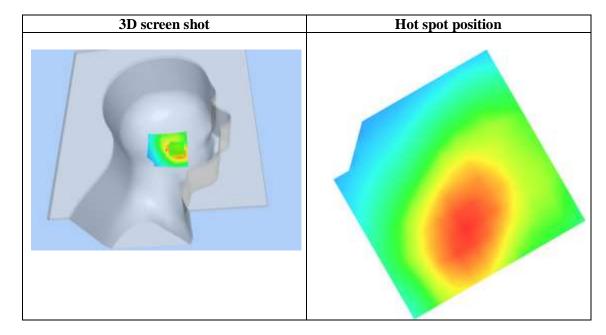

Page 49 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid-Tilt-Right <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.27; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.26$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/GSM 850 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Tilt		
Band	GSM 850		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

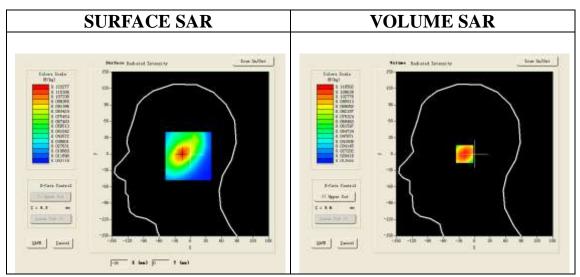


Maximum location: X=-16.00, Y=0.00

SAR 10g (W/Kg)	0.077297		
SAR 1g (W/Kg)	0.111175		

Report No.: AGC00068140905FH01 Page 50 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00			
SAR (W/Kg)	0.0000	0.1165	0.0915	0.0683	0.0475			
	SAR, Z Axis Scan $(X = -16, Y = 0)$							
0). 12 -							
C). 10-				-			
). 08 –							
SAR). 06 -		+					
	0.04 - 0.03 - 0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0			
	Z (mm)							

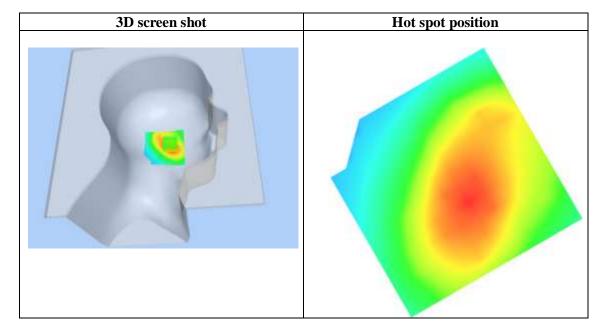

Page 51 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid-Touch-Right <SIM 2>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.27; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon = 41.26$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/GSM 850 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Cheek			
Band	GSM 850			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

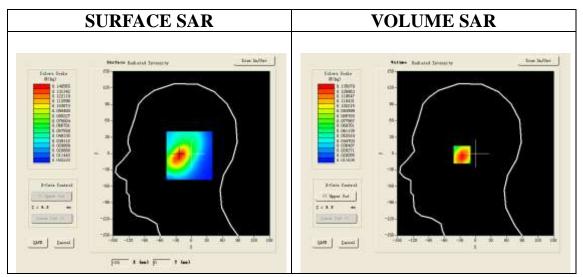


Maximum location: X=-23.00, Y=-2.00

SAR 10g (W/Kg)	0.086087
SAR 1g (W/Kg)	0.129427

Report No.: AGC00068140905FH01 Page 52 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1351	0.1004	0.0725	0.0503
	SAR, Z	Axis Scan	(X = -23,	∀ = −2)	
	0. 14 -				
/kg)), 10 -				
SAR	1. 08 -				
	0.03- 0.0 2.5 5		12.5 15.0 17.5 Z (mm)	5 20.0 22.5 25	5.0

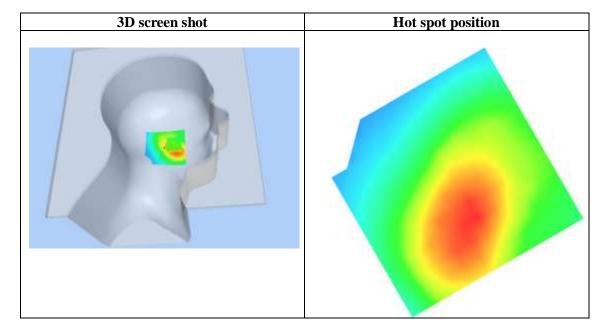

Page 53 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid- Body- Back <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.48; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 55.18$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/GSM 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Validation plane		
Device Position	Body Back		
Band	GSM 850		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

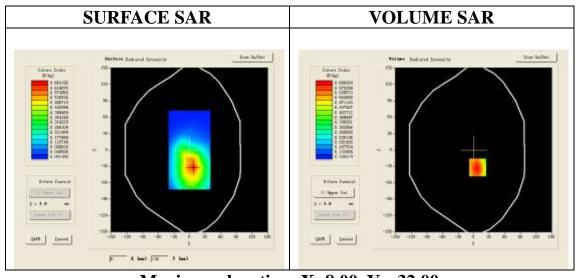


Maximum location: X=8.00, Y=-32.00

SAR 10g (W/Kg)	0.410751	
SAR 1g (W/Kg)	0.582339	

Report No.: AGC00068140905FH01 Page 54 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00			
SAR (W/Kg)	0.0000	0.6060	0.4737	0.3557	0.2531			
	SAR, Z Axis Scan (X = 8, Υ = -32)							
0	1.6-							
0	.5-							
//kg)	4-							
SAR (W/kg)								
٥	1.3-							
0	0.0 2.5 5	.0 7.5 10.0	12.5 15.0 17.5	5 20.0 22.5 25	5.0			
	Z (mm)							

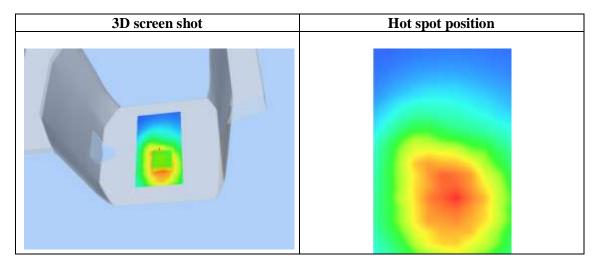

Page 55 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

GSM 850 Mid- Body- Front (MS) <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.48; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 55.18$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/GSM 850 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm **Configuration/GSM 850 Mid-Body- Front Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Validation plane			
Device Position	Body Front			
Band	GSM 850			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

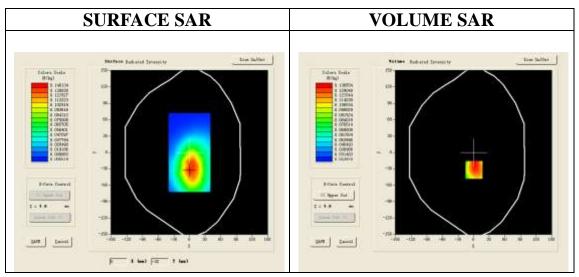


Maximum location: X=1.00, Y=-32.00

	,
SAR 10g (W/Kg)	0.094769
SAR 1g (W/Kg)	0.132226

Report No.: AGC00068140905FH01 Page 56 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1324	0.1034	0.0791	0.0589
	SAR, Z	Axis Scan	(X = 1, Y)	<i>y</i> = −32)	
	0.13				
(W/kg)). 10 -				
O	0.08-				
	0.04- 0.0 2.5 5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	5. 0

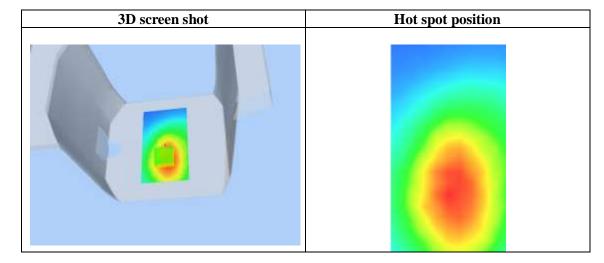

Page 57 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Touch- Left <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.51; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon = 40.72$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Left head		
Device Position	Cheek		
Band	PCS 1900		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

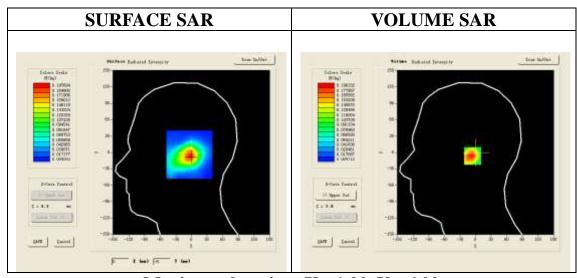


Maximum location: X=-1.00, Y=-6.00

	,
SAR 10g (W/Kg)	0.096654
SAR 1g (W/Kg)	0.180372

Report No.: AGC00068140905FH01 Page 58 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1903	0.1032	0.0557	0.0310
	SAR, Z	Axis Scan	(X = −1,	Y = -6)	
). 190 –			1 1	- 1
0). 175 -	\longrightarrow	\rightarrow		-
0). 150 –	\longrightarrow			
, je). 125 -	+ + +			-
€ 0). 100 -				
	0. 075 -	++	$\downarrow \downarrow \downarrow \downarrow$		
o). 050 –				-
C	0.017-	50 75 10 0	12 5 15 0 17	5 20.0 22.5 25	50
	Z (mm)				

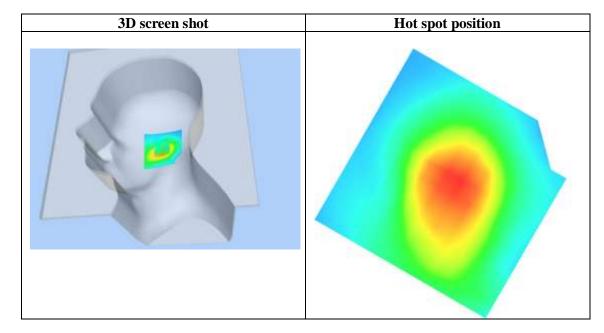

Page 59 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Tilt-Left <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.51; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon = 40.72$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 21.0, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Left head		
Device Position	Tilt		
Band	PCS 1900		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

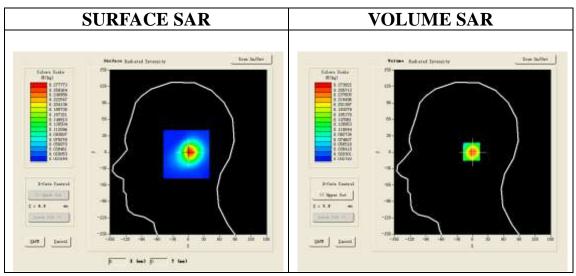


Maximum location: X=2.00, Y=1.00

	, , , , , , , , , , , , , , , , , , ,
SAR 10g (W/Kg)	0.127591
SAR 1g (W/Kg)	0.255550

Report No.: AGC00068140905FH01 Page 60 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2738	0.1426	0.0740	0.0403
	SAR, Z	Axis Scar	n (X = 2,	Y = 1)	
). 27 –). 25 –				
9). 20 -	+			
\$ 0). 15 -	+			
SAR). 10 -		$\downarrow \downarrow \downarrow \downarrow$		
O). 05 -				
	0.02 - 0.0 2.5 5			5 20.0 22.5 25	5.0
			Z (mm)		

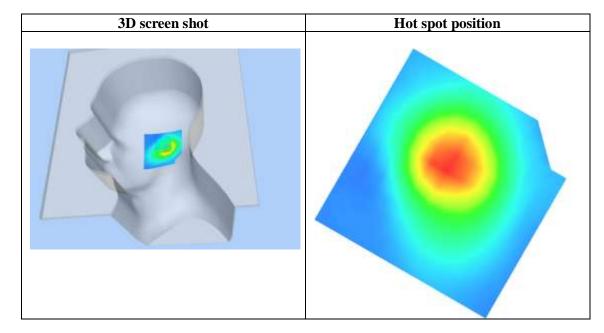

Page 61 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Touch-Right <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.51; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42 \text{ mho/m}$; $\epsilon = 40.72$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/PCS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Cheek			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

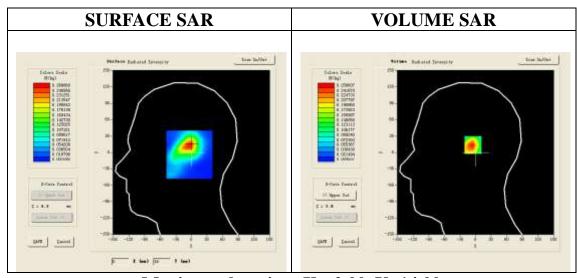


Maximum location: X=-2.00, Y=14.00

SAR 10g (W/Kg)	0.127671
SAR 1g (W/Kg)	0.244941

Report No.: AGC00068140905FH01 Page 62 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2586	0.1405	0.0746	0.0396
	SAR, Z	Axis Scan	(X = -2,	¥ = 14)	
0). 26 –				
		\			
0	. 20 –				
		$ $ $ $			
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\). 15 –	+			_
		$ \cdot \cdot $			
SAR	. 10 -	 	$\downarrow \downarrow \downarrow \downarrow$		-
0). 05 –		\rightarrow		-
0	0.02-				
	0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0
Z (mm)					

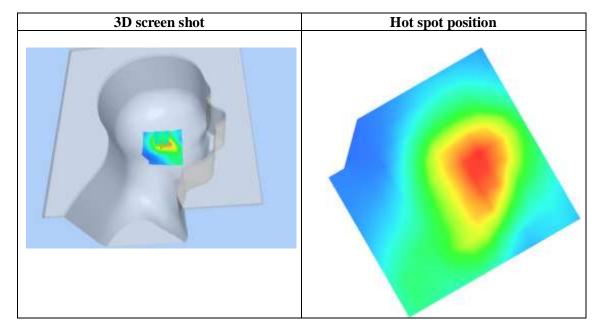

Page 63 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Tilt-Right <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.51; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon = 40.72$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Tilt		
Band	PCS 1900		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

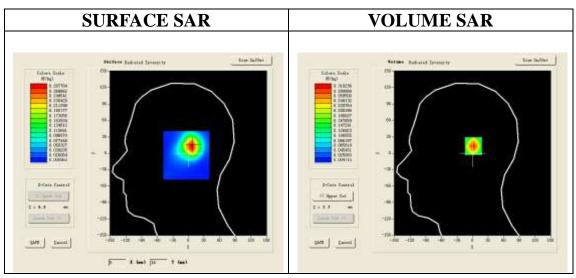


Maximum location: X=6.00, Y=13.00

	,
SAR 10g (W/Kg)	0.144546
SAR 1g (W/Kg)	0.289964

Report No.: AGC00068140905FH01 Page 64 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3102	0.1519	0.0743	0.0394
	SAR, Z	Axis Scan	(X = 6,	Y = 13)	
0	0. 31 -				
SAR (W/kg)). 25 –	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5. o
	Z (mm)				

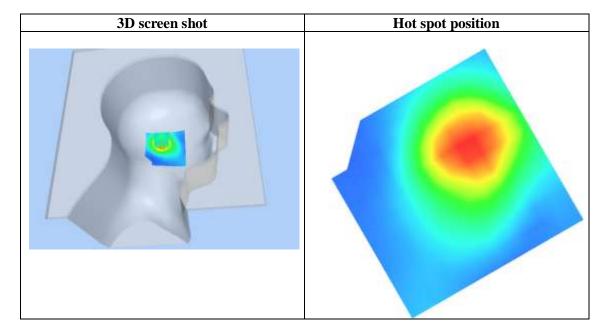

Page 65 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Tilt-Right <SIM 2>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.51; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon = 40.72$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Tilt			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

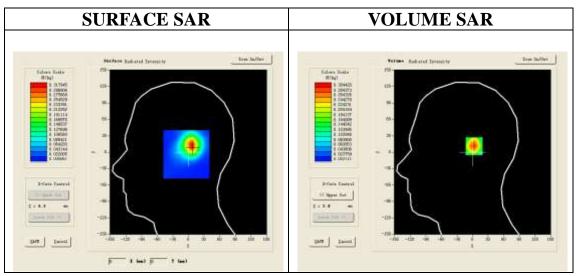


Maximum location: X=7.00, Y=11.00

SAR 10g (W/Kg)	0.143226
SAR 1g (W/Kg)	0.286337

Report No.: AGC00068140905FH01 Page 66 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00	
SAR (W/Kg)	0.0000	0.3044	0.1489	0.0734	0.0398	
	SAR, Z Axis Scan (X = 7, Y = 11)					
0	0.30-	 	1 1 1			
o). 25 -	$\backslash\!$				
/kg)	1. 20 -	+				
≥ 0). 15-	++				
8 0). 10 -					
). 05 –). 02 –		+			
	0.0 2.5 5			5 20.0 22.5 25	5.0	
			Z (mm)			

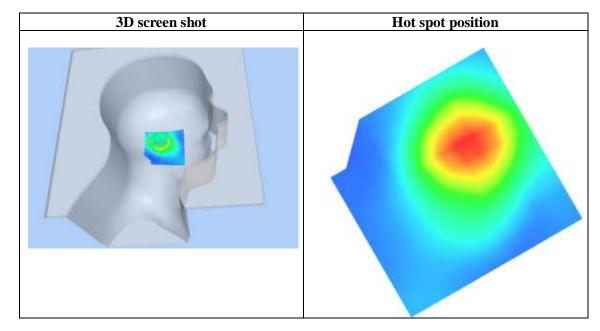

Page 67 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Body-Back <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.45; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.49$ mho/m; $\epsilon = 53.63$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Validation plane		
Device Position	Body Back		
Band	PCS 1900		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

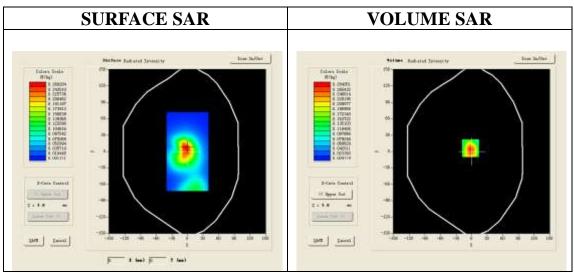


Maximum location: X=-2.00, Y=6.00

SAR 10g (W/Kg)	0.139286
SAR 1g (W/Kg)	0.274810

Report No.: AGC00068140905FH01 Page 68 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2841	0.1469	0.0751	0.0398
	SAR, Z	Axis Scan	(X = -2,	Y = 6)	
0). 28 –				
0). 25 -				
200). 20 -	+			-
/kg). 20 -	N			
<u>පි</u>	0. 15 -	+			-
SAR					
). 10 -				
). 05 –				
). 02 -				
	0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0
			Z (mm)		

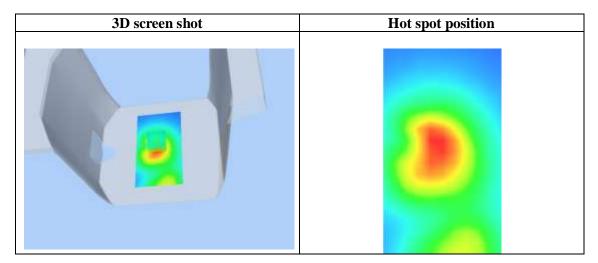

Page 69 of 110

Test Laboratory: AGC Lab Date: Sep. 29,2014

PCS 1900 Mid-Body -Front (MS) <SIM 1>

DUT: 2G GSM MOBILE PHONE; Type: Simple ONE

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.45; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.49$ mho/m; $\epsilon = 53.63$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/PCS1900 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Validation plane			
Device Position	Body Front			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

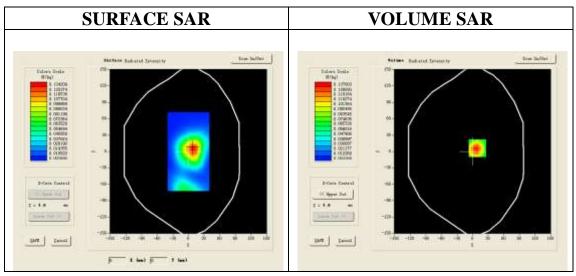


Maximum location: X=9.00, Y=6.00

SAR 10g (W/Kg)	0.068146
SAR 1g (W/Kg)	0.134613


Report No.: AGC00068140905FH01 Page 70 of 110

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1370	0.0638	0.0302	0.0165
	SAR, Z	Axis Sca	n (X = 9,	Y = 6)	
0). 14 –				
0). 12 –				-
_ 0). 10-	\longrightarrow			
(#/kg)). 08 -	+ + +			
). 06 –	++			-
). 04 -		+		
C	0.01 - 0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	- sl.o
	Z (mm)				

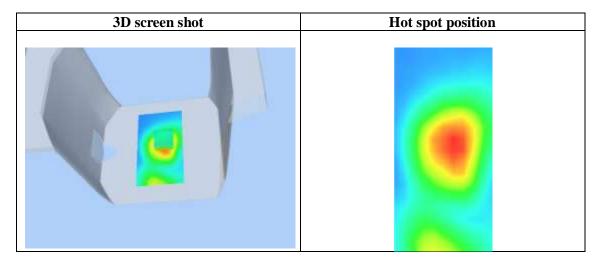

Page 71 of 110

APPENDIX C. TEST SETUP PHOTOGRAPHS & EUT PHOTOGRAPHS

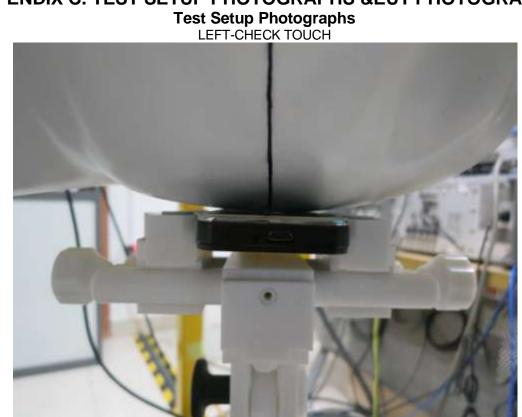







Report No.: AGC00068140905FH01 Page 72 of 110



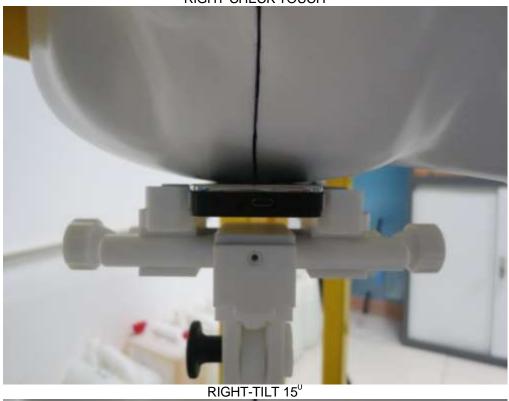






Report No.: AGC00068140905FH01 Page 73 of 110









Page 74 of 110

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2003





Page 75 of 110

EUT PHOTOGRAPHS

All VIEW OF EUT







Report No.: AGC00068140905FH01 Page 76 of 110







Report No.: AGC00068140905FH01 Page 77 of 110






Page 78 of 110





Report No.: AGC00068140905FH01 Page 79 of 110

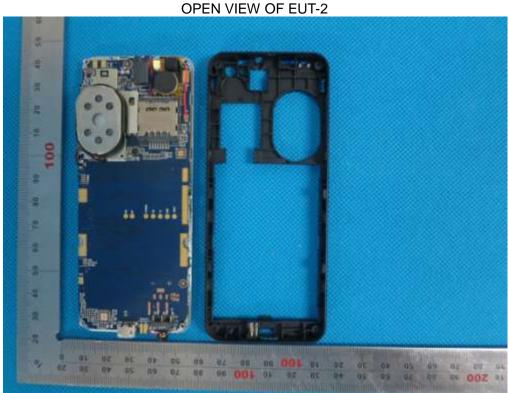







Report No.: AGC00068140905FH01 Page 80 of 110



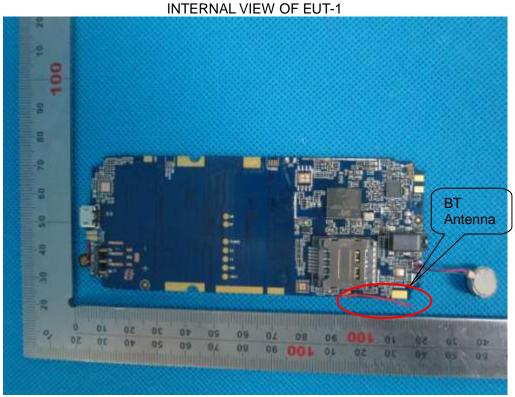

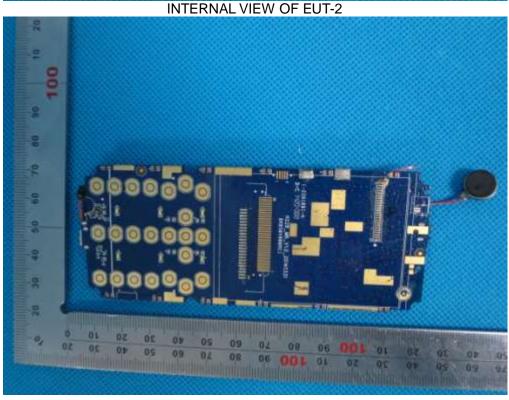

Page 81 of 110

APPENDIX D. PROBE CALIBRATION DATA



COMOSAR E-Field Probe Calibration Report

Ref: ACR.351.1.14.SATU.A

ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

1&2F, NO.2 BUILDING, HUAFENG NO.1 INDUSTRIAL PARK, GUSHU COMMUNITY XIXIANG STREET BAOAN DISTRICT, SHENZHEN, P.R. CHINA SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 22/12 EP159

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



01/12/14

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.

Page 82 of 110



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	1/12/2014	JS
Checked by :	Jérôme LUC	Product Manager	1/12/2014	JS
Approved by :	Kim RUTKOWSKI	Quality Manager	1/12/2014	Jum Puthowski

	Customer Name
Distribution :	ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

Issue	Date	Modifications
A	1/12/2014	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.351.1.14.SATU.A

TABLE OF CONTENTS

1	Dev	ice Under Test4	
2	Prod	luct Description	
	2.1	General Information	4
3	Mea	surement Method	
	3.1	Linearity	4
	3.2	Sensitivity	5
	3.3	Lower Detection Limit	
	3.4	Isotropy	5
	3.5	Boundary Effect	5
4	Mea	surement Uncertainty5	
5	Cali	bration Measurement Results 6	
	5.1	Sensitivity in air	6
	5.2	Linearity	
	5.3	Sensitivity in liquid	7
	5.4	Isotropy	8
6	List	of Equipment	



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.351.1.14.SATU.A.

1 DEVICE UNDER TEST

Device	Under Test
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	Satimo
Model	SSE5
Serial Number	SN 22/12 EP159
Product Condition (new / used)	used
Frequency Range of Probe	0.3 GHz-3GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.230 MΩ
	Dipole 2: R2=0.226 MΩ
	Dipole 3: R3=0.231 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 - Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

Page 85 of 110



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis $(0^{\circ}-180^{\circ})$ in 15° increments. At each step the probe is rotated about its axis $(0^{\circ}-360^{\circ})$.

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe	calibration in wave	guide			
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	√3	1	1.732%
Liquid conductivity	5.00%	Rectangular	√3	1	2.887%
Liquid permittivity	4.00%	Rectangular	√3	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	√3	1	2.887%
Field probe linearity	3.00%	Rectangular	√3	1	1.732%

Page: 5/10

Page 86 of 110



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

Combined standard uncertainty			5.831%
Expanded uncertainty 95 % confidence level k = 2			11.662%

5 CALIBRATION MEASUREMENT RESULTS

	Calibration Parameters
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


5.1 SENSITIVITY IN AIR

Normx dipole	Normy dipole	Normz dipole
$1 (\mu V/(V/m)^2)$	$2 (\mu V/(V/m)^2)$	$3 (\mu V/(V/m)^2)$
5.41	4.68	5.48

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
102	99	95

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{{E_1}^2 + {E_2}^2 + {E_3}^2}$$

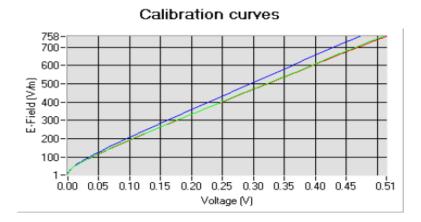

Dipole 1 Dipole 2 Dipole 3


Page: 6/10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.3 1.1.1 .SATU.A

5.2 LINEARITY

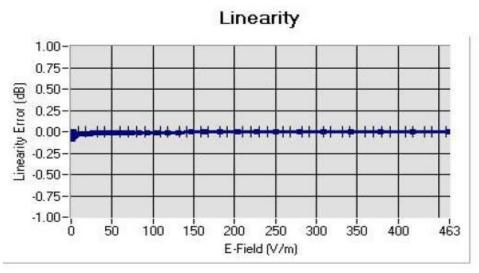

Linearity: I+/-1.97% (+/-0.09dB)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/-	Permittivity	Epsilon (S/m)	ConvF
	100MHz)*		4	
HL300	300	45.27	0.85	4.60
BL300	300	58.01	0.94	4.68
HL450	450	42.87	0.89	4.71
BL450	450	56.37	0.93	4.83
HL850	835	41.12	0.91	5.27
BL850	835	55.03	0.97	5.48
HL900	900	40.77	0.98	5.20
BL900	900	55.49	1.04	5.28
HL1800	1750	39.22	1.38	4.58
BL1800	1750	53.27	1.51	4.71
HL1900	1880	39.54	1.41	4.51
BL1900	1880	52.88	1.55	4.45
HL2000	1950	38.97	1.45	4.31
BL2000	1950	52.01	1.58	4.33
HL2450	2450	39.17	1.85	4.42
BL2450	2450	52.47	1.99	4.31

LOWER DETECTION LIMIT: 9mW/kg

Page: 7/10

Page 88 of 110




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB - Hemispherical isotropy: 0.08 dB



HL1800 MHz

- Axial isotropy: 0.07 dB - Hemispherical isotropy: 0.12 dB



Page 89 of 110




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

HL2450 MHz

- Axial isotropy: 0.09 dB - Hemispherical isotropy: 0.14 dB





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.351.1.14.SATU.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet						
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date		
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.		
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.		
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016		
Reference Probe	Satimo	EP 94 SN 37/08	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Multimeter	Keithley 2000	1188656	11/2013	11/2016		
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	11/2013	11/2016		
Power Sensor	HP ECP-E26A	US37181460	11/2013	11/2016		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.		
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.		
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.		
Temperature / Humidity Sensor	Control Company	11-661-9	3/2012	3/2014		

Page 91 of 110

APPENDIX E. DIPOLE CALIBRATION DATA



SAR Reference Dipole Calibration Report

Ref: ACR.318.5.13.SATU.A

ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

1&2F, NO.2 BUILDING, HUAFENG NO.1 INDUSTRIAL PARK, GUSHU COMMUNITY XIXIANG STREET BAOAN DISTRICT, SHENZHEN, P.R. CHINA SATIMO COMOSAR REFERENCE DIPOLE

> FREQUENCY: 900 MHZ SERIAL NO.: SN 46/11 DIP 0G900-185

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



11/14/13

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Report No.: AGC00068140905FH01 Page 92 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR:318:5:13 SATU A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	11/14/2013	25
Checked by :	Jérôme LUC	Product Manager	11/14/2013	JE
Approved by :	Kim RUTKOWSKI	Quality Manager	11/14/2013	ALM FALLAMONTAL

	Customer Name
Distribution :	ATTESTATION
	OF GLOBAL
	COMPLIANCE
	CO. LTD.

Date	Modifications	
11/14/2013	Initial release	
	EF GEOG	



Ref. ACR 318.5.13.SATU.A

TABLE OF CONTENTS

1	Inti	oduction4	
2	De	vice Under Test4	
3		duct Description4	
	3.1	General Information	4
4	Me	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement_	5
6	Ca	libration Measurement Results6	
	6.1	Return Loss and Impedance	6
	6.2	Mechanical Dimensions	6
7	Va	lidation measurement	
	7.1	Measurement Condition	7
	7.2	Head Liquid Measurement	
	7.3	Measurement Result	
	7.4	Body Measurement Result	9
8	Lis	t of Equipment10	



Ref ACR 318 5.13 SATU A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test			
Device Type	COMOSAR 900 MHz REFERENCE DIPOLE		
Manufacturer	Satimo		
Model	SID900		
Serial Number	SN 46/11 DIP 0G900-185		
Product Condition (new / used)	Used		

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Page: 4/10

Page 95 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR 318.5.13 SATU A

4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Len	
3 - 300	0.05 mm	

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Exp anded Uncertainty
1 g	20.3 %
10 g	20.1 %


Page: 5/10



Ref. ACR 318 5.13 SATU A

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE



Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
900	-39.65	-20	50.5 Ω1.1 jΩ

6.2 MECHANICAL DIMENSIONS

Frequency MHz L mm		nm	hmm		d r	nm
	required	measured	required	measured	required	measured
300	420.0 ±1 %.	4	250.0 ±1 %.		6.35 ±1 %	
450	290.0 ±1.%.		166.7±1%.		6:35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %	
835	161,0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	Ĭ
900	149.0 ±1 %.	PASS	93.3 ±1 %.	PASS	3.6 ±1 %.	PASS
1450	89.1 ±1 %.		51.7±1%		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.	D. I	3.6 ±1 %.	
1750	75.2 ±1 %.	Ų.	42.9 ±1 %		3.6 ±1 %.	1
1800	72.0 ±1 %.		41.7±1 %.	().	3,6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.	ų,	38.5 ±1 %.		3.6 ±1 %.	1
2000	64.5 ±1 %	ş	37.5 ±1 %		3.6 ±1 %.	
2100	61.0 ±1 %		35.7±1%.		3.6 ±1 %.	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %.	
2450	51.5 ±1 %.	1	30.4±1 %		3.6 ±1 %.	
2600	48.5 ±1 %		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %		25.0 ±1 %.	D: 1	3.6 ±1 %.	
3500	37.0±1 %.		26.4±1 %		3.6 ±1 %.	ī
3700	34.7±1 %.		26.4±1 %		3.6 ±1 %.	

Page: 6/10



Ref. ACR 318.5.13 SATU A

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 MEASUREMENT CONDITION

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Head Liquid Values: eps': 41.8 sigma: 0.96	
Distance between dipole center and liquid	15.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	900 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45%	

7.2 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative per	mittivity (e,')	Conductiv	ity (σ) \$/m
	required	measured	required	m ea sure c
300	45.3 ±5 %		0.87±5 %	
450	43.5 ±5 %		0.87±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %	PASS	0.97±5%	PASS
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4±5 %		1.29 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37±5%	
1880	40.0 ±5 %	0	1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1,48 ±5 %	
2100	39.8 ±5 %		1,49 ±5 %	
2300	39.5 ±5 %		1.67±5%	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %	/	2.91 ±5 %	

Page: 7/10




Ref. ACR 318 5 13 SATU A

7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency MHz	1 g SAR	(W/kg/W)	10 g SAR	(W/kg/W)
00.00	required	measured	required	measured
30.0	2.85		1.94	
450	4.58		3.06	
750	8,49		5,55	
835	9.56		6.22	
900	10.9	10.70 (1.07)	6.99	6.72 (0.67
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7		20.5	
1950	40.5		20,9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

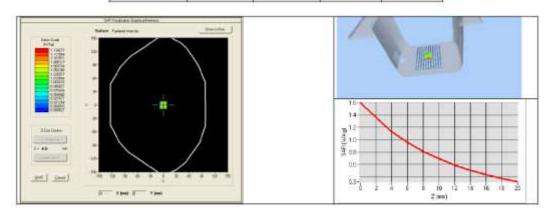

Page: 8/10




Ref ACR 318.5.13 SATU A

7.4 BODY MEASUREMENT RESULT

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 56.0 sigma : 1.04
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	900 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
50001000 000	measured	measured
900	11.27 (1.13)	7.18 (0.72)

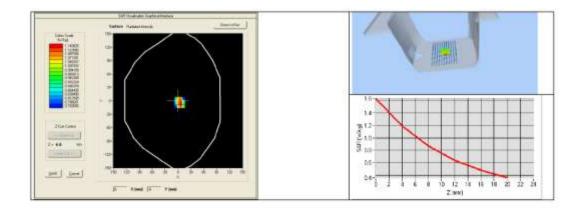

Report No.: AGC00068140905FH01 Page 100 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR 318.5.13.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet					
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
SAM Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013 02/2016		
Calipers	Саттега	CALIPER-01	12/2010 12/2013		
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to Characterized prior test. No cal required, test. No cal required.		
Multimeter	Keithley 2000	1188656	11/2010 11/2013		
Signal Generator	Agilent E4438C	MY49070581	12/2010 12/2013		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	11/2010	11/2013	
Power Sensor	HP ECP-E26A	US37181460	11/2010 11/2013		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No call required.	
Temperature and Humidity Sensor	Control Company	11-661-9	3/2012	3/2014	

Page 101 of 110



SAR Reference Dipole Calibration Report

Ref: ACR.318.7.13.SATU.A

ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

1&2F, NO.2 BUILDING, HUAFENG NO.1 INDUSTRIAL PARK, GUSHU COMMUNITY XIXIANG STREET BAOAN DISTRICT, SHENZHEN, P.R. CHINA SATIMO COMOSAR REFERENCE DIPOLE

FREQUENCY: 1900 MHZ SERIAL NO.: SN 46/11 DIP 1G900-187

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



11/14/13

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Report No.: AGC00068140905FH01 Page 102 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 318.7.13 SATU A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	11/14/2013	JS
Checked by :	Jérôme LUC	Product Manager	11/14/2013	JES
Approved by :	Kim RUTKOWSKI	Quality Manager	11/14/2013	Aim Authorish

Customer Name
ATTESTATION
OF GLOBAL
COMPLIANCE
CO. LTD.

Issue	Date	Modifications	
A	11/14/2013	Initial release	



Ref: ACR 318 7.13 SATU A

TABLE OF CONTENTS

1	Intr	oduction4	
2	De	vice Under Test4	
3		duct Description4	
	3.1	General Information	4
4	Me	asurement Method5	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty5	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement	5
6	Cal	libration Measurement Results	
	6.1	Return Loss and Impedance	6
	6.2	Mechanical Dimensions	6
7	Val	lidation measurement	
	7.1	Measurement Condition	7
	7.2	Head Liquid Measurement	7
	7.3	Measurement Result	
	7.4	Body Measurement Result	
8	Lis	t of Equipment10	



Ref: ACR 318.7.13 SATU A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test		
Device Type COMOSAR 1900 MHz REFERENCE DIF		
Manufacturer	Satimo	
Model	SID1900	
Serial Number	SN 46/11 DIP 1G900-187	
Product Condition (new / used) Used		

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Page: 4/10

Page 105 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.318.7.13.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty	
1 g	20.3 %	
10 g	20.1 %	


Page: 5/10



Ref. ACR.318.7.13.SATU A

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE



Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1900	-32.90	-20	$48.9 \Omega + 2.3 j\Omega$

6.2 MECHANICAL DIMENSIONS

Frequency MHz	Ln	L mm h mm		d mm		
	required	measured	required	measured	required	measure
300	420.0 ±1 %.		250.0 ±1 %.		6,35 ±1 %.	
450	290.0 ±1 %.		166.7±1%		6.35 ±1 %	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7±1%		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %,		45.7±1%		3.6 ±1 %.	
1750	75.2 ±1 %,		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %		41.7±1%.		3.6 ±1 %.	
1900	68.0 ±1 %.	PASS	39.5 ±1 %.	PASS	3.6 ±1 %.	PASS
1950	66.3 ±1 %		38.5 ±1 %.		3.6 ±1 %.	
2800	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %.	
2100	61,0 ±1 %.		35.7±1%		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51,5 ±1 %.		30.4±1%		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0±1 %.		26.4±1%.		3.6 ±1 %.	
3700	34.7±1 %.		26.4±1 %.		3.6 ±1 %.	

Page: 6/10



Ref. ACR 318.7.13.SATU A

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 MEASUREMENT CONDITION

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Head Liquid Values: eps' : 39.8 sigma : 1.43	
Distance between dipole center and liquid	10.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	1900 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45%	

7.2 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (e,')		Conductiv	ity (ø) S/m
	required	measured	required	measured
300	45.3 ±5 %		0.87±5%	
450	43.5 ±5 %		0.87±5%	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97±5%	
1.450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40,1 ±5 %		1.37±5%	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67±5%	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2,40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

Page: 7/10




Ref: ACR 318.7.13.3ATU.A

7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR	(W/kg/W)
1,1,1,7,11	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8,49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34,2		18.4	
1750	36.4		19.3	
1900	38.4		20.1	
1900	39.7	39.65 (3.96)	20.5	20.24 (2.02)
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

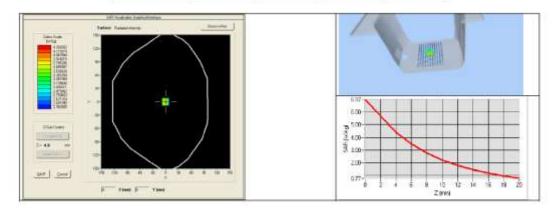

Page: 8/10




Ref ACR 318 7 13 SATU A

7.4 BODY MEASUREMENT RESULT

Software	OPENSAR V4		
Phantom	SN 20/09 SAM71		
Probe	SN 18/11 EPG122		
Liquid	Body Liquid Values: eps' : 52.5 sigma : 1.50		
Distance between dipole center and liquid	10.0 mm		
Area scan resolution	dx=8mm/dy=8mm		
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm		
Frequency	1900 MHz		
Input power	20 dBm		
Liquid Temperature	21 °C		
Lab Temperature	21 °C		
Lab Humidity	45%		

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W/	
	measured	measured	
1900	40.74 (4.07)	21.43 (2.14)	

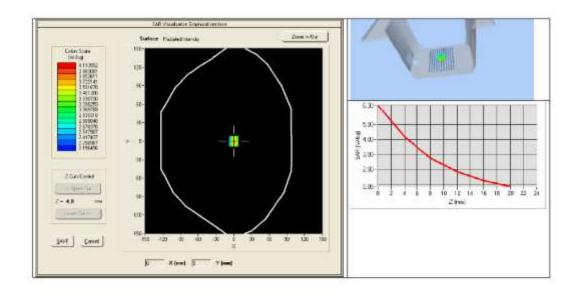

Report No.: AGC00068140905FH01 Page 110 of 110



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.318.7.13.SATU.A

8 LIST OF EQUIPMENT

Equipment	Manufacturer /	Identification No.	Current	Next Calibration	
Description	Model		Calibration Date	Date	
SAM Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.	
COMOSAR Test Bench	Version 3	NA	Validated, No cal required.	Validated. No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Calipers	Сапега	CALIPER-01	12/2010	12/2013	
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Multimeter	Keithley 2000	1188656	11/2010	11/2013	
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	11/2010	11/2013	
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required	Characterized prior to test. No cal required	
Temperature and Humidity Sensor	Control Company	11-661-9	3/2012	3/2014	