

FCC Test Report

FCC ID : 2ACAHAC01

Equipment : AudioClip

Model No. : AC1A, AC1B

(Please refer to section 1.1.1 for more details)

Applicant : SBO Hearing A/S

Address : Kongebakken 9 DK-2765 Smoerum, Denmark

Standard : 47 CFR FCC Part 15.247

Received Date : Sep. 04, 2017

Tested Date : Sep. 07 ~ Sep. 18, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

er Testing Laboratory 2732

Report No.: FR790403AC Page: 1 of 32



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	16
3.4	Power Spectral Density	18
3.5	Emissions in Restricted Frequency Bands	
3.6	Emissions in non-restricted Frequency Bands	30
4	TEST LABORATORY INFORMATION	32



Release Record

Report No.	Version	Description	Issued Date
FR790403AC	Rev. 01	Initial issue	Oct. 16, 2017
FR790403AC	Rev. 02	Modified frequency of section 1.1.6	Oct. 25, 2017

Report No.: FR790403AC Page: 3 of 32



Summary of Test Results

FCC Rules	Test Items	Measured	Result	
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.589MHz 33.81(Margin -12.19dB) - AV	Pass	
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz	Pass	
15.209	INdulated Lillissions	46.34 (Margin -7.66dB) - AV	F 055	
15.247(b)(3)	Maximum Output Power	Power [dBm]: 9.03	Pass	
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass	
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass	
15.203	Antenna Requirement	Meet the requirement of limit	Pass	

Report No.: FR790403AC Page: 4 of 32



1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Model Name	Product Name	Description	
AC1A	AudioClip F	For different housing design	
AC1B		For different housing design.	

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Modulation Mode	Ch. Frequency (MHz)	Channel Number	Data Rate	
2400-2483.5	DSSS	2404-2476	0-35 [36]	4 Mbps	

Note 1: Modulation is 4FSK.

Note 2: HW version: 8 / SW version: Luna1.1.0

1.1.3 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	Inverted-F	5.8		

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter 5Vdc from host 3.7Vec from battery
-------------------	--

Report No.: FR790403AC Page: 5 of 32



1.1.5 Accessories

	Accessories				
No.	Equipment	Description			
1	AC adapter	Brand: PHIHONG Model: AM05A-050A Power Rating: I/P: 100-240Vac, 50/60Hz, 0.2A O/P: 5Vdc, 1A Power Line: 1.8m non-shielded cable without core			
2	Battery	Brand: SYNERGY Model: AHB451730PC Power Rating: Rating: 3.7Vdc, 200mAh			
3	USB cable	1m shielded cable without core			

1.1.6 Channel List

	Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
0	2404	9	2422	18	2442	27	2460	
1	2406	10	2424	19	2444	28	2462	
2	2408	11	2428	20	2446	29	2464	
3	2410	12	2430	21	2448	30	2466	
4	2412	13	2432	22	2450	31	2468	
5	2414	14	2434	23	2452	32	2470	
6	2416	15	2436	24	2454	33	2472	
7	2418	16	2438	25	2456	34	2474	
8	2420	17	2440	26	2458	35	2476	

1.1.7 Test Tool and Duty Cycle

Test tool NebulaDeveloper, Version: 3.2.0.0	
Duty cycle of test signal (%)	100.00%
Duty Factor (dB)	0.00

1.1.8 Power Setting

Modulation Mode		Test Frequency (MHz)	
Modulation Mode	2404	2440	2476
DSSS/4Mbps	default	default	default


Report No.: FR790403AC Page: 6 of 32



1.2 Local Support Equipment List

Support Equipment List						
No. Equipment Brand			Model	FCC ID	Signal cable / Length (m)	
1	Notebook	DELL	Latitude E6430	DoC		

1.3 Test Setup Chart

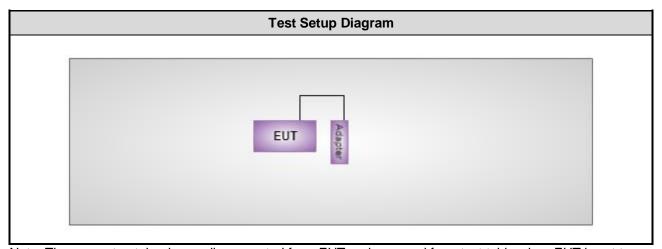

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Report No.: FR790403AC Page: 7 of 32



1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission	Conducted Emission					
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)					
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until					
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017		
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017		
RF Cable-CON	EMC	EMC					
Measurement Software AUDIX e3 6.120210k NA NA							
Note: Calibration Interval of instruments listed above is one year.							

Test Item	Radiated Emission	Radiated Emission					
Test Site	966 chamber 3 / (03C	H03-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Nov. 15, 2016	Nov. 14, 2017		
Receiver	Agilent	N9038A	MY53290044	Oct. 06, 2016	Oct. 05, 2017		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017		
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018		
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018		
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018		
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018		
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018		
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018		
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Feb. 04, 2017	Feb. 03, 2018		
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Feb. 04, 2017	Feb. 03, 2018		
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Feb. 04, 2017	Feb. 03, 2018		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		
Note: Calibration Inter	val of instruments liste	d above is one year.					

Report No.: FR790403AC Page: 8 of 32



RF Conducted				
(TH01-WS)				
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
GW INSTEK	GPC-6030D	EM892433	Oct. 20, 2016	Oct. 19, 2017
APC	AFC-500W	F312060012	Oct. 28, 2016	Oct. 27, 2017
Sporton	Sporton_1	1.3.30	NA	NA
	(TH01-WS) Manufacturer R&S Anritsu Anritsu GW INSTEK APC	(TH01-WS) Manufacturer Model No. R&S FSV40 Anritsu ML2495A Anritsu MA2411B GW INSTEK GPC-6030D APC AFC-500W	Manufacturer Model No. Serial No. R&S FSV40 101063 Anritsu ML2495A 1241002 Anritsu MA2411B 1207366 GW INSTEK GPC-6030D EM892433 APC AFC-500W F312060012	Manufacturer Model No. Serial No. Calibration Date R&S FSV40 101063 Mar. 15, 2017 Anritsu ML2495A 1241002 Oct. 06, 2016 Anritsu MA2411B 1207366 Oct. 06, 2016 GW INSTEK GPC-6030D EM892433 Oct. 20, 2016 APC AFC-500W F312060012 Oct. 28, 2016

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters Uncertains					
Bandwidth	±34.134 Hz				
Conducted power	±0.808 dB				
Power density	±0.463 dB				
Conducted emission	±2.670 dB				
AC conducted emission	±2.90 dB				
Radiated emission ≤ 1GHz	±3.66 dB				
Radiated emission > 1GHz	±5.37 dB				

Report No.: FR790403AC Page: 9 of 32



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 57%	Alex Huang
Radiated Emissions	03CH01-WS	24-25°C / 64-65%	Aska Huang Brand Wu
RF Conducted	TH01-WS	25°C / 65%	Felix Sung

FCC Designation No.: TW0009
 FCC site registration No.: 207696
 IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	DSSS	2476	4Mbps	
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	DSSS	2404, 2440, 2476	4Mbps	

NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
- 2. S/N of test samples are as below 000016098300J2305570011 000016098300J2305570023 000016098300J2304263002
- 3. Two models AC1A and AC1B had been covered during the pretest. The worst model is AC1B, and only its data was record in this test report.

Report No.: FR790403AC Page: 10 of 32



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz)	Quasi-Peak	Average			
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30 60 50					
Note 1: * Decreases with the logarithm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

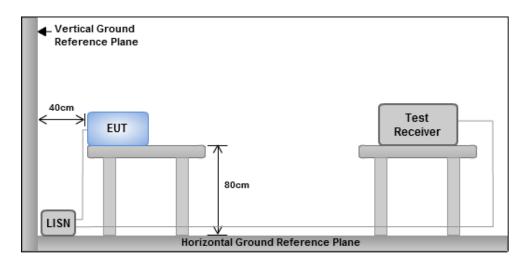


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR790403AC Page: 11 of 32




3.1.4 Test Result of Conducted Emissions

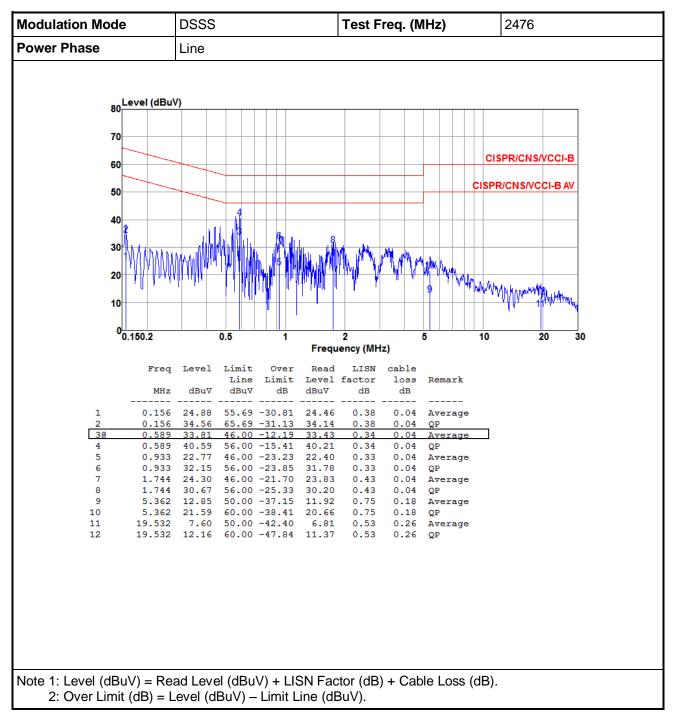

Report No.: FR790403AC Page: 12 of 32



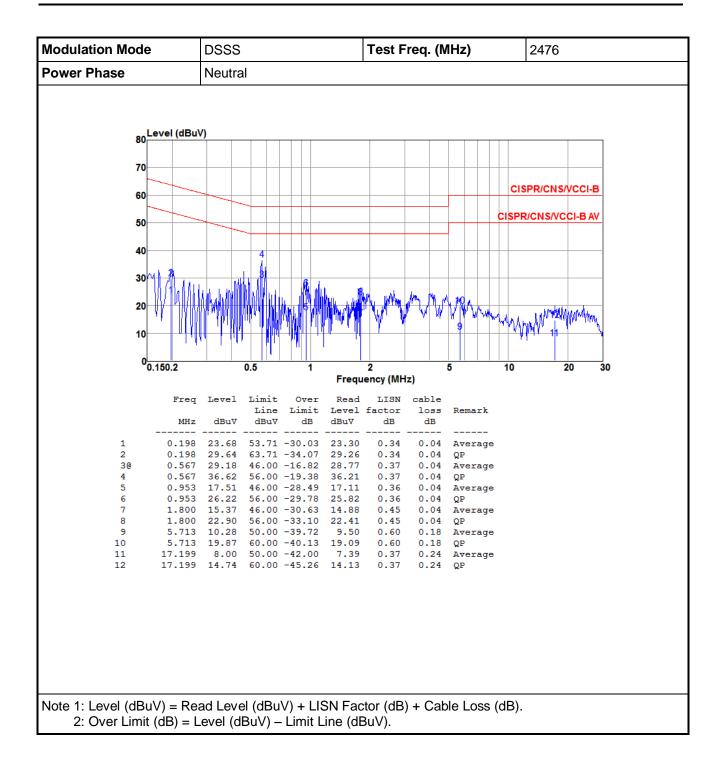

Report No.: FR790403AC Page: 13 of 32



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




Report No.: FR790403AC Page: 14 of 32



3.2.4 Test Result of 6dB and Occupied Bandwidth

Mode	Freq. (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit of 6dB Bandwidth (kHz)
DSSS	2404	3.699	4.99	500
DSSS	2440	3.699	5.00	500
DSSS	2476	3.699	4.95	500

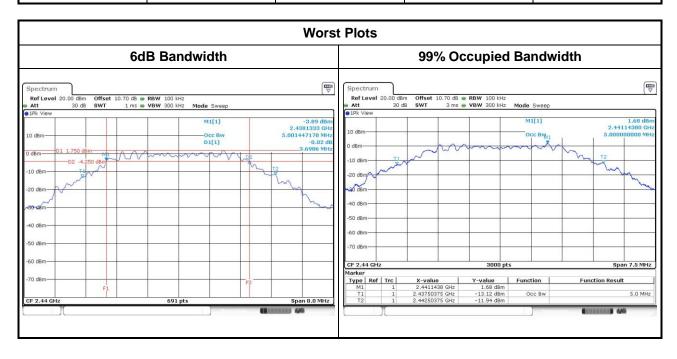

Report No.: FR790403AC Page: 15 of 32



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

Spectrum analyzer

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Average Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR790403AC Page: 16 of 32



3.3.4 Test Result of Maximum Output Power

			Peak Power		Antenna	EIRP	EIRP
Mode	Freq. (MHz)	Power (mW)	Power (dBm)	Limit (dBm)	gain (dBi)	(dBm)	Limit (dBm)
DSSS	2404	3.990	6.01	30	5.8	11.81	36
DSSS	2440	5.970	7.76	30	5.8	13.56	36
DSSS	2476	7.998	9.03	30	5.8	14.83	36

Mode	Freq. (MHz)	AV Power (mW)	AV Power (dBm)	Limit (dBm)
DSSS	2404	3.451437	5.38	
DSSS	2440	5.636377	7.51	
DSSS	2476	7.046931	8.48	

Note: Average power is for reference only

Report No.: FR790403AC Page: 17 of 32



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - 1. Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - 1. Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR790403AC Page: 18 of 32



3.4.4 Test Result of Power Spectral Density

Mode	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
DSSS	2404	-15.41	8
DSSS	2440	-13.27	8
DSSS	2476	-12.38	8

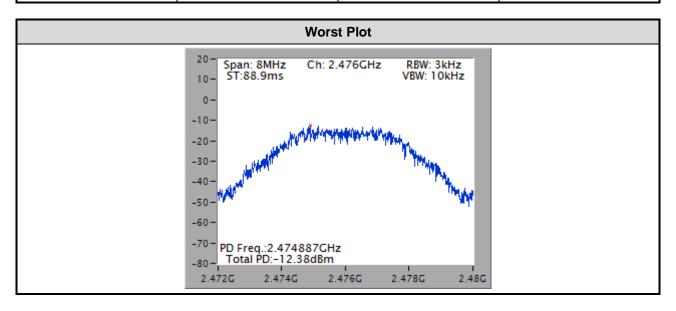

Report No.: FR790403AC Page: 19 of 32



3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	requency Range (MHz) Field Strength (uV/m) Field Strength (dBuV/m		Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR790403AC Page: 20 of 32




3.5.3 Test Setup

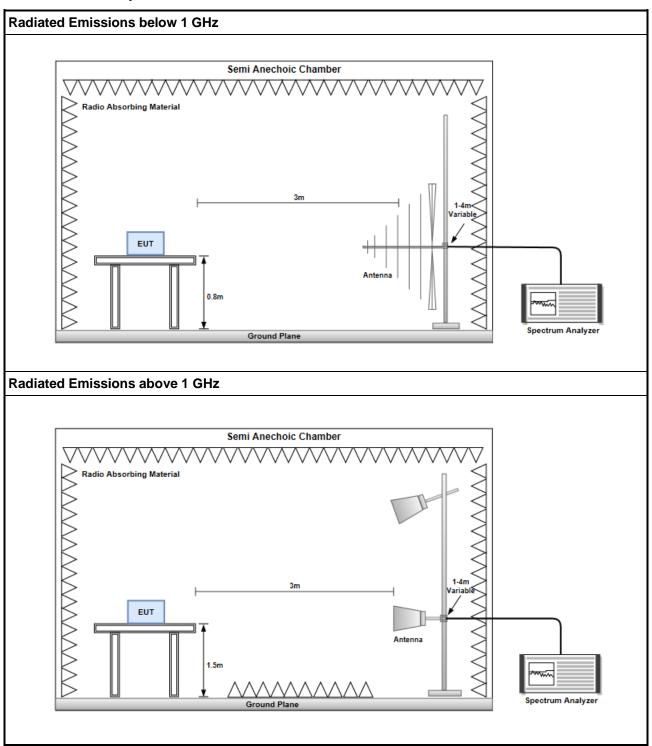

Report No.: FR790403AC Page: 21 of 32



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

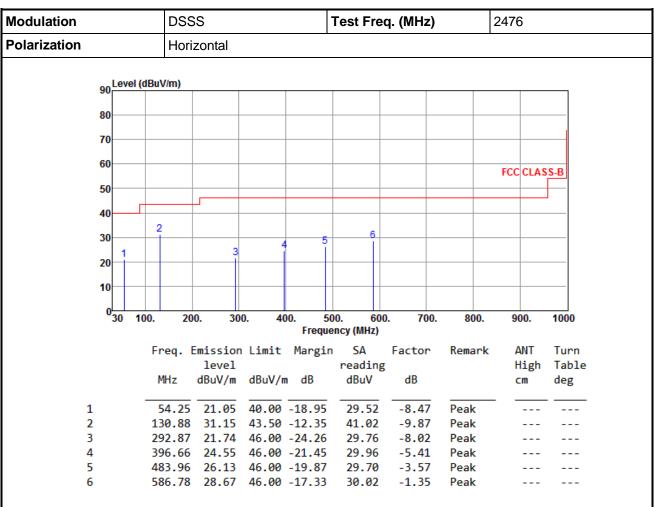

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR790403AC Page: 22 of 32



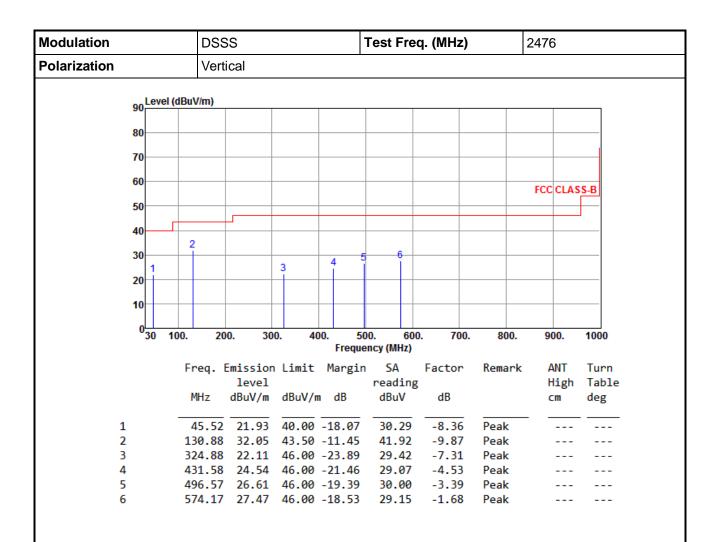

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR790403AC Page: 23 of 32



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

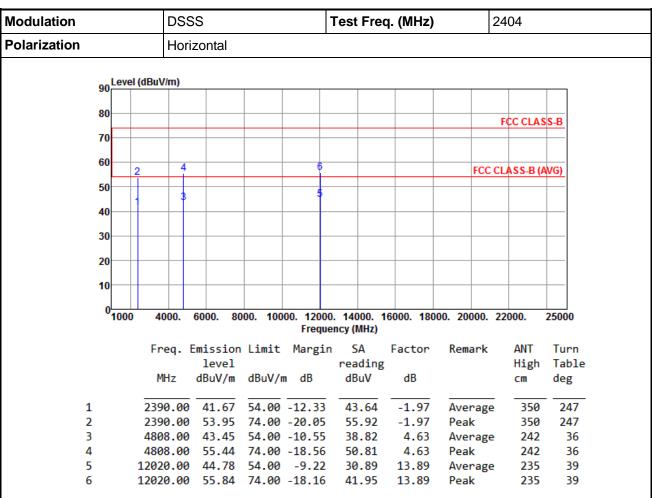

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR790403AC Page: 24 of 32



Modulation	DSSS					Test Freq. (MHz)					2404				
Polarization Vertical															
00	Level (dBu\	//m)													
90															

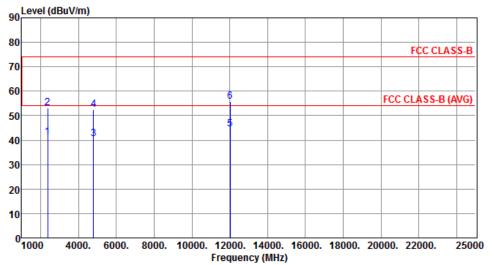

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	41.25	54.00	-12.75	43.22	-1.97	Average	343	261
2	2390.00	53.12	74.00	-20.88	55.09	-1.97	Peak	343	261
3	4808.00	40.58	54.00	-13.42	35.95	4.63	Average	129	85
4	4808.00	52.43	74.00	-21.57	47.80	4.63	Peak	129	85
5	12020.00	44.54	54.00	-9.46	30.65	13.89	Average	130	69
6	12020.00	55.78	74.00	-18.22	41.89	13.89	Peak	130	69

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR790403AC Page: 25 of 32



Modulation			3				Test Freq. (MHz)					2440		
larization		Horiz	Horizontal											
امم	evel (dBu	ıV/m)												
90														
80											F	CC CLAS	S-B	
70														
60	2	4									ECC CI	ASS-B (A	VG)	
50	12			6							TCC CI	-МЭЭ-Б (М	voj	
40-		3		•										
30-														
20														
10						_								
0	000	4000. 6	000.	8000.	40000	420/	0 44	00 40	2000 44	1000 1	20000. 22	2000	2500	

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	41.93	54.00	-12.07	43.90	-1.97	Average	348	183
2	2390.00	53.21	74.00	-20.79	55.18	-1.97	Peak	348	183
3	4880.00	42.34	54.00	-11.66	37.56	4.78	Average	242	35
4	4880.00	54.60	74.00	-19.40	49.82	4.78	Peak	242	35
5	7320.00	40.79	54.00	-13.21	31.45	9.34	Average	244	31
6	7320.00	52.59	74.00	-21.41	43.25	9.34	Peak	244	31


Frequency (MHz)

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR790403AC Page: 26 of 32



Modulation		DSSS				Test	Test Freq. (MHz)					2440		
Polarization			Vertica	al										
	Leve	el (dBu\	//m)											
	80													
	00										E/	C CLAS	e D	

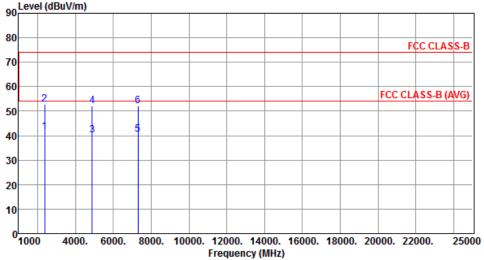


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	41.42	54.00	-12.58	43.39	-1.97	Average	341	208
2	2390.00	52.96	74.00	-21.04	54.93	-1.97	Peak	341	208
3	4880.00	40.24	54.00	-13.76	35.46	4.78	Average	129	81
4	4880.00	52.19	74.00	-21.81	47.41	4.78	Peak	129	81
5	7320.00	40.59	54.00	-13.41	31.25	9.34	Average	131	68
6	7320.00	52.30	74.00	-21.70	42.96	9.34	Peak	131	68

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR790403AC Page: 27 of 32



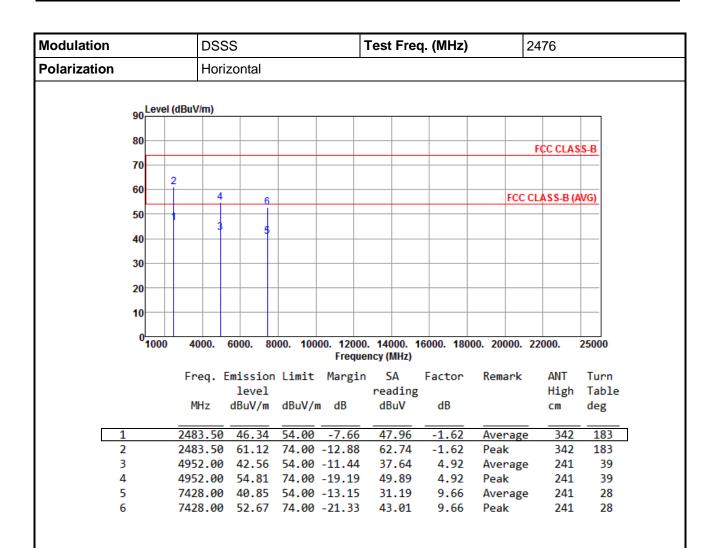


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR790403AC Page: 28 of 32



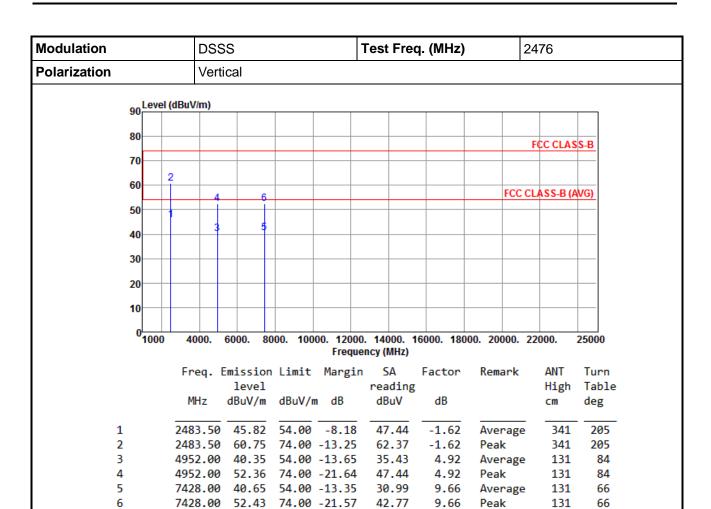

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR790403AC Page: 29 of 32



3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.6.3 Test Setup



Report No.: FR790403AC Page: 30 of 32



3.6.4 Test Result of Emissions in non-restricted Frequency Bands

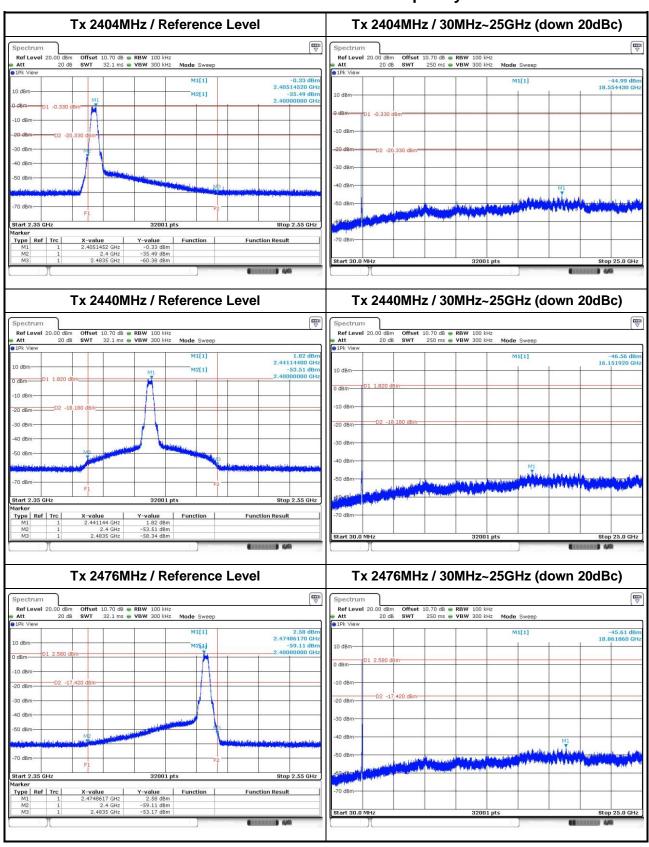

Report No.: FR790403AC Report Version: Rev. 02



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C. Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

__END__

Report No.: FR790403AC Page: 32 of 32