

Measurement Results

1-1053/20-03-05_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	4
2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	7
3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	10
4. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	13
5. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	16
6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	19
7. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	22
8. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	24
9. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	26
10. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	28
11. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	30
12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	32
13. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	34
14. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	36
15. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	38
16. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	40
17. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	42
18. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	44
19. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	46
20. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	49
21. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	52
22. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	55
23. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	58
24. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	61
25. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	64
26. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	66
27. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	68
28. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	70
29. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	72
30. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	74

EUT Summary

EUT DEFINITION	
Manufacturer	SBO Hearing A/S
Type	Cosmic_12_MNB_T and Hubble_9_MNB_T
Kind	Hearing aid
Serial Number Setup Number	C3: 66927623 (Lowest channel, TX 1 Msps) C4: 66927810 (Middle channel, TX 1 Msps) C5: 66927874 (Highest channel, TX 1 Msps) C6: 66927771 (Lowest channel, TX 2 Msps) C7: 66927954 (Middle channel, TX 2 Msps) C8: 66927571 (Highest channel, TX 2 Msps) 1.0
Version SW FW HW	SR1512_rel_5.3_12.0_b1 NI Final LAB
Comment 1 2	
Temperature [°C] Min Nom Max	0 20 40
Voltage [V] Min Nom Max	1.1 1.4 1.45

EUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 12:18:35
Ambit Temp [°C] Humidity [rel%]	24.6 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.80 10.89 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	702	kHz	INFO

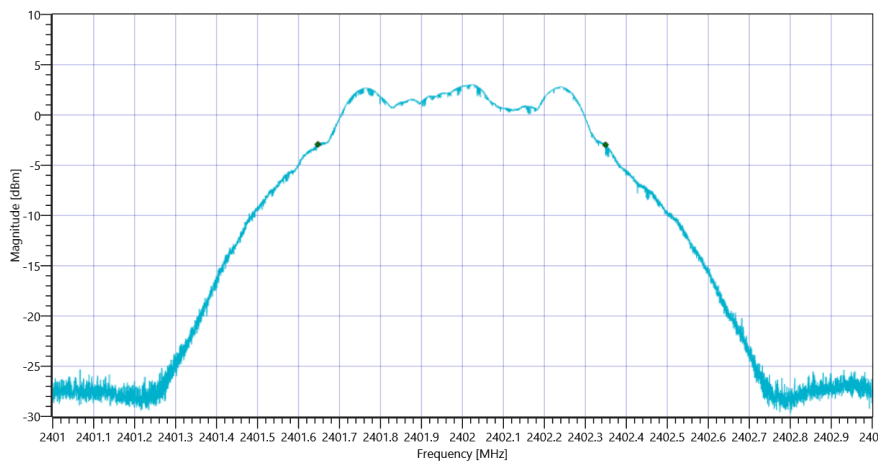


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_20092021_121908.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.80 10.89 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.7	dBm	PASS
Peak Power	---	1000	2.344229	mW	PASS
Frequency at Peak	---	---	2401.736	MHz	INFO

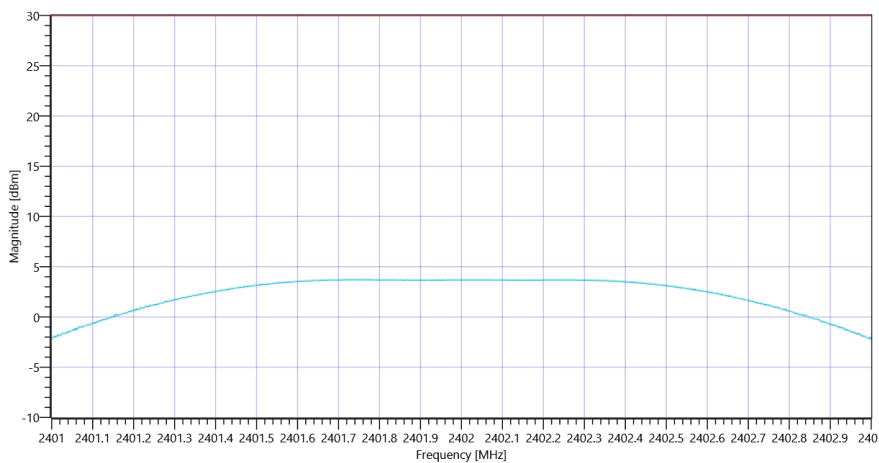

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msp.20092021_121925.png

TEST FINISHED	
General Verdict	PASS

2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:06:47
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.46 10.9 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	698	kHz	INFO

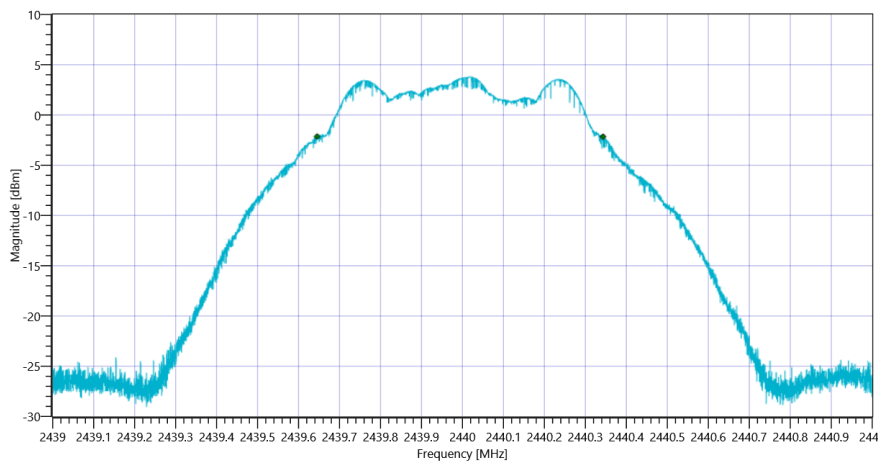


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_20092021_130721.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.46 10.9 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	4.44	dBm	PASS
Peak Power	---	1000	2.779713	mW	PASS
Frequency at Peak	---	---	2439.73	MHz	INFO

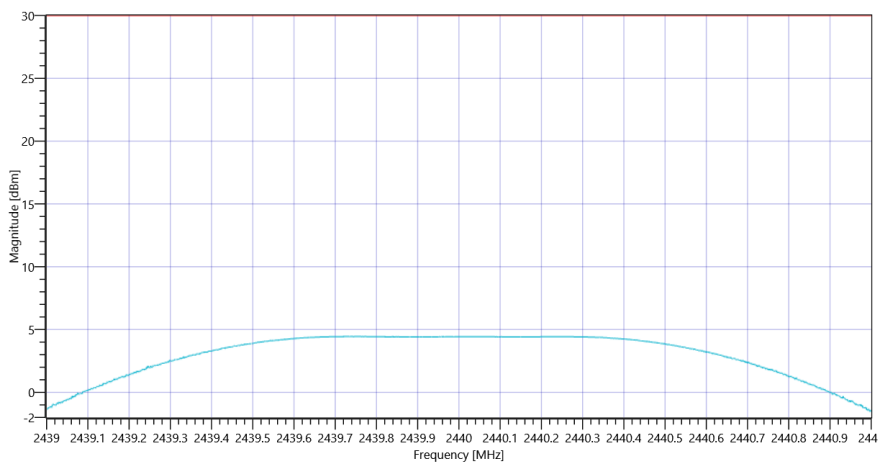

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_20092021_130738.png

TEST FINISHED	
General Verdict	PASS

3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:33:20
Ambit Temp [°C] Humidity [rel%]	24.4 50
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.03 10.95 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	696	kHz	INFO

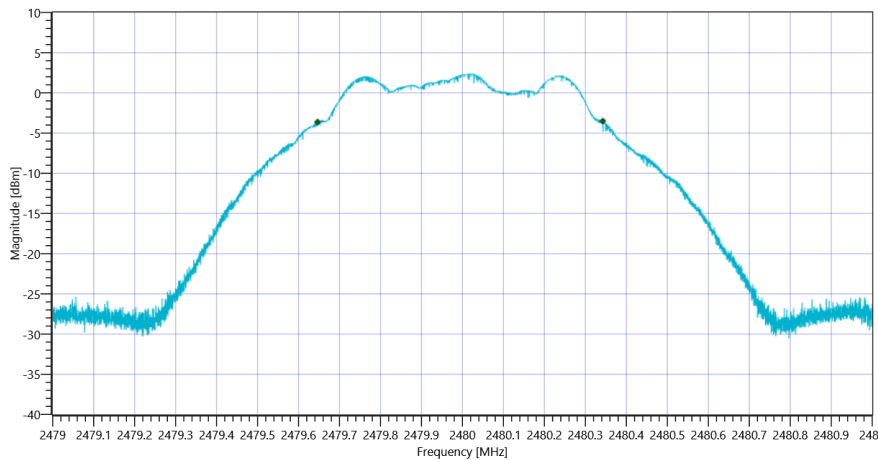


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_20092021_133354.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.03 10.95 20
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3	dBm	PASS
Peak Power	---	1000	1.995262	mW	PASS
Frequency at Peak	---	---	2479.744	MHz	INFO

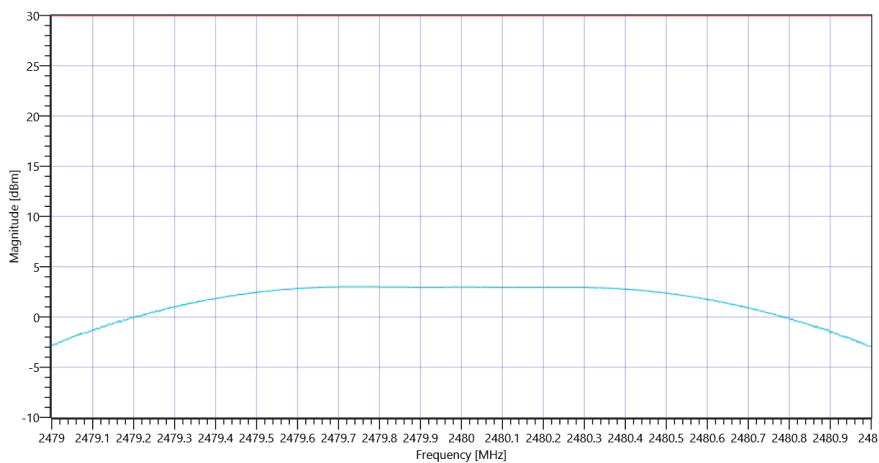

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_20092021_133412.png

TEST FINISHED	
General Verdict	PASS

4. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:05:07
Ambit Temp [°C] Humidity [rel%]	24.5 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2404 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.95 10.9 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1199	kHz	INFO

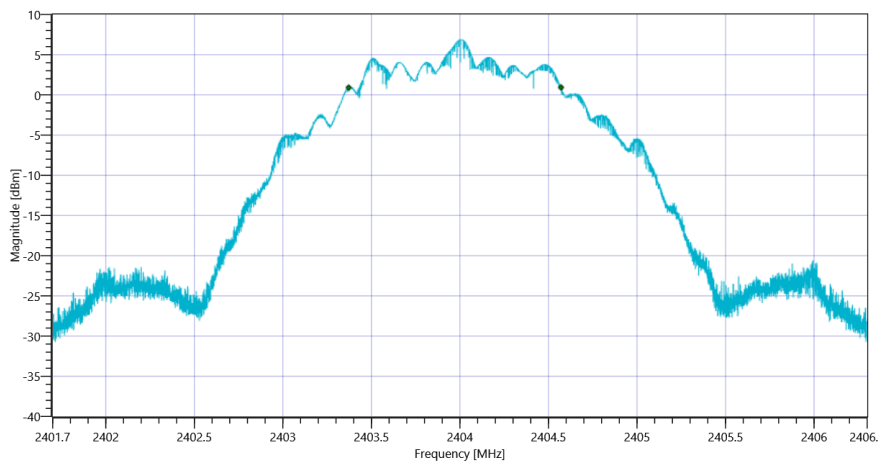


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_20092021_140541.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.95 10.9 25
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	7.71	dBm	PASS
Peak Power	---	1000	5.902011	mW	PASS
Frequency at Peak	---	---	2404.446	MHz	INFO

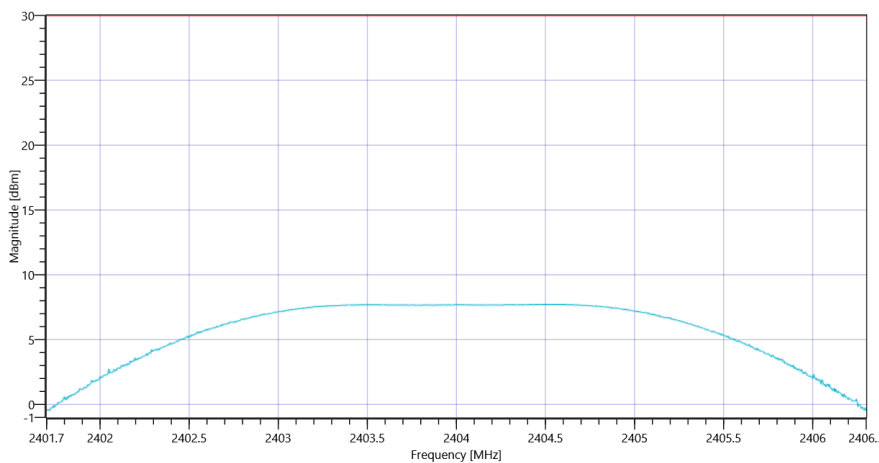

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msp.20092021_140559.png

TEST FINISHED	
General Verdict	PASS

5. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:40:57
Ambit Temp [°C] Humidity [rel%]	24.9 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.26 10.9 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1196	kHz	INFO

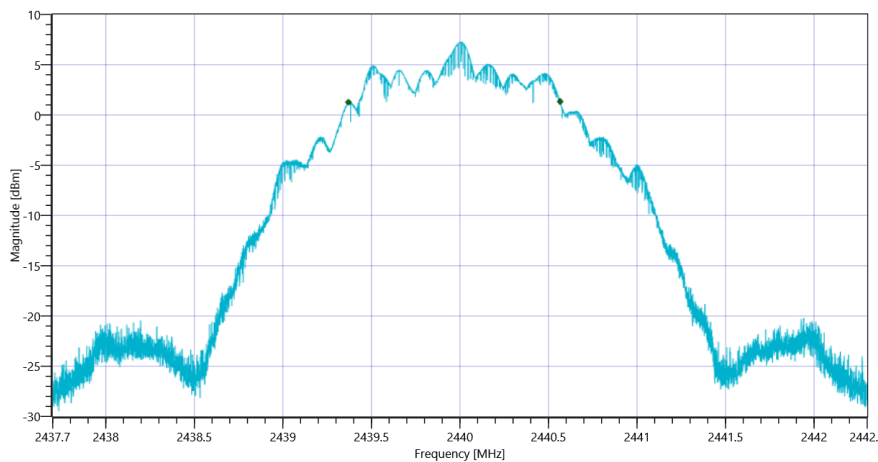


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_20092021_144132.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.26 10.9 25
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	8.09	dBm	PASS
Peak Power	---	1000	6.441693	mW	PASS
Frequency at Peak	---	---	2440.506	MHz	INFO

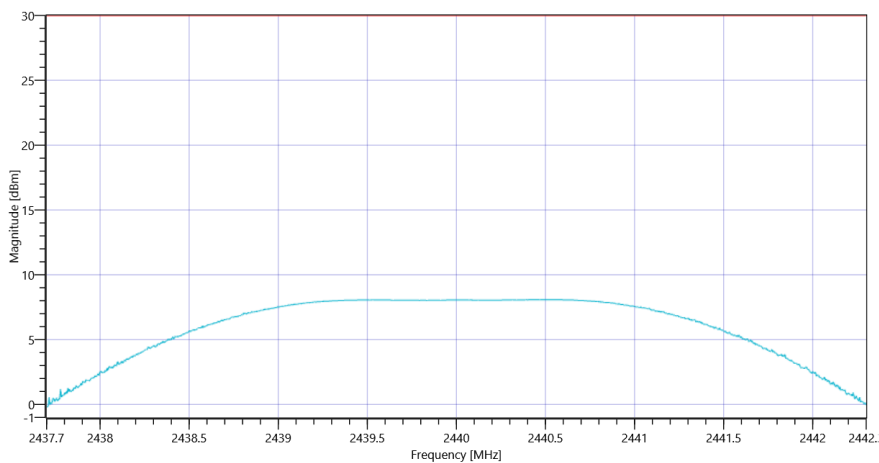

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_20092021_144150.png

TEST FINISHED	
General Verdict	PASS

6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 15:10:20
Ambit Temp [°C] Humidity [rel%]	25.1 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.65 10.95 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1195	kHz	INFO

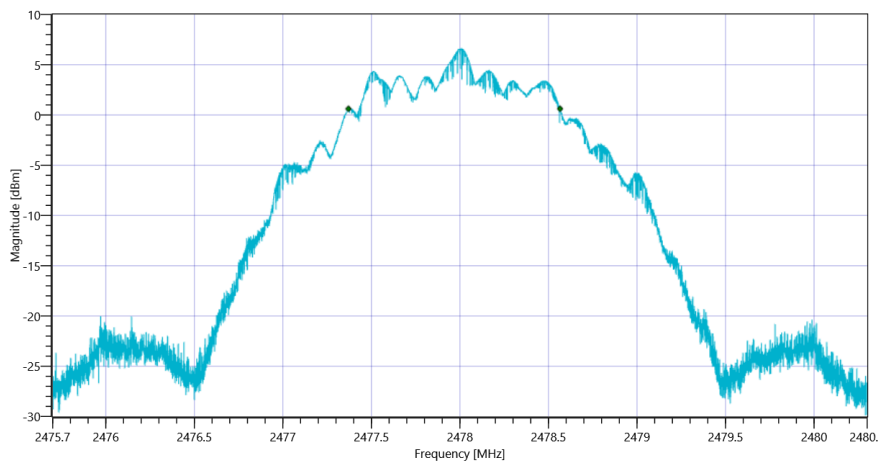


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_20092021_151054.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.65 10.95 25
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	7.58	dBm	PASS
Peak Power	---	1000	5.72796	mW	PASS
Frequency at Peak	---	---	2477.508	MHz	INFO

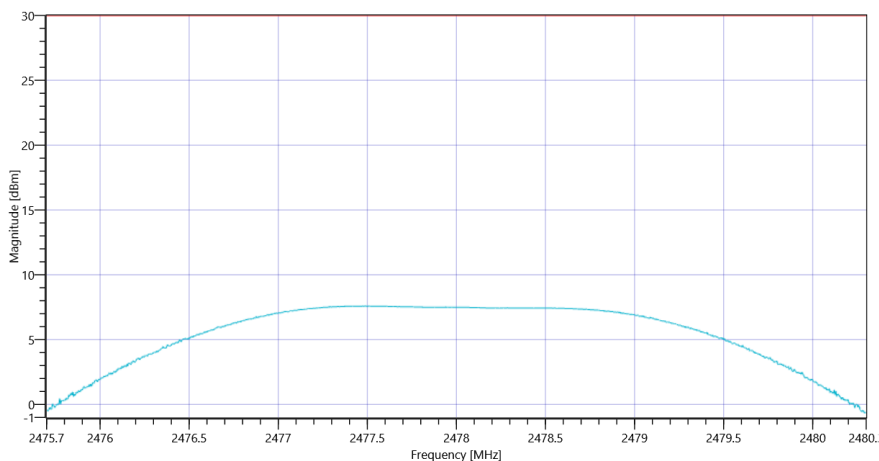

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_20092021_151113.png

TEST FINISHED	
General Verdict	PASS

7. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 12:19:31
Ambit Temp [°C] Humidity [rel%]	24.6 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.76 10.89 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	701	kHz	PASS

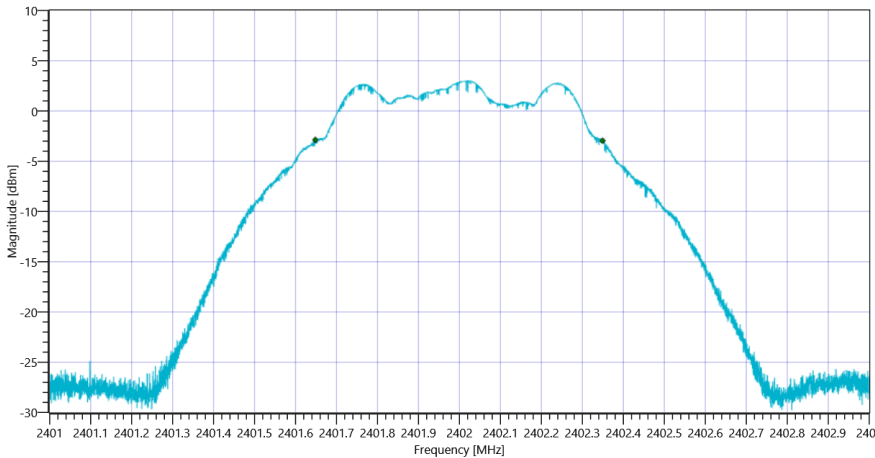

TEST FINISHED	
General Verdict	PASS

8. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 13:07:44
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.47 10.9 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	699	kHz	PASS

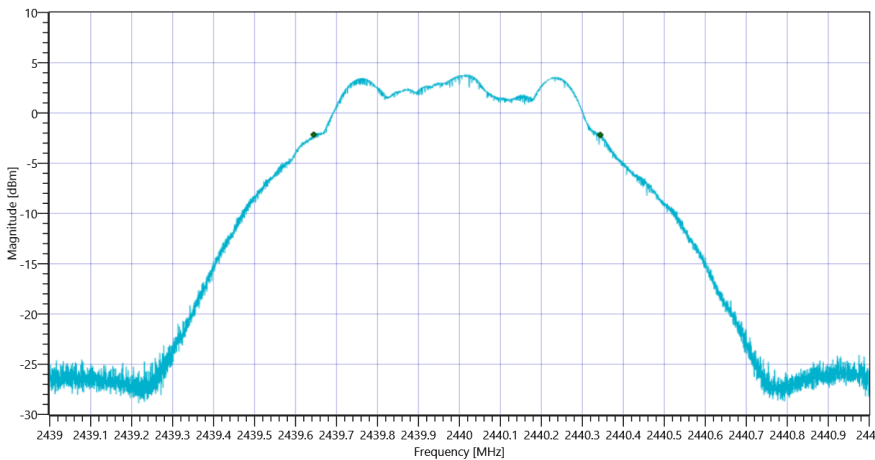

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_20092021_130817.png

TEST FINISHED	
General Verdict	PASS

9. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 13:34:17
Ambit Temp [°C] Humidity [rel%]	24.4 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.04 10.95 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	696	kHz	PASS

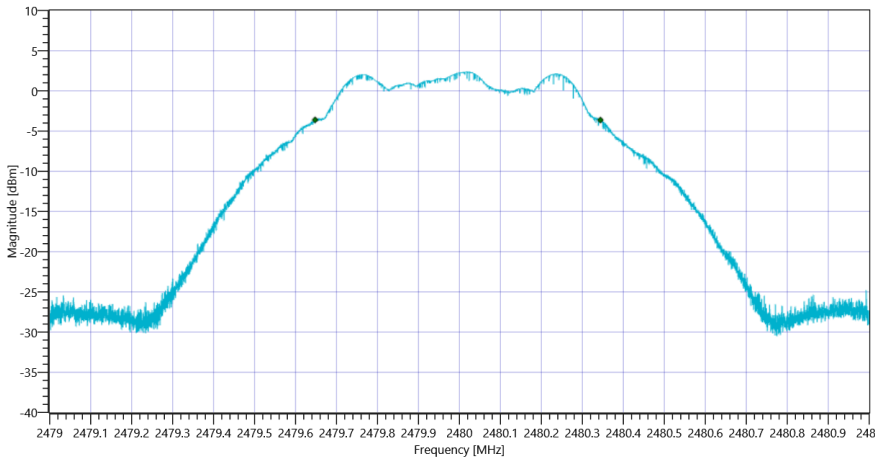

TEST FINISHED	
General Verdict	PASS

10. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 14:06:05
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2404 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.94 10.9 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1204	kHz	PASS

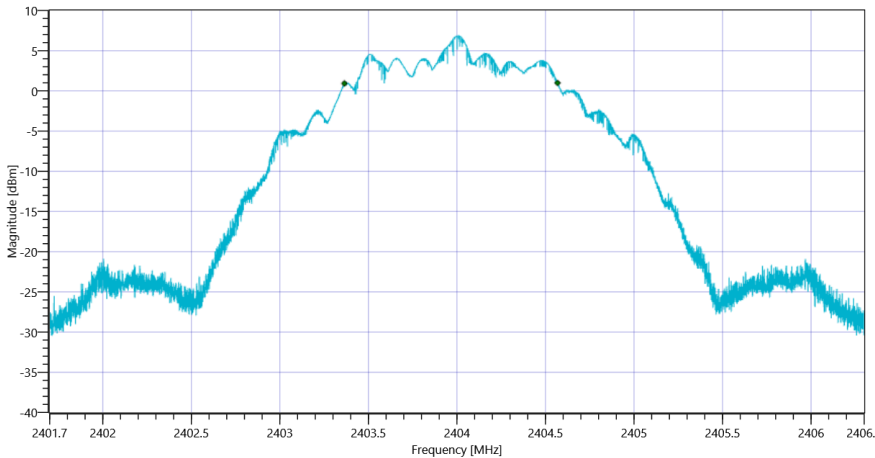

TEST FINISHED	
General Verdict	PASS

11. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 14:41:56
Ambit Temp [°C] Humidity [rel%]	24.9 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.24 10.9 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1185	kHz	PASS

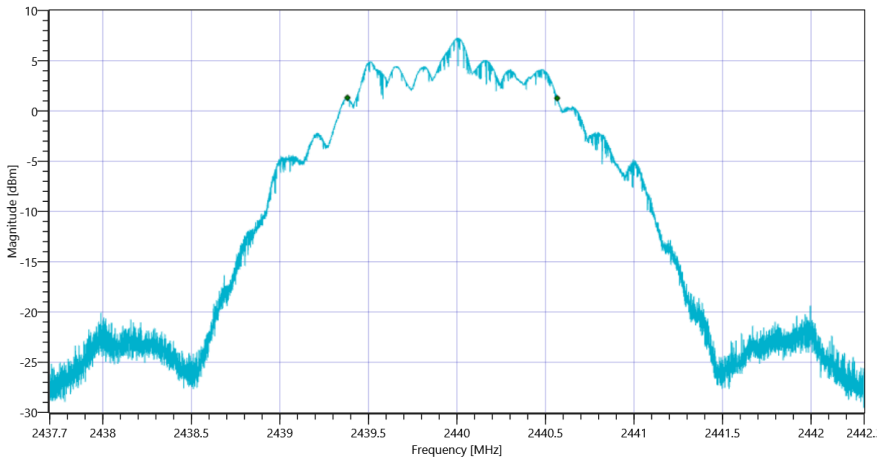

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_20092021_144231.png

TEST FINISHED	
General Verdict	PASS

12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 15:11:19
Ambit Temp [°C] Humidity [rel%]	25.1 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.65 10.95 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1192	kHz	PASS

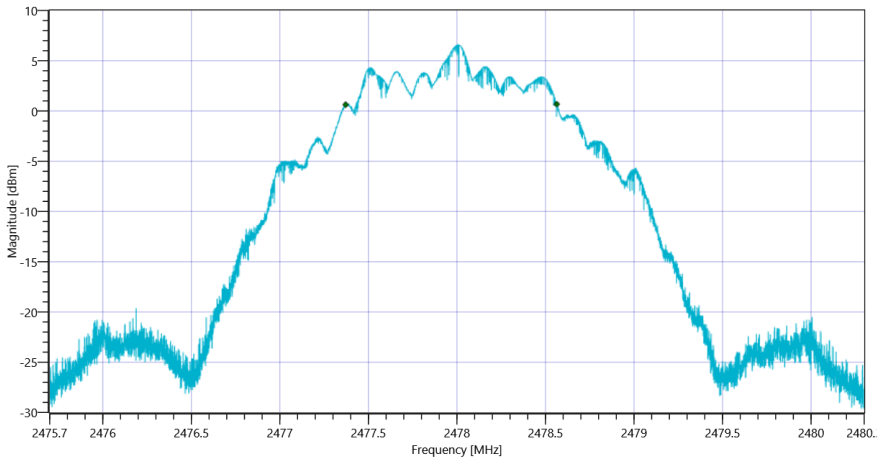

TEST FINISHED	
General Verdict	PASS

13. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 12:20:09
Ambit Temp [°C] Humidity [rel%]	24.6 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.78 10.89 15
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.45	dBm/3KHz	PASS

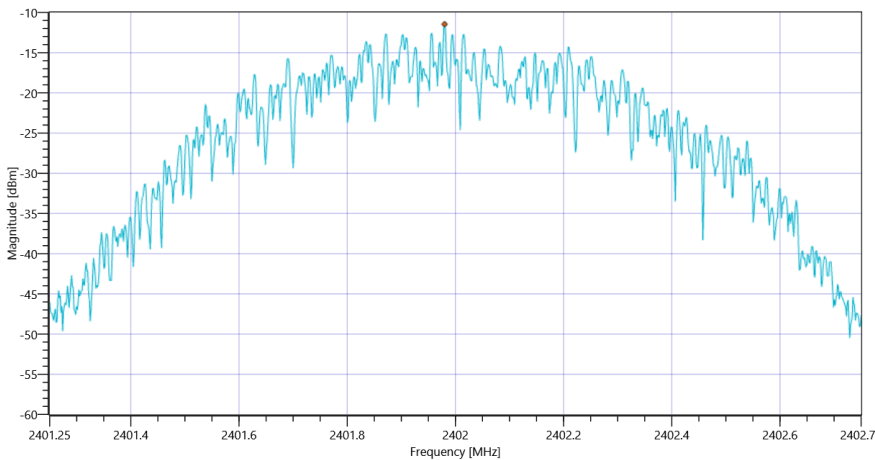

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_20092021_122051.png

TEST FINISHED	
General Verdict	PASS

14. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 13:08:23
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.51 10.9 15
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.65	dBm/3KHz	PASS

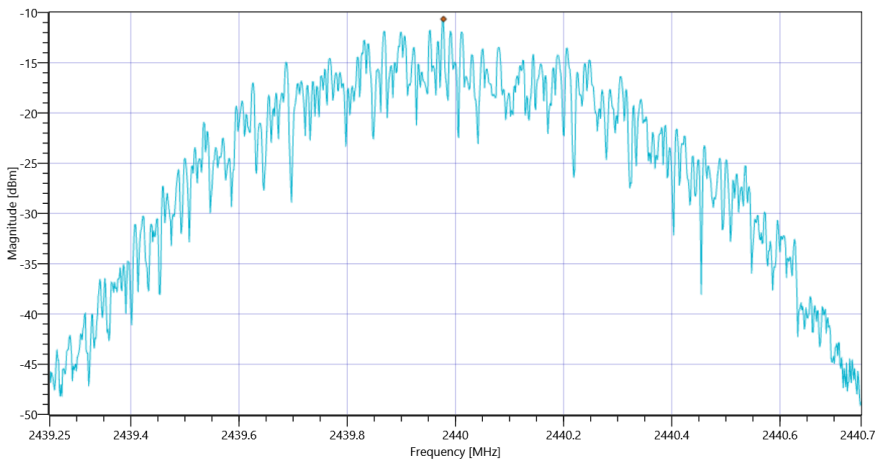

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_20092021_130906.png

TEST FINISHED	
General Verdict	PASS

15. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	20.09.2021 13:34:57
Ambit Temp [°C] Humidity [rel%]	24.4 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.04 10.95 15
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-12.12	dBm/3KHz	PASS

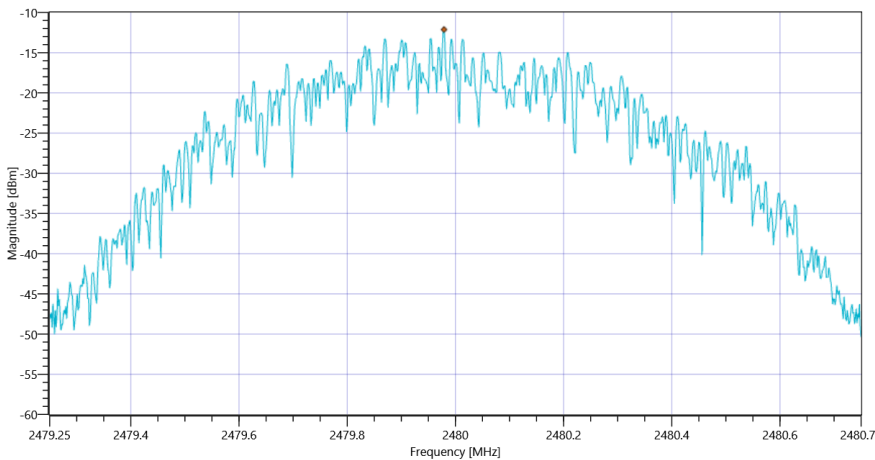

TEST FINISHED	
General Verdict	PASS

16. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 14:06:45
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2404 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.92 10.9 20
Start [MHz] Stop [MHz]	2402.275 2405.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.36	dBm/3KHz	PASS

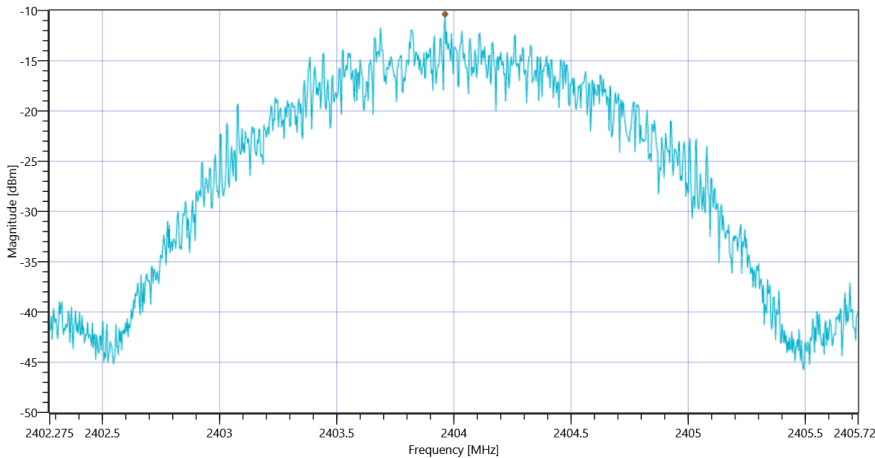

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_20092021_140729.png

TEST FINISHED	
General Verdict	PASS

17. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 14:42:37
Ambit Temp [°C] Humidity [rel%]	24.9 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.27 10.9 20
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.05	dBm/3KHz	PASS

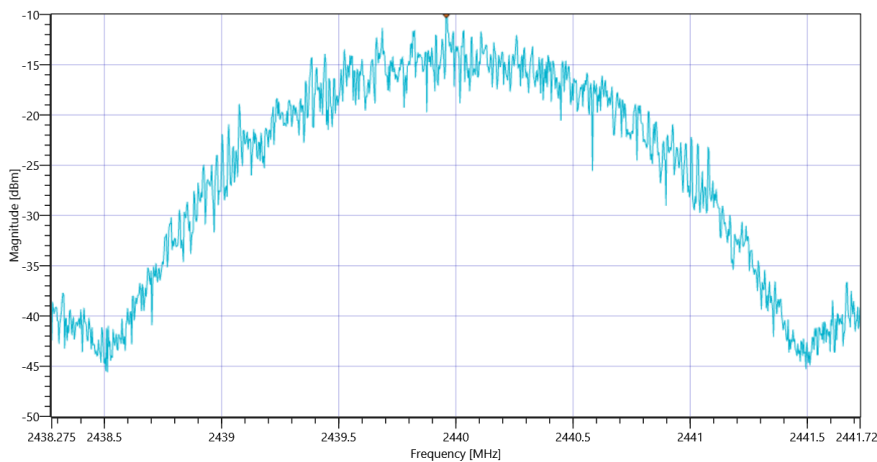

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_20092021_144321.png

TEST FINISHED	
General Verdict	PASS

18. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 15:12:00
Ambit Temp [°C] Humidity [rel%]	25.1 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.65 10.95 20
Start [MHz] Stop [MHz]	2476.275 2479.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.43	dBm/3KHz	PASS

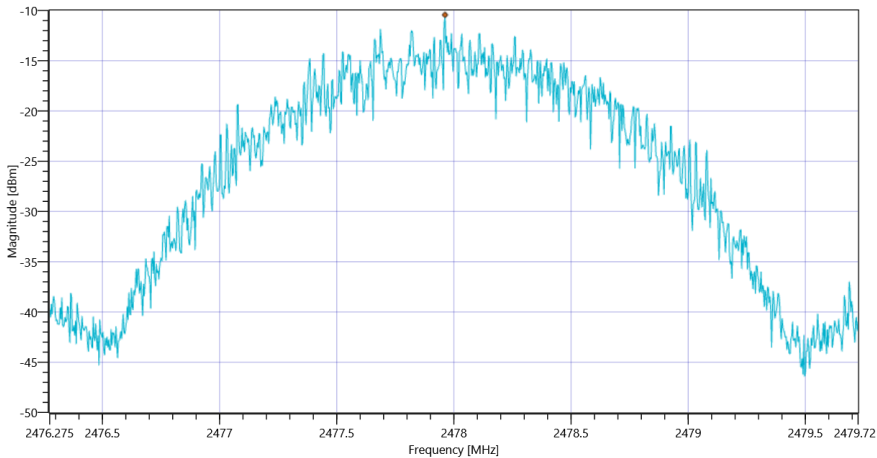

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_20092021_151245.png

TEST FINISHED	
General Verdict	PASS

19. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 12:20:57
Ambit Temp [°C] Humidity [rel%]	24.6 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	



Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.76 10.89 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1040.096	kHz	INFO
T1 99%	2400.000000	---	2401.4913	MHz	PASS
T2 99%	---	2483.500000	2402.5313	MHz	PASS

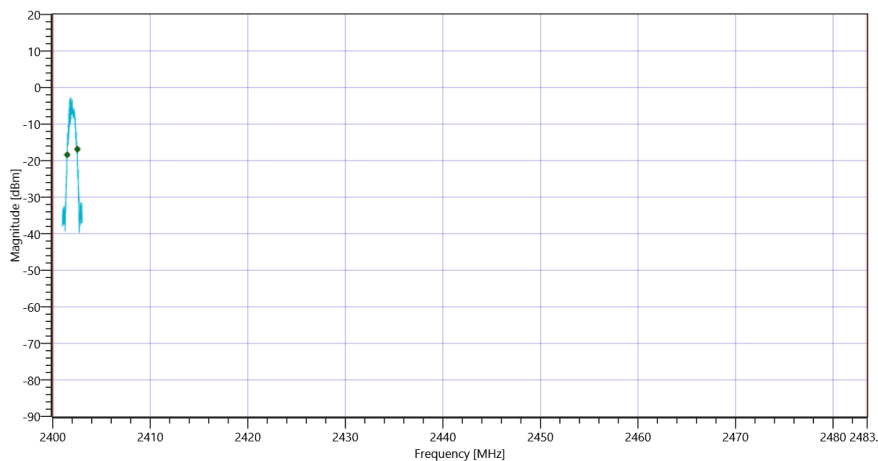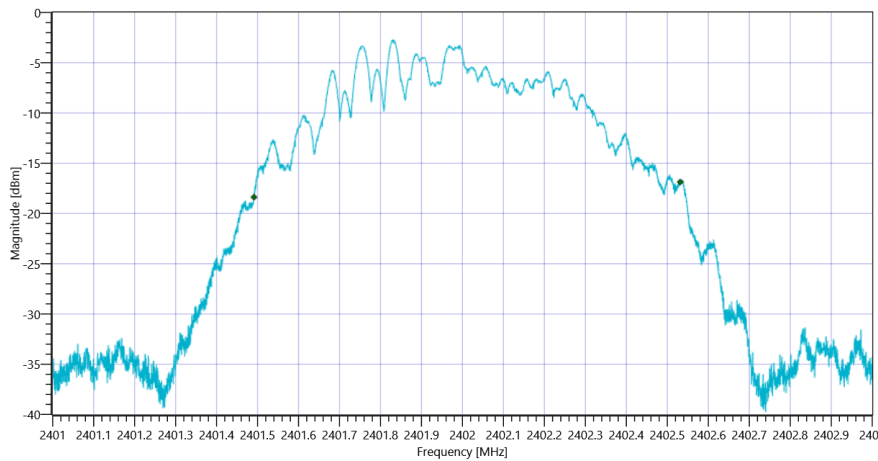

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1171	kHz	INFO
T1 20dB	2400.000000	---	2401.4426	MHz	PASS
T2 20dB	---	2483.500000	2402.6132	MHz	PASS

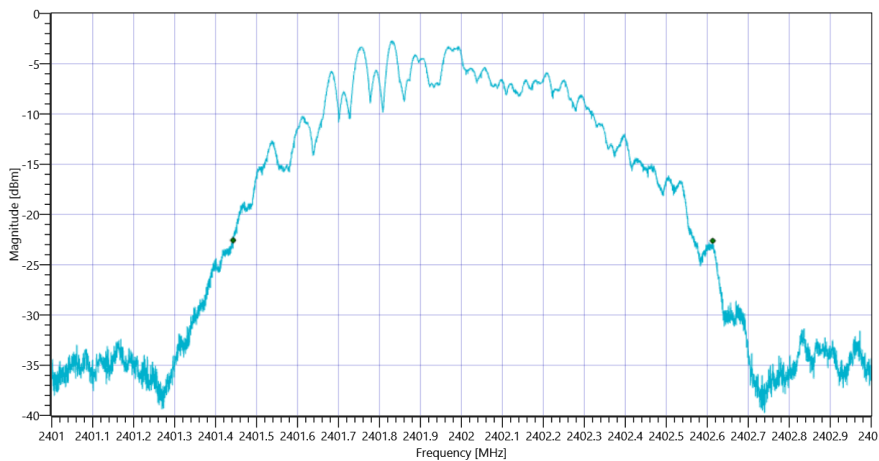

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_20092021_122143.png

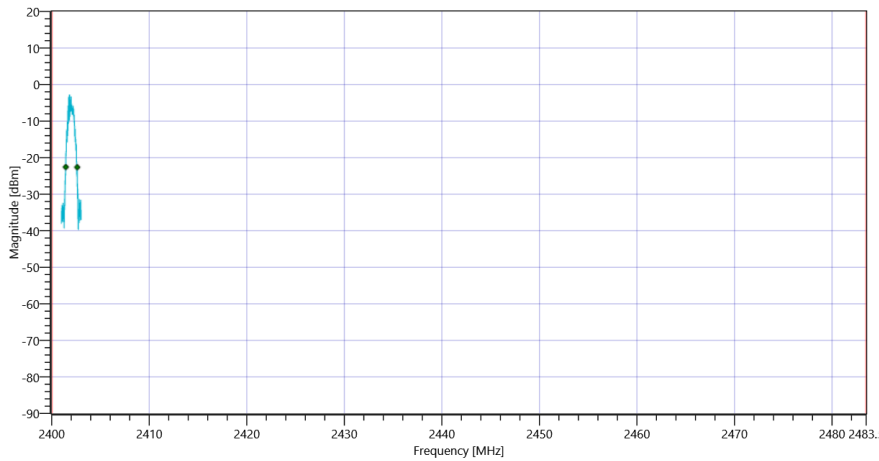

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_20092021_122149.png

TEST FINISHED	
General Verdict	PASS

20. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:09:11
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.48 10.9 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1040.696	kHz	INFO
T1 99%	2400.000000	---	2439.4875	MHz	PASS
T2 99%	---	2483.500000	2440.5281	MHz	PASS

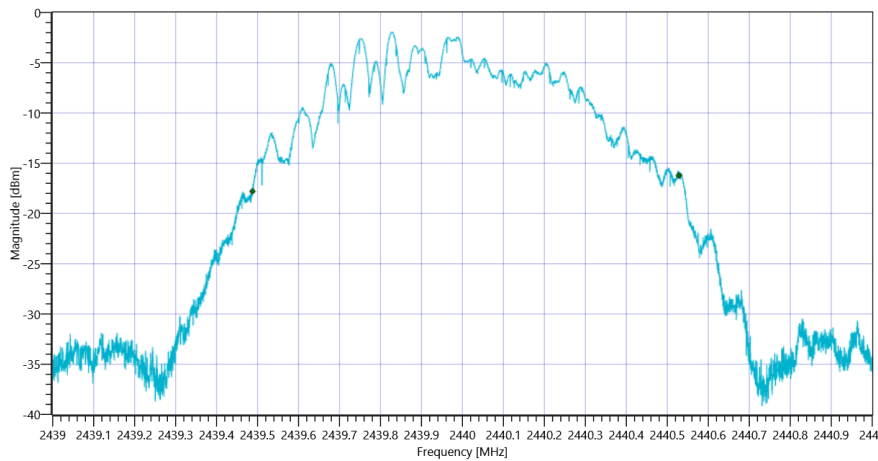


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_20092021_130945.png

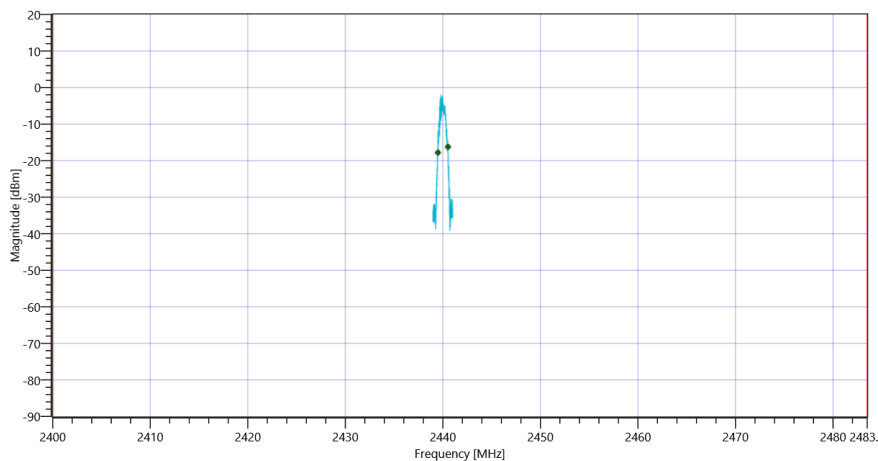


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_20092021_130951.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1170	kHz	INFO
T1 20dB	2400.000000	---	2439.4366	MHz	PASS
T2 20dB	---	2483.500000	2440.6064	MHz	PASS

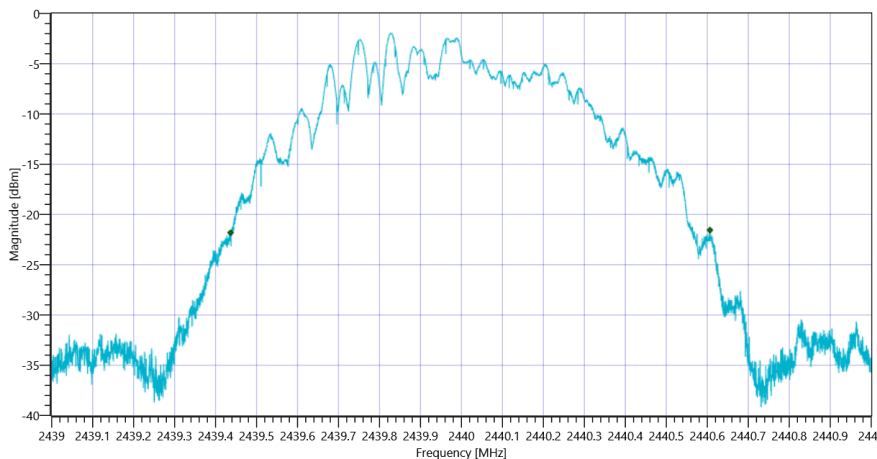

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_20092021_130958.png

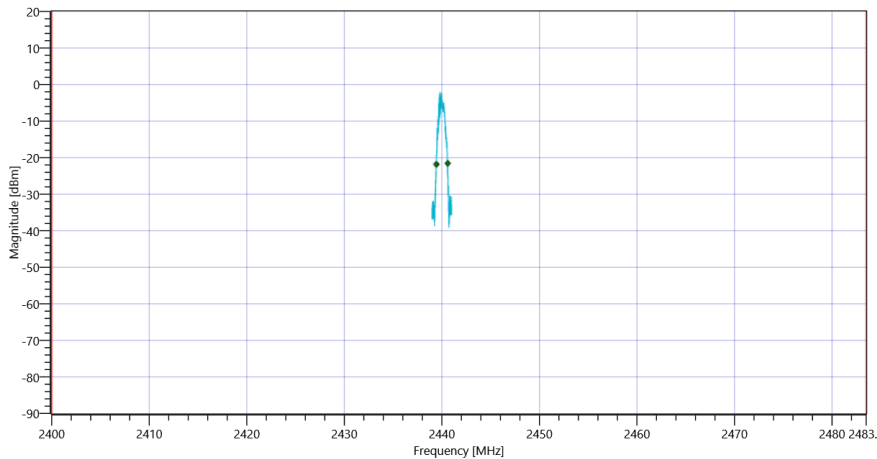

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_20092021_131004.png

TEST FINISHED	
General Verdict	PASS

21. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:35:46
Ambit Temp [°C] Humidity [rel%]	24.4 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.05 10.95 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1041.296	kHz	INFO
T1 99%	2400.000000	---	2479.4883	MHz	PASS
T2 99%	---	2483.500000	2480.5295	MHz	PASS

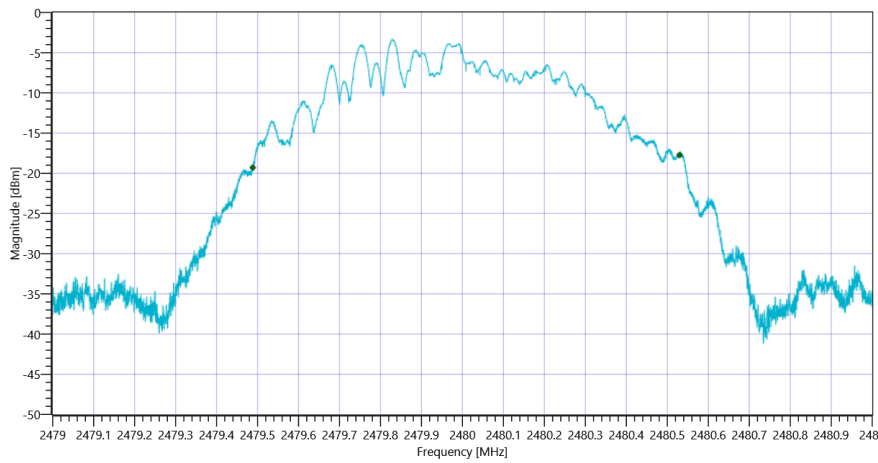


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_20092021_133620.png

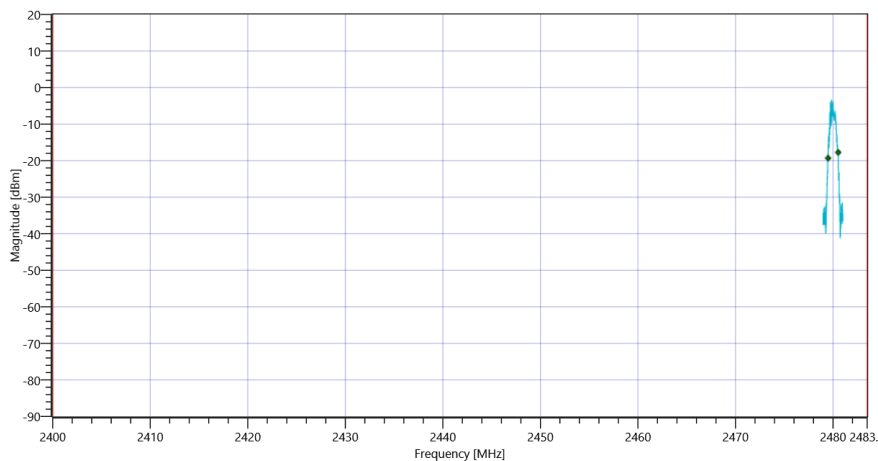


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_20092021_133627.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1179	kHz	INFO
T1 20dB	2400.000000	---	2479.4294	MHz	PASS
T2 20dB	---	2483.500000	2480.6080	MHz	PASS

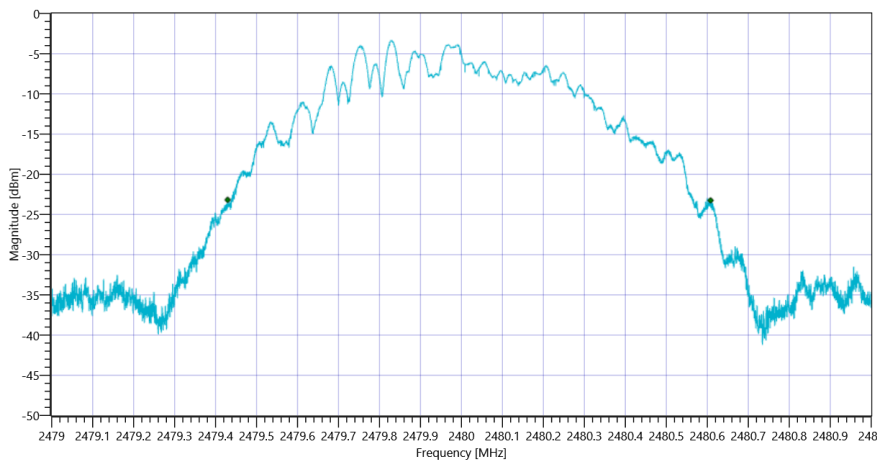

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_20092021_133634.png

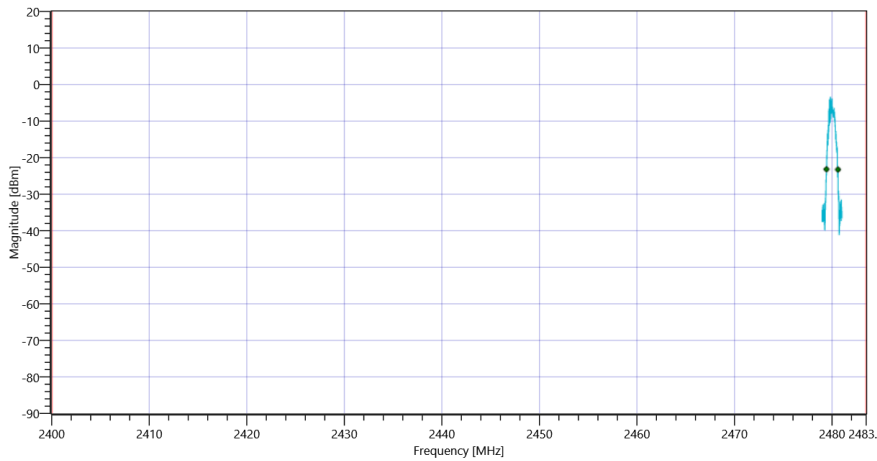

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_20092021_133640.png

TEST FINISHED	
General Verdict	PASS

22. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:07:34
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2404 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.94 10.9 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2116.708	kHz	INFO
T1 99%	2400.000000	---	2402.9550	MHz	PASS
T2 99%	---	2483.500000	2405.0717	MHz	PASS

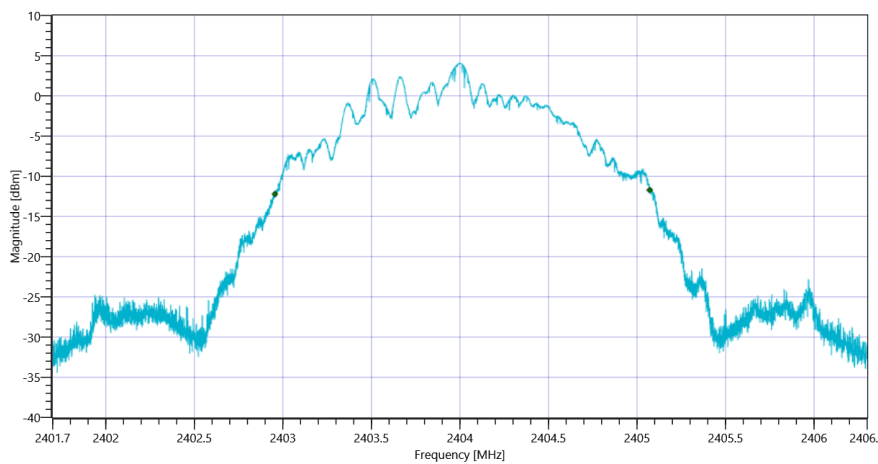


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_20092021_140810.png

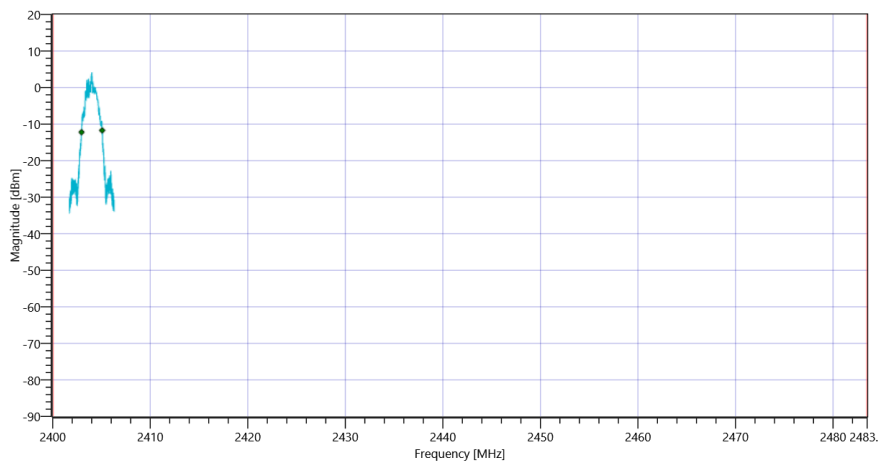


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_20092021_140816.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2306	kHz	INFO
T1 20dB	2400.000000	---	2402.8583	MHz	PASS
T2 20dB	---	2483.500000	2405.1647	MHz	PASS

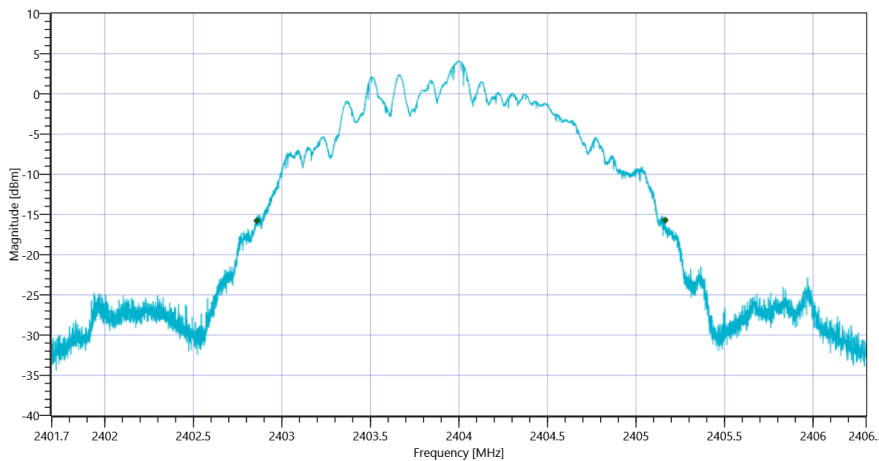

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_20092021_140823.png

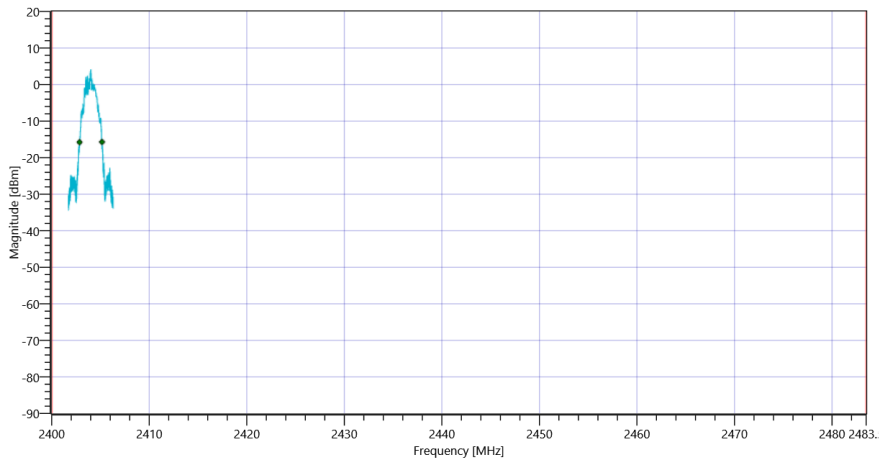

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_20092021_140829.png

TEST FINISHED	
General Verdict	PASS

23. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:43:27
Ambit Temp [°C] Humidity [rel%]	24.9 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.25 10.9 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2122.688	kHz	INFO
T1 99%	2400.000000	---	2438.9504	MHz	PASS
T2 99%	---	2483.500000	2441.0731	MHz	PASS

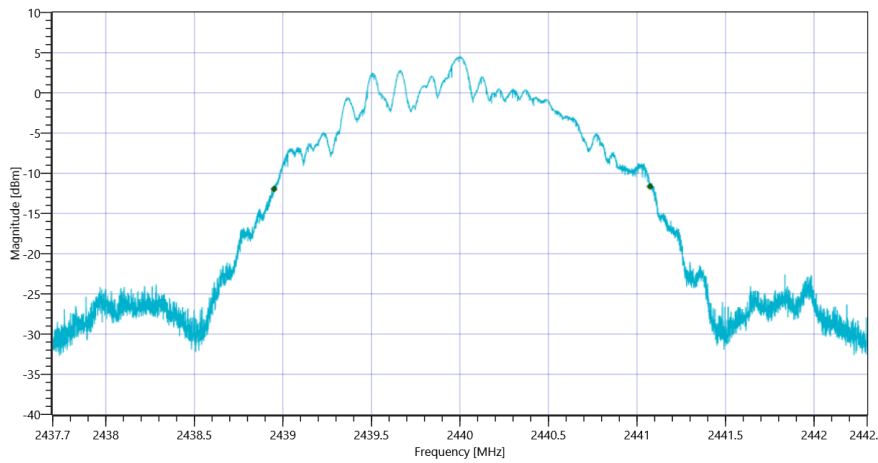


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_20092021_144403.png

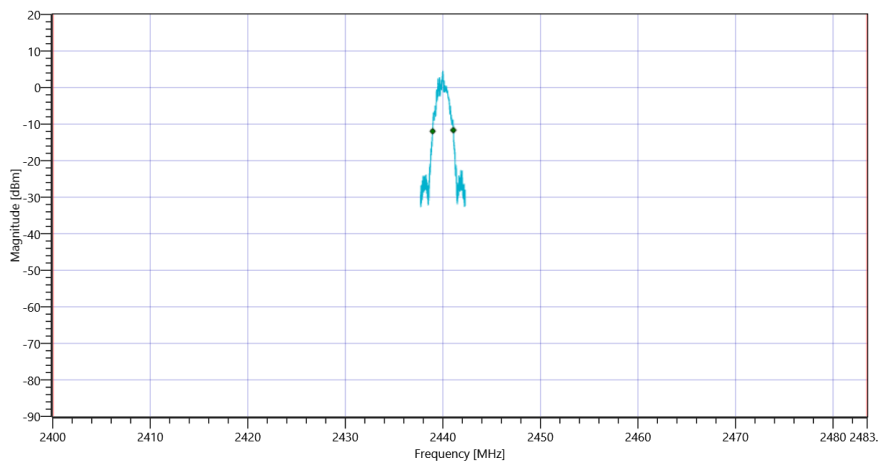


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_20092021_144409.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2309	kHz	INFO
T1 20dB	2400.000000	---	2438.8528	MHz	PASS
T2 20dB	---	2483.500000	2441.1615	MHz	PASS

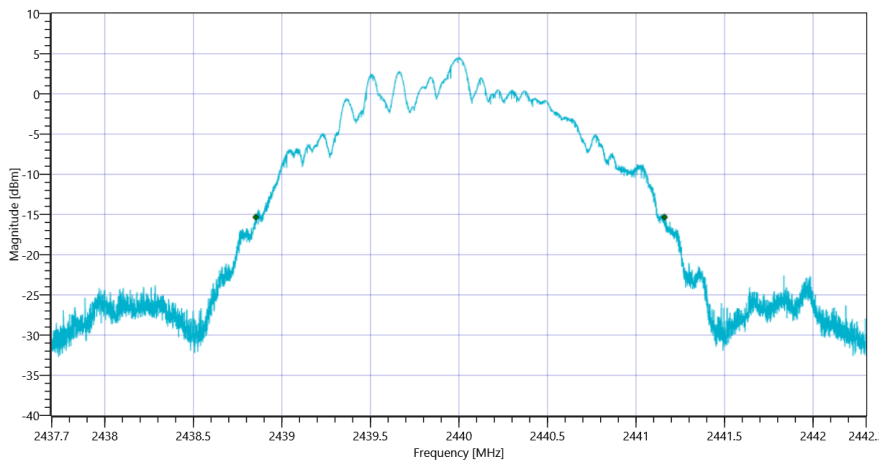

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_20092021_144416.png

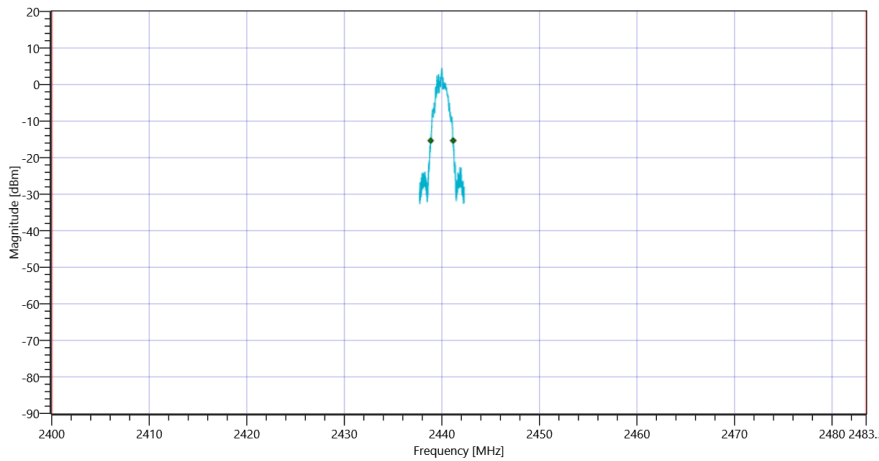

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_20092021_144423.png

TEST FINISHED	
General Verdict	PASS

24. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 15:12:51
Ambit Temp [°C] Humidity [rel%]	25.1 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.67 10.95 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2135.106	kHz	INFO
T1 99%	2400.000000	---	2476.9380	MHz	PASS
T2 99%	---	2483.500000	2479.0731	MHz	PASS

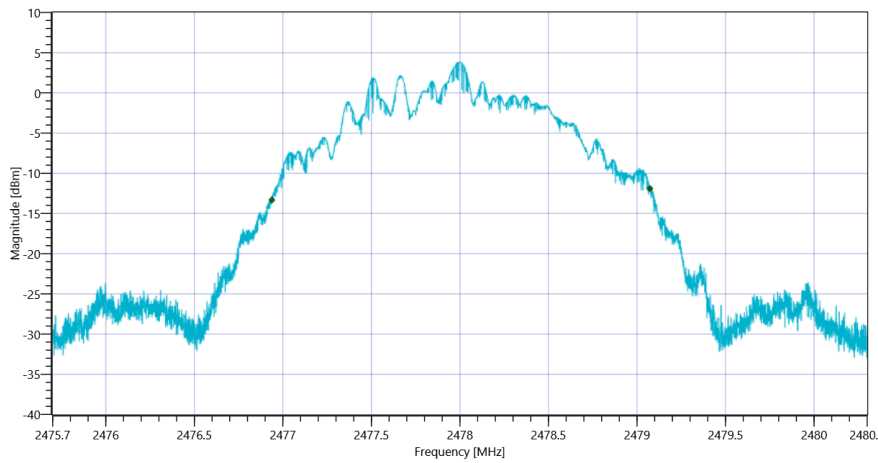


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_20092021_151327.png

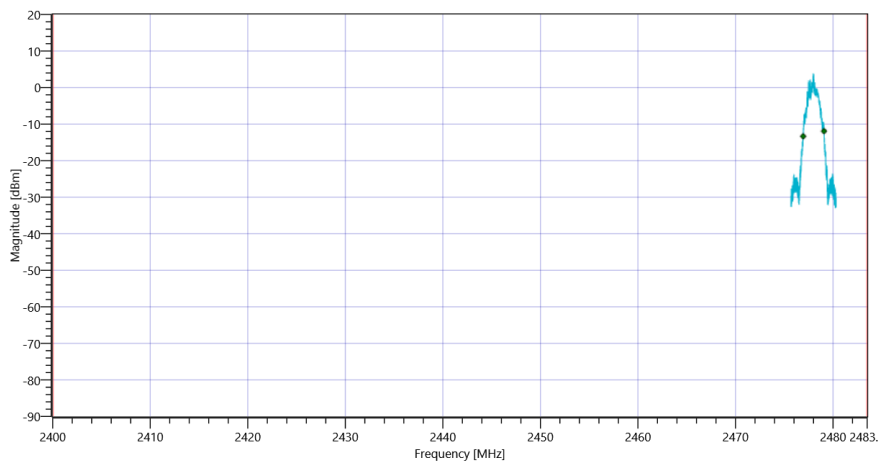


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_20092021_151333.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2306	kHz	INFO
T1 20dB	2400.000000	---	2476.8514	MHz	PASS
T2 20dB	---	2483.500000	2479.1574	MHz	PASS

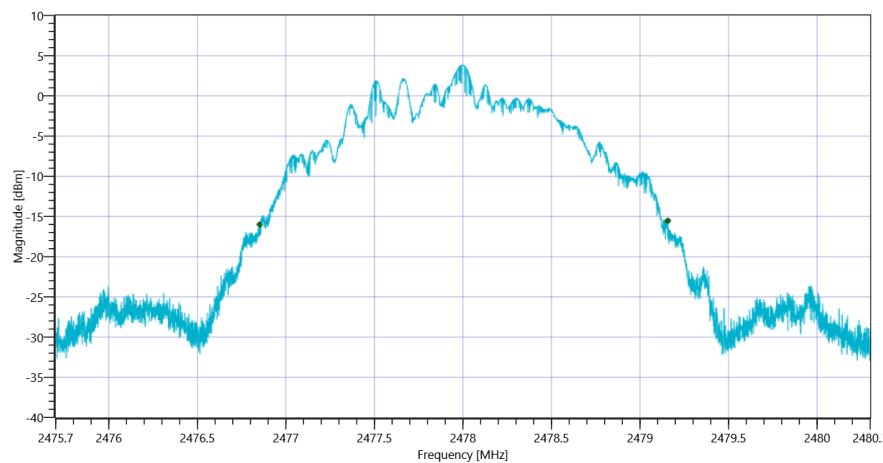

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_20092021_151341.png

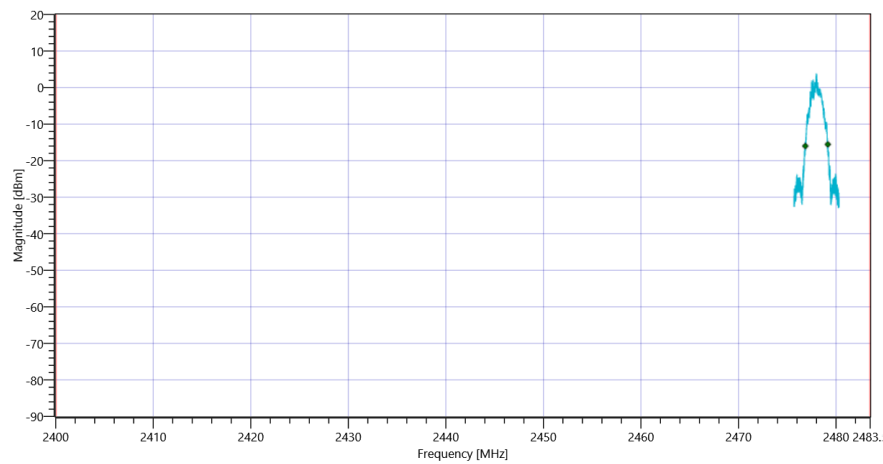

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_20092021_151347.png

TEST FINISHED	
General Verdict	PASS


25. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 12:21:55
Ambit Temp [°C] Humidity [rel%]	24.6 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			3.80 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		
RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.33 MHz	---	---	2.67	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-137.05	dB	INFO

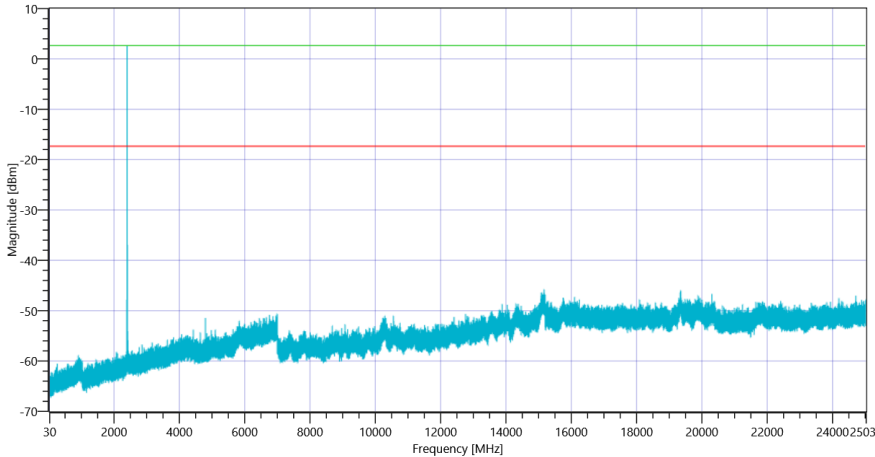

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_20092021_122731.png

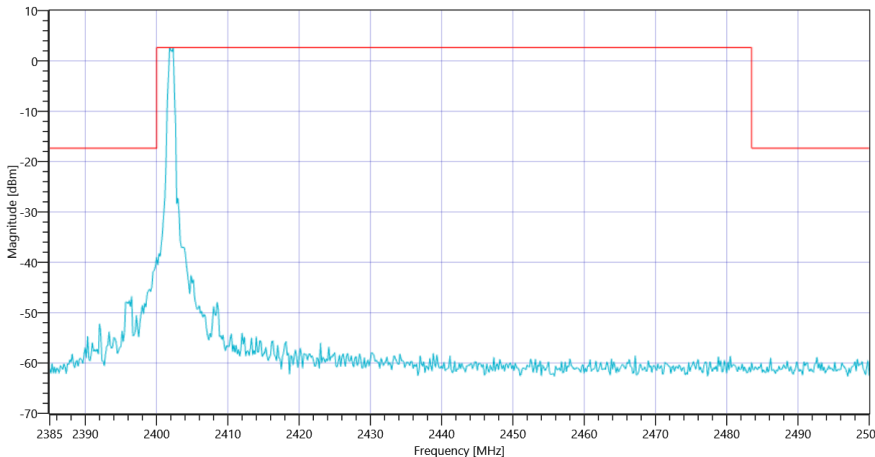

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_20092021_122736.png

TEST FINISHED	
General Verdict	PASS

26. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:10:10
Ambit Temp [°C] Humidity [rel%]	24.6 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.49 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	3.80	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15127.667 MHz	0	---	29.39	dB	INFO

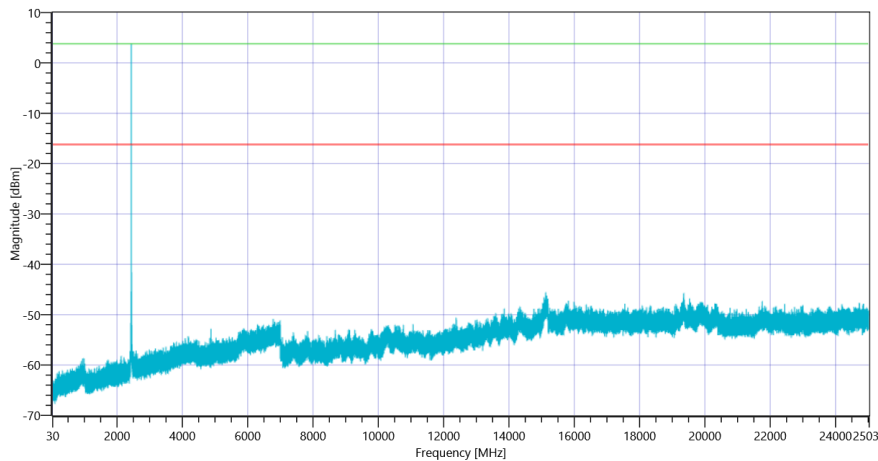

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_20092021_131547.png

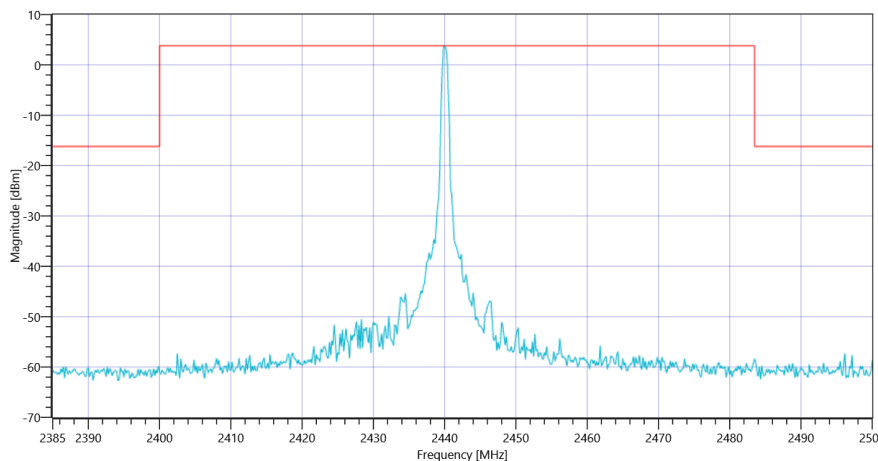

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_20092021_131552.png

TEST FINISHED

General Verdict

PASS

27. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	20.09.2021 13:36:46
Ambit Temp [°C] Humidity [rel%]	24.4 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.04 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.33 MHz	---	---	1.99	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2484.167 MHz	0	---	27.54	dB	INFO

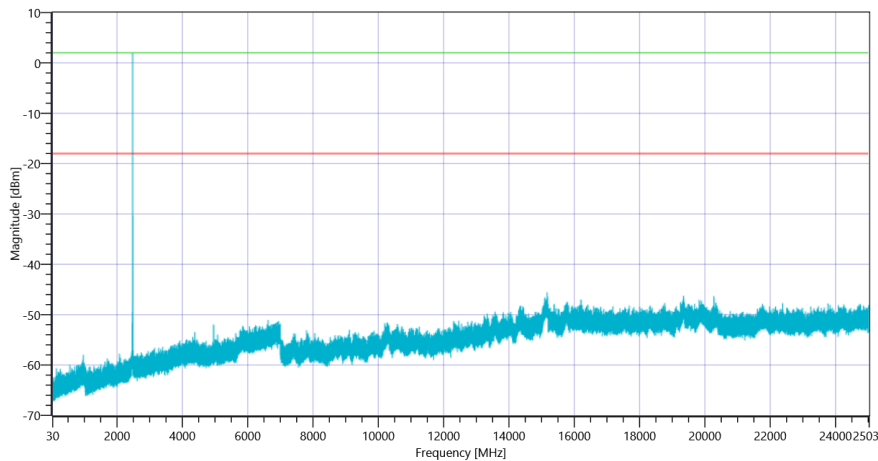

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_20092021_134223.png

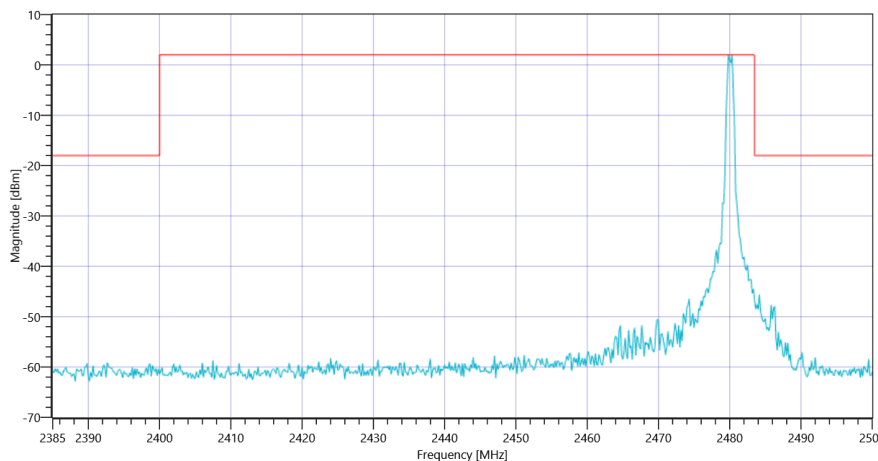

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_20092021_134228.png

TEST FINISHED

General Verdict

PASS

28. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:08:35
Ambit Temp [°C] Humidity [rel%]	24.7 49
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2404 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.94 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2404.17 MHz	---	---	5.39	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.667 MHz	0	---	22.01	dB	INFO

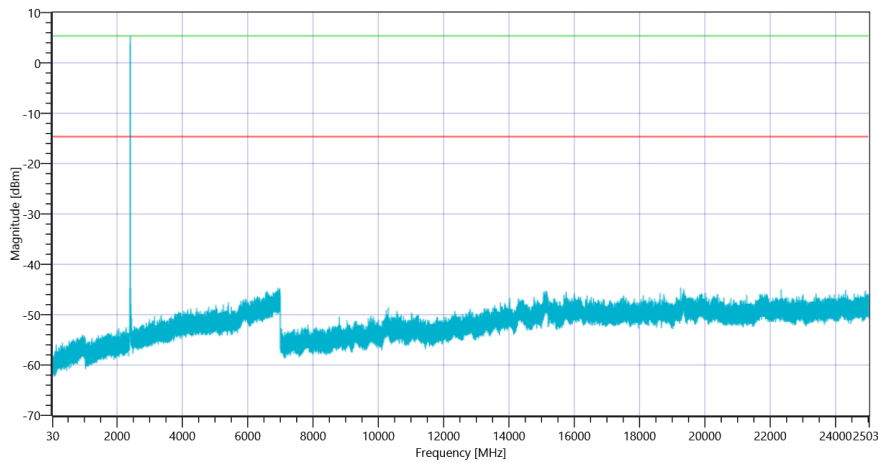

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_20092021_141413.png

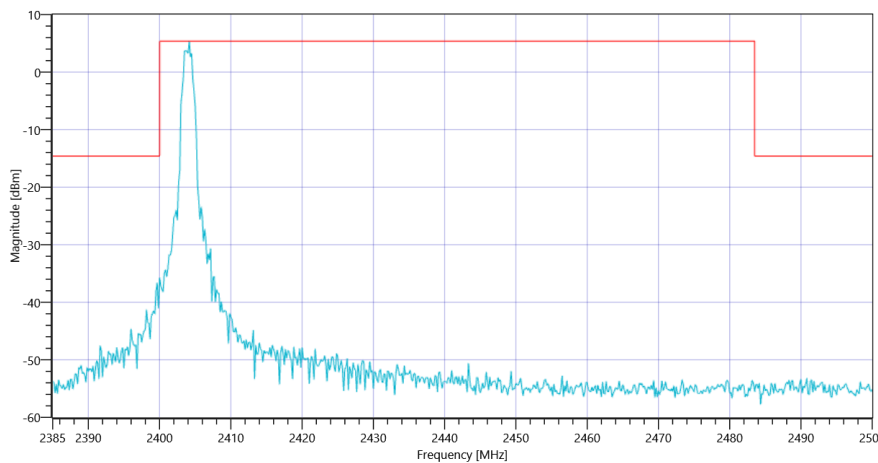

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_20092021_141418.png

TEST FINISHED

General Verdict

PASS

29. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	20.09.2021 14:44:29
Ambit Temp [°C] Humidity [rel%]	24.9 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.23 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.17 MHz	---	---	6.13	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-140.76	dB	INFO

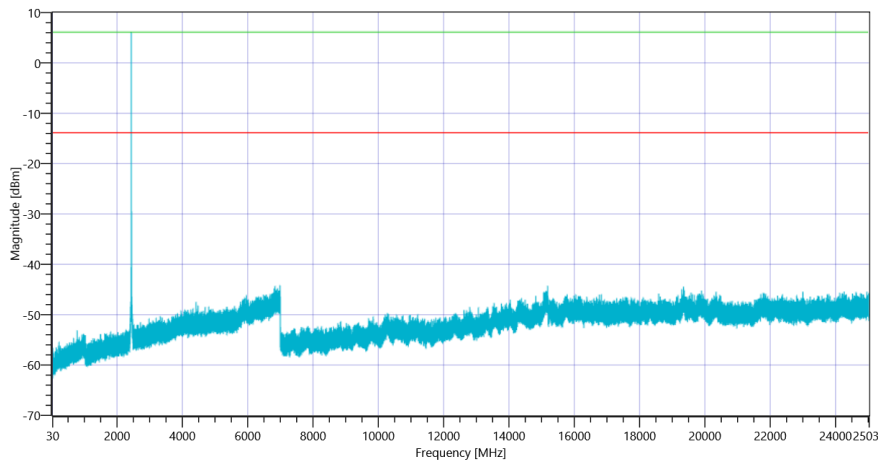

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_20092021_145008.png

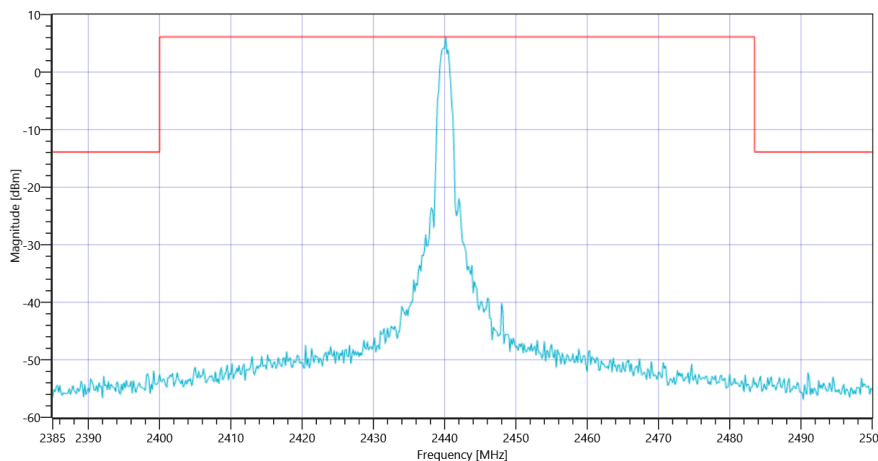

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_20092021_145013.png

TEST FINISHED

General Verdict

PASS

30. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps


Test References	
TC Start	20.09.2021 15:13:53
Ambit Temp [°C] Humidity [rel%]	25.1 48
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	Yes No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			7.66 0 25		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2478.17 MHz	---	---	6.29	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2484 MHz	0	---	26.45	dB	INFO

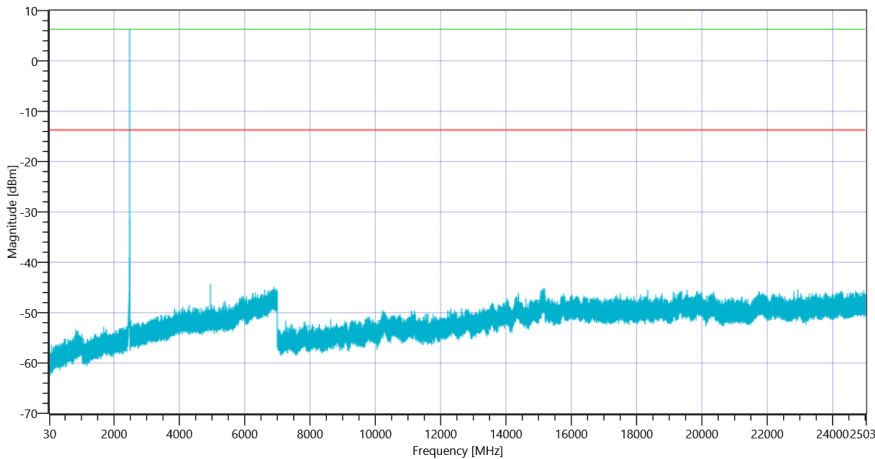

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2478_20092021_151932.png

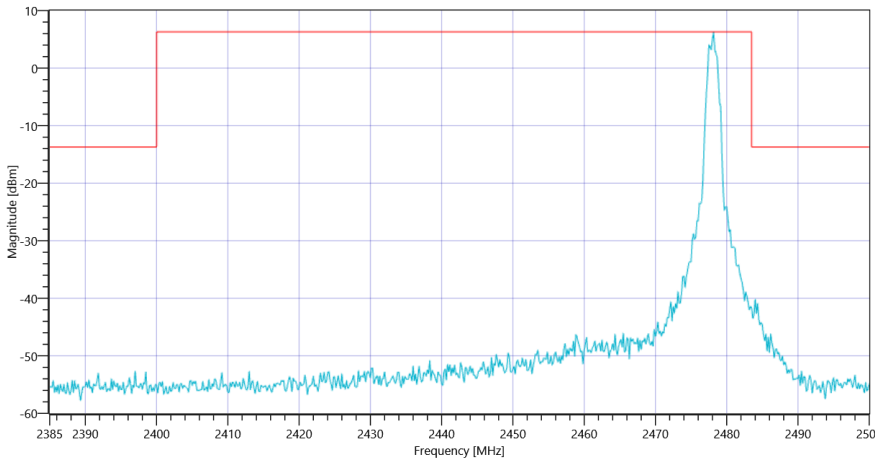

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2478_20092021_151938.png

TEST FINISHED	
General Verdict	PASS

- END OF DOCUMENT -