FCC ID: 2ACB7SKB100

Report No.: DRTFCC1405-0693

Total 53pages

SAR TEST REPORT

Test item	: Smart Beacon					
Model No.	: Smart Beacon					
Order No.	: DEMC1405-01625					
Date of receipt	: 2014-05-02					
Test duration	: 2014-05-28					
Date of issue	: 2014-05-28					
Use of report	: FCC Original Grant					
Applicant : SK Planet, In 475 Brannan	c. Street, Suite 420, San Francisco,	CA 94107				
Test laboratory : Digital EMC 0 42, Yurim-ro,	Co., Ltd. 154beon-gil, Cheoin-gu, Yongin-s	, Gyeonggi-do, Korea 449-935				
Test rule part : CFR §2.1093						
Test environment	: See appended test report					
Test result	: 🛛 Pass 🔲 Fa	il				
the use of this test report is inhibited	in this test report are limited only to the same d other than its purpose. This test report sl ut the written approval of DIGITAL EMC CC	nall not be reproduced except in full,				
Tested by:	Witnessed by:	Reviewed by:				
byth		M				
	Engineer N/A	Technical Director Harvey Sung				

Table of Contents

FCC ID: 2ACB7SKB100

1. DESCRIPTION OF DEVICE	
1.1 Guidance Applied	
1.2 Nominal and Maximum Output Power Specifications	
1.3 SAR Test Exclusions Applied	
2. INTROCUCTION	
3. DESCRIPTION OF TEST EQUIPMENT	7
3.1 SAR MEASUREMENT SETUP	
3.2 EX3DV4 Probe Specification	
3.3 Probe Calibration Process	
3.3.1 E-Probe Calibration	
3.4 Data Extrapolation	
3.6 Device Holder for Transmitters	
3.7 Brain & Muscle Simulation Mixture Characterization	
3.8 SAR TEST EQUIPMENT	13
4. TEST SYSTEM SPECIFICATIONS	14
5. SAR MEASUREMENT PROCEDURE	15
5.1 Measurement Procedure	15
6. SAR Measurement Procedures for USB Dongle Transmitters	16
7. RF EXPOSURE LIMITS	17
8. FCC MEASUREMENT PROCEDURES	18
8.1 Measured and Reported SAR	18
8.2 SAR Testing with 802.11 Transmitters	
8.2.1 General Device Setup	18
8.2.2 Frequency Channel Configurations	18
9. RF CONDUCTED POWERS	19
9.1 WLAN Conducted Powers	19
9.2 Bluetooth Conducted Powers	
10. DESCRIPTION OF SUPPORTED UNITS	
11. SYSTEM VERIFICATION	22
11.1 Tissue Verification	
11.2 Test System Verification	
12. SAR TEST RESULTS	
12.1 Body SAR Results	
12.2 SAR Test Notes	
13.1 Introduction	24 24
13.3 Simultaneous Transmission Procedures	
13.4 Body-Worn Simultaneous Transmission Analysis	
13.5 Simultaneous Transmission Conclusion	25
14. SAR MEASUREMENT VARIABILITY	
14.1 Measurement Variability	
14.2 Measurement Uncertainty	
15. IEEE P1528 –MEASUREMENT UNCERTAINTIES	
16.CONCLUSION	
17. REFERENCES	
Attachment 1. – Probe Calibration Data	31
Attachment 2. – Dipole Calibration Data	43
Attachment 3. – SAR SYSTEM VALIDATION	52

Test Report Version

Test Report No.	Date	Description
DRTFCC1405-0693	May. 28, 2014	Final version for approval

1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

General Information:

EUT type	Smart Beacon					
FCC ID	2ACB7SKB100					
Equipment model name	Smart Beacon					
Equipment add model name	N/A					
Equipment serial no.	Identical prototype					
Mode(s) of Operation	2.4 GHz W-LAN (802.11	2.4 GHz W-LAN (802.11b/g/n HT20)				
TX Frequency Range	2412 ~ 2462 MHz (802.11b)					
RX Frequency Range	RX Frequency Range 2412 ~ 2462 MHz (802.11b)					
	Measured Reported SAR					
Equipment Class	Band	Conducted	1g SAR (W/kg)			
Equipment Class	Band	Conducted Power [dBm]	1g SAR (W/kg) Body			
	Band 2.4 GHz W-LAN	Power				
Class		Power [dBm]	Body			
Class DTS DTS	2.4 GHz W-LAN	Power [dBm] 13.03 0.60	Body 0.272			
Class DTS DTS	2.4 GHz W-LAN Bluetooth LE	Power [dBm] 13.03 0.60 01r03	Body 0.272 N/A			
DTS DTS Simultaneous S	2.4 GHz W-LAN Bluetooth LE AR per KDB 690783 D01v0	Power [dBm] 13.03 0.60 01r03	Body 0.272 N/A			
DTS DTS Simultaneous Some FCC Equipment Class	2.4 GHz W-LAN Bluetooth LE AR per KDB 690783 D01v0 Digital Transmission Sys	Power [dBm] 13.03 0.60 01r03	Body 0.272 N/A			

1.1 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 447498 D02v02 (SAR Procedures for Dongle Xmtr)
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB Publication 865664 D02 RF Exposure Reporting v01r01

1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05r02.

Band & Mod	de	Modulated Burst Average [dBm]
IEEE 802.11b (2.4 GHz)	Maximum	14.5
IEEE 602.110 (2.4 GHZ)	Nominal	13.0
IEEE 802.11g (2.4 GHz)	Maximum	9.5
	Nominal	8.0
IEEE 902 11n /2 4 CH=\	Maximum	9.5
IEEE 802.11n (2.4 GHz)	Nominal	8.0
Pluotooth I E	Maximum	1.5
Bluetooth LE	Nominal	0.5

1.3 SAR Test Exclusions Applied

(A) WIFI & BT

Per FCC KDB 447498 D01v05r02, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:


$$\frac{Max\ Power\ of\ Channel\ (mW)}{Test\ Separation\ Dist\ (mm)}*\sqrt{Frequency(GHz)} \leq 3.0$$

Based on the maximum conducted power of **Bluetooth LE** (rounded to the nearest mW) and the antenna to user separation distance, **Bluetooth LE SAR was not required**; $[(1/5)^* \sqrt{2.480}] = 0.4 < 3.0$.

Based on the maximum conducted power of **2.4 GHz WIFI** (rounded to the nearest mW) and the antenna to user separation distance, **2.4 GHz WIFI SAR was required**; $[(28/5)^* \sqrt{2.462}] = 8.8 > 3.0$.

Per KDB Publication 447498 D01v05r02, the maximum power of the channel was rounded to the nearest mW before calculation.

1.4 DUT Antenna Locations



Note 1: Exact antenna dimensions and separation distances are shown in the "Tune-up procedure_2ACB7SKB100_r1" in the FCC Filing.

2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95*.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU)absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

 σ = conductivity of the tissue-simulating material (S/m) ρ = mass density of the tissue-simulating material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i5-2600 3.40 GHz desktop computer with Windows NT system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

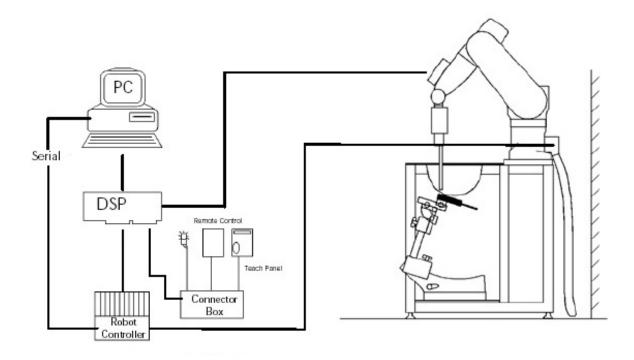


Figure 3.1 SAR Measurement System Setup

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

3.2 EX3DV4 Probe Specification

Calibration In air from 10 MHz to 6 GHz

In brain and muscle simulating tissue at Frequencies of

450 MHz, 600 MHz, 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz

Frequency 10 MHz to 6 GHz

Linearity ± 0.2 dB (30 MHz to 6 GHz)

Dynamic 10 μ W/g to > 100 mW/g

Range Linearity: $\pm 0.2 \text{ dB}$

Dimensions Overall length: 337 mm

Tip length 20 mm

Body diameter 12 mm

Tip diameter 2.5 mm

Distance from probe tip to sensor center 1.0 mm

Application SAR Dosimetry Testing

Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 Probe Calibration Process

3.3.1 E-Probe Calibration

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

 $SAR = \frac{\left|E\right|^2 \cdot \sigma}{\rho}$

where: where:

 Δt = exposure time (30 seconds),

 σ = simulated tissue conductivity,

C = heat capacity of tissue (brain or muscle),

o = Tissue density (1.25 g/cm³ for brain tissue)

 ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;




Figure 3.4 E-Field and Temperature Measurements at 900MHz




Figure 3.5 E-Field and Temperature Measurements at 1800MHz

3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_{i} = U_{i} + U_{i}^{2} \cdot \frac{gf}{dcp_{i}}$$
 with V_{i} = compensated signal of channel i (i=x,y,z)
 U_{i} = input signal of channel i (i=x,y,z)
 C_{i} = crest factor of exciting field (DASY parameter)
 C_{i} = crest factor of exciting field (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: with
$$V_i$$
 = compensated signal of channel i (i = x,y,z)
Norm_i = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
ConvF = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$
 with SAR = local specific absorption rate in W/g = total field strength in V/m = conductivity in [mho/m] or [Siemens/m] p = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{prov} = \frac{E_{tot}^2}{3770}$$
 with $P_{pwe} = \text{equivalent power density of a plane wave in W/cm}^2$ = total electric field strength in V/m

3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

SAM Twin Phantom Specification:

Construction

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching

three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as

Twin SAM V4.0, but has reinforced top structure.

Shell Thickness $2 \pm 0.2 \text{ mm}$ Filling VolumeApprox. 25 liters

Dimensions Length: 1000 mm

Width: 500 mm

Height: adjustable feet

Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected alongthemid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.

Figure 3.7 Sam Twin Phantom shell

3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table 3.1 Composition of the Tissue Equivalent Matter

Ingredients		Frequency (MHz)							
(% by weight)	835		1900		2450		5200 ~ 5800		
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	
Water	40.19	50.75	55.24	70.23	71.88	73.40	65.52	80.00	
Salt (NaCl)	1.480	0.940	0.310	0.290	0.160	0.060	-	-	
Sugar	57.90	48.21	-	-	-	-	-	-	
HEC	0.250	-	-	-	-	-	-	-	
Bactericide	0.180	0.100	-	-	-	-	-	-	
Triton X-100	-	-	-	-	19.97	-	17.24	-	
DGBE	-	-	44.45	29.48	7.990	26.54	-	-	
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	-	
Polysorbate (Tween) 80	-	-	-	-	-	-	-	20.00	
Target for Dielectric Constant	41.5	55.2	40.0	53.3	39.2	52.7	-	-	
Target for Conductivity (S/m)	0.90	0.97	1.40	1.52	1.80	1.95	-	-	

Salt: 99 % Pure Sodium Chloride Sugar: 98 % Pure Sucrose

Water: De-ionized, 16M resistivity HEC: Hydroxyethyl Cellulose

DGBE: 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether

3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
\boxtimes	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
\boxtimes	Robot	SCHMID	TX60L	N/A	N/A	F12/5LP5A1/A/01
\boxtimes	Robot Controller	SCHMID	C58C	N/A	N/A	F12/5LP5A1/C/01
\boxtimes	Joystick	SCHMID	N/A	N/A	N/A	S-12030401
\boxtimes	Intel Core i5-2600 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
\boxtimes	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
\boxtimes	Mounting Device	SCHMID	SD000H01HA	N/A	N/A	N/A
\boxtimes	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1679
	2mm Oval Phantom ELI5	SCHMID	QDOVA002AA	N/A	N/A	1166
	Head/Body Equivalent Matter(835 MHz)	N/A	N/A	2014-01-01	2015-01-01	N/A
	Head/Body Equivalent Matter(1900 MHz)	N/A	N/A	2014-01-01	2015-01-01	N/A
	Head/Body Equivalent Matter(2450 MHz)	N/A	N/A	2014-01-01	2015-01-01	N/A
	Head/Body Equivalent Matter(5 GHz)	N/A	N/A	2014-01-01	2015-01-01	N/A
\boxtimes	Data Acquisition Electronics	SCHMID	DAE4	2014-03-27	2015-03-27	1335
\boxtimes	Dosimetric E-Field Probe	SCHMID	EX3DV4	2014-04-24	2015-04-24	3916
	Dummy Probe	N/A	N/A	N/A	N/A	N/A
	835MHz SAR Dipole	SCHMID	D835V2	2013-09-05	2015-09-05	4d159
	1900MHz SAR Dipole	SCHMID	D1900V2	2013-09-05	2015-09-05	5d176
\boxtimes	2450MHz SAR Dipole	SCHMID	D2450V2	2013-09-10	2015-09-10	920
	5000MHz SAR Dipole	SCHMID	D5GHzV2	2014-03-26	2016-03-26	1103
\boxtimes	Network Analyzer	Agilent	E5071C	2013-10-21	2014-10-21	MY46106970
\boxtimes	Signal Generator	Agilent	ESG-3000A	2013-06-27	2014-06-27	US37230529
\boxtimes	Amplifier	EMPOWER	BBS3Q7ELU	2013-09-12	2014-09-12	1020
	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2013-10-22	2014-10-22	1005
\boxtimes	Power Meter	HP	EPM-442A	2014-02-28	2015-02-28	GB37170267
	Power Meter	Anritsu	ML2496A	2013-10-29	2014-10-29	1338004
	Wide Bandwidth Power Sensor	Anritsu	MA2411B	2013-10-29	2014-10-29	1306053
\boxtimes	Power Sensor	HP	8481A	2014-02-28	2015-02-28	3318A96566
\boxtimes	Power Sensor	HP	8481A	2014-01-07	2015-01-07	3318A96030
	Dual Directional Coupler	Agilent	778D-012	2014-01-07	2015-01-07	50228
\boxtimes	Directional Coupler	HP	773D	2013-06-27	2014-06-27	2389A00640
	Low Pass Filter 1,5GHz	Micro LAB	LA-15N	2014-01-07	2015-01-07	N/A
\boxtimes	Low Pass Filter 3,0GHz	Micro LAB	LA-30N	2013-09-12	2014-09-12	N/A
	Low Pass Filter 6,0GHz	Micro LAB	LA-60N	2014-02-27	2015-02-27	03942
\boxtimes	Attenuators(3 dB)	Agilent	8491B	2013-06-27	2014-06-27	MY39260700
\boxtimes	Attenuators(10 dB)	WEINSCHEL	23-10-34	2014-01-07	2015-01-07	BP4387
	Step Attenuator	HP	8494A	2013-09-12	2014-09-12	3308A33341
\boxtimes	Dielectric Probe kit	SCHMID	DAK-3.5	2014-01-07	2015-01-07	1092

NOTE: The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by Digital EMC before each test. The brain and muscle simulating material are calibrated by Digital EMC using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. Each equipment item was used solely within its respective calibration period.

 Report No.:
 DRTFCC1405-0693
 FCC ID:
 2ACB7SKB100
 Date of issue:
 May.
 28, 2014

4. TEST SYSTEM SPECIFICATIONS

Automated TEST SYSTEM SPECIFICATIONS:

<u>Positioner</u>

Robot Stäubli Unimation Corp. Robot Model: TX60L

Repeatability 0.02 mm

No. of axis 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor Intel Core i5-2600

Clock Speed 3.40 GHz

Operating System Windows 7 Professional DASY5 PC-Board

Data Converter

Features Signal, multiplexer, A/D converter. & control logic

Software DASY5

Connecting Lines Optical downlink for data and status info

Optical uplink for commands and clock

PC Interface Card

Function 24 bit (64 MHz) DSP for real time processing

Link to DAE 4

16 bit A/D converter for surface detection system

serial link to robot

direct emergency stop output for robot

E-Field Probes

Model EX3DV4 S/N: 3916

Construction Triangular core fiber optic detection system

Frequency 10 MHz to 6 GHz

Linearity \pm 0.2 dB (30 MHz to 6 GHz)

Phantom

Phantom SAM Twin Phantom (V5.0)

Shell MaterialCompositeThickness $2.0 \pm 0.2 \text{ mm}$



Figure 2.2 DASY5 Test System

5. SAR MEASUREMENT PROCEDURE

5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r03 and IEEE 1528-2013:

- The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r03 (See Table 5-1) and IEEE 1528-2013.
- 2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.




Figure 5.1 Sample SAR Area Scan

- 3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r03 (See Table 5-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- 4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

	Maximum Area Scan			imum Zoom Se Resolution (Minimum Zoom Scan
Frequency	Resolution (mm) (Δx _{area} , Δy _{area})	(Δx_{zoom} , Δy_{zoom})	Uniform Grid	Graded Grid		Volume (mm) (x,y,z)
	,, ,,	,	Δz _{zoom} (n)	$\Delta z_{zoom}(1)^*$	Δz _{zoom} (n>1)*	, ,,, ,
≤ 2 GHz	≤15	≤8	≤5	≤4	$\leq 1.5*\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤12	≤5	≤5	≤ 4	$\leq 1.5*\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤12	≤5	≤ 4	≤3	$\leq 1.5*\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤3	≤ 2.5	$\leq 1.5*\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤2	≤2	$\leq 1.5*\Delta z_{zoom}(n-1)$	≥ 22

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r03

*Also compliant to IEEE 1528-2013 Table 6

6. SAR Measurement Procedures for USB Dongle Transmitters

Simple Dongle Procedures

Test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back] with a device-to-phantom separation distance of 5 mm or less, according to KDB 447498 requirements. These test orientations are intended for the exposure conditions found in typical laptop/notebook/netbook or tablet computers with either horizontal or vertical USB connector configurations at various locations in the keyboard section of the computer. Current generation portable host computers should be used to establish the required SAR measurement separation distance. The same test separation distance must be used to test all frequency bands and modes in each USB orientation. The typical Horizontal-Up USB connection (A), found in the majority of host computers, must be tested using an appropriate host computer. A host computer with either Vertical-Front (C) or Vertical-Back (D) USB connection should be used to test one of the vertical USB orientations. If a suitable host computer is not available for testing the Horizontal-Down (B) or the remaining Vertical USB orientation, a high quality USB cable, 12 inches or less, may be used for testing these other orientations. It must be documented that the USB cable does not influence the radiating characteristics and output power of the transmitter.

Dongles with Swivel or Rotating Connectors

A swivel or rotating USB connector may enable the dongle to connect in different orientations to host computers. When the antenna is built-in within the housing of a dongle, a swivel or rotating connector may allow the antenna to assume different positions. The combination of these possible configurations must be considered to determine the SAR test requirements. When the antenna is located near the tip of a dongle, it may operate at closer proximity to users in certain connector orientations where dongle tip testing may be required.

The 5 mm test separation distance used for testing simple dongles has been established based on the overall host platform (laptop/notebook/netbook) and device variations, and varying user operating configurations and exposure conditions expected for a peripheral device. The same test distance should generally apply to dongles with swivel or rotating connectors. The procedures described for simple dongles should be used to position the four surfaces of the dongle at 5 mm from the phantom to evaluate SAR. At least one of the horizontal and one of the vertical positions should be tested using an applicable host computer. If the antenna is within 1 cm from the tip of the dongle (the end without the USB connector), the tip of the dongle should also be tested at 5 mm perpendicular to the phantom. For antennas located within 2.5 cm from the USB connector and if the dongle can be positioned at 45° to 90° from the horizontal position [(A) or (B)], testing in one or more of these configurations may need to be considered. A KDB inquiry should be submitted to determine the applicable test configurations.

Dongles with External, Swivel or Rotating Antennas

For dongles with external antennas or antennas that may swivel or rotate, a KDB inquiry should be submitted to the FCC Laboratory to determine the applicable test configurations. The inquiry should identify if the antenna may transmit in its stowed position, and if a swivel or rotating USB connector is also used. Depending on the antenna configurations used in the individual dongle design and its operating configurations, different test separation distances may apply and must be determined on a case-by-case basis.

Other SAR Test Considerations

USB dongles have a rather small footprint; therefore, the SAR scan resolutions should be smaller than those typically used for testing devices with larger form factors, to maintain acceptable uncertainty for the interpolation and extrapolation algorithms used in the 1-g SAR analysis. In addition, when USB cables are used to connect a dongle to the host for SAR testing, the dongle should be supported in several cm of foamed polystyrene (e.g., Styrofoam) to minimize any field perturbation effects due to test device holder used to position the dongle for SAR testing. Dongles with certain spacers, contours or tapering added to the housing should generally be tested according to the 5 mm test separation requirement required for simple dongles, which is based on overall host platform, device and user operating configurations and exposure conditions of a peripheral device as compared to individual use conditions.

USB dongle transmitters must show compliance at a test separation distance of 5 mm. When the SAR is \geq 1.2 W/kg, applications for equipment certification require a PBA for TCB approval. Preliminary data submitted through KDB inquiries showing compliance at test distances greater than 5 mm are usually inapplicable and insufficient for the

FCC to determine if potential exposure concerns may be eliminated to enable the device to satisfy compliance. The information must clearly demonstrate that the likelihood of non-compliance is remote. When the SAR is \geq 1.2 W/kg, especially for SAR > 1.5 W/kg, certain caution statements, labels and other means to ensure compliance may be required.

(A) (B) (C) (D)

Horizontal-Up Horizontal-Down Vertical-Front Vertical-Back

Note: These are USB connector crientations on laptop computers; USB dongles have the reverse configuration for plugging into the corresponding laptop computers.

USB Connector Orientations Implemented on Laptop Computers

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-200

	HUMAN EXPO	SURE LIMITS
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

- 1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2. The Spatial Average value of the SAR averaged over the whole body.
- 3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05r02, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

8.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

8.2.2 Frequency Channel Configurations

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

9. RF CONDUCTED POWERS

9.1 WLAN Conducted Powers

	-			802.11b (2.4 GHz) C	onducted Power (dBn	n)
Mode	Freq.	Channel		Data R	ate (Mbps)	
	(MHz)		1	2	5.5	11
	2412	1	<u>13.03</u>	12.76	12.59	12.33
802.11b	2437	6	12.81	12.55	12.44	12.21
	2462	11	12.43	12.17	12.05	11.79

Table 9.1 IEEE 802.11b Average RF Power

					802.11g (2	.4 GHz) Coi	nducted Po	wer (dBm))	
Mode	Freq.	Channel				Data Rat	e (Mbps)			
	(MHz)		6	9	12	18	24	36	48	54
	2412	1	8.85	8.70	8.77	8.79	8.72	8.67	8.76	8.75
802.11g	2437	6	8.78	8.76	8.69	8.68	8.62	8.67	8.71	8.64
	2462	11	8.33	8.25	8.30	8.18	8.19	8.21	8.14	8.11

Table 9.2 IEEE 802.11g Average RF Power

	Freq.	Channel	802.11n HT20 (2.4 GHz) Conducted Power (dBm)							
Mode			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
	2412	1	8.72	8.69	8.67	8.61	8.56	8.65	8.67	8.60
802.11n	2437	6	8.63	8.61	8.55	8.55	8.57	8.57	8.38	8.40
(HT-20)	2462	11	8.21	8.05	8.07	8.14	8.05	8.10	7.99	8.03

Table 9.3 IEEE 802.11n HT20 Average RF Power

NOTE1: There was no power deviation between the power when using the short USB cable and the power when direct plug into USB port of the Laptop PC.

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 / April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The underlined data rate and channel above were tested for SAR.




Figure 9.3 Power Measurement Setup for Bandwidths < 50 MHz

9.2 Bluetooth Conducted Powers

Channel	Frequency	Frame AVG Output Power (LE)				
	(MHz)	(dBm)	(mW)			
Low	2402	0.49	1.119			
Mid	2441	0.60	1.148			
High	2480	0.47	1.114			

Table 9.4 Bluetooth LE Average RF Power

Note:

The average conducted output powers of Bluetooth were measured using following test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.




Figure 9.4 Power Measurement Setup

10. DESCRIPTION OF SUPPORTED UNITS

The EUT has been tested with other necessary accessories or supported units. The following supported units or accessories were used to perform SAR tests for this device.

- Supported Units

No.	PRODUCT	BRAND	SERIAL NO.	PART NO.	FCC ID	Note
1	LAPTOP	TOSHIBA	4C087923Q	PSC72K-00Q004	CJ6UPA3839WL	-
2	USB Cable	-	-	-	-	4.92 inch

11. SYSTEM VERIFICATION

11.1 Tissue Verification

	MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]	
				2412	52.751	1.914	54.411	1.929	3.15	0.78	
May. 28. 2014	2450	21.4	22.3	2437	52.717	1.938	54.329	1.963	3.06	1.29	
Iviay. 20. 2014	Body	21.4	22.3	2450	52.700	1.950	54.284	1.980	3.01	1.54	
				2462	52.685	1.967	54.247	1.996	2.96	1.47	

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_{r}\varepsilon_{0}}{[\ln(b/a)]^{2}} \int_{a}^{b} \int_{a}^{b} \int_{0}^{\pi} \cos\phi' \frac{\exp\left[-j\omega r(\mu_{0}\varepsilon_{r}'\varepsilon_{0})^{1/2}\right]}{r} d\phi' d\rho' d\rho'$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + {\rho'}^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

11.2 Test System Verification

Prior to assessment, the system is verified to the \pm 10 % of the specifications at 2450 MHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

	SYSTEM DIPOLE VERIFICATION TARGET & MEASURED											
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
В	2450	D2450V2, SN: 920	May. 28. 2014	Body	21.4	22.3	3916	250	48.9	11.9	47.6	-2.66

Note1: System Verification was measured with input 250 mW and normalized to 1W.

Note2: To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.






Figure 11.1 Dipole Verification Test Setup Diagram & Photo

12. SAR TEST RESULTS

12.1 Body SAR Results

Table 11.1 W-LAN Body SAR

					M	IEASUREMEN	T RESULTS					
FREQU	ENCY			Maximu m	Conducte d	Drift	Spacing	Duty	1g	Scaling	1g Scaled	Plots
MHz	Ch	Band	Service	Allowed Power [dBm]	Power [dBm]	Power [dB]	[Side]	Cycle	SAR (W/kg)	Factor	SAR (W/kg)	#
2412	1	802.11b	DSSS	14.5	13.03	0.140	5 mm [Tip orientation] With usb cable	1:1	0.049	1.403	0.069	
2412	1	802.11b	DSSS	14.5	13.03	0.100	5 mm [(A) Horizontal-Up] With usb cable	1:1	0.187	1.403	0.262	
2412	1	802.11b	DSSS	14.5	13.03	-0.110	5 mm [(B) Horizontal-Down] With usb cable	1:1	0.170	1.403	0.239	
2412	1	802.11b	DSSS	14.5	13.03	0.120	5 mm [(C) Vertical-Front] With usb cable	1:1	0.021	1.403	0.029	
2412	1	802.11b	DSSS	14.5	13.03	0.040	5 mm [(D) Vertical-Back] With usb cable	1:1	0.194	1.403	0.272	A1
2412	1	802.11b	DSSS	14.5	13.03	0.190	5 mm [(B) Horizontal-Down] Direct Laptop	1:1	0.169	1.403	0.237	
	ANSI / IEEE C95.1-2005— SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure				Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entry means, there was no SAR measurement deviation between direct connection to laptop and using USB cable.

12.2 SAR Test Notes

General Notes:

- 1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05r02.
- 2. Liquid tissue depth was at least 15.0 cm for all frequencies.
- 3. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05r02.

WLAN Notes:

- Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- 2. WIFI transmission was verified using a spectrum analyzer.
- 3. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other default channels was not required.

13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

13.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

13.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r02 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is \leq 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r02 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

Estimated SAR=
$$\frac{\sqrt{f(GHz)}}{7.5} * \frac{\text{(Max Power of channel, mW)}}{\text{Min. Separation Distance, mm}}$$

Table 13.1 Estimated SAR

Mode	Frequency	Maximum Allowed Power		Separation Distance (Body)	Estimated SAR (Body)	
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]	
Bluetooth	2480	1.5	1.0	5	0.059	

Note: Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

13.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v05r02, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 13.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 13.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05r02 3) procedures.

Table 13.2 Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body	Note
1	2.4 GHz WLAN + Bluetooth	Yes	

Notes:

13.4 Body-Worn Simultaneous Transmission Analysis

Table 13.7 Simultaneous Transmission Scenario with Bluetooth LE (5 mm)

Configuration Mode	2.4G W-LAN (802.11b) SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
Tip orientation	0.069	0.059	0.128
Horizontal Up	0.262	0.059	0.321
Horizontal Down	0.239	0.059	0.298
Vertical Front	0.029	0.059	0.088
Vertical Back	0.272	0.059	0.331

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498 D01v05r02. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

13.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05r02 and IEEE 1528-2013 Section 6.3.4.1.2.

^{1.} Bluetooth and WIFI can transmit simultaneously.

14. SAR MEASUREMENT VARIABILITY

14.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r03, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2. A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
- 4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

14.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r03, the standard measurement uncertainty analysis per IEEE 1528-2003 was not required.

TRF-RF-601(00)120709 Page26 / 53

 Report No.:
 DRTFCC1405-0693
 FCC ID: 2ACB7SKB100
 Date of issue: May. 28, 2014

15. IEEE P1528 -MEASUREMENT UNCERTAINTIES

2450 MHz Body

Error Description	Uncertainty	Probability	Divisor	(Ci)	Standard	vi 2 or
Error Description	value ±%	Distribution	DIVISOI	1g	(1g)	Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	8
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	8
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	8
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	8
Liquid conductivity (Meas.)	± 4.5	Normal	1	0.64	± 4.5 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.4	Normal	1	0.6	± 4.4 %	8
Combined Standard Uncertainty					± 12.2 %	330
Expanded Uncertainty (k=2)					± 24.4 %	

The above measurement uncertainties are according to IEEE P1528 (2003)

16.CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s)tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.

- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Pre standard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hoschschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices Human models, instrumentation, and procedures Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.

[21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 4, March 2010.

- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Net book and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WiMax SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de Septembro de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices Human models, instrumentation, and procedures Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

 Report No.:
 DRTFCC1405-0693
 FCC ID: 2ACB7SKB100
 Date of issue: May. 28, 2014

Attachment 1. - Probe Calibration Data

Calibration Laboratory of Schmid & Partner

Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kallbrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

Digital EMC (Dymstec)

Certificate No: EX3-3916_Apr14

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3916

Calibration procedure(s) QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,

QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date: April 24, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:

Name

Function

Signature

Laboratory Technician

Approved by:

Katja Pokovic

Technical Manager

Issued: April 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3916_Apr14

Page 1 of 11

Calibration Laboratory of

Schmid & Partner Engineering AG





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 108

Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid NORMx,y,z sensitivity in free space sensitivity in TSL / NORMx,y,z ConvF diode compression point DCP

crest factor (1/duty_cycle) of the RF signal CF A, B, C, D modulation dependent linearization parameters

Polarization φ φ rotation around probe axis

9 rotation around an axis that is in the plane normal to probe axis (at measurement center), Polarization 9

i.e., 9 = 0 is normal to probe axis

information used in DASY system to align probe sensor X to the robot coordinate system Connector Angle

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORMx,v,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Page 2 of 11 Certificate No: EX3-3916 Apr14

EX3DV4 - SN:3916 April 24, 2014

Probe EX3DV4

SN:3916

Manufactured:

December 18, 2012

Calibrated: April 24, 2014

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: EX3-3916_Apr14

Page 3 of 11

April 24, 2014 EX3DV4-SN:3916

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.58	0.49	0.53	± 10.1 %
DCP (mV) ^B	99.0	100.0	99.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc ⁻ (k=2)
0	CW	X	0.0	0.0	1.0	0.00	149.7	±3.8 %
		Y	0.0	0.0	1.0		142.3	
		Z	0.0	0.0	1.0		140.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3916_Apr14

Page 4 of 11

A The uncertainties of NormX,Y,Z do not affect the E2-field uncertainty inside TSL (see Pages 5 and 6).

The uncertainties of NormX,Y,Z do not affect the E*-field uncertainty inside TSL (see Pages 5 and 6).
Numerical linearization parameter: uncertainty not required.
Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

April 24, 2014 EX3DV4-SN:3916

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
300	45.3	0.87	11.59	11.59	11.59	0.08	1.10	± 13.3 %
450	43.5	0.87	10.80	10.80	10.80	0.18	1.20	± 13.3 %
600	42.7	0.88	10.17	10.17	10.17	0.10	1.10	± 13.3 %
750	41.9	0.89	10.22	10.22	10.22	0.24	1.21	± 12.0 %
835	41.5	0.90	9.79	9.79	9.79	0.42	0.85	± 12.0 %
900	41.5	0.97	9.59	9.59	9.59	0.26	1.08	± 12.0 %
1750	40.1	1.37	8.21	8.21	8.21	0.80	0.59	± 12.0 %
1900	40.0	1.40	7.96	7.96	7.96	0.31	0.88	± 12.0 %
2300	39.5	1.67	7.57	7.57	7.57	0.30	0.87	± 12.0 %
2450	39.2	1.80	7.18	7.18	7.18	0.28	0.99	± 12.0 %
2600	39.0	1.96	6.99	6.99	6.99	0.40	0.79	± 12.0 %
3500	37.9	2.91	7.17	7.17	7.17	0.58	0.86	± 13.1 %
5200	36.0	4.66	5.09	5.09	5.09	0.35	1.80	± 13.1 %
5250	35.9	4.71	4.99	4.99	4.99	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.86	4.86	4.86	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.94	4.94	4.94	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.62	4.62	4.62	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.83	4.83	4.83	0.40	1.80	± 13.1 9
5800	35.3	5.27	4.68	4.68	4.68	0.40	1.80	± 13.1 9

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to

Page 5 of 11 Certificate No: EX3-3916_Apr14

measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-SN:3916

April 24, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
300	58.2	0.92	11.72	11.72	11.72	0.08	1.10	± 13.3 %
450	56.7	0.94	11.59	11.59	11.59	0.10	1.10	± 13.3 %
600	56.1	0.95	10.15	10.15	10.15	0.02	1.05	± 13.3 %
750	55.5	0.96	10.04	10.04	10.04	0.40	0.93	± 12.0 %
835	55.2	0.97	9.94	9.94	9.94	0.62	0.71	± 12.0 %
900	55.0	1.05	9.74	9.74	9.74	0.40	0.94	± 12.0 %
1750	53.4	1.49	8.12	8.12	8.12	0.50	0.74	± 12.0 %
1900	53.3	1.52	7.69	7.69	7.69	0.32	0.91	± 12.0 %
2300	52.9	1.81	7.52	7.52	7.52	0.60	0.65	± 12.0 %
2450	52.7	1.95	7.24	7.24	7.24	0.80	0.50	± 12.0 %
2600	52.5	2.16	7.01	7.01	7.01	0.80	0.50	± 12.0 %
3500	51.3	3.31	6.84	6.84	6.84	0.42	1.09	± 13.1 %
5200	49.0	5.30	4.61	4.61	4.61	0.40	1.90	± 13.1 %
5250	48.9	5.36	4.43	4.43	4.43	0.45	1.90	± 13.1 9
5300	48.9	5.42	4.27	4.27	4.27	0.45	1.90	± 13.1 9
5500	48.6	5.65	4.05	4.05	4.05	0.50	1.90	± 13.1 9
5600	48.5	5.77	4.07	4.07	4.07	0.40	1.90	± 13.1 9
5750	48.3	5.94	4.24	4.24	4.24	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.21	4.21	4.21	0.50	1.90	± 13.1 9

Certificate No: EX3-3916_Apr14

Page 6 of 11

^C Frequency validity of \pm 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to \pm 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to \pm 5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3916 April 24, 2014

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

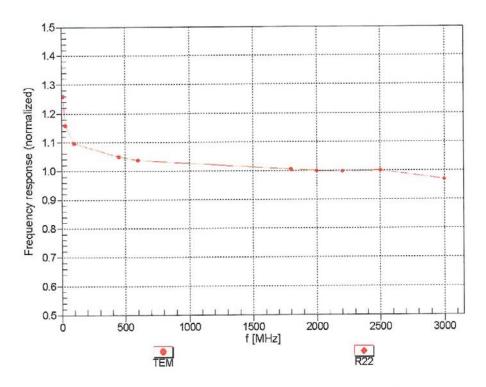


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


The second secon

Certificate No: EX3-3916_Apr14 Page 7 of 11

EX3DV4- SN:3916 April 24, 2014

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

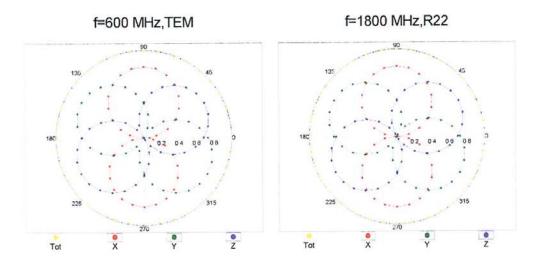

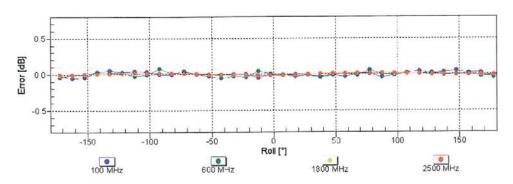



Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3916_Apr14 Page 8 of 11

April 24, 2014 EX3DV4-SN:3916

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

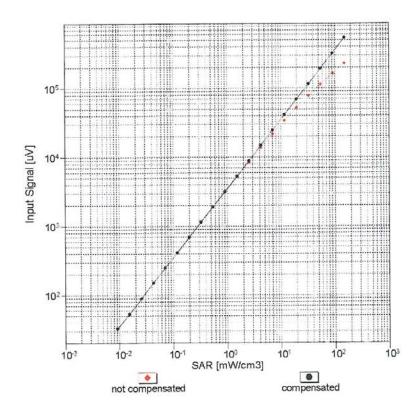

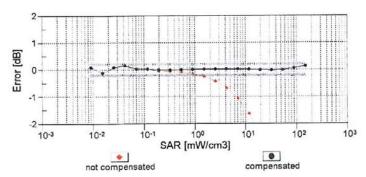


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3916_Apr14


Page 9 of 11


April 24, 2014 EX3DV4-SN:3916

Conversion Factor Assessment

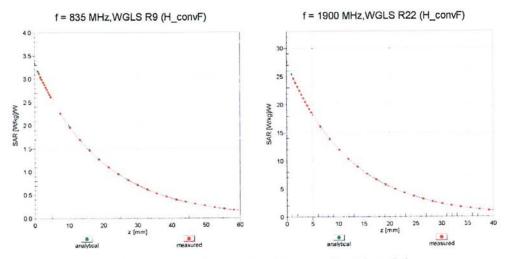

Deviation from Isotropy in Liquid Error (♦, ९), f = 900 MHz

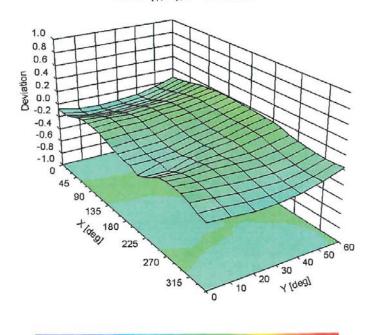



Certificate No: EX3-3916_Apr14

Page 10 of 11

EX3DV4-SN:3916

April 24, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Other Probe Parameters

Triangular
-92.3
enabled
disabled
337 mm
10 mm
9 mm
2.5 mm
1 mm
1 mm
1 mm
2 mm

Certificate No: EX3-3916_Apr14

Page 11 of 11

Attachment 2. – Dipole Calibration Data

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client Digital EMC (Dymstec)

Certificate No: D2450V2-920_Sep13

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE Object D2450V2 - SN: 920 QA CAL-05.v9 Calibration procedure(s) Calibration procedure for dipole validation kits above 700 MHz Calibration date: September 10, 2013 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards Cal Date (Certificate No.) Scheduled Calibration Power meter EPM-442A GB37480704 01-Nov-12 (No. 217-01640) Oct-13 Power sensor HP 8481A US37292783 01-Nov-12 (No. 217-01640) Oct-13 Reference 20 dB Attenuator SN: 5058 (20k) 04-Apr-13 (No. 217-01736) Apr-14 Type-N mismatch combination SN: 5047.3 / 06327 04-Apr-13 (No. 217-01739) Apr-14 Reference Probe ES3DV3 SN: 3205 28-Dec-12 (No. ES3-3205_Dec12) Dec-13 DAE4 SN: 601 25-Apr-13 (No. DAE4-601_Apr13) Apr-14 Secondary Standards Scheduled Check Check Date (in house) Power sensor HP 8481A MY41092317 18-Oct-02 (in house check Oct-11) In house check: Oct-13 RF generator R&S SMT-06 100005 In house check: Oct-13 04-Aug-99 (in house check Oct-11) Network Analyzer HP 8753E US37390585 S4206 18-Oct-01 (in house check Oct-12) In house check: Oct-13 Name Function Calibrated by: Israe El-Naoug Laboratory Technician ran El-Vancey Approved by: Katja Pokovic Technical Manager Issued: September 10, 2013 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-920_Sep13

Page 1 of 8

Calibration Laboratory of





Schweizerischer Kalibrierdienst Service suisse d'étalonnage

C Service suisse d etalorimage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 108

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-920_Sep13

Page 2 of 8

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.4 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.8 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.2 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		S

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.4 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	48.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.80 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.0 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-920_Sep13

Page 3 of 8

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$56.7 \Omega + 2.3 j\Omega$		
Return Loss	- 23.6 dB		

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$52.8 \Omega + 4.6 j\Omega$		
Return Loss	- 25.6 dB		

General Antenna Parameters and Design

Electrical Delay (one direction)	1.155 ns
Electrical Delay (one allection)	1.100118

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG					
Manufactured on	December 19, 2012					

DASY5 Validation Report for Head TSL

Date: 10.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 920

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 1.83 \text{ S/m}$; $\varepsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 25.04.2013

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.202 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 16.8 W/kg

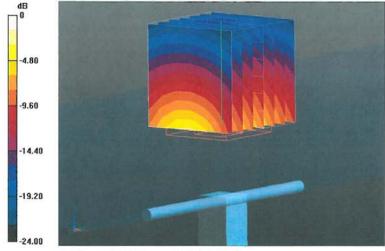


0 dB = 16.8 W/kg = 12.25 dBW/kg

Certificate No: D2450V2-920_Sep13

Page 5 of 8

Impedance Measurement Plot for Head TSL

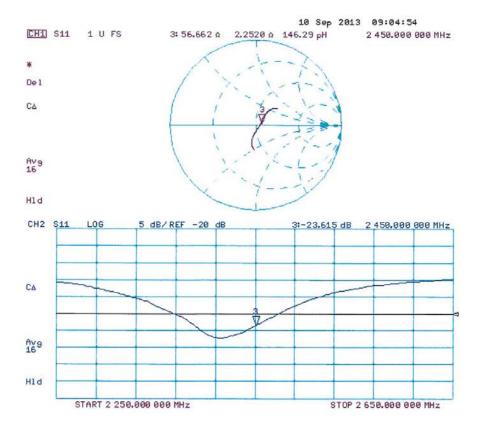

Certificate No: D2450V2-920_Sep13

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 10.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 920

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 2$ S/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 25.04.2013

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.202 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.8 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

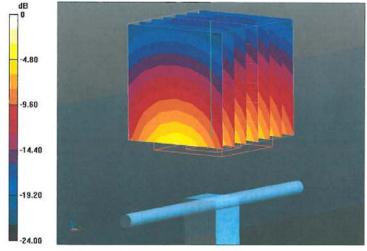


0 dB = 16.3 W/kg = 12.12 dBW/kg

Certificate No: D2450V2-920_Sep13

Page 7 of 8

Impedance Measurement Plot for Body TSL

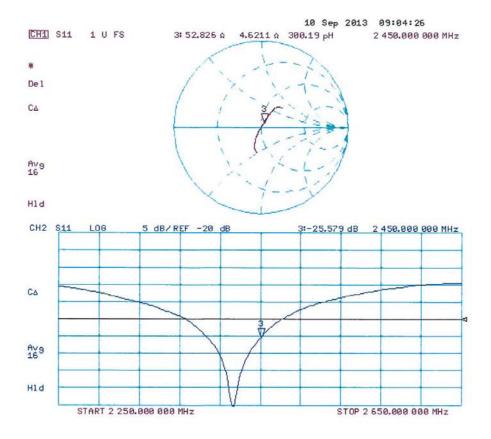

Certificate No: D2450V2-920_Sep13

Page 8 of 8

 Report No.:
 DRTFCC1405-0693
 FCC ID: 2ACB7SKB100
 Date of issue: May. 28, 2014

Attachment 3. - SAR SYSTEM VALIDATION

SAR System Validation

Per FCC KDB 865664 D02v01r01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01v01r03 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table Attachment 3.1 SAR System Validation Summary

SAR	Freq. [MHz]	Date	Probe SN	Probe Type	Probe CAL. Point		PERM.	COND.	CW Validation			MOD. Validation		
System							(ɛr)	(σ)	Sensi- tivity	Probe Linearity	Probe Isortopy	MOD. Type	Duty Factor	PAR
В	835	2014-05-01	3916	EX3DV4	835	Head	40.987	0.918	PASS	PASS	PASS	GMSK	PASS	N/A
В	1900	2014-05-02	3916	EX3DV4	1900	Head	39.318	1.396	PASS	PASS	PASS	GMSK	PASS	N/A
В	2450	2014-05-06	3916	EX3DV4	2450	Head	39.530	1.806	PASS	PASS	PASS	OFDM	N/A	PASS
В	5200	2014-05-07	3916	EX3DV4	5200	Head	35.869	4.543	PASS	PASS	PASS	OFDM	N/A	PASS
В	5300	2014-05-07	3916	EX3DV4	5300	Head	35.709	4.655	PASS	PASS	PASS	OFDM	N/A	PASS
В	5500	2014-05-07	3916	EX3DV4	5500	Head	35.388	4.878	PASS	PASS	PASS	OFDM	N/A	PASS
В	5600	2014-05-07	3916	EX3DV4	5600	Head	35.226	4.993	PASS	PASS	PASS	OFDM	N/A	PASS
В	5800	2014-05-07	3916	EX3DV4	5800	Head	34.893	5.228	PASS	PASS	PASS	OFDM	N/A	PASS
В	835	2014-05-01	3916	EX3DV4	835	Body	55.853	0.989	PASS	PASS	PASS	GMSK	PASS	N/A
В	1900	2014-05-02	3916	EX3DV4	1900	Body	51.936	1.519	PASS	PASS	PASS	GMSK	PASS	N/A
В	2450	2014-05-06	3916	EX3DV4	2450	Body	51.427	1.988	PASS	PASS	PASS	OFDM	N/A	PASS
В	5200	2014-05-08	3916	EX3DV4	5200	Body	48.400	5.189	PASS	PASS	PASS	OFDM	N/A	PASS
В	5300	2014-05-08	3916	EX3DV4	5300	Body	48.230	5.324	PASS	PASS	PASS	OFDM	N/A	PASS
В	5500	2014-05-08	3916	EX3DV4	5500	Body	47.873	5.593	PASS	PASS	PASS	OFDM	N/A	PASS
В	5600	2014-05-08	3916	EX3DV4	5600	Body	47.684	5.730	PASS	PASS	PASS	OFDM	N/A	PASS
В	5800	2014-05-08	3916	EX3DV4	5800	Body	47.351	6.010	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both a CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r03 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.