



## FCC 47 CFR PART 15 SUBPART C

for

**WIFI Coverage Kit**

**Model: IR150, PE150**

**Brand: VOLANS**

**Test Report Number:**  
**C140310Z08-RP1**

**Issued Date: April 1, 2014**

Issued for

**Chengdu Volans Technology, Inc.**  
**7-8F, Building G4, No.1800, Mid Yizhou Ave, Hi-tech Zone,**  
**Chengdu, P.R.China 610041**

Issued by:

**Compliance Certification Services (Shenzhen) Inc.**  
No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China  
TEL: 86-755-28055000  
FAX: 86-755-28055221



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



## Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C140310Z08-RP1	Initial Issue	ALL	Sabrina Wang



## TABLE OF CONTENTS

<b>1 TEST CERTIFICATION .....</b>	<b>4</b>
<b>2 TEST RESULT SUMMARY .....</b>	<b>5</b>
<b>3 EUT DESCRIPTION .....</b>	<b>6</b>
<b>4 TEST METHODOLOGY .....</b>	<b>7</b>
4.1. DESCRIPTION OF TEST MODES .....	7
<b>5 SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF SUPPORT UNITS .....	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST .....	8
<b>6 FACILITIES AND ACCREDITATIONS .....</b>	<b>9</b>
6.1. FACILITIES .....	9
6.2. ACCREDITATIONS .....	9
6.3. MEASUREMENT UNCERTAINTY .....	9
<b>7 FCC PART 15.247 REQUIREMENTS .....</b>	<b>10</b>
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT .....	10
7.2. SPURIOUS EMISSIONS MEASUREMENT .....	14
7.3. 6dB BANDWIDTH MEASUREMENT .....	46
7.4. PEAK OUTPUT POWER .....	56
7.5. BAND EDGES MEASUREMENT .....	59
7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	77



## 1 TEST CERTIFICATION

<b>Product</b>	WIFI Coverage Kit
<b>Model</b>	IR150, PE150
<b>Brand</b>	VOLANS
<b>Tested</b>	March 10~April 1, 2014
<b>Applicant</b>	<b>Chengdu Volans Technology, Inc.</b> 7-8F, Building G4, No.1800, Mid Yizhou Ave, Hi-tech Zone, Chengdu, P.R.China 610041
<b>Manufacturer</b>	<b>Chengdu Volans Technology, Inc.</b> 7-8F, Building G4, No.1800, Mid Yizhou Ave, Hi-tech Zone, Chengdu, P.R.China 610041

### APPLICABLE STANDARDS

<b>Standard</b>	<b>Test Type</b>	<b>Standard</b>	<b>Test Type</b>
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

Sunday Hu  
Supervisor of EMC Dept.  
Compliance Certification Service Inc.

**Reviewed by:**

Ruby Zhang  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.  
2. The information of measurement uncertainty is available upon the customer's request.



### 3 EUT DESCRIPTION

<b>Product</b>	WIFI Coverage Kit
<b>Model Number</b>	IR150, PE150
<b>Brand</b>	VOLANS
<b>Model Discrepancy</b>	The models are identical except the input port, output port and software are different.
<b>Serial Number</b>	C140310Z08-RP1
<b>Received Date</b>	March 10, 2014
<b>Power Supply</b>	AC100-240V,50/60Hz,150mA
<b>Transmit Power</b>	IEEE 802.11b mode: 17.78dBm IEEE 802.11g mode: 20.07dBm IEEE 802.11n HT20 MHz mode: 19.95dBm IEEE 802.11n HT40 MHz mode: 16.59dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
<b>Transmit Data Rate</b>	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65.0Mbps with fall back rates of 65.0/58.5/52.0/39.0/26.0/19.5/13.0/6.5 Mbps IEEE 802.11n HT40: 135.0Mbps with fall back rates of 121.5/ 108.0/81.0/54.0/40.5/27.0/13.5 Mbps
<b>Number of Channels</b>	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
<b>Antenna Specification</b>	Embedded Antenna with 2.6dBi gain (Max)
<b>Channels Spacing</b>	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
<b>Temperature Range</b>	0°C ~ 40°C

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: **2ACBQ150KIT** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 4 TEST METHODOLOGY

### 4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	<b>Mode 1:</b> Standby	<b>Mode 1</b>
Radiated Emission	<b>Mode 1:</b> TX	<b>Mode 1</b>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid(2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



## 5 SETUP OF EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	B475	WB04861612	N/A	Dell	N/A	Shielded, 1.0m

**Note:**

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



## 6 FACILITIES AND ACCREDITATIONS

### 6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at  
**No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town,  
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 7 FCC PART 15.247 REQUIREMENTS

### 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

#### 7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2013	04/19/2014
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/17/2014	03/17/2015
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




## 7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



## 7.1.4. TEST SETUP

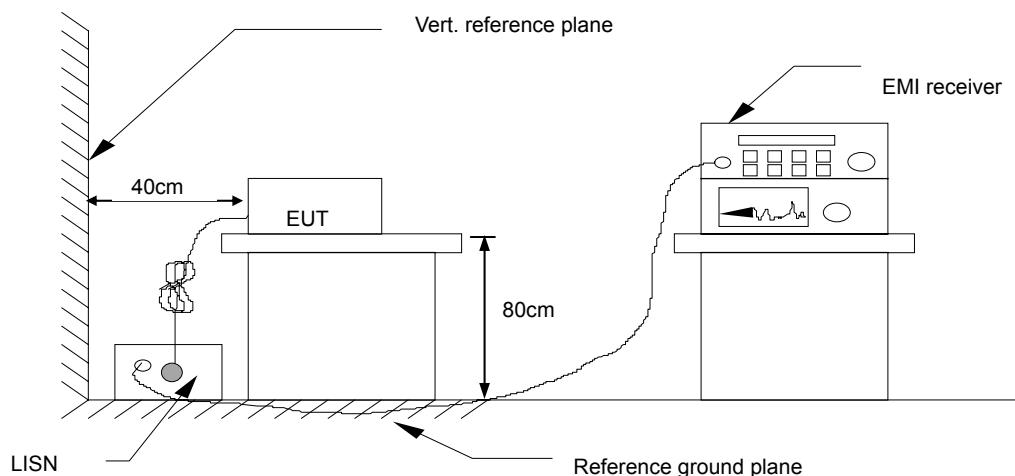

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

## 7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss  
Result = Quasi-peak Reading/ Average Reading + Factor  
Limit = Limit stated in standard  
Margin = Result (dBuV) – Limit (dBuV)



## 7.1.6. TEST RESULTS

<b>Model No.</b>	IR150	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Sun Guo	<b>Line</b>	L1

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.5950	40.05	6.65	9.73	49.78	16.38	56.00	46.00	-6.22	-29.62	Pass	L1
0.6150	39.20	5.17	9.75	48.95	14.92	56.00	46.00	-7.05	-31.08	Pass	L1
0.7990	37.78	9.21	9.77	47.55	18.98	56.00	46.00	-8.45	-27.02	Pass	L1
1.0710	37.00	9.67	9.71	46.71	19.38	56.00	46.00	-9.29	-26.62	Pass	L1
1.2070	38.74	2.42	9.71	48.45	12.13	56.00	46.00	-7.55	-33.87	Pass	L1
1.5190	40.72	5.55	9.72	50.44	15.27	56.00	46.00	-5.56	-30.73	Pass	L1
0.6590	42.35	5.62	9.69	52.04	15.31	56.00	46.00	-3.96	-30.69	Pass	L2
0.6790	41.96	6.51	9.69	51.65	16.20	56.00	46.00	-4.35	-29.80	Pass	L2
0.8070	39.08	4.94	9.74	48.82	14.68	56.00	46.00	-7.18	-31.32	Pass	L2
0.9750	38.23	3.82	9.80	48.03	13.62	56.00	46.00	-7.97	-32.38	Pass	L2
1.4070	37.41	7.25	9.78	47.19	17.03	56.00	46.00	-8.81	-28.97	Pass	L2
1.6550	39.61	8.51	9.75	49.36	18.26	56.00	46.00	-6.64	-27.74	Pass	L2

**REMARKS:** L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



## 7.2. SPURIOUS EMISSIONS MEASUREMENT

### 7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

### 7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




## 7.2.4. TEST RESULTS

### Test Plot

#### IEEE 802.11b mode

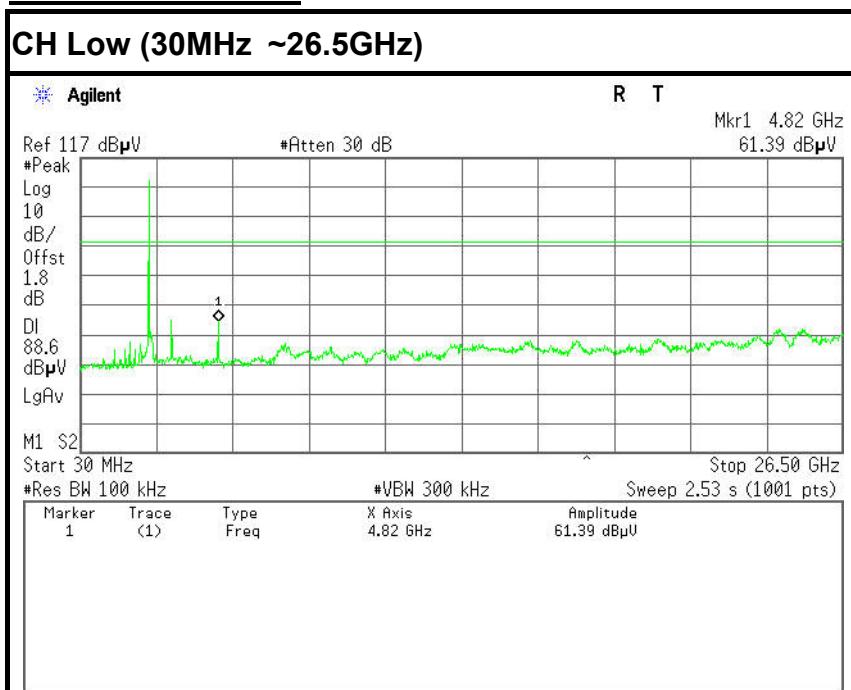


#### **CH Low (2.31GHz ~2.43GHz)**

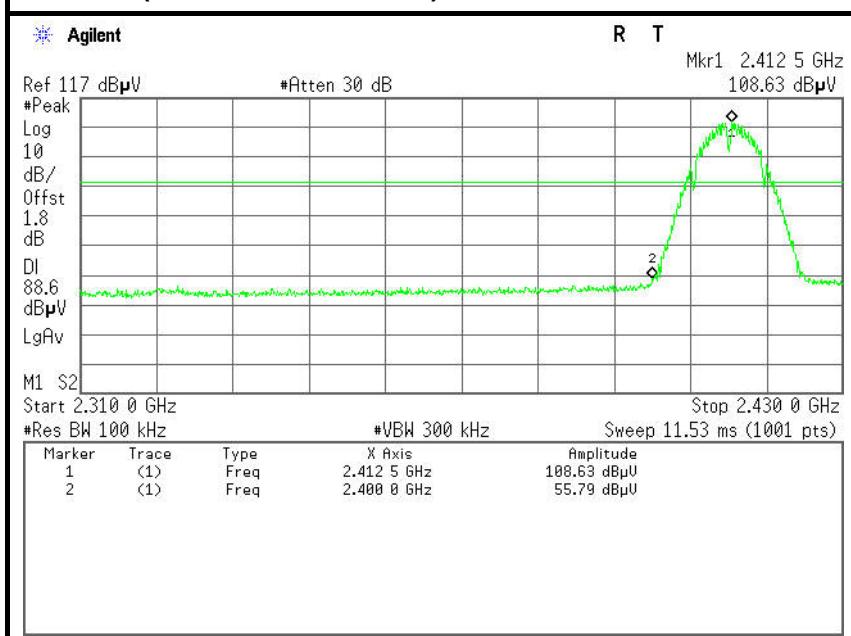




## CH Mid (30MHz ~26.5GHz)

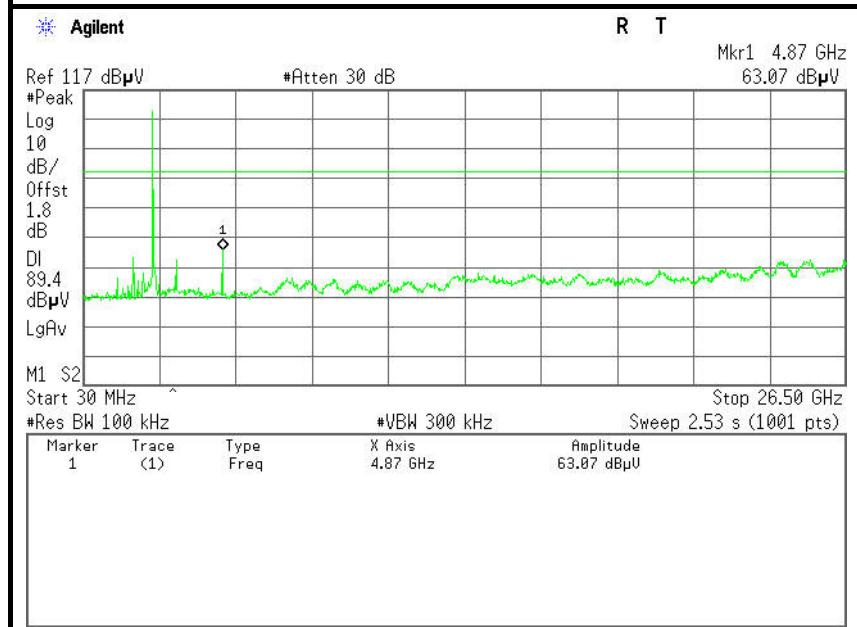




## CH High (30MHz ~26.5GHz)

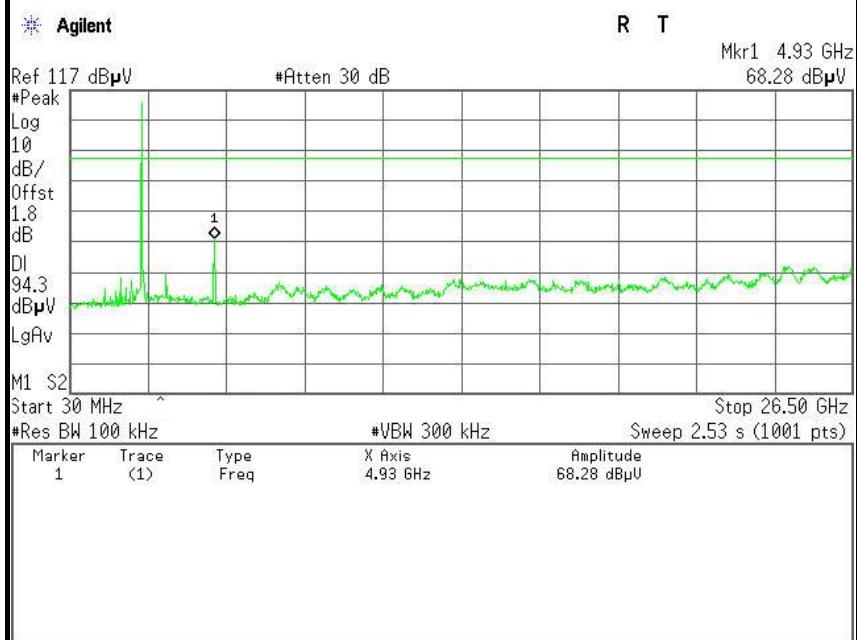


## CH High (2.45GHz ~2.5GHz)

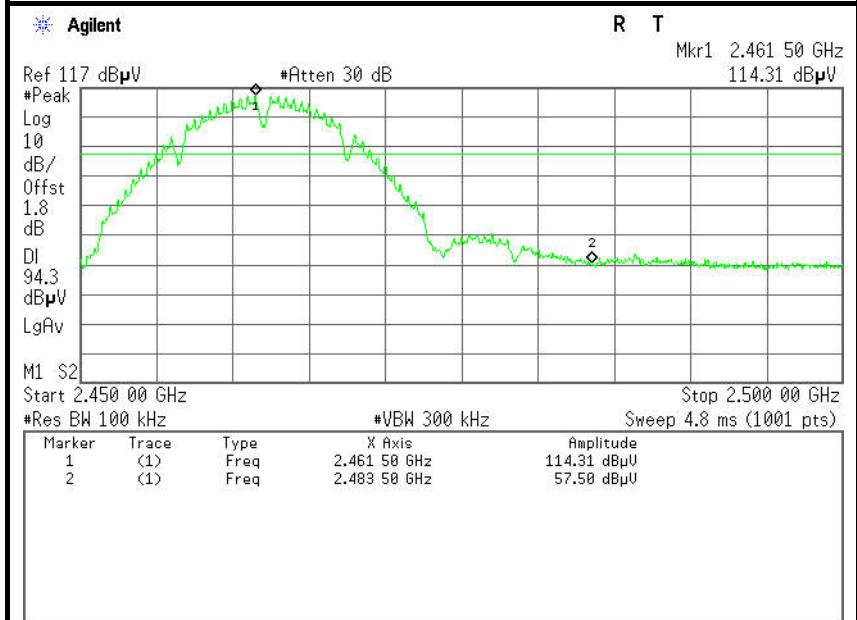




## IEEE 802.11g mode

### CH Low (30MHz ~26.5GHz)

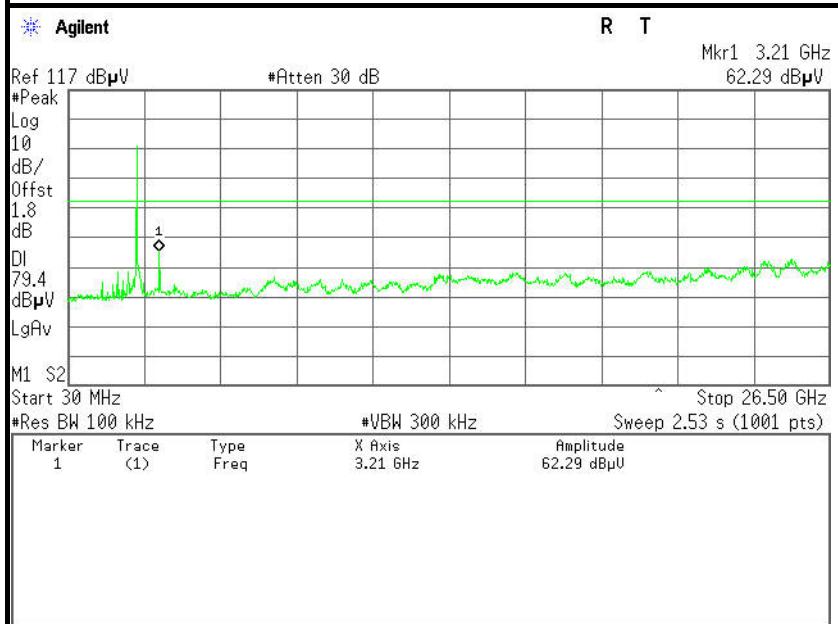




### CH Low (2.31GHz ~2.43GHz)

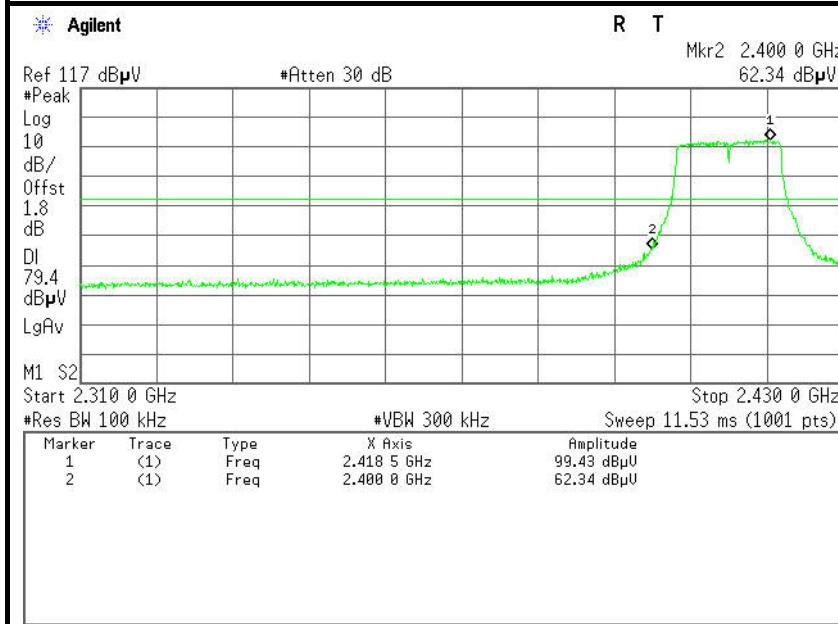



## CH Mid (30MHz ~26.5GHz)

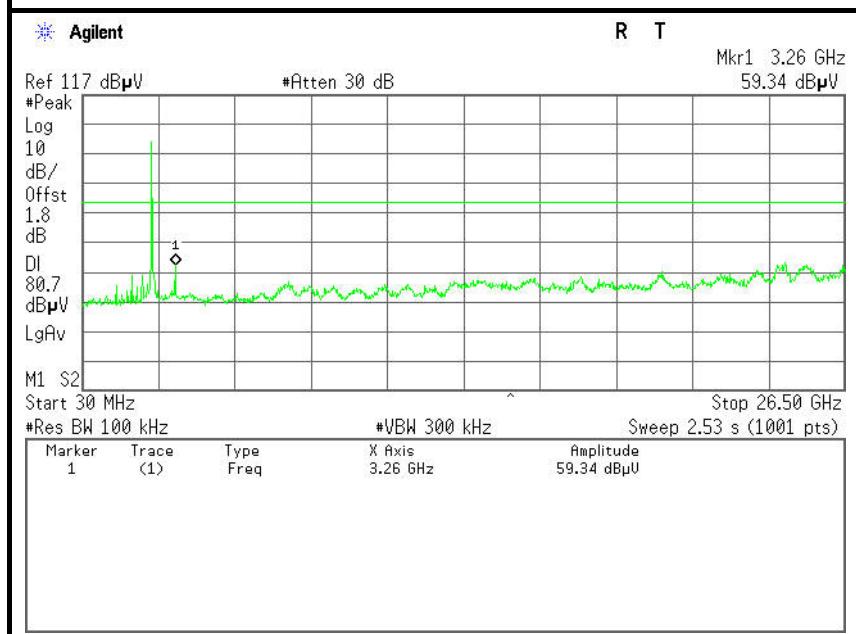


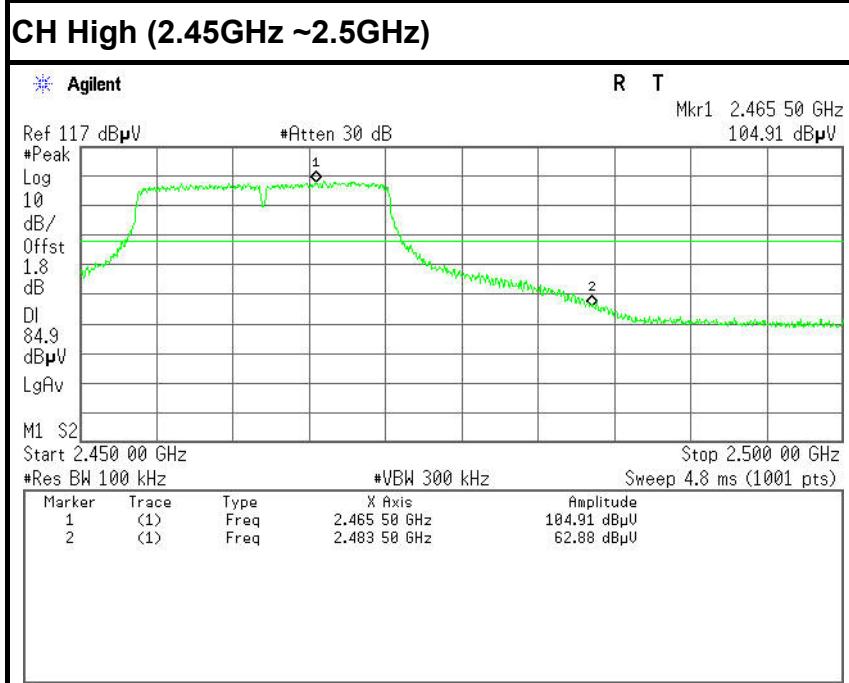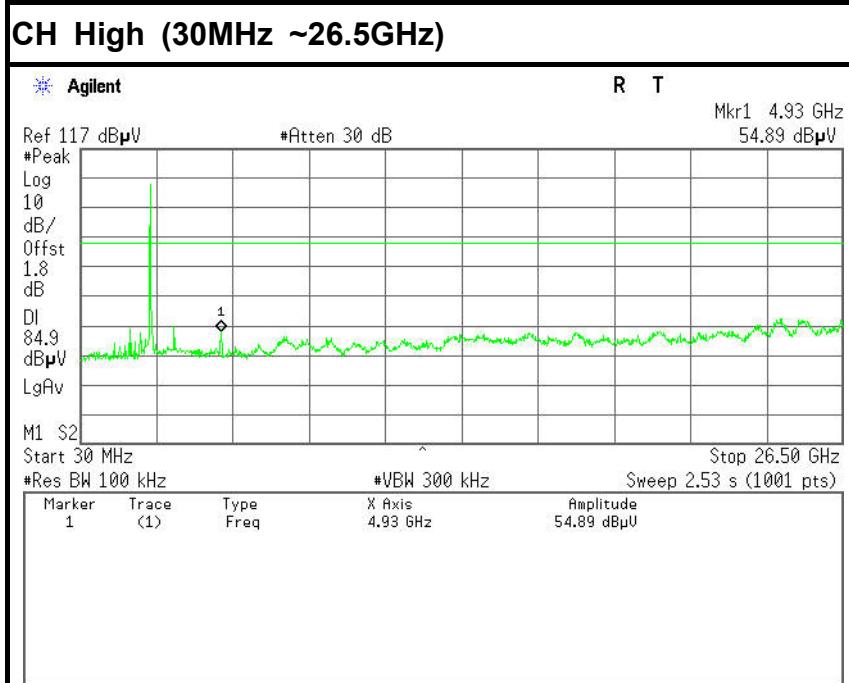




## IEEE 802.11n HT20 MHz mode

### CH Low (30MHz ~26.5GHz)

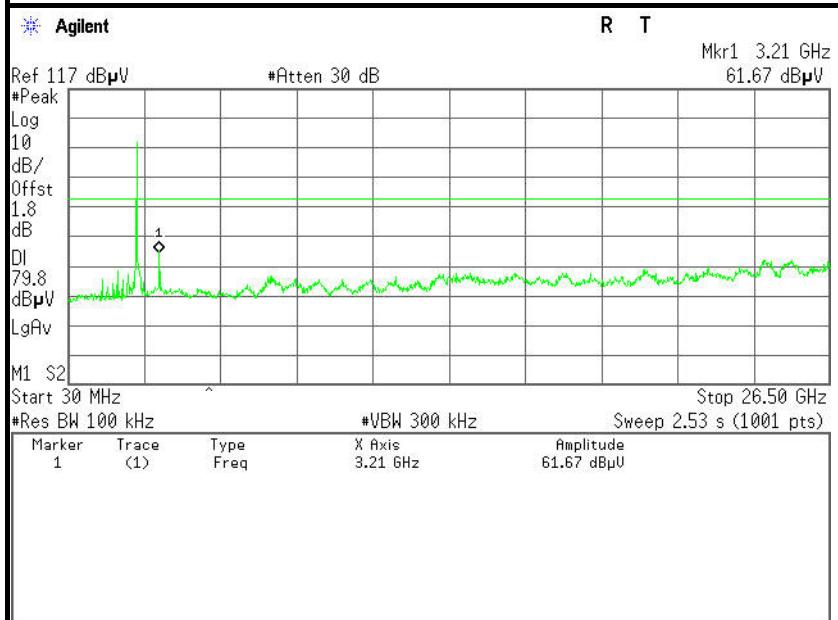


### CH Low (2.31GHz ~2.43GHz)

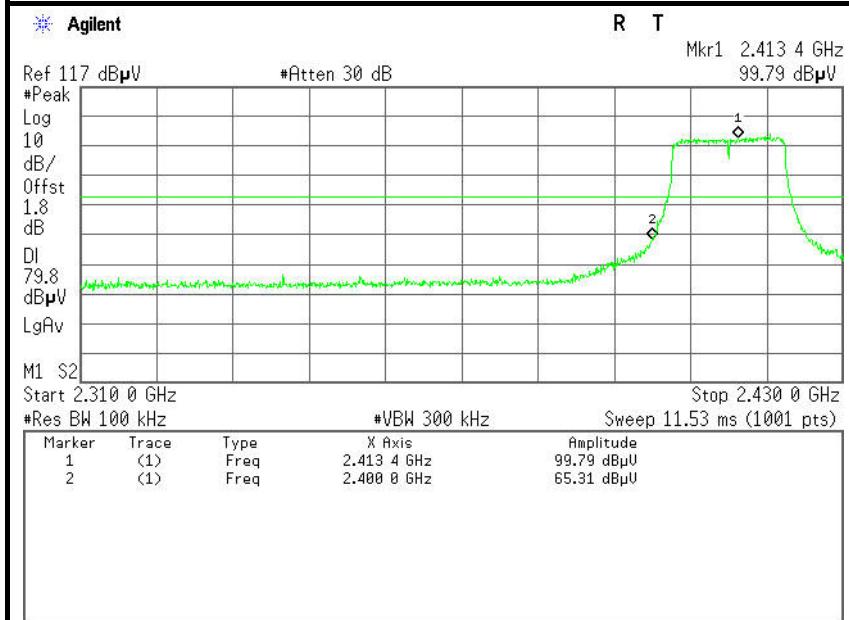




## CH Mid (30MHz ~26.5GHz)

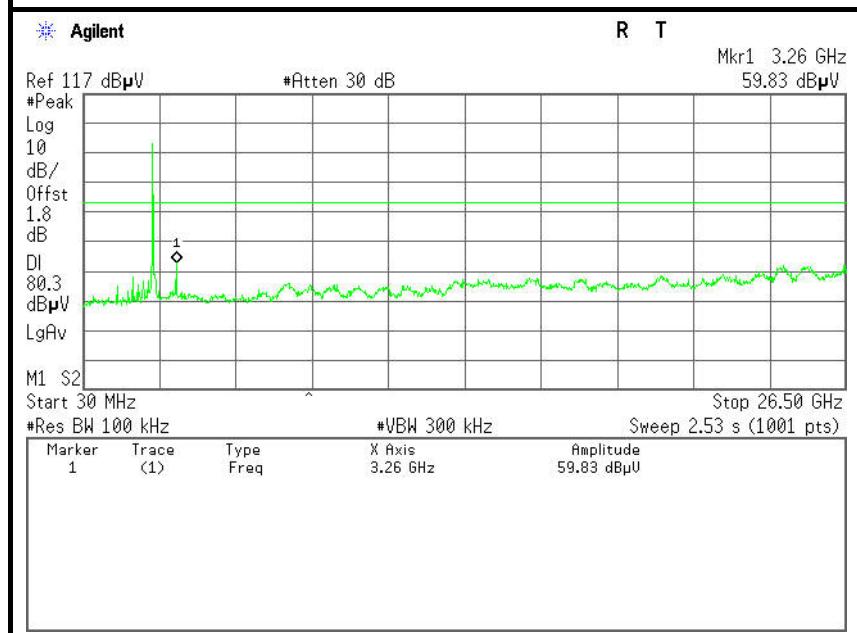




## CH High (30MHz ~26.5GHz)

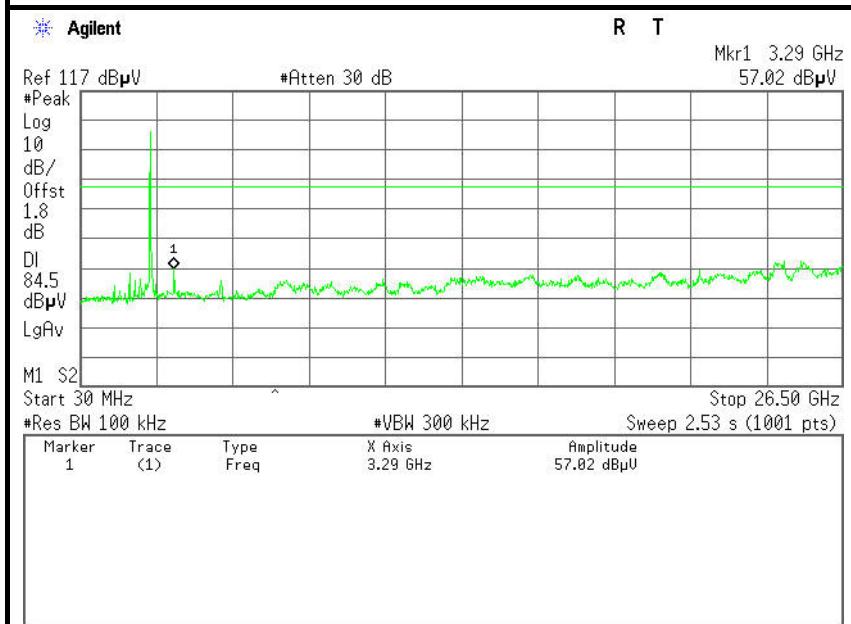


## CH High (2.45GHz ~2.5GHz)

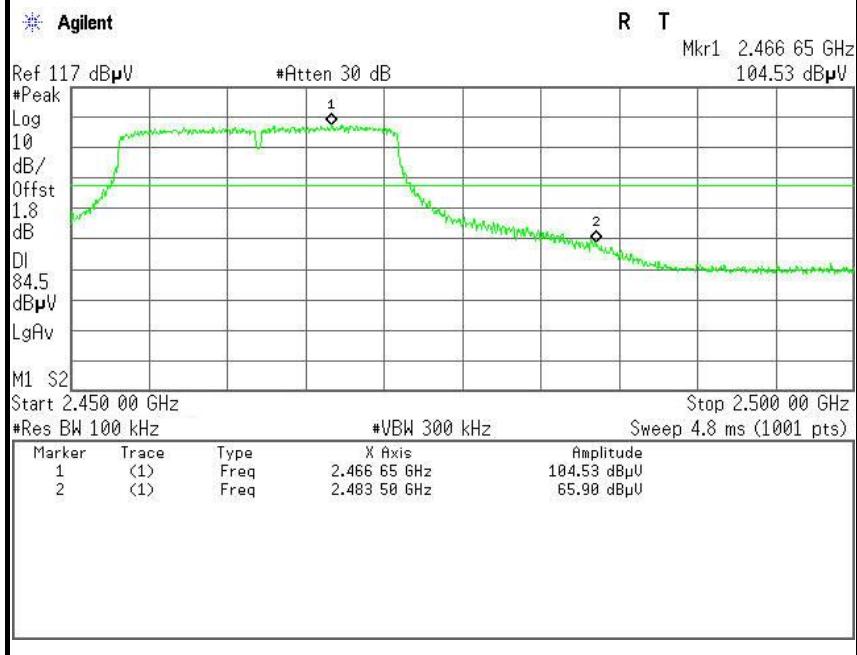




## IEEE 802.11n HT40 MHz mode

### CH Low (30MHz ~26.5GHz)

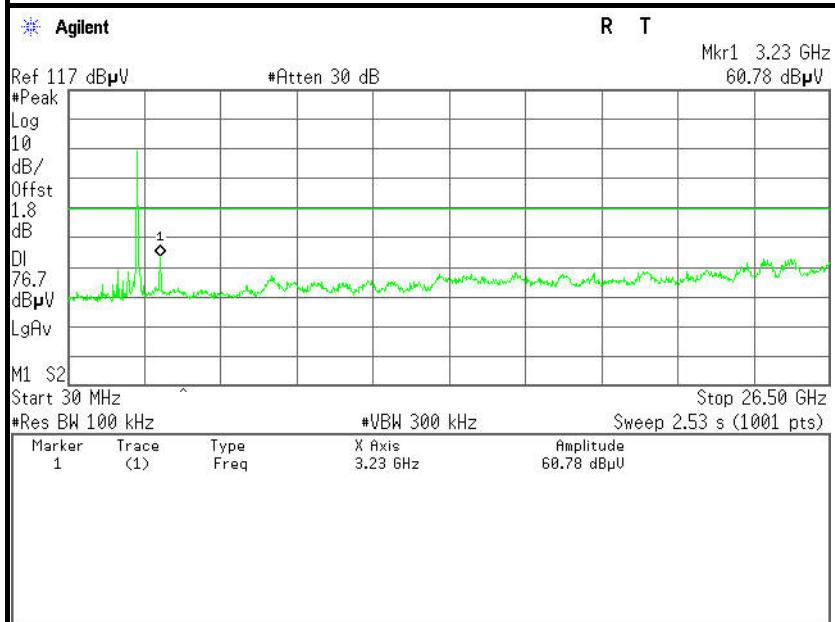


### CH Low (2.31GHz ~2.45GHz)

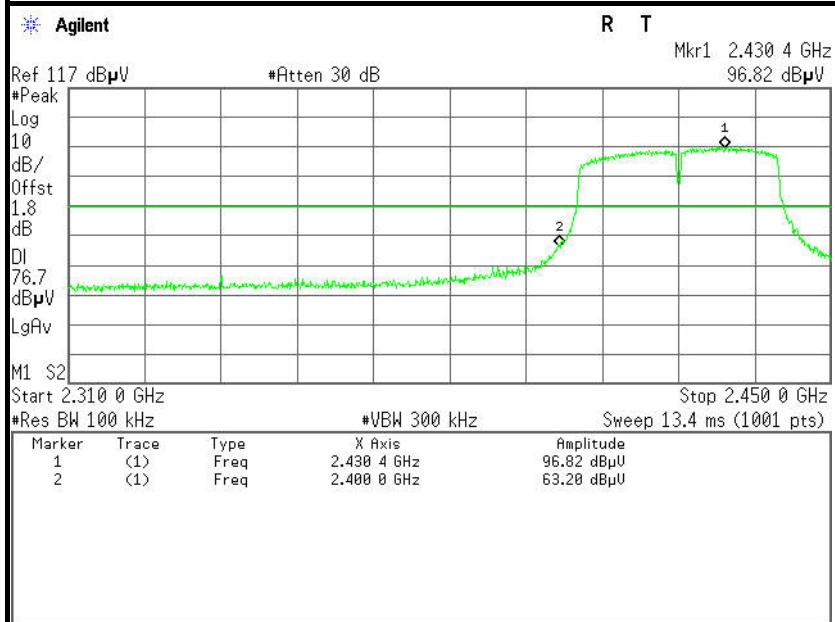




## CH Mid (30MHz ~26.5GHz)

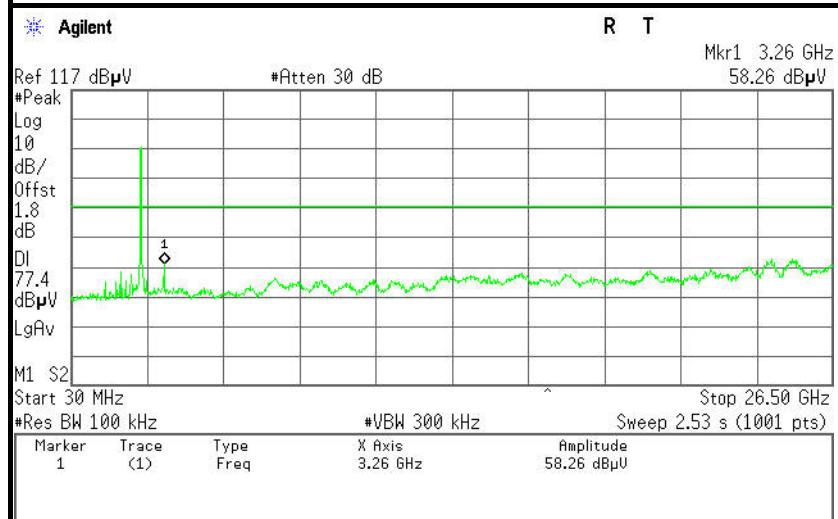




## CH High (30MHz ~26.5GHz)

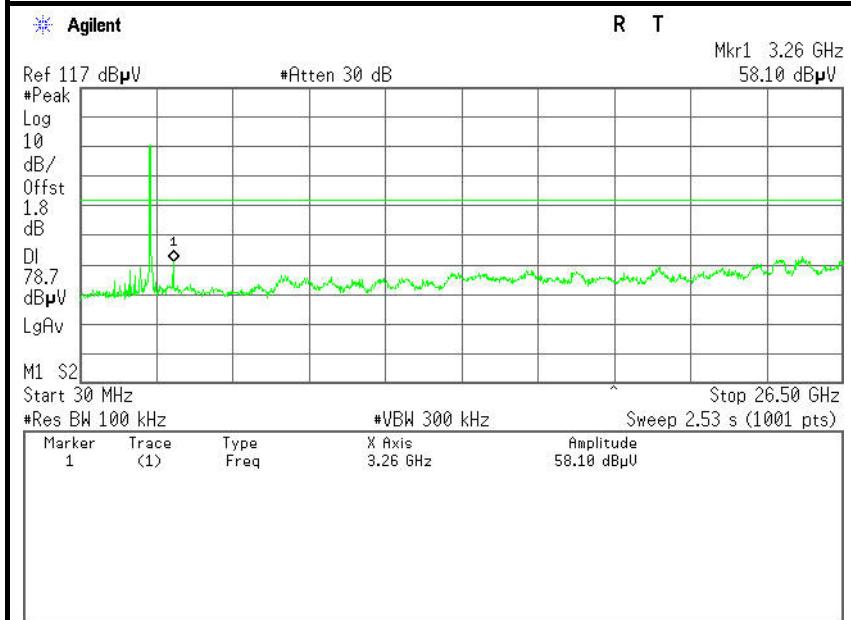

## CH High (2.43GHz ~2.5GHz)

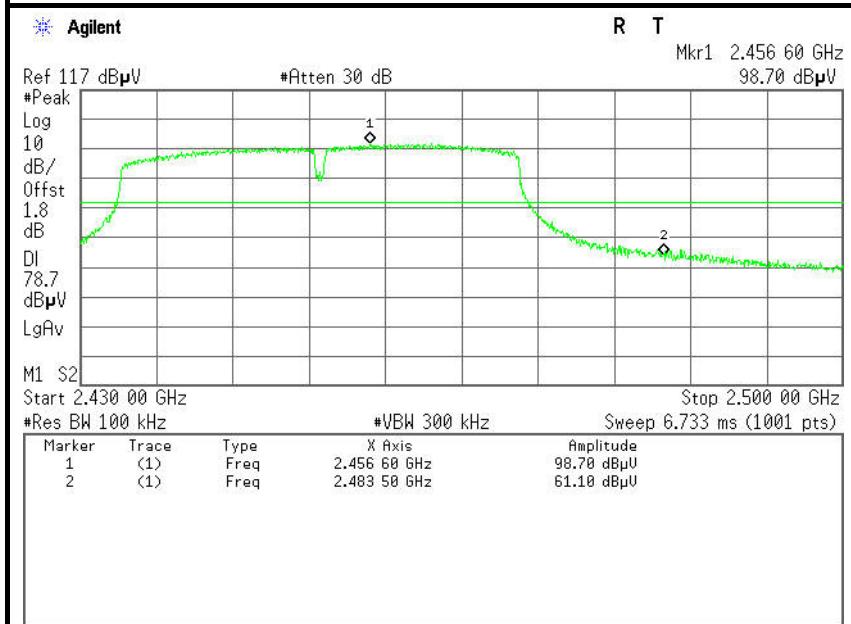



## 7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**NOTE:**(1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).



## 7.2.4.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2013	07/09/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	COM-POWER	AL-130	121044	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.



### 7.2.4.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.


#### 7.2.4.4. TEST SETUP

##### Below 30MHz

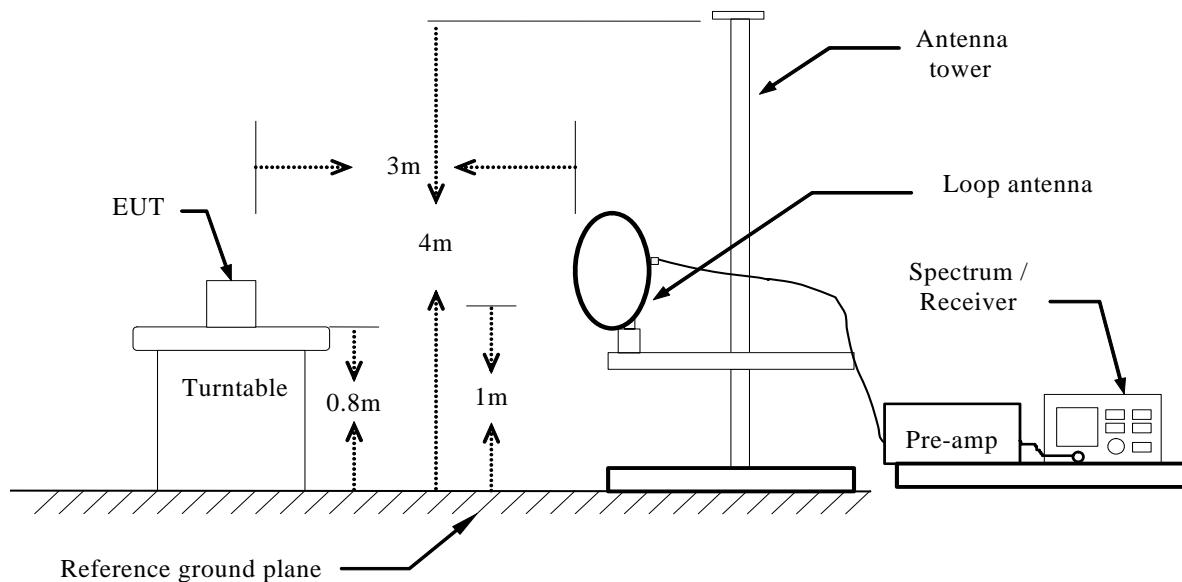

##### Below 1 GHz

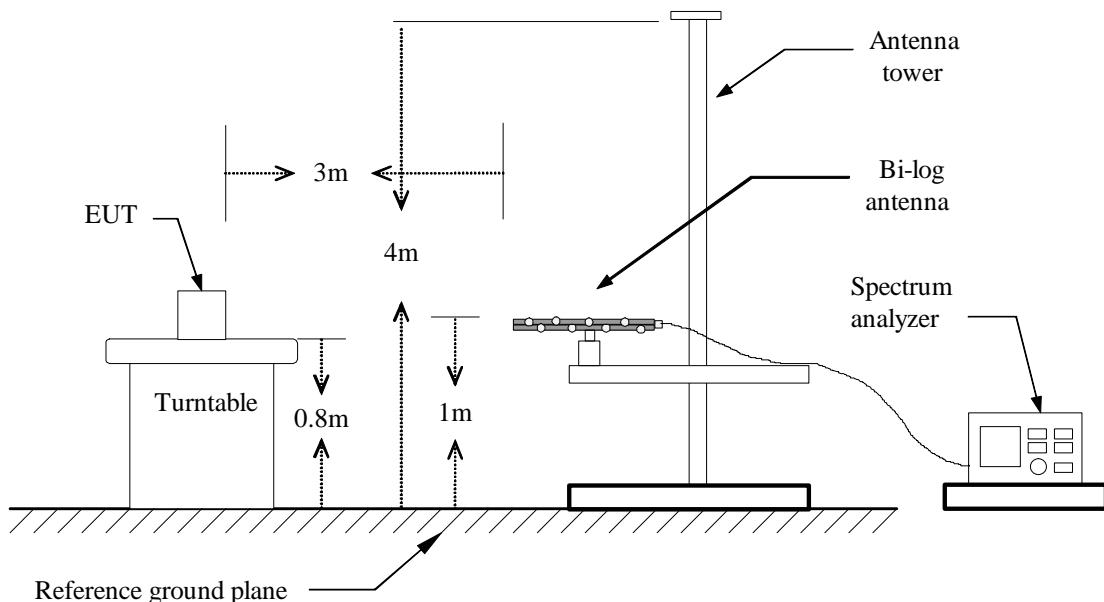

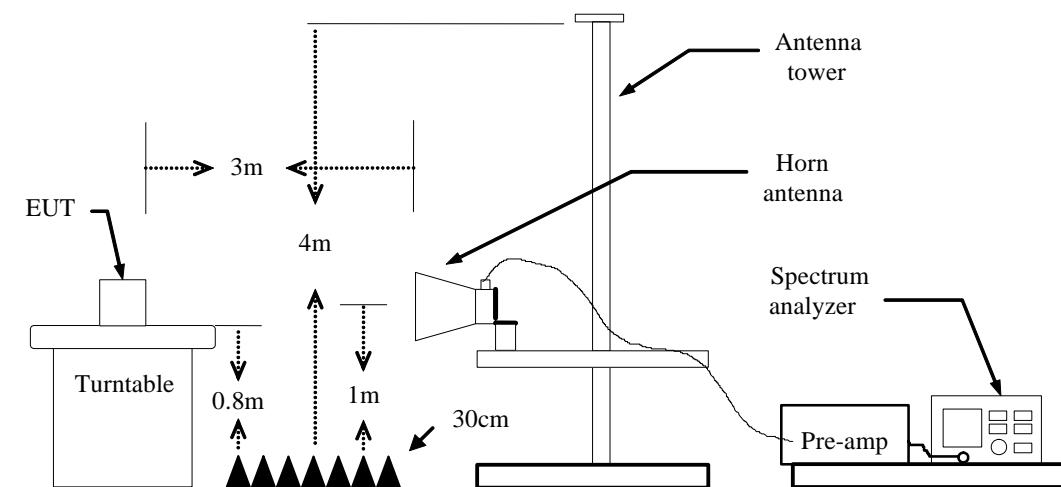**Above 1 GHz**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



## 7.2.4.5. DATA SAMPLE

### Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz  
Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
Limit (dBuV/m) = Limit stated in standard  
Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
Q.P. = Quasi-peak Reading

### Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz  
Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
Limit (dBuV/m) = Limit stated in standard  
Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
Peak = Peak Reading  
AVG = Average Reading

### Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)  
Result (dBuV/m) = Reading (dBuV) + Correction Factor



## 7.2.4.6. TEST RESULTS

## Below 1 GHz

## Test Mode: TX

**Tested by:** Sun Guo

**Ambient temperature: 24°C    Relative humidity: 52% RH    Date: March 19, 2014**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
49.4000	51.98	-16.82	35.16	40.00	-4.84	V	QP
250.1900	51.27	-17.78	33.49	46.00	-12.51	V	QP
399.5700	59.92	-16.22	43.70	46.00	-2.30	V	QP
600.3600	56.58	-12.94	43.64	46.00	-2.36	V	QP
874.8700	42.93	-9.78	33.15	46.00	-12.85	V	QP
1000.0000	41.44	-8.64	32.80	54.00	-21.20	V	QP
250.1900	53.03	-17.78	35.25	46.00	-10.75	H	QP
375.3200	52.19	-16.79	35.40	46.00	-10.60	H	QP
399.5700	54.64	-16.22	38.42	46.00	-7.58	H	QP
600.3600	51.92	-12.94	38.98	46.00	-7.02	H	QP
749.7400	43.15	-11.37	31.78	46.00	-14.22	H	QP
874.8700	43.63	-9.78	33.85	46.00	-12.15	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

### **Notes:**

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Receiver reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Measured (dB $\mu$ V/m) – Limits (dB $\mu$ V/m)  
Antenna Pol e(H/V) = Current carrying line of reading



## Above 1 GHz

**Test Mode: TX / IEEE 802.11b(CH Low)**

**Tested by: Sun Guo**

**Ambient temperature: 24°C      Relative humidity: 52% RH**

**Date: March 19, 2014**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2566.0000	61.24	-16.91	44.33	74.00	-29.67	V	peak
3043.0000	59.80	-14.85	44.95	74.00	-29.05	V	peak
3619.0000	59.86	-13.38	46.48	74.00	-27.52	V	peak
4825.0000	65.93	-9.75	56.18	74.00	-17.82	V	peak
4825.0000	60.91	-9.75	51.16	54.00	-2.84	V	AVG
5734.0000	55.87	-6.29	49.58	74.00	-24.42	V	peak
6301.0000	55.97	-4.07	51.90	74.00	-22.10	V	peak
1729.0000	63.12	-19.80	43.32	74.00	-30.68	H	Peak
3187.0000	60.32	-14.40	45.92	74.00	-28.08	H	Peak
3709.0000	59.84	-13.36	46.48	74.00	-27.52	H	Peak
4825.0000	63.27	-9.75	53.52	74.00	-20.48	H	peak
4825.0000	58.32	-9.75	48.57	54.00	-5.43	H	AVG
5356.0000	57.97	-7.99	49.98	74.00	-24.02	H	peak
6031.0000	55.57	-4.80	50.77	74.00	-23.23	H	peak

### **REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1342.0000	62.52	-19.03	43.49	74.00	-30.51	V	Peak
3043.0000	59.95	-14.85	45.10	74.00	-28.90	V	Peak
4159.0000	59.40	-12.53	46.87	74.00	-27.13	V	Peak
4870.0000	63.66	-9.60	54.06	74.00	-19.94	V	Peak
4870.0000	60.77	-9.60	51.17	54.00	-2.83	V	AVG
5293.0000	57.59	-8.20	49.39	74.00	-24.61	V	Peak
5869.0000	55.20	-5.57	49.63	74.00	-24.37	V	Peak
2557.000	60.89	-16.95	43.94	74.00	-30.06	H	Peak
2800.000	60.71	-15.87	44.84	74.00	-29.16	H	Peak
3340.000	59.72	-13.91	45.81	74.00	-28.19	H	Peak
3637.000	59.88	-13.37	46.51	74.00	-27.49	H	Peak
4870.000	60.63	-9.60	51.03	74.00	-22.97	H	Peak
5995.000	55.52	-4.91	50.61	74.00	-23.39	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH High)

Tested by: Sun Guo

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1270.0000	62.06	-19.04	43.02	74.00	-30.98	V	Peak
2467.0000	62.04	-17.31	44.73	74.00	-29.27	V	Peak
3016.0000	59.95	-14.94	45.01	74.00	-28.99	V	Peak
4402.0000	59.31	-11.36	47.95	74.00	-26.05	V	Peak
4924.0000	65.09	-9.41	55.68	74.00	-18.32	V	Peak
4924.0000	60.85	-9.41	51.44	54.00	-2.56	V	AVG
6130.0000	55.02	-4.53	50.49	74.00	-23.51	V	Peak
1477.0000	62.62	-19.17	43.45	74.00	-30.55	H	Peak
2782.0000	61.37	-15.95	45.42	74.00	-28.58	H	Peak
3421.0000	59.71	-13.65	46.06	74.00	-27.94	H	Peak
4258.0000	60.28	-12.06	48.22	74.00	-25.78	H	Peak
4924.0000	60.29	-9.41	50.88	74.00	-23.12	H	Peak
6031.0000	55.34	-4.80	50.54	74.00	-23.46	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11g(CH Low)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C    **Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2485.0000	62.46	-17.25	45.21	74.00	-28.79	V	Peak
2809.0000	60.89	-15.83	45.06	74.00	-28.94	V	Peak
4177.0000	59.54	-12.45	47.09	74.00	-26.91	V	Peak
4978.0000	59.14	-9.22	49.92	74.00	-24.08	V	Peak
5230.0000	58.79	-8.40	50.39	74.00	-23.61	V	Peak
6139.0000	56.10	-4.50	51.60	74.00	-22.40	V	Peak
<hr/>							
1189.0000	61.86	-19.02	42.84	74.00	-31.16	H	Peak
2224.0000	62.06	-18.11	43.95	74.00	-30.05	H	Peak
4276.0000	60.86	-11.97	48.89	74.00	-25.11	H	Peak
4870.0000	60.45	-9.60	50.85	74.00	-23.15	H	Peak
5770.0000	55.69	-6.10	49.59	74.00	-24.41	H	Peak
6382.0000	55.62	-3.85	51.77	74.00	-22.23	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Test Mode:** TX / IEEE 802.11g (CH Mid)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C    **Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2809.000	45.03	-4.72	40.31	74.00	-33.69	V	Peak
3358.000	44.05	-3.15	40.90	74.00	-33.10	V	Peak
3862.000	43.71	-1.55	42.16	74.00	-31.84	V	Peak
4879.000	46.30	2.01	48.31	74.00	-25.69	V	Peak
5932.000	41.18	3.28	44.46	74.00	-29.54	V	Peak
6571.000	41.04	5.85	46.89	74.00	-27.11	V	Peak
2233.000	45.84	-7.33	38.51	74.00	-35.49	H	Peak
2845.000	44.86	-4.54	40.32	74.00	-33.68	H	Peak
3214.000	43.51	-3.41	40.10	74.00	-33.90	H	Peak
3736.000	43.04	-2.02	41.02	74.00	-32.98	H	Peak
4186.000	42.22	-0.49	41.73	74.00	-32.27	H	Peak
4870.000	47.26	1.97	49.23	74.00	-24.77	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode: TX / IEEE 802.11g (CH High)****Tested by: Sun Guo****Ambient temperature: 24°C****Relative humidity: 52% RH****Date: March 19, 2014**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2017.0000	62.36	-18.79	43.57	74.00	-30.43	V	Peak
2467.0000	61.11	-17.31	43.80	74.00	-30.20	V	Peak
3772.0000	60.40	-13.35	47.05	74.00	-26.95	V	Peak
4240.0000	60.78	-12.14	48.64	74.00	-25.36	V	Peak
5032.0000	59.03	-9.04	49.99	74.00	-24.01	V	Peak
5329.0000	58.30	-8.08	50.22	74.00	-23.78	V	Peak
1297.0000	61.52	-19.04	42.48	74.00	-31.52	H	Peak
2134.0000	61.07	-18.41	42.66	74.00	-31.34	H	Peak
3637.0000	60.57	-13.37	47.20	74.00	-26.80	H	Peak
4519.0000	59.78	-10.82	48.96	74.00	-25.04	H	Peak
5014.0000	59.63	-9.09	50.54	74.00	-23.46	H	Peak
5257.0000	58.52	-8.31	50.21	74.00	-23.79	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Low)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2107.0000	61.52	-18.50	43.02	74.00	-30.98	V	Peak
2800.0000	60.42	-15.87	44.55	74.00	-29.45	V	Peak
3421.0000	60.19	-13.65	46.54	74.00	-27.46	V	Peak
4348.0000	59.38	-11.62	47.76	74.00	-26.24	V	Peak
5005.0000	59.81	-9.12	50.69	74.00	-23.31	V	Peak
5914.0000	54.99	-5.34	49.65	74.00	-24.35	V	Peak
<hr/>							
1711.0000	64.99	-19.75	45.24	74.00	-28.76	H	Peak
2998.0000	61.11	-15.00	46.11	74.00	-27.89	H	Peak
3700.0000	60.17	-13.36	46.81	74.00	-27.19	H	Peak
4357.0000	60.16	-11.58	48.58	74.00	-25.42	H	Peak
4825.0000	60.49	-9.75	50.74	74.00	-23.26	H	Peak
5743.0000	56.81	-6.24	50.57	74.00	-23.43	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C    **Relative humidity:** 52% RH**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2575.000	45.74	-5.84	39.90	74.00	-34.10	V	Peak
3358.000	43.93	-3.15	40.78	74.00	-33.22	V	Peak
4186.000	42.22	-0.49	41.73	74.00	-32.27	V	Peak
4870.000	55.65	1.97	57.62	74.00	-16.38	V	Peak
4870.000	44.16	1.97	46.13	54.00	-7.87	V	AVG
6553.000	39.87	5.77	45.64	74.00	-28.36	V	Peak
7246.000	39.94	8.18	48.12	74.00	-25.88	V	Peak
2836.000	45.36	-4.59	40.77	74.00	-33.23	H	Peak
3781.000	42.17	-1.85	40.32	74.00	-33.68	H	Peak
4870.000	53.42	1.97	55.39	74.00	-18.61	H	Peak
4870.000	41.03	1.97	43.00	54.00	-11.00	H	AVG
5788.000	40.21	3.03	43.24	74.00	-30.76	H	Peak
6499.000	40.14	5.54	45.68	74.00	-28.32	H	Peak
7210.000	40.06	8.11	48.17	74.00	-25.83	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / EEE 802.11n HT20 MHz (CH High)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2107.0000	60.92	-18.50	42.42	74.00	-31.58	V	Peak
2755.0000	62.15	-16.07	46.08	74.00	-27.92	V	Peak
3466.0000	60.07	-13.51	46.56	74.00	-27.44	V	Peak
4285.0000	60.22	-11.93	48.29	74.00	-25.71	V	Peak
5032.0000	60.45	-9.04	51.41	74.00	-22.59	V	Peak
5455.0000	58.08	-7.67	50.41	74.00	-23.59	V	Peak
<hr/>							
2539.0000	61.32	-17.03	44.29	74.00	-29.71	H	Peak
3709.0000	60.74	-13.36	47.38	74.00	-26.62	H	Peak
4303.0000	60.64	-11.84	48.80	74.00	-25.20	H	Peak
4798.0000	59.91	-9.85	50.06	74.00	-23.94	H	Peak
5320.0000	57.84	-8.11	49.73	74.00	-24.27	H	Peak
6040.0000	55.50	-4.77	50.73	74.00	-23.27	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Test Mode:** TX/ IEEE 802.11n HT40 MHz (CH Low)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1729.0000	62.42	-19.80	42.62	74.00	-31.38	V	Peak
3421.0000	60.06	-13.65	46.41	74.00	-27.59	V	Peak
4276.0000	59.86	-11.97	47.89	74.00	-26.11	V	Peak
4996.0000	59.75	-9.15	50.60	74.00	-23.40	V	Peak
5923.0000	55.42	-5.29	50.13	74.00	-23.87	V	Peak
6229.0000	55.44	-4.26	51.18	74.00	-22.82	V	Peak
<hr/>							
1099.0000	62.83	-18.88	43.95	74.00	-30.05	H	Peak
3151.0000	59.75	-14.51	45.24	74.00	-28.76	H	Peak
3466.0000	59.23	-13.51	45.72	74.00	-28.28	H	Peak
4744.0000	60.41	-10.04	50.37	74.00	-23.63	H	Peak
5041.0000	58.99	-9.01	49.98	74.00	-24.02	H	Peak
5455.0000	57.52	-7.67	49.85	74.00	-24.15	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Test Mode:** TX / IEEE 802.11n HT40 MHz (CH Mid)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1729.0000	65.66	-19.80	45.86	74.00	-28.14	V	Peak
2548.0000	60.51	-16.99	43.52	74.00	-30.48	V	Peak
3493.0000	59.21	-13.42	45.79	74.00	-28.21	V	Peak
4825.0000	59.09	-9.75	49.34	74.00	-24.66	V	Peak
5203.0000	59.27	-8.49	50.78	74.00	-23.22	V	Peak
6085.0000	54.54	-4.65	49.89	74.00	-24.11	V	Peak
<hr/>							
1729.0000	64.83	-19.80	45.03	74.00	-28.97	H	Peak
2476.0000	62.48	-17.28	45.20	74.00	-28.80	H	Peak
3466.0000	59.85	-13.51	46.34	74.00	-27.66	H	Peak
3682.0000	59.90	-13.36	46.54	74.00	-27.46	H	Peak
4825.0000	59.47	-9.75	49.72	74.00	-24.28	H	Peak
5311.0000	58.34	-8.14	50.20	74.00	-23.80	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Test Mode:** TX/ IEEE 802.11n HT40 MHz (CH High)

**Tested by:** Sun Guo

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** March 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1729.0000	66.67	-19.80	46.87	74.00	-27.13	V	Peak
2431.0000	61.63	-17.43	44.20	74.00	-29.80	V	Peak
2791.0000	60.19	-15.91	44.28	74.00	-29.72	V	Peak
3718.0000	59.55	-13.36	46.19	74.00	-27.81	V	Peak
4834.0000	59.93	-9.72	50.21	74.00	-23.79	V	Peak
5842.0000	55.38	-5.72	49.66	74.00	-24.34	V	Peak
2233.0000	62.60	-18.08	44.52	74.00	-29.48	H	Peak
3430.0000	59.56	-13.62	45.94	74.00	-28.06	H	Peak
4024.0000	59.62	-13.18	46.44	74.00	-27.56	H	Peak
4663.0000	59.83	-10.32	49.51	74.00	-24.49	H	Peak
5284.0000	57.88	-8.23	49.65	74.00	-24.35	H	Peak
5878.0000	56.13	-5.53	50.60	74.00	-23.40	H	Peak

**REMARKS:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



## 7.3. 6dB BANDWIDTH MEASUREMENT

### 7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

#### 8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3.4. TEST SETUP





## 7.3.5. TEST RESULTS

*No non-compliance noted*

### Test Data

#### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	7106	>500	PASS
Mid	2437	7563		PASS
High	2462	7564		PASS

#### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16524	>500	PASS
Mid	2437	16563		PASS
High	2462	16534		PASS

#### Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17749	>500	PASS
Mid	2437	17733		PASS
High	2462	17768		PASS


#### Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35568	>500	PASS
Mid	2437	34483		PASS
High	2452	35420		PASS




## Test Plot

### IEEE 802.11b mode

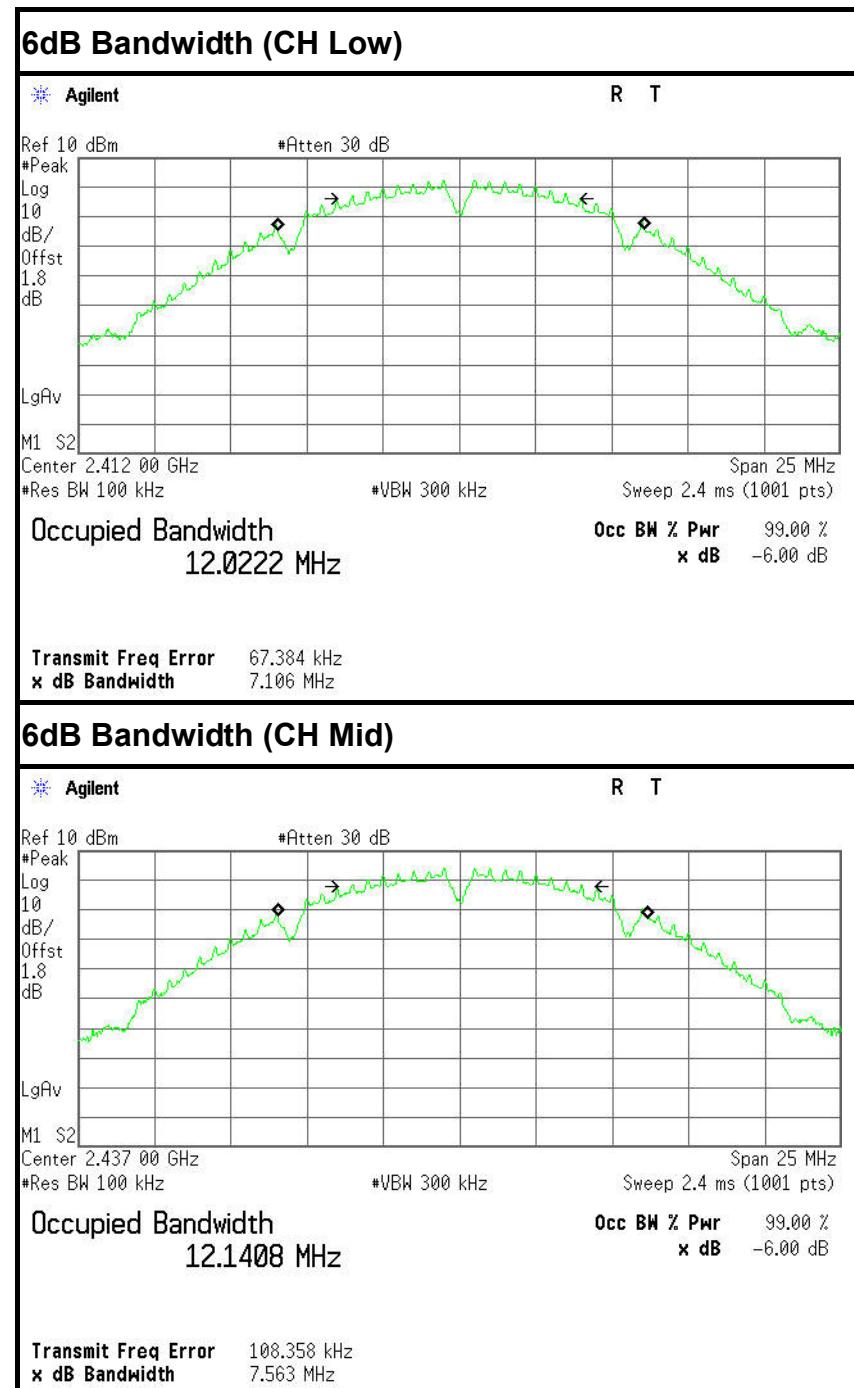




## 6dB Bandwidth (CH High)

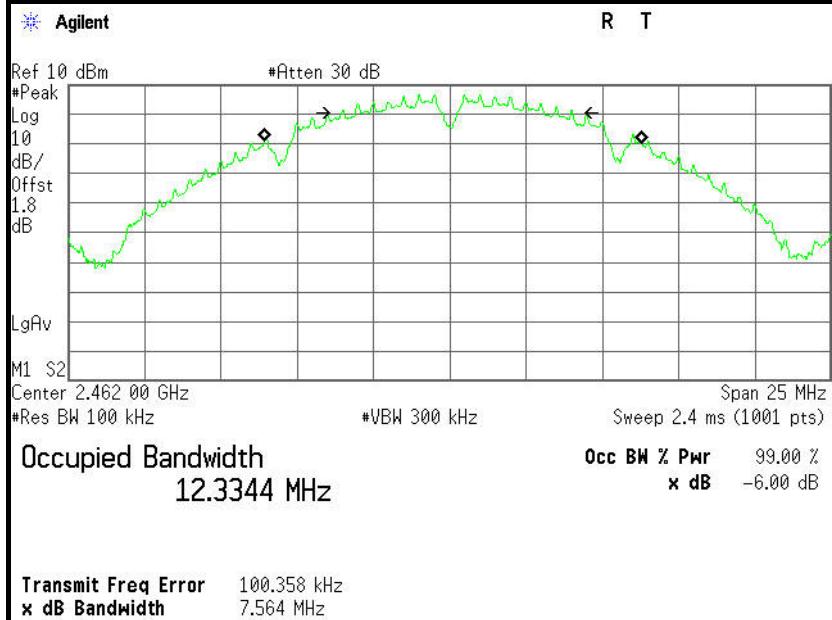





## IEEE 802.11g mode

### 6dB Bandwidth (CH Low)

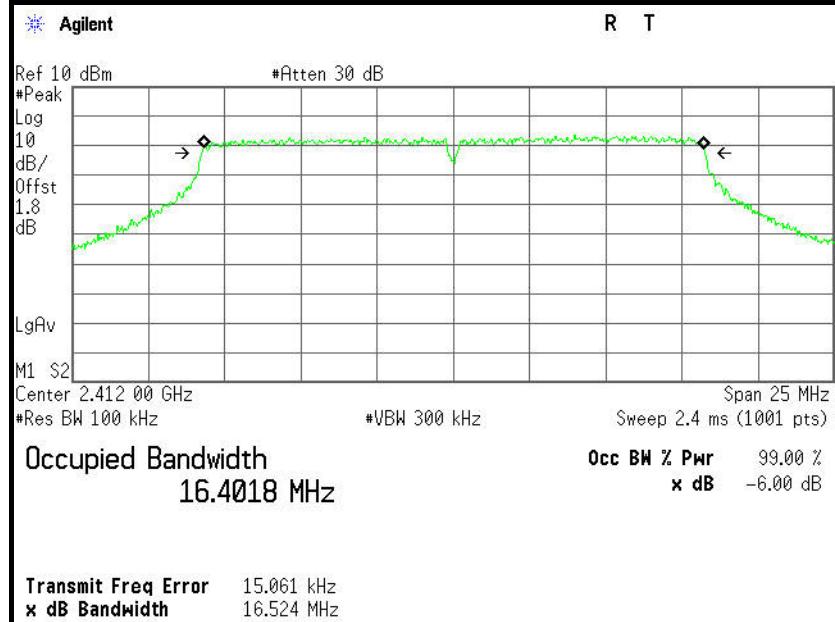

### 6dB Bandwidth (CH Mid)

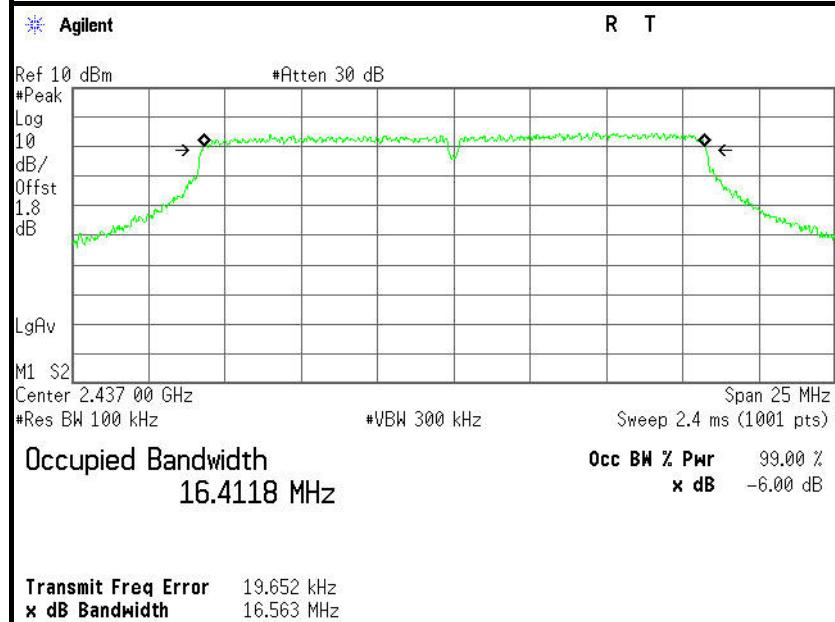


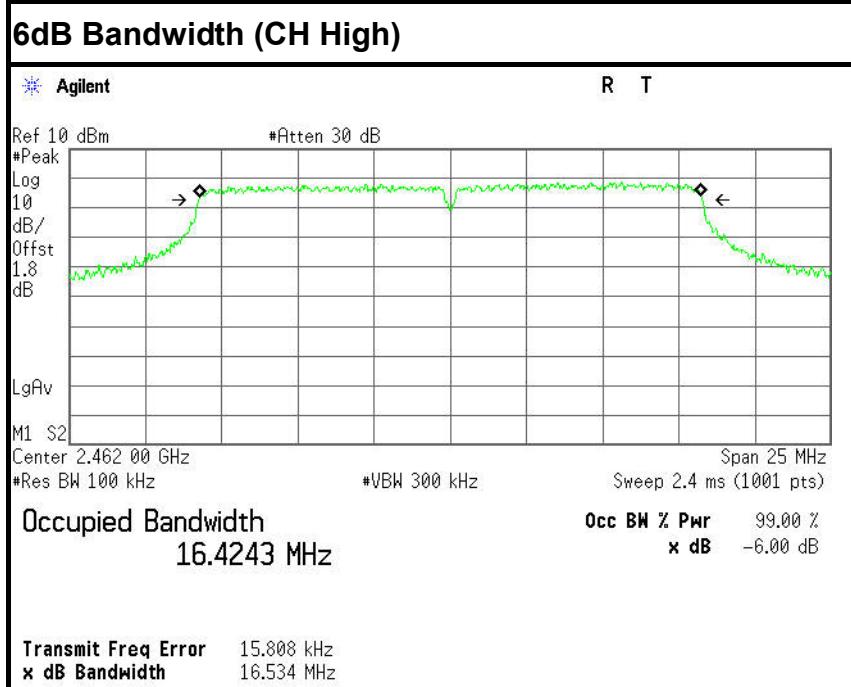




## IEEE 802.11n HT20 MHz mode

### 6dB Bandwidth (CH Low)

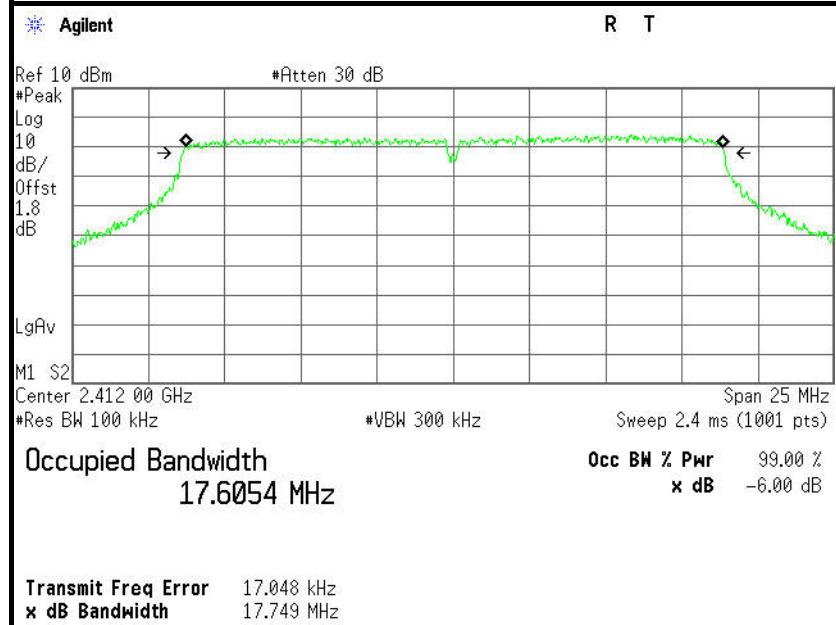


### 6dB Bandwidth (CH Mid)

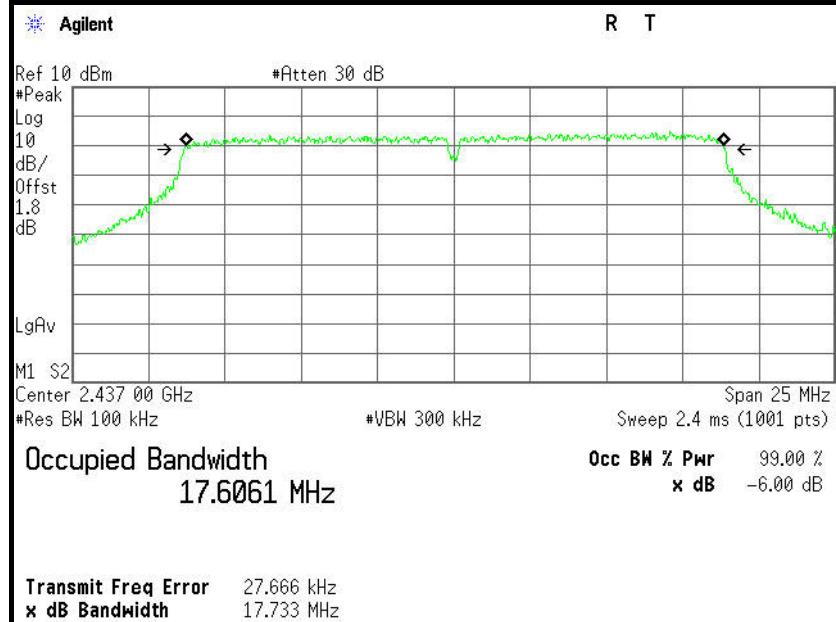




## 6dB Bandwidth (CH High)

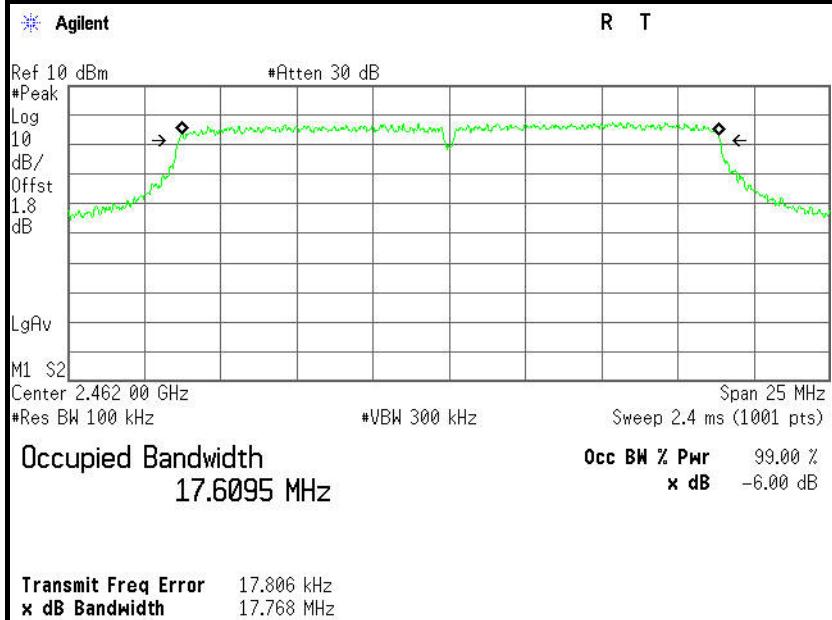





## IEEE 802.11n HT40 MHz mode

### 6dB Bandwidth (CH Low)

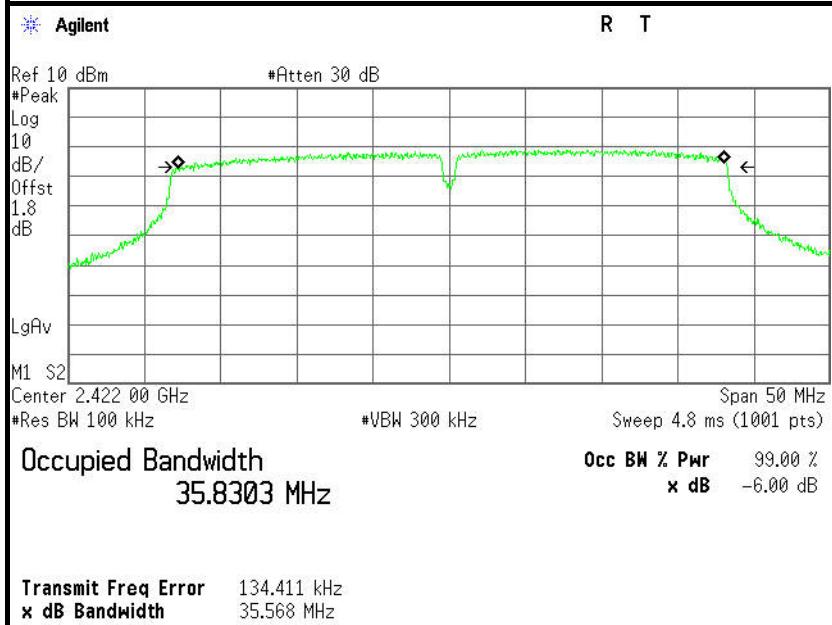

### 6dB Bandwidth (CH Mid)

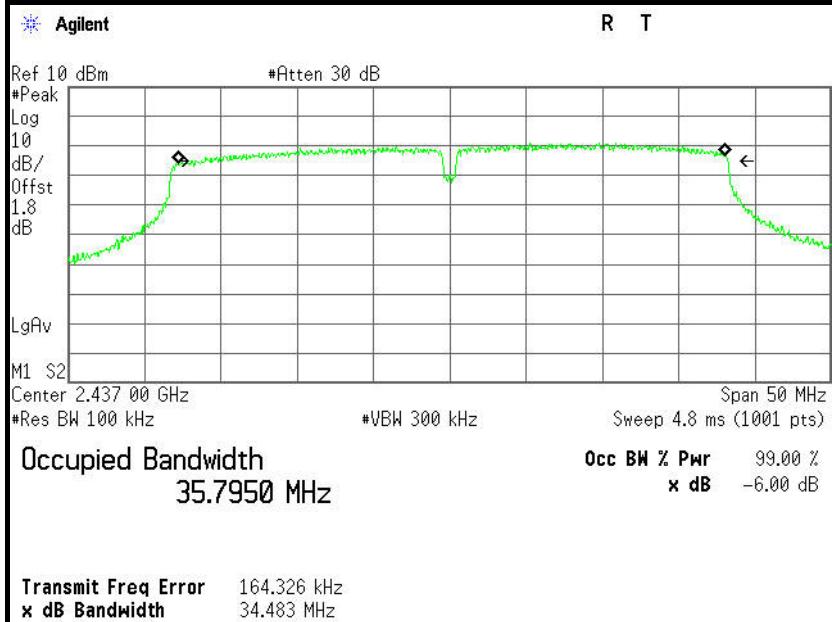

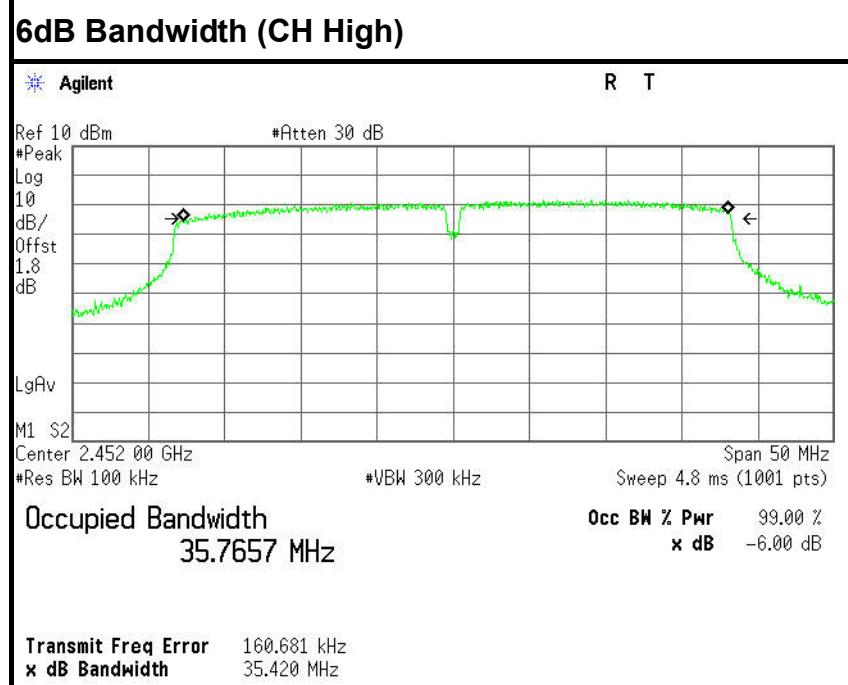



## 7.4. PEAK OUTPUT POWER

### 7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
Power Meter	Anritsu	ML2495A	1204003	03/01/2014	03/01/2015
Power Sensor	Anritsu	MA2411B	1126150	03/01/2014	03/01/2015

### 7.4.3. TEST PROCEDURES (please refer to measurement standard)

#### 9.1.1 $\text{RBW} \geq \text{DTS bandwidth}$

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the  $\text{RBW} \geq \text{DTS bandwidth}$ .
- b) Set  $\text{VBW} \geq 3 \text{ RBW}$ .
- c) Set span  $\geq 3 \times \text{RBW}$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



## 9.1.2 Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.


- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq$  3 RBW
- c) Set the span  $\geq$  1.5 x DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

## 9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.



#### 7.4.4. TEST SETUP

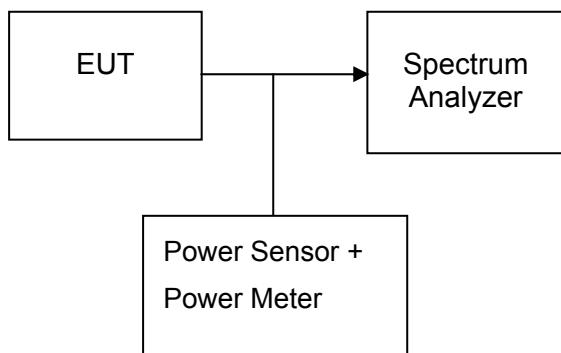

#### 7.4.5. TEST RESULTS

*No non-compliance noted*

##### Test Data

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.05	0.03199	1	PASS
Mid	2437	15.75	0.03758		PASS
High	2462	17.78	0.05998		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.71	0.04688	1	PASS
Mid	2437	17.17	0.05212		PASS
High	2462	20.07	0.10162		PASS

**Test mode: IEEE 802.11n HT20 MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.09	0.04064	1	PASS
Mid	2437	17.06	0.05082		PASS
High	2462	19.95	0.09886		PASS

**Test mode: IEEE 802.11n HT40 MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	15.95	0.03936	1	PASS
Mid	2437	15.43	0.03491		PASS
High	2452	16.59	0.04560		PASS



## 7.5. BAND EDGES MEASUREMENT

### 7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.5.2. TEST INSTRUMENTS


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2013	07/09/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	COM-POWER	AL-130	121044	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.

**7.5.3. TEST PROCEDURES** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

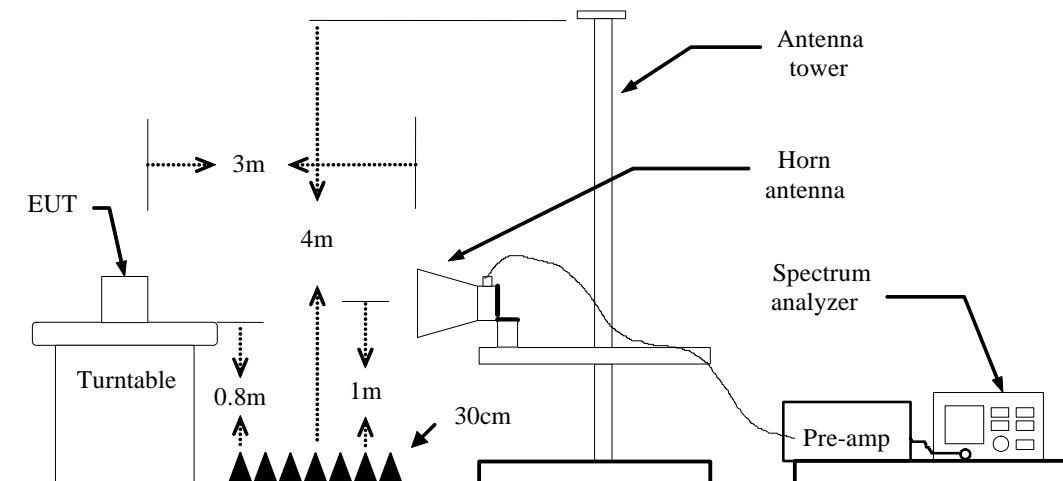**7.5.4. TEST SETUP**




## 7.5.5. TEST RESULTS

### Test Plot

#### IEEE 802.11b mode

##### Band Edges (CH Low)

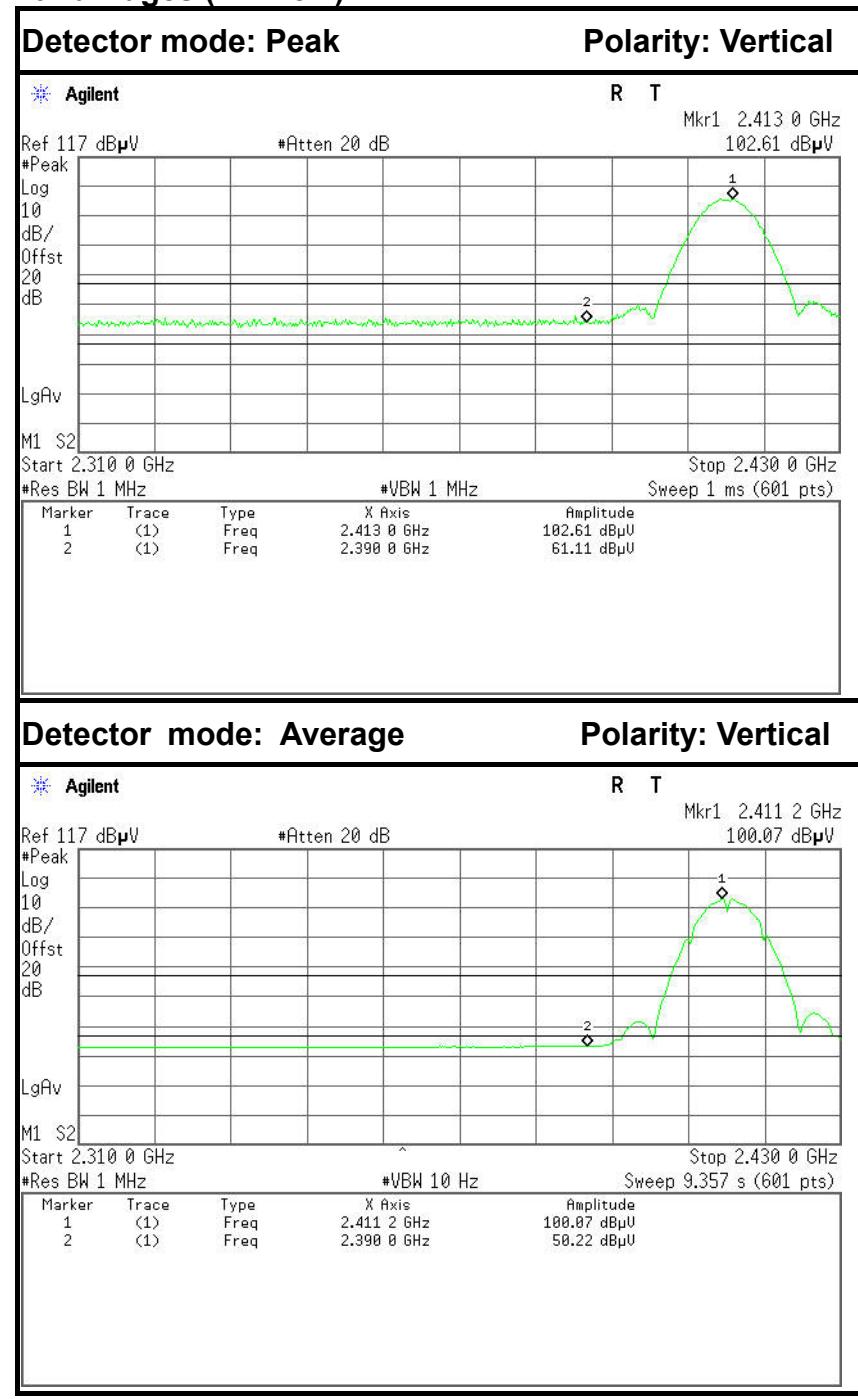


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	54.51	-6.60	61.11	74.00	-12.89	Peak	Vertical
2	2390.0000	43.62	-6.60	50.22	54.00	-3.78	Average	Vertical




## Detector mode: Peak

## Polarity: Horizontal

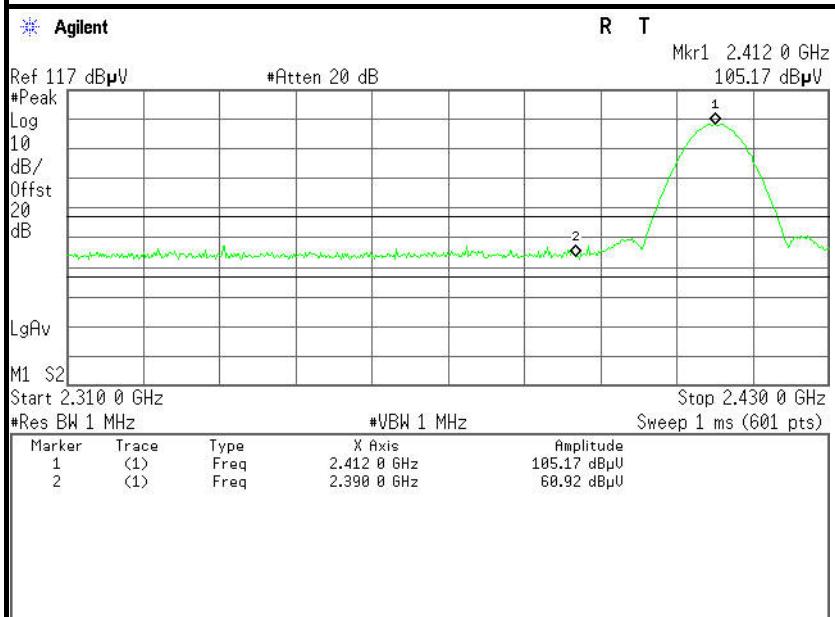

## Detector mode: Average

## Polarity: Horizontal

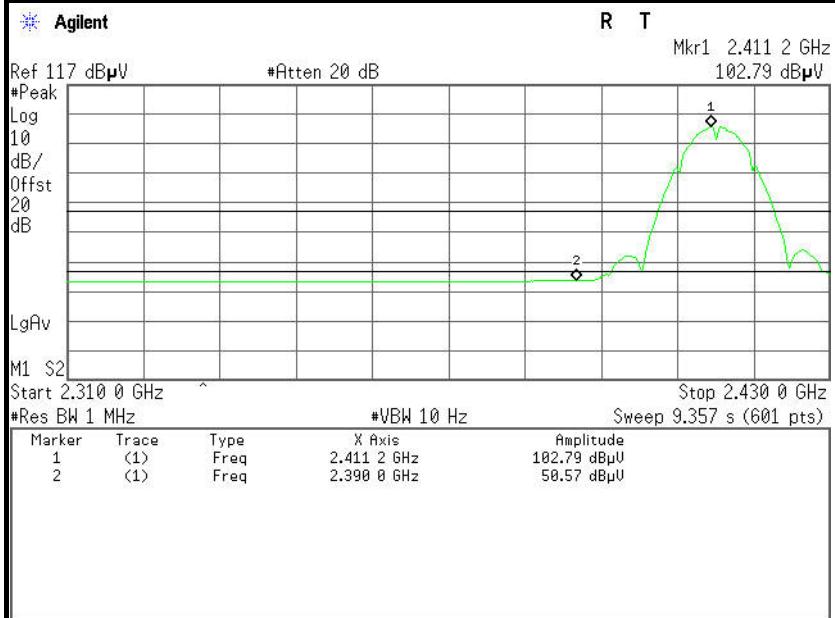


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	54.32	-6.60	60.92	74.00	-13.08	Peak	Horizontal
2	2390.0000	43.97	-6.60	50.57	54.00	-3.43	Average	Horizontal



## Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

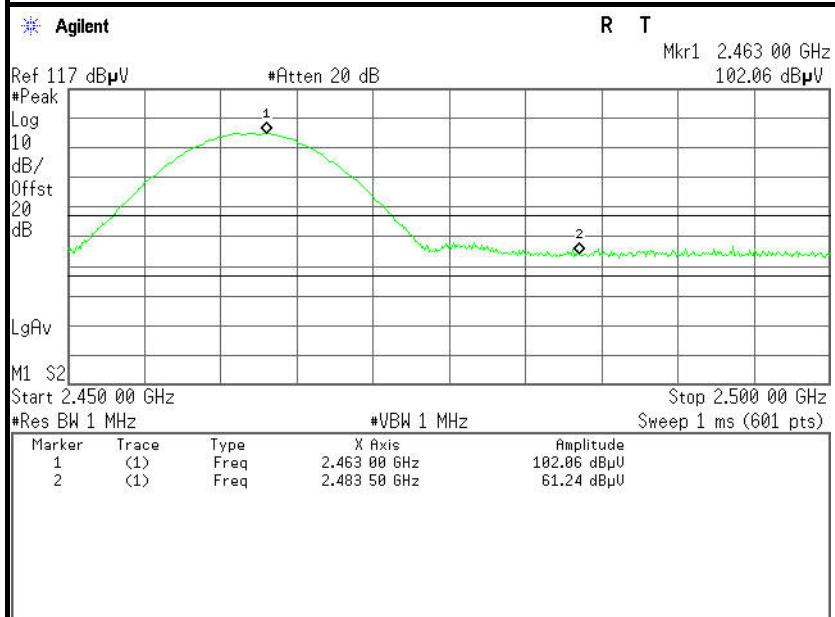

Detector mode: Average


Polarity: Vertical

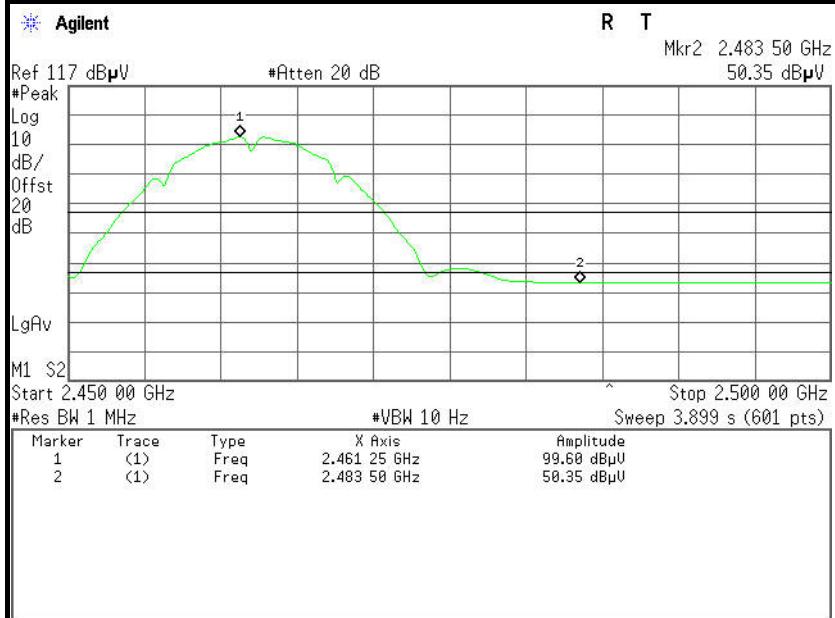


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.00	-6.24	61.24	74.00	-12.76	Peak	Vertical
2	2483.5000	44.11	-6.24	50.35	54.00	-3.65	Average	Vertical



## Detector mode: Peak      Polarity: Horizontal

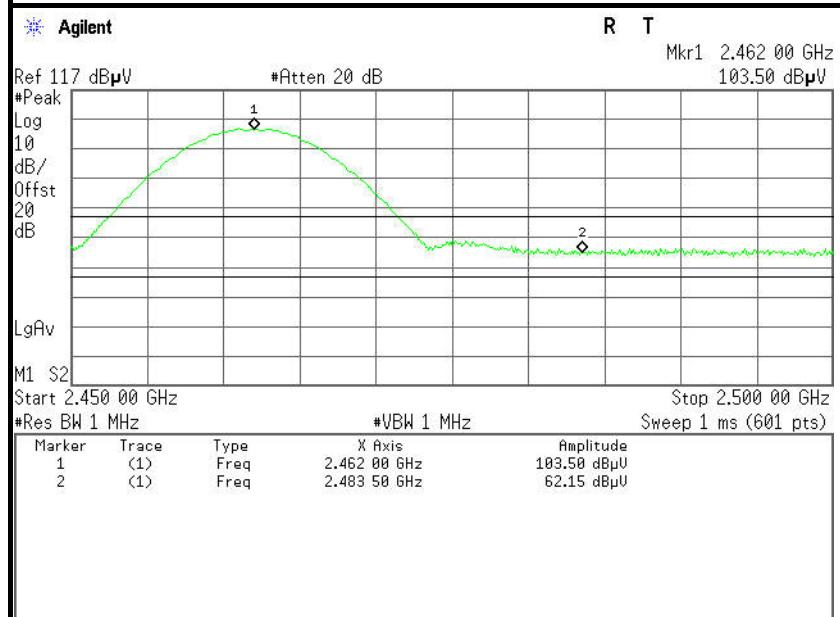

## Detector mode: Average      Polarity: Horizontal

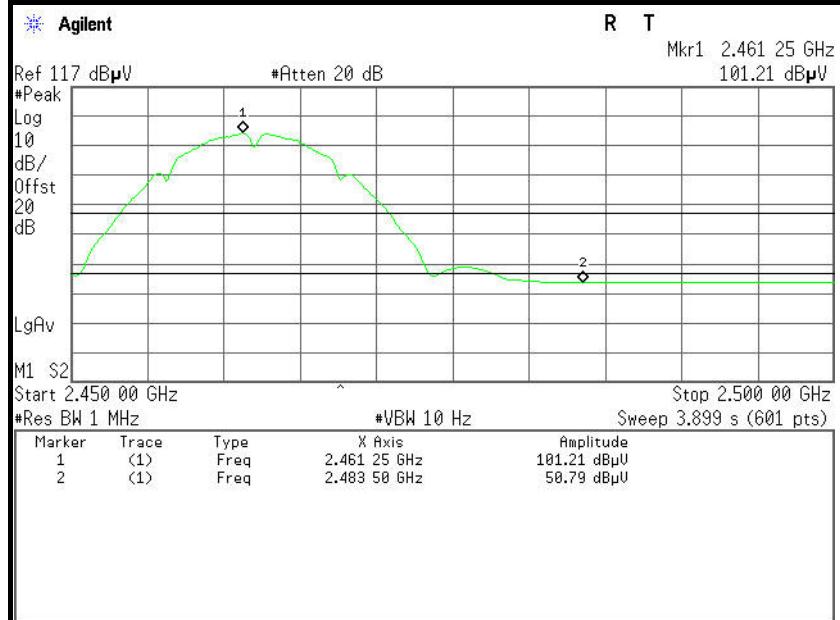


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.91	-6.24	62.15	74.00	-11.85	Peak	Horizontal
2	2483.5000	44.55	-6.24	50.79	54.00	-3.21	Average	Horizontal




## IEEE 802.11g mode Band Edges (CH Low)



**Detector mode: Peak**      **Polarity: Vertical**

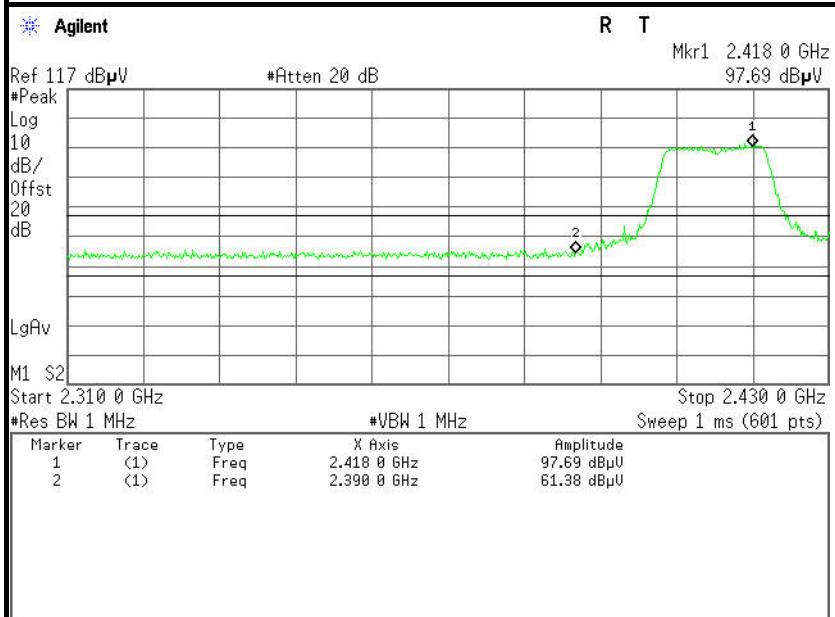

**Detector mode: Average**      **Polarity: Vertical**

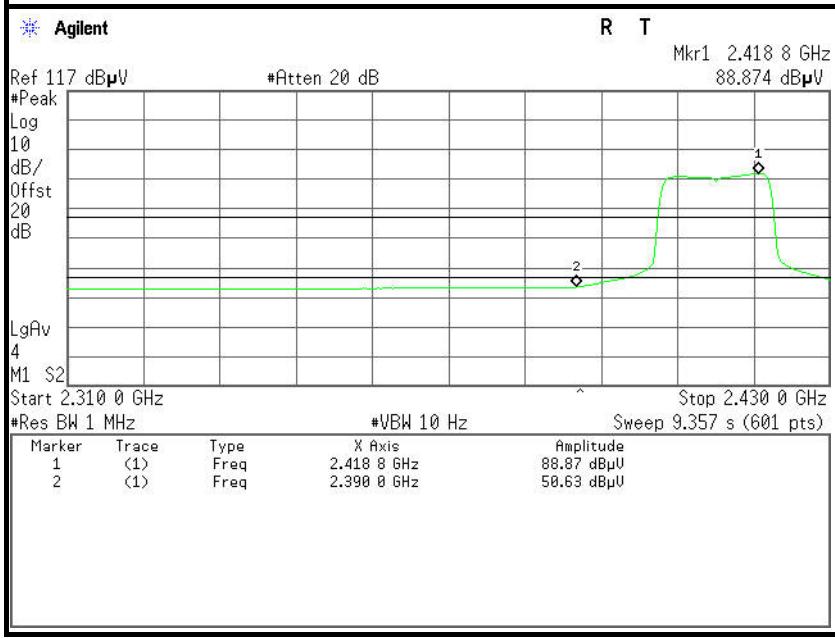

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	54.78	-6.60	61.38	74.00	-12.62	Peak	Vertical
2	2390.0000	44.03	-6.60	50.63	54.00	-3.37	Average	Vertical

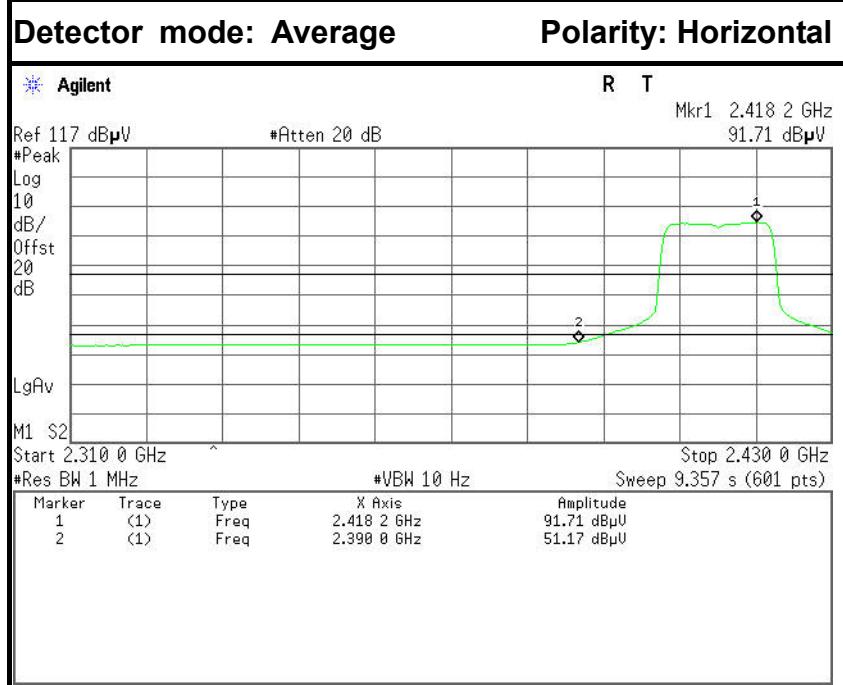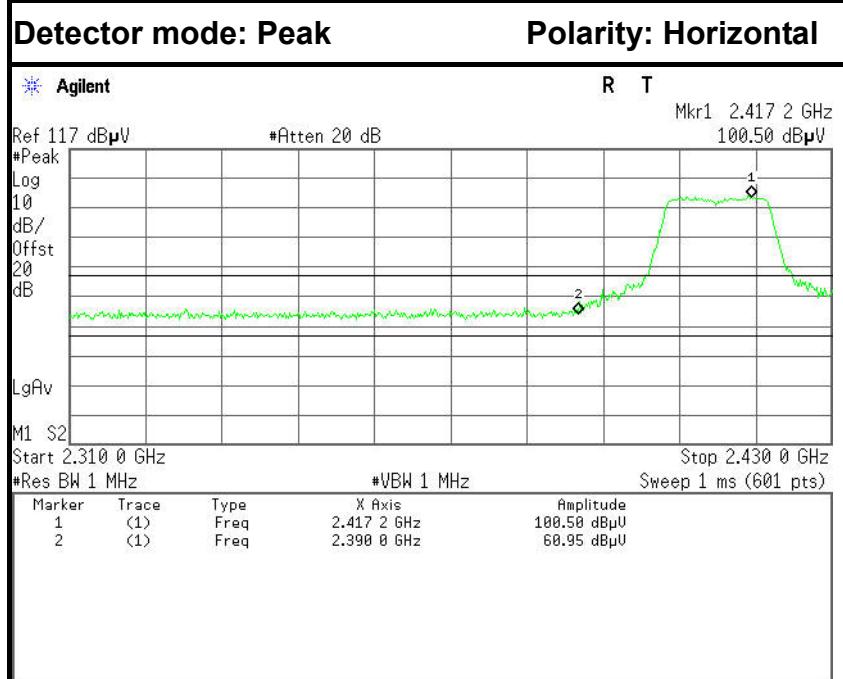


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	54.35	-6.60	60.95	74.00	-13.05	Peak	Horizontal
2	2390.0000	44.57	-6.60	51.17	54.00	-2.83	Average	Horizontal



## Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

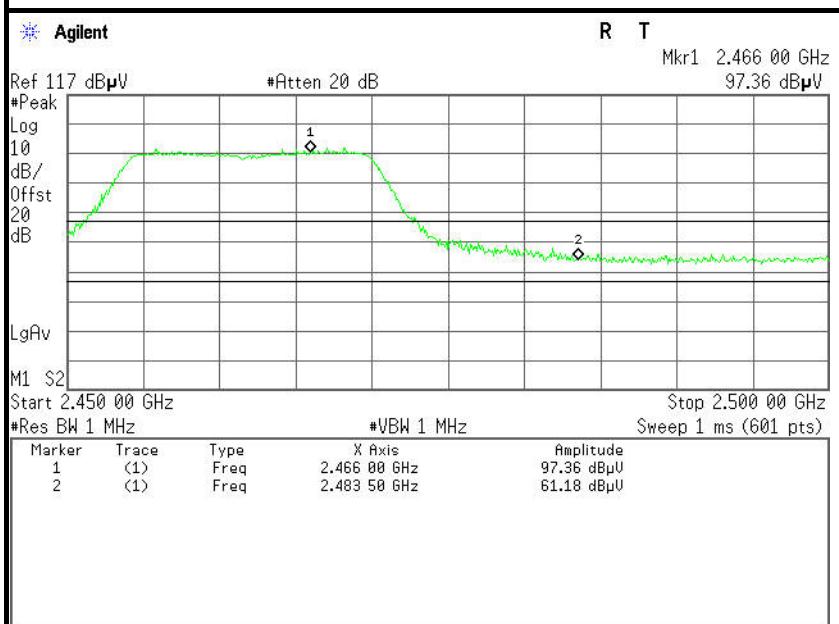

Detector mode: Average


Polarity: Vertical

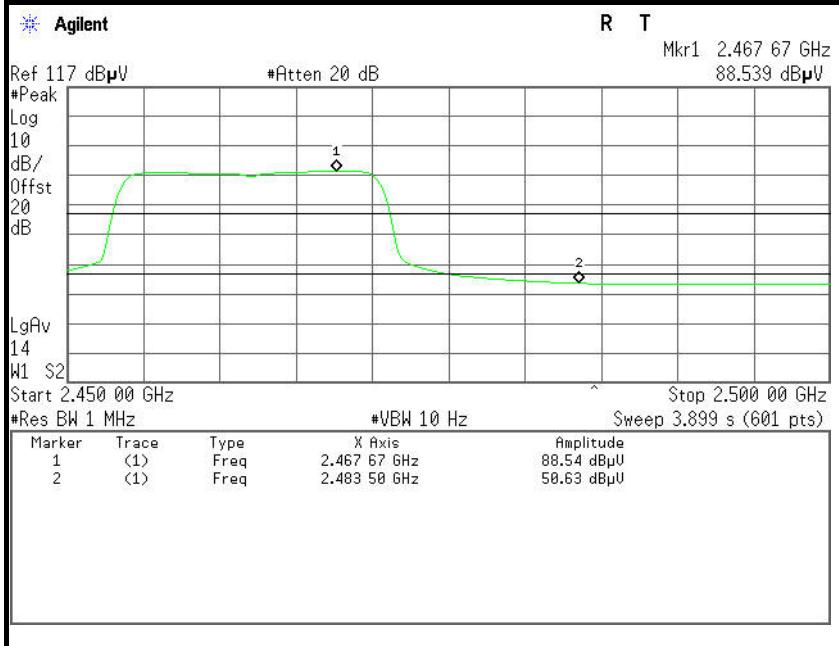


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	54.94	-6.24	61.18	74.00	-12.82	Peak	Vertical
2	2483.5000	44.39	-6.24	50.63	54.00	-3.37	Average	Vertical



## Detector mode: Peak      Polarity: Horizontal

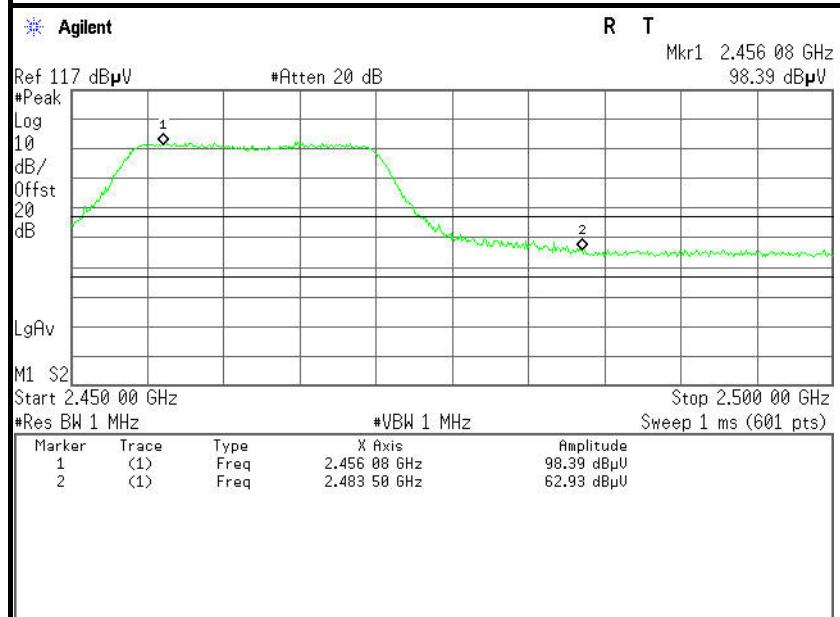

## Detector mode: Average      Polarity: Horizontal

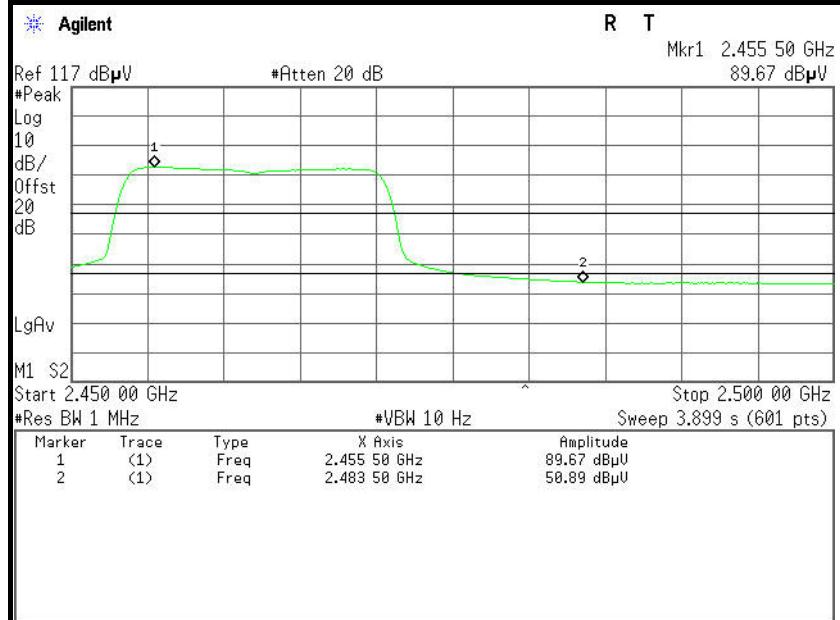


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	56.69	-6.24	62.93	74.00	-11.07	Peak	Horizontal
2	2483.5000	44.65	-6.24	50.89	54.00	-3.11	Average	Horizontal





## IEEE 802.11n HT20 MHz mode

## Band Edges (CH Low)

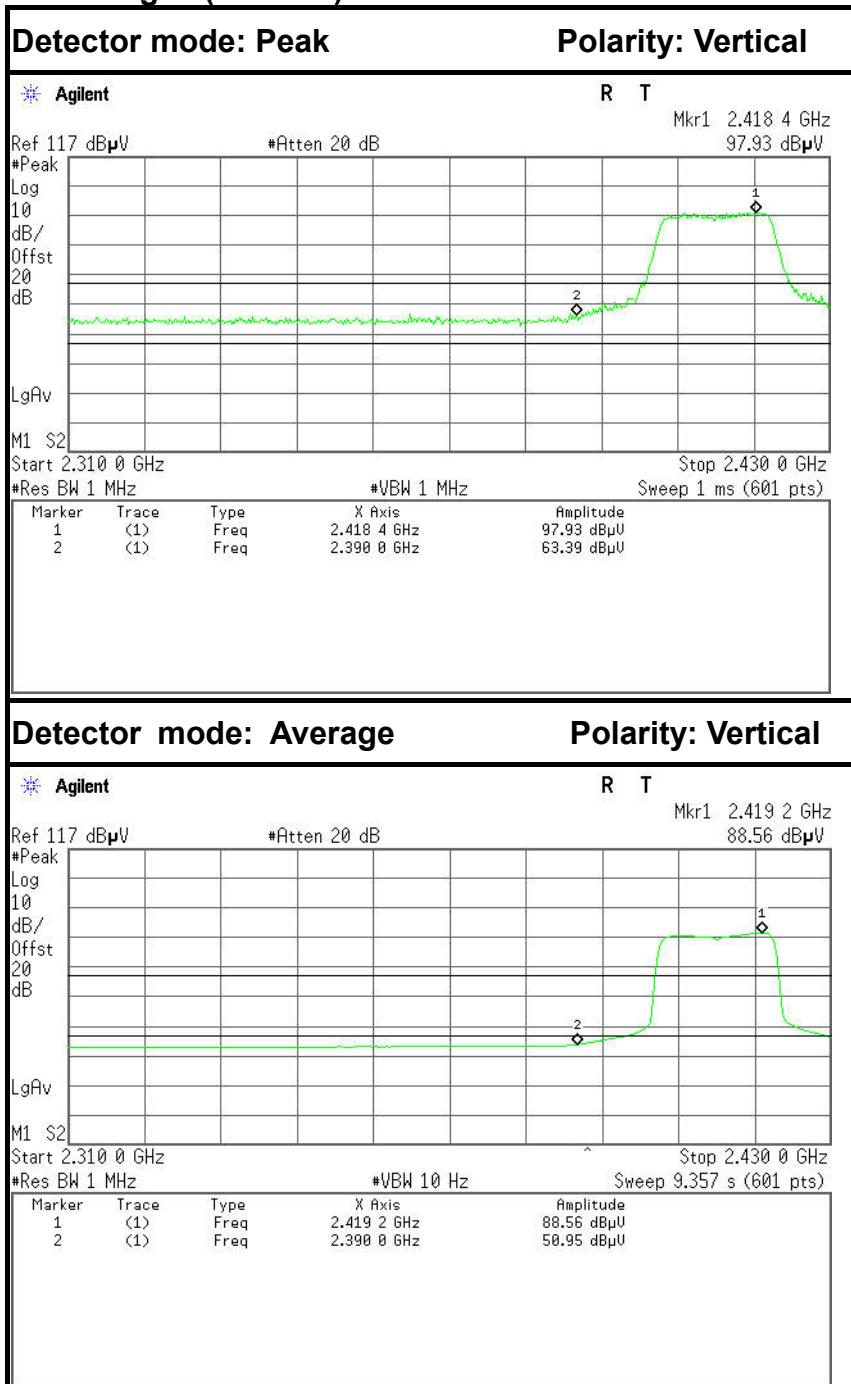



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	56.79	-6.60	63.39	74.00	-10.61	Peak	Vertical
2	2390.0000	44.35	-6.60	50.95	54.00	-3.05	Average	Vertical

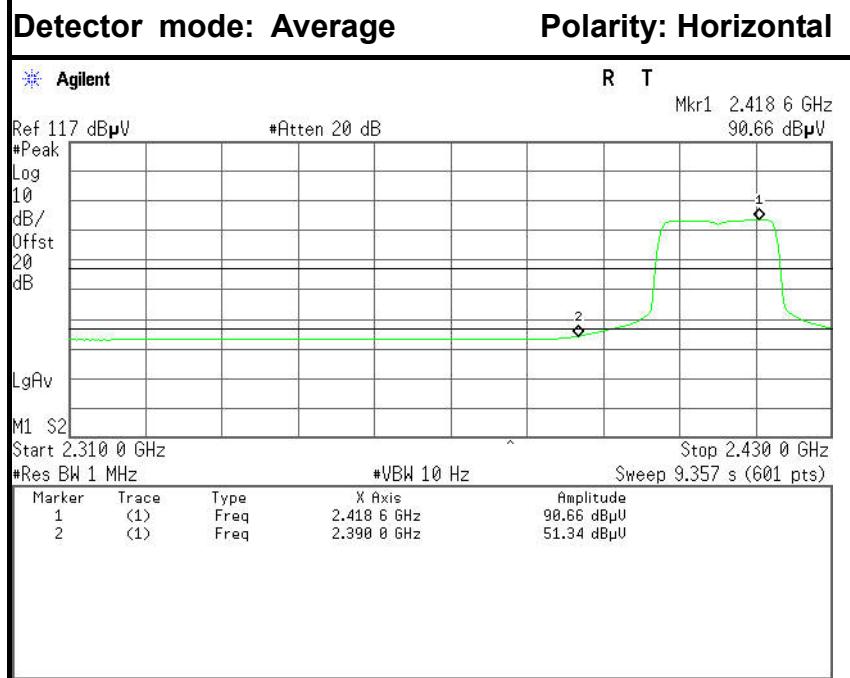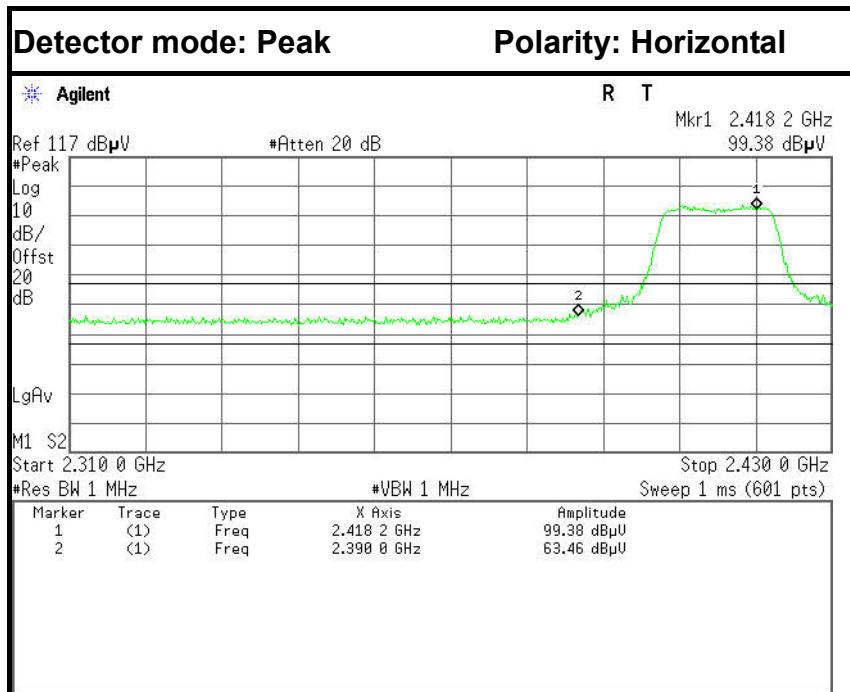

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	56.86	-6.60	63.46	74.00	-10.54	Peak	Horizontal
2	2390.0000	44.74	-6.60	51.34	54.00	-2.66	Average	Horizontal




## Band Edges (CH High)

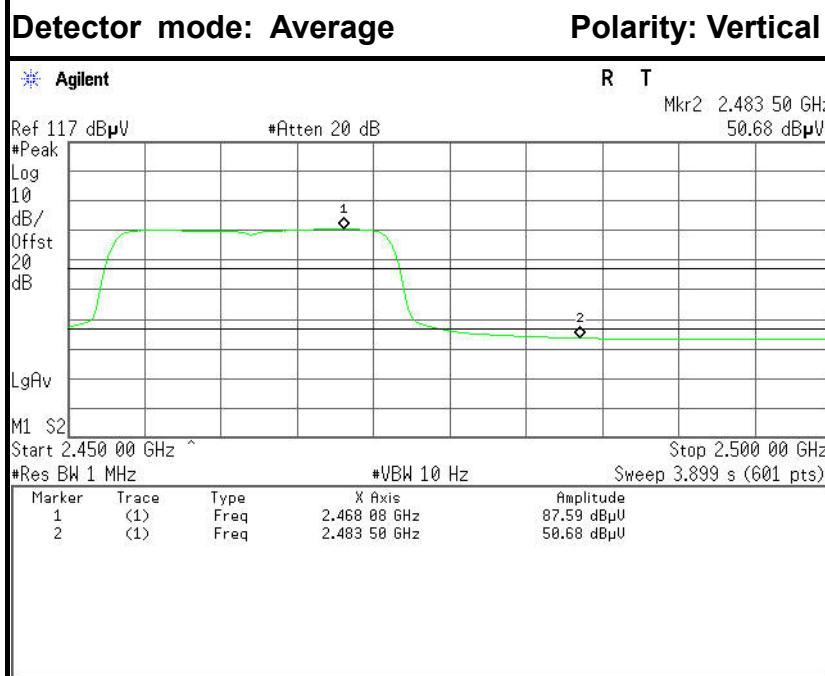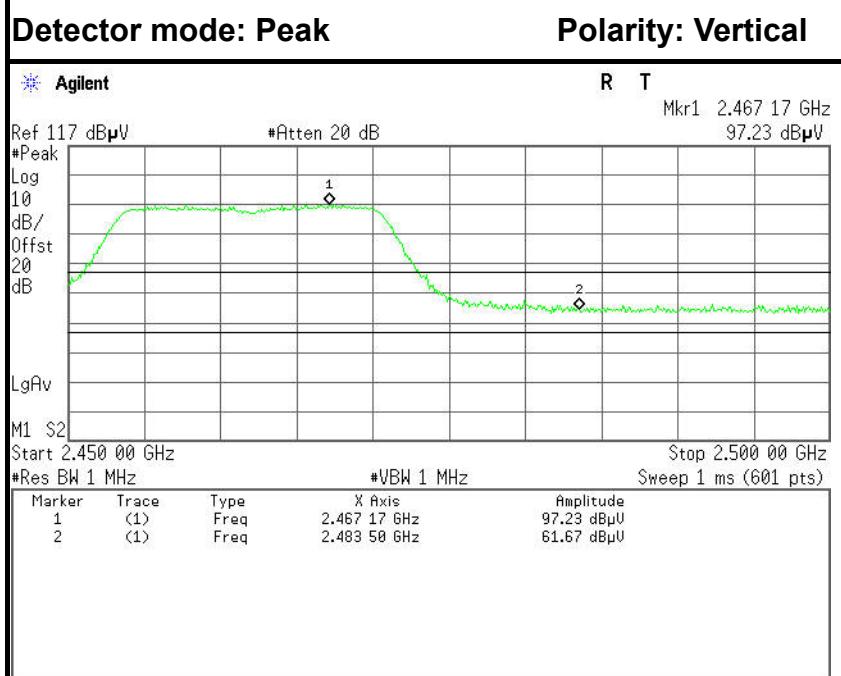


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.43	-6.24	61.67	74.00	-12.33	Peak	Vertical
2	2483.5000	44.44	-6.24	50.68	54.00	-3.32	Average	Vertical



## Detector mode: Peak      Polarity: Horizontal

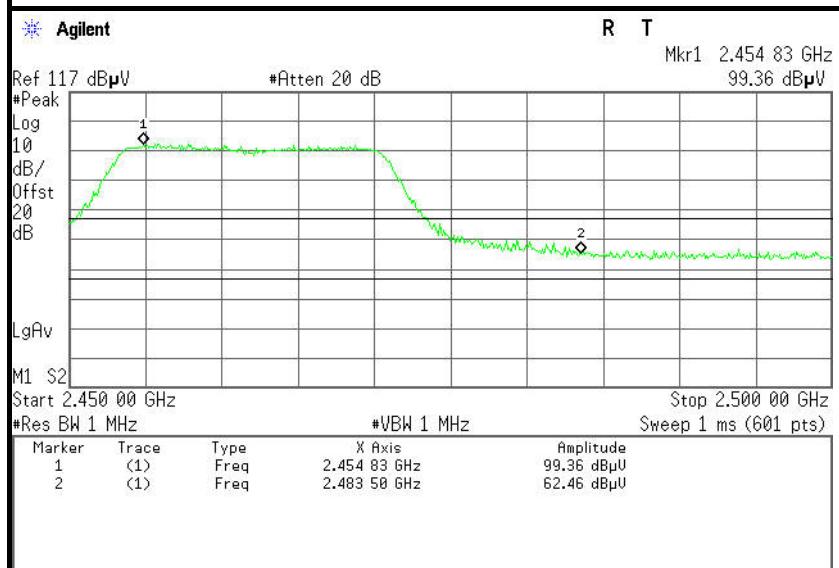

## Detector mode: Average      Polarity: Horizontal

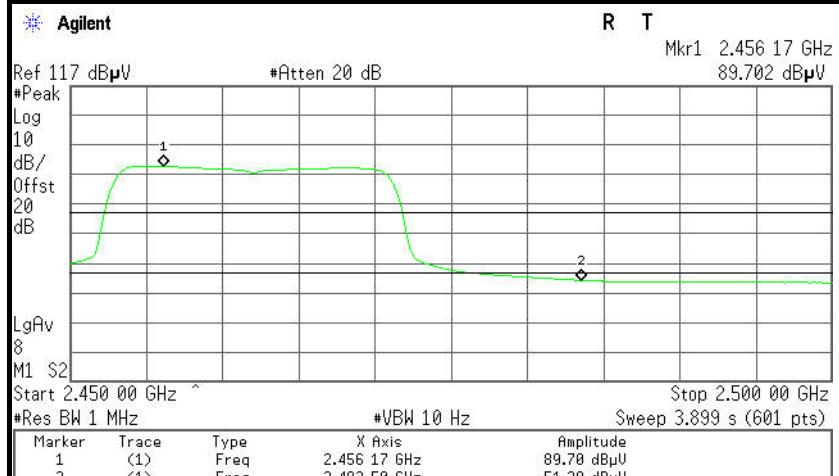


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	56.22	-6.24	62.46	74.00	-11.54	Peak	Horizontal
2	2483.5000	45.04	-6.24	51.28	54.00	-2.72	Average	Horizontal




## IEEE 802.11n HT40 MHz mode

## Band Edges (CH Low)



Detector mode: Peak      Polarity: Vertical

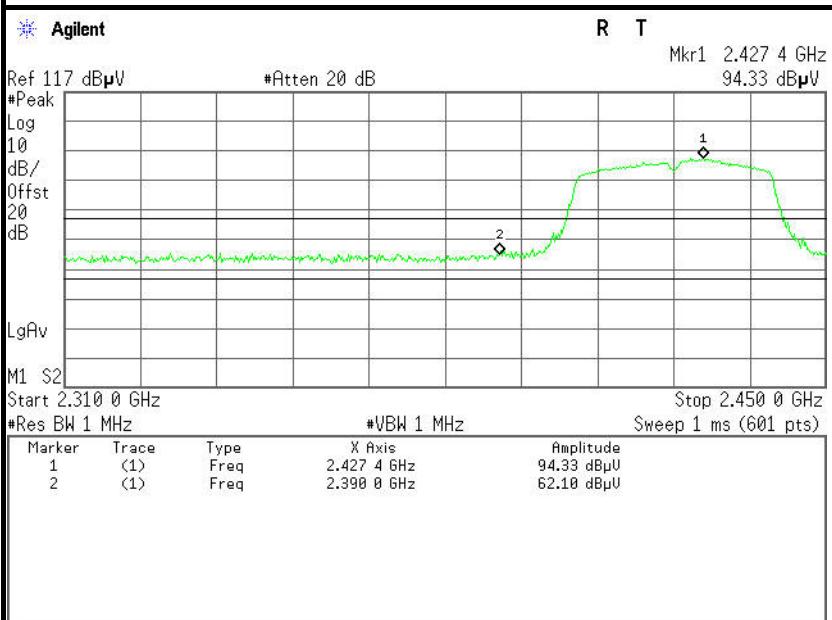

Detector mode: Average      Polarity: Vertical

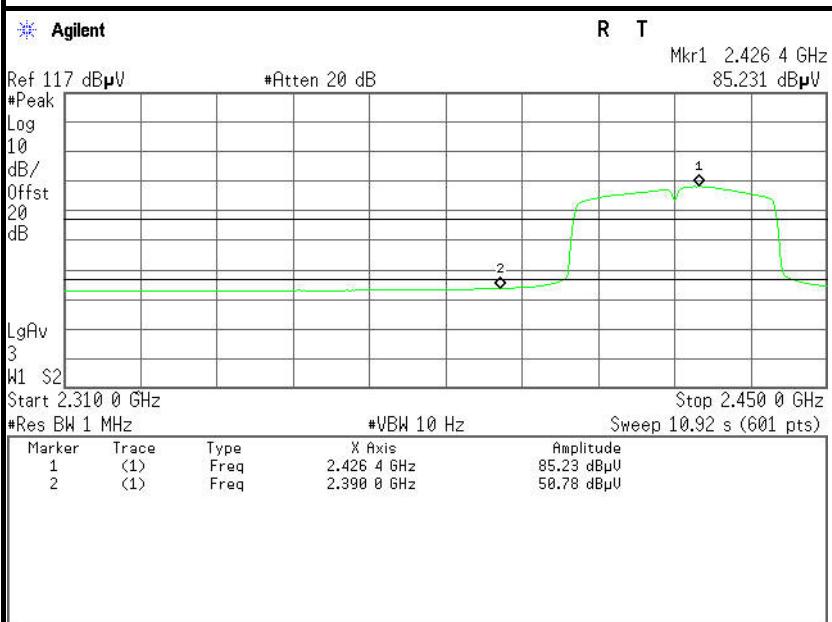



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	55.50	-6.60	62.10	74.00	-11.90	Peak	Vertical
2	2390.0000	44.18	-6.60	50.78	54.00	-3.22	Average	Vertical

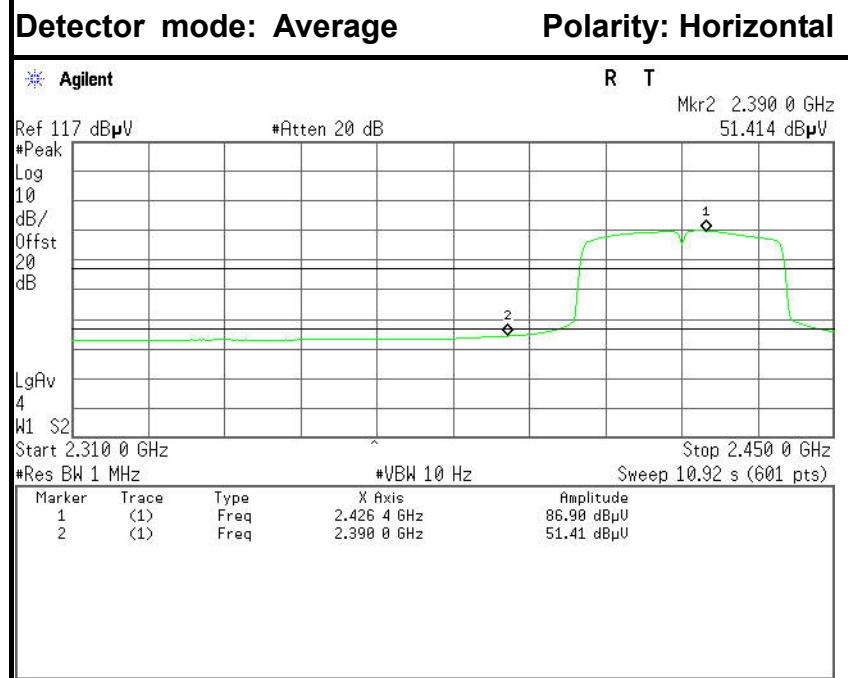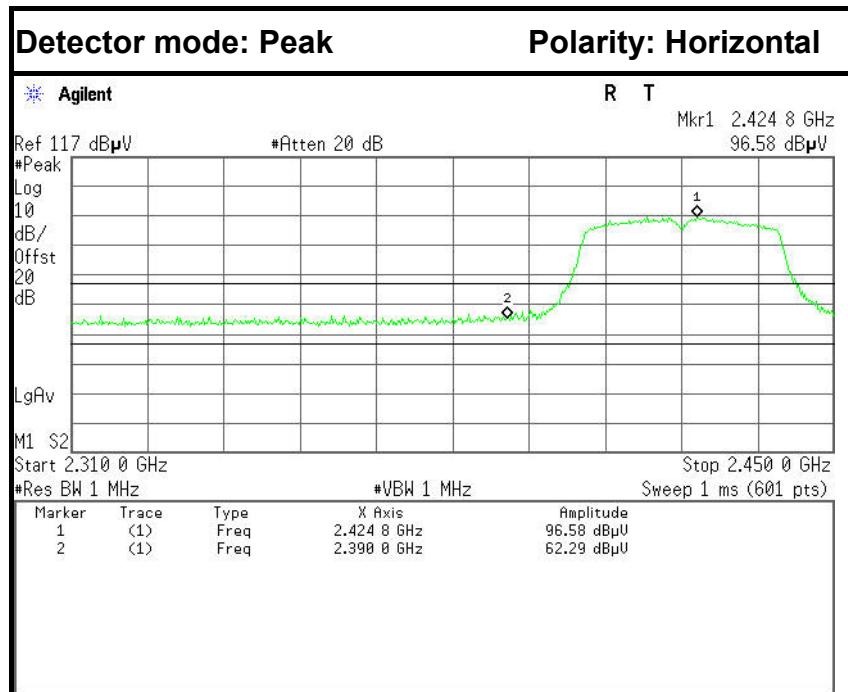



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	55.69	-6.60	62.29	74.00	-11.71	Peak	Horizontal
2	2390.0000	44.81	-6.60	51.41	54.00	-2.59	Average	Horizontal



## Band Edges (CH High)

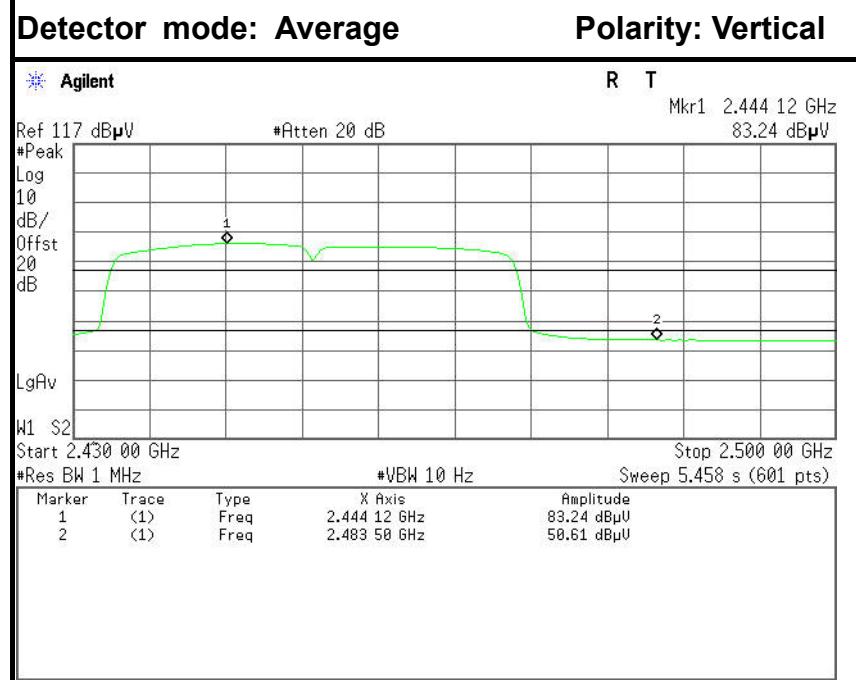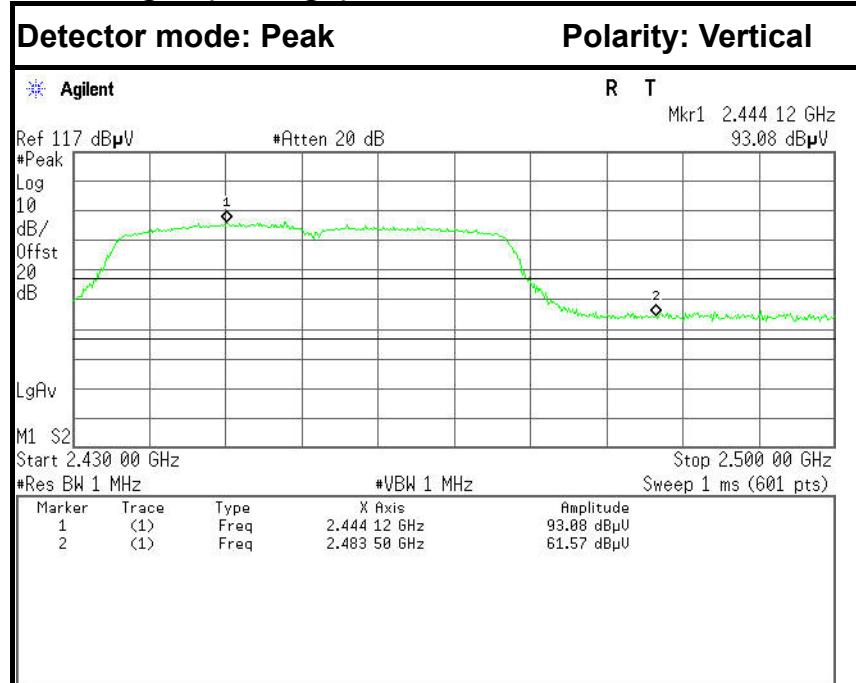

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.33	-6.24	61.57	74.00	-12.43	Peak	Vertical
2	2483.5000	44.37	-6.24	50.61	54.00	-3.39	Average	Vertical

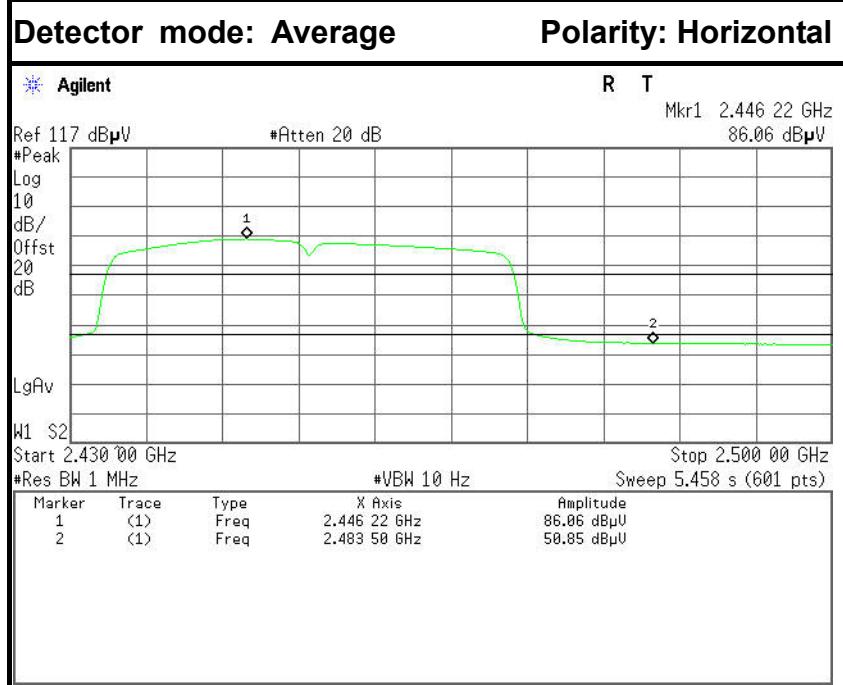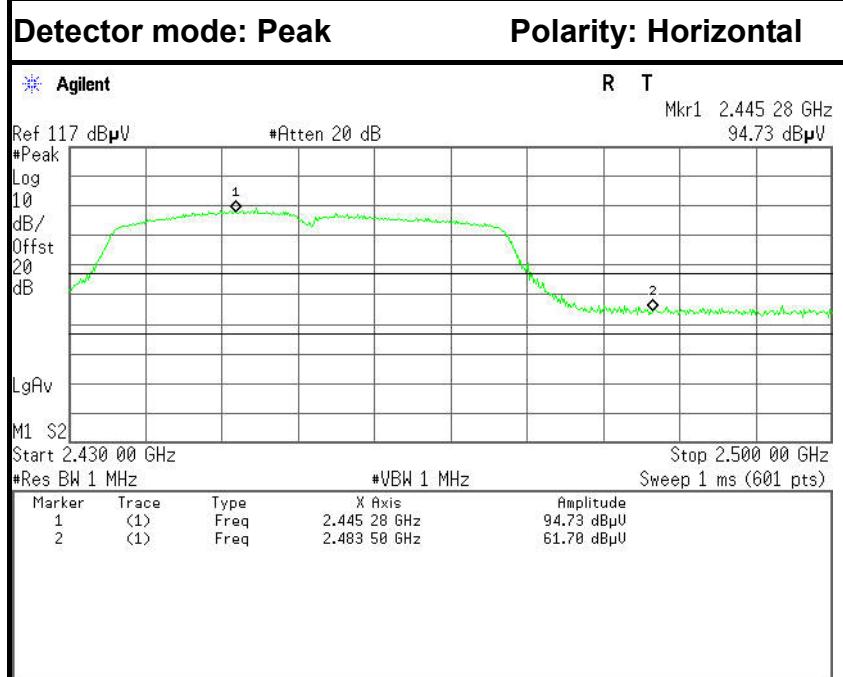

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.46	-6.24	61.70	74.00	-12.30	Peak	Horizontal
2	2483.5000	44.61	-6.24	50.85	54.00	-3.15	Average	Horizontal



## 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 7.6.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015


### 7.6.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

#### 10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.6.4. TEST SETUP





## 7.6.5. TEST RESULTS

*No non-compliance noted*

### Test Data

#### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-12.93	8	PASS
Mid	2437	-9.51		PASS
High	2462	-7.46		PASS

#### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-18.85	8	PASS
Mid	2437	-16.60		PASS
High	2462	-13.84		PASS

#### Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-17.56	8	PASS
Mid	2437	-18.18		PASS
High	2462	-14.67		PASS

#### Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-20.00	8	PASS
Mid	2437	-20.10		PASS
High	2452	-16.91		PASS




## Test Plot

### IEEE 802.11b mode

#### PPSD (CH Low)

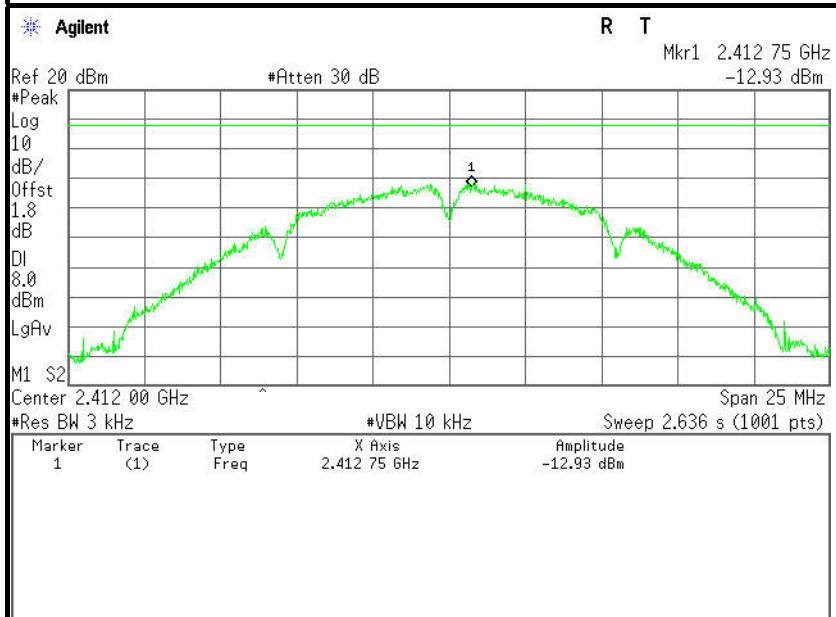


#### PPSD (CH Mid)

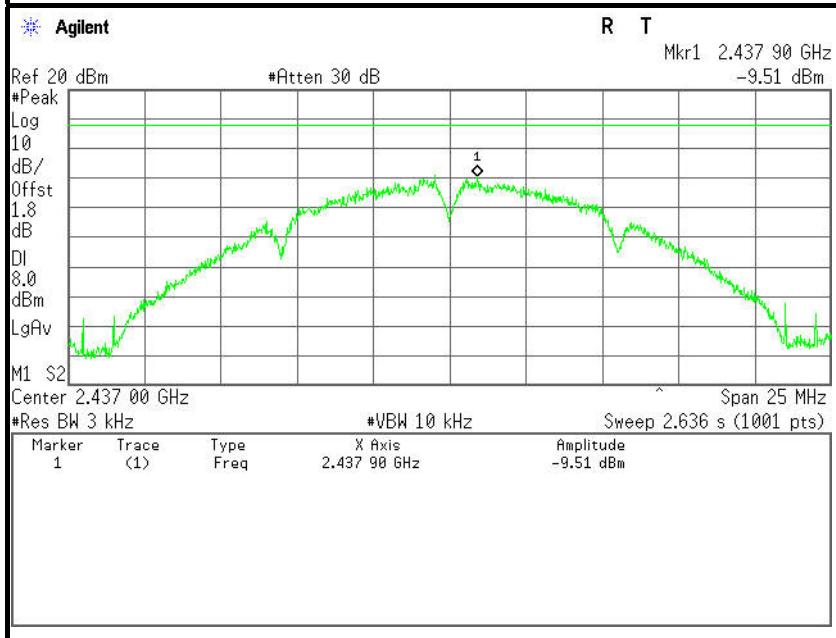




## PPSD (CH High)

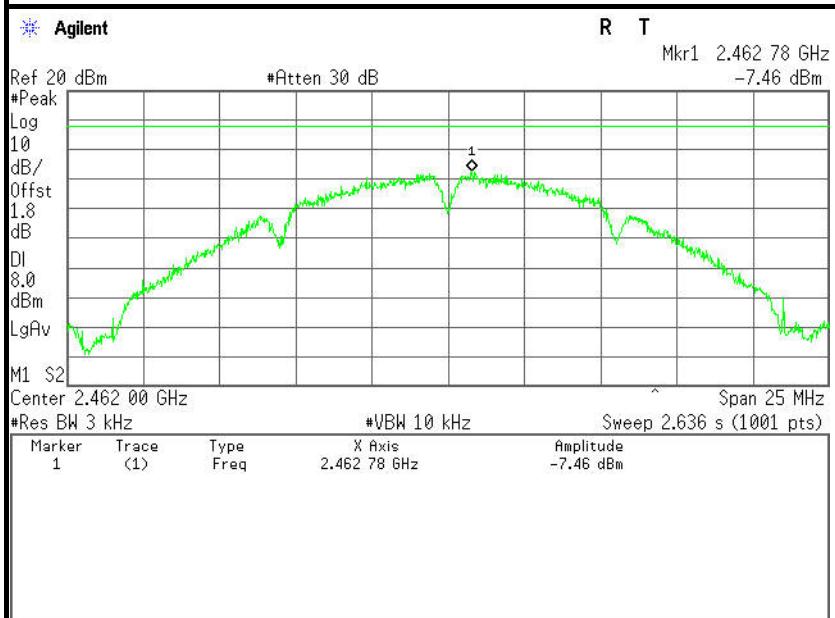


## IEEE 802.11g mode

## PPSD (CH Low)

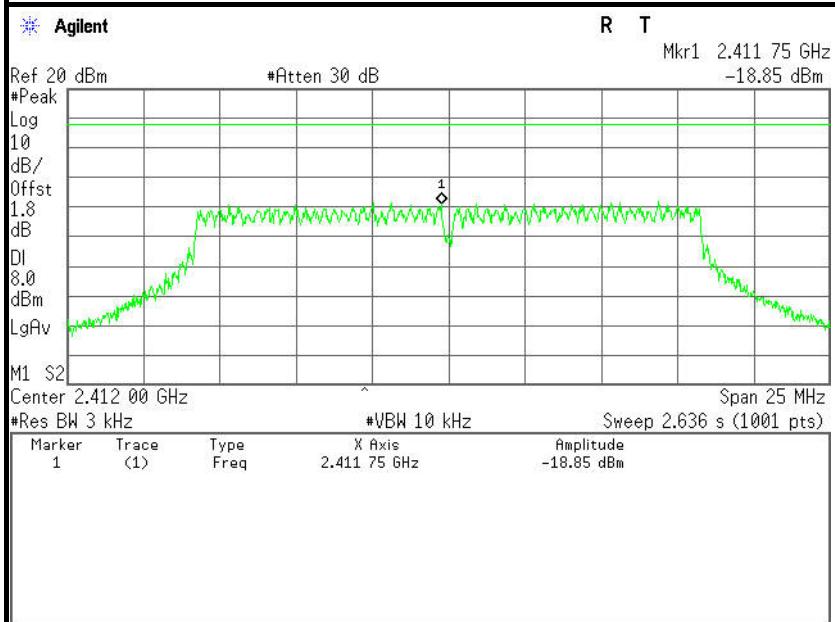




## PPSD (CH Mid)

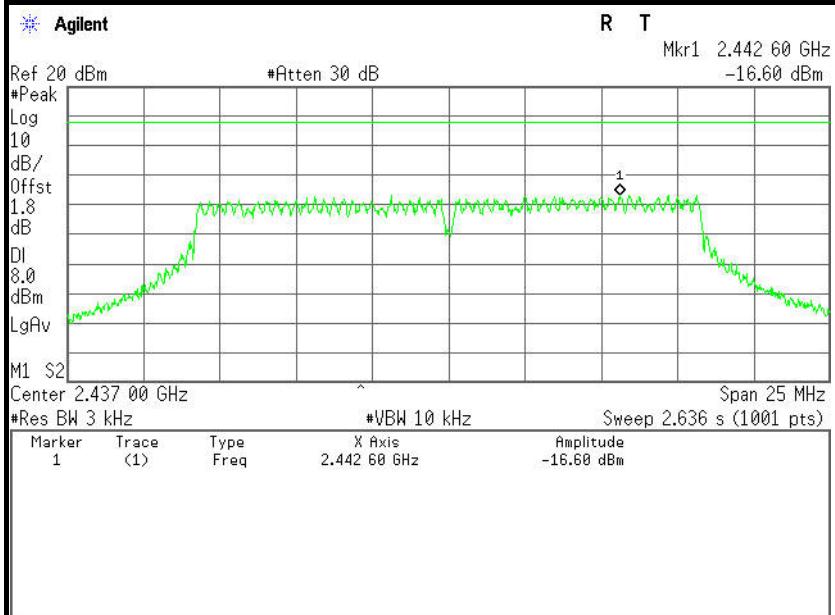


## PPSD (CH High)

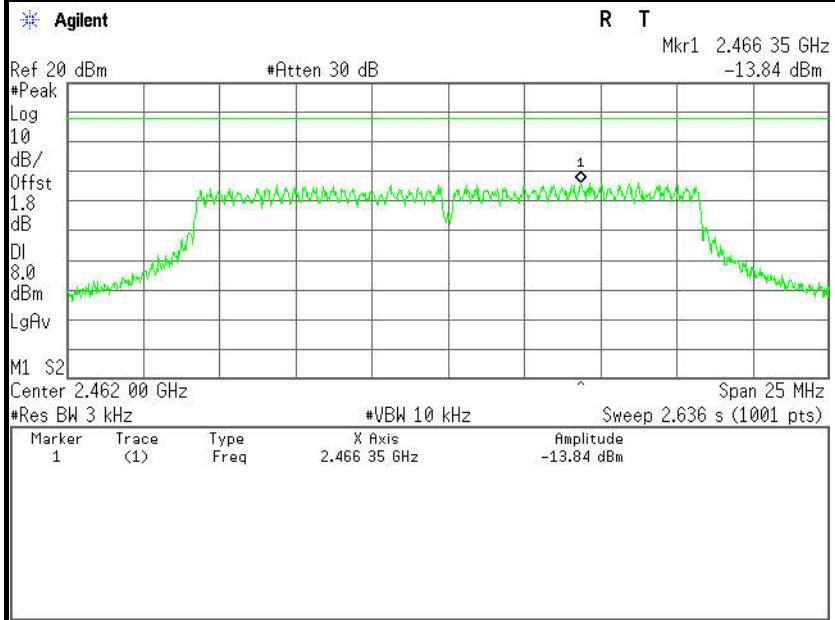




## IEEE 802.11n HT20 MHz mode

### PPSD (CH Low)

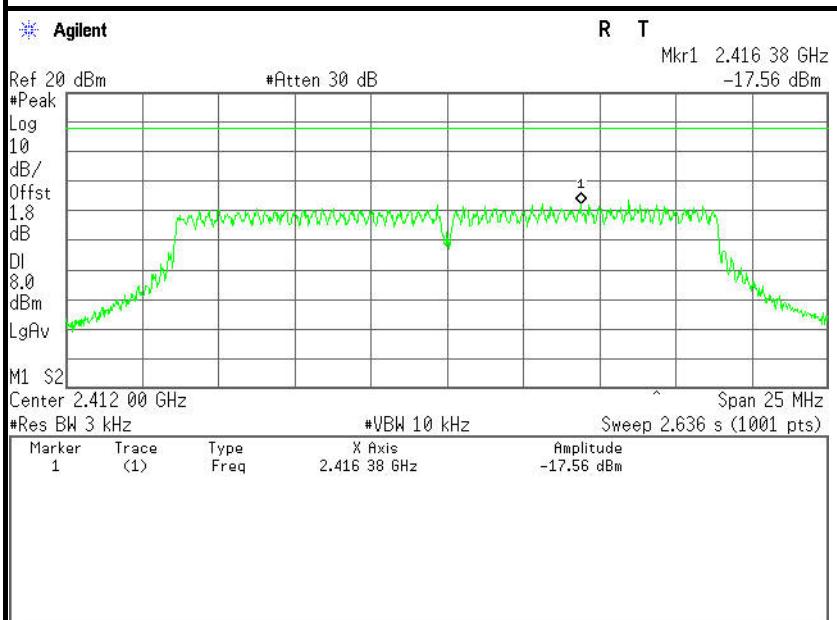


### PPSD (CH Mid)

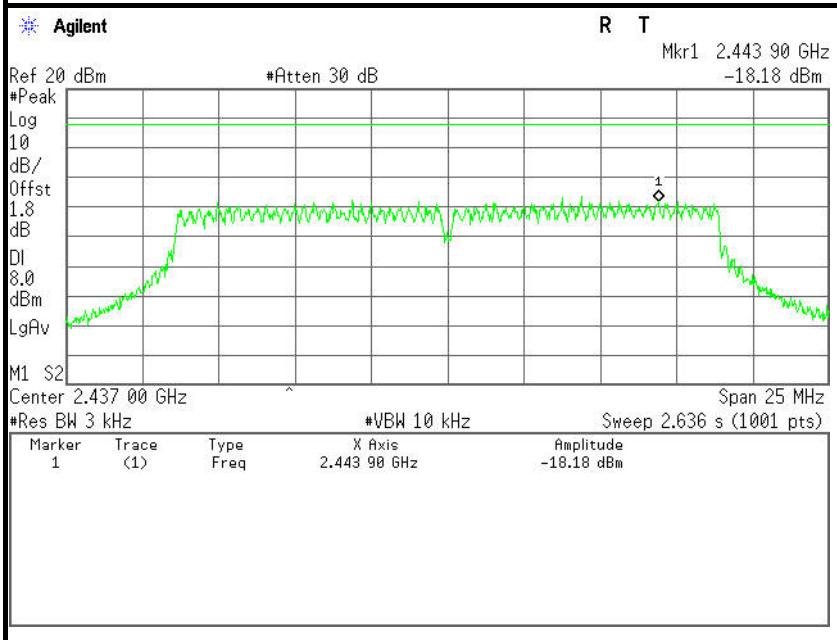




## PPSD (CH High)

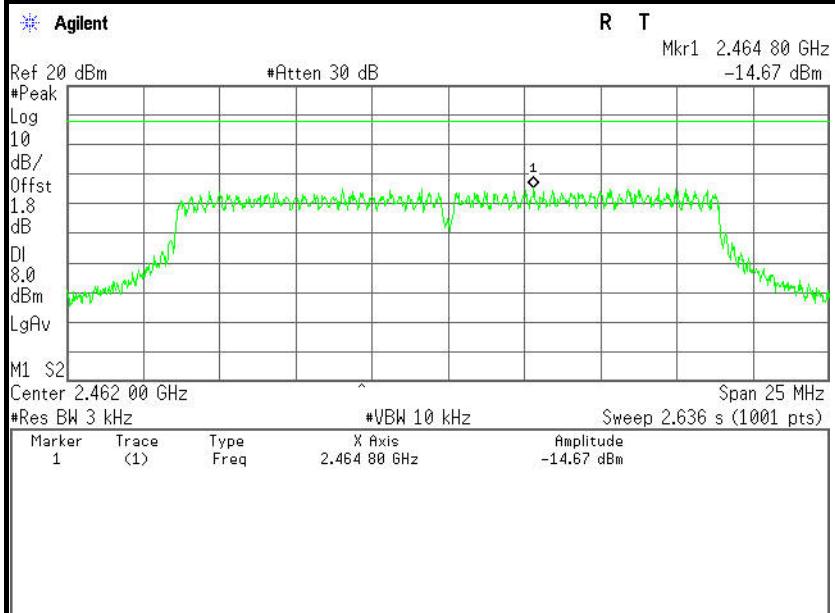


## IEEE 802.11n HT40 MHz mode

## PPSD (CH Low)

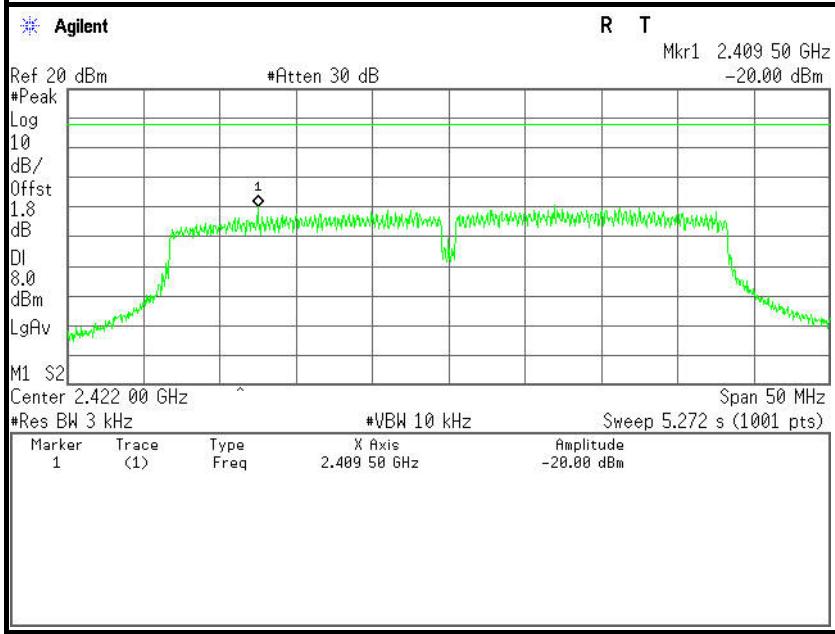



## PPSD (CH Mid)

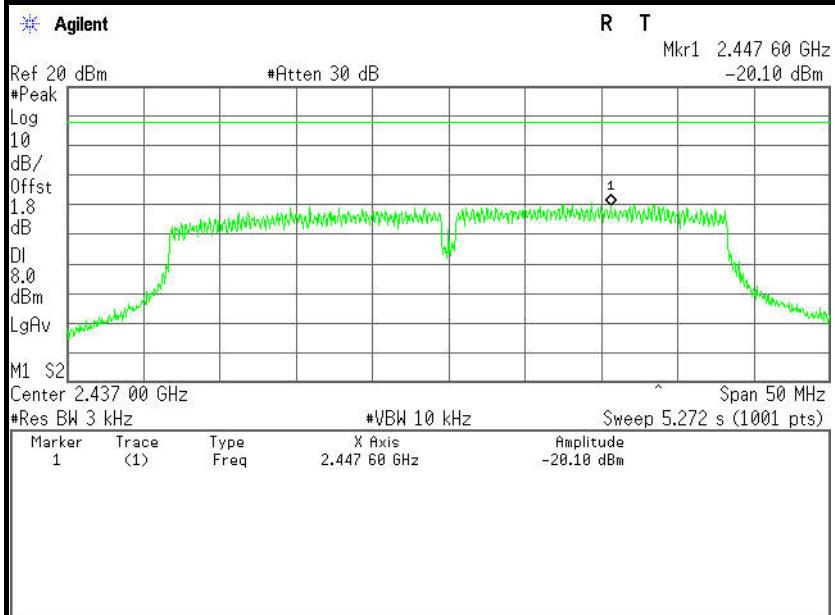

## PPSD (CH High)

