



MRT Technology (Taiwan) Co., Ltd
Phone: +886-3-3288388
Fax: +886-3-3288918
Web: www.mrt-cert.com

Report No.: 1610TW0501-U2
Report Version: 1.0
Issue Date: 2016-10-25

MEASUREMENT REPORT

FCC PART 15.225

FCC ID: 2ACC5-GT500

APPLICANT: A Mobile Intelligent Corp.

Application Type: Certification

Product: 5" Rugged Android™ Handheld Device with LTE solution

Model No.: GT-500

Brand Name:

FCC Classification: (DXX) Part 15 Low Power Communication Device
Transmitter

FCC Rule Part(s): Part 15.225

Test Procedure(s): ANSI C63.10-2013

Test Date: October 4 ~ 5 , 2016

Reviewed By :

(Paddy Chen)

Approved By :

(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1610TW0501-U2	1.0	Original report	2016-10-25	

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Test Mode.....	7
2.3. Test Software.....	7
2.4. Test Configuration.....	7
2.5. EMI Suppression Device(s)/Modifications.....	7
2.6. Labeling Requirements.....	7
3. DESCRIPTION of TEST.....	8
3.1. Evaluation Procedure	8
3.2. AC Line Conducted Emissions	8
3.3. Radiated Emissions.....	9
4. ANTENNA REQUIREMENTS.....	10
5. TEST EQUIPMENT CALIBRATION DATE.....	11
6. MEASUREMENT UNCERTAINTY.....	12
7. TEST RESULT	13
7.1. Summary.....	13
7.2. Field Strength of Fundamental Emissions Measurement.....	14
7.2.1. Test Limit	14
7.2.2. Test Procedure used.....	14
7.2.3. Test Setting.....	15
7.2.4. Test Setup	15
7.2.5. Test Result.....	16
7.3. Radiated Spurious Emissions Measurement	17
7.3.1. Test Limit	17
7.3.2. Test Procedure Used	17
7.3.3. Test Setting.....	18
7.3.4. Test Setup	19
7.3.5. Test Result.....	20
7.4. 20dB Bandwidth Measurement.....	23

7.4.1. Test Limit	23
7.4.2. Test Procedure Used	23
7.4.3. Test Setting.....	23
7.4.4. Test Setup	23
7.4.5. Test Result.....	24
7.5. Frequency Stability Measurement	25
7.5.1. Test Limit	25
7.5.2. Test Procedure Used	25
7.5.3. Test Setup	26
7.5.4. Test Result.....	27
7.6. AC Conducted Emissions Measurement	28
7.6.1. Test Limit	28
7.6.2. Test Setup	28
7.6.3. Test Result.....	29
8. CONCLUSION	31
Appendix A - Test Photograph.....	32
Appendix B - External Photograph.....	34
Appendix C - Internal Photograph.....	37

§2.1033 General Information

Applicant:	AMobile Intelligent Corp.
Applicant Address:	8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer:	MAKER TECHNOLOGY
Manufacturer Address:	12th Floor, NO.82 building, NO.1198 North QinzhouRoad, Xuhui District, Shanghai, China
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.:	291082
FCC Rule Part(s):	Part 15.225
Model No.:	GT-500
FCC ID:	2ACC5-GT500
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
2. MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

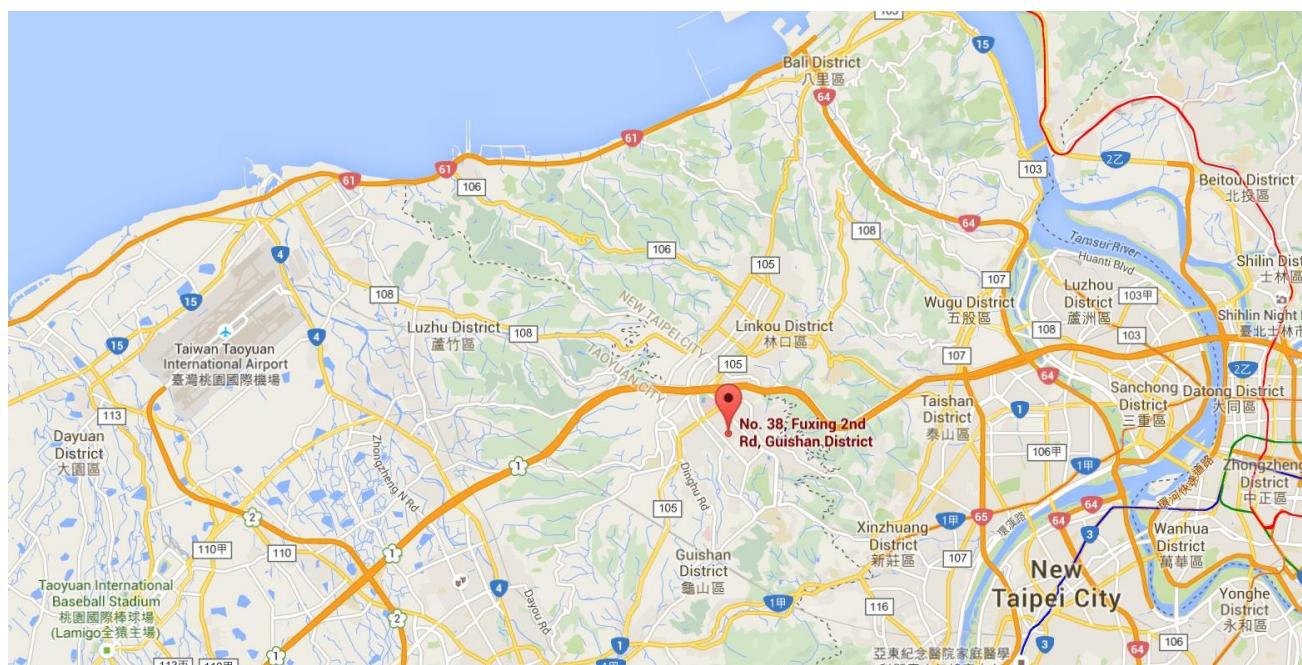

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	5" Rugged Android™ Handheld Device with LTE solution
FCC ID	2ACC5-GT500
Model No.	GT-500
Brand Name	
Antenna Type	PCB
NFC Specification	13.56MHz
Modulation	ASK

2.2. Test Mode

Test Mode	Mode 1: Transmit by NFC
-----------	-------------------------

2.3. Test Software

The test utility software used during testing was "MTK EngineerMode".

2.4. Test Configuration

The **5" Rugged Android™ Handheld Device with LTE solution, FCC ID: 2ACC5-GT500**. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the **5" Rugged Android™ Handheld Device with LTE solution FCC ID: 2ACC5-GT500**

Deviation from measurement procedure.....**None**

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.6.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions.

According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated Emissions test results are shown in Section 7.2 & 7.3 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of **5" Rugged Android™ Handheld Device with LTE solution** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **5" Rugged Android™ Handheld Device with LTE solution** FCC ID: **2ACC5-GT500** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2017/03/16
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2017/03/23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2017/03/23
Cable	Rosnol	N1C50-RG400-B1 C50-500CM	MRTTWE00013	1 year	2017/05/19

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2017/03/16
Broadband TRILOG Antenna	Schwarzbeck	VULB 9162	MRTTWA00001	1 year	2017/04/05
Acitve Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2017/04/05
Broadband Horn antenna	Schwarzbeck	BBHA 9120D	MRTTWA00003	1 year	2017/04/05
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2017/04/05
Broadband Preamplifier	Schwarzbeck	BBV 9718	MRTTWA00005	1 year	2017/04/05
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2017/04/05
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2017/03/02
Cable	HUBERSUH NER	SF106	MRTTWA00010	1 year	2017/05/19
Cable	Rosnol	K1K50-UP026 4-K1K50-4M	MRTTWA00012	1 year	2017/05/19

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2017/07/10
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2017/03/17

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement – SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 2.42dB
Conducted Measurement– SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.3dB
Radiated Emission Measurement – AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): Horizontal: 9K~30MHz: 4.14dB 30MHz~1GHz: 4.22dB 1GHz~40GHz: 4.05dB Vertical: 9K~30MHz: 4.14dB 30MHz~1GHz: 3.37dB 1GHz~40GHz: 4.08dB

7. TEST RESULT

7.1. Summary

Product Name: 5" Rugged Android™ Handheld Device with LTE solution
FCC ID: 2ACC5-GT500
FCC Classification: (DXX) Part 15 Low Power Communication Device Transmitter

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.225 (a)(b)(c)	Field Strength of Fundamental Emissions	FCC 15.225 limits	Radiated	Pass	Section 7.2
15.225(d)	Radiated Spurious Emissions	FCC 15.209 limits		Pass	Section 7.3
2.1049	20dB Bandwidth	N/A	Conducted	Pass	Section 7.4
15.225(e)	Frequency Stability	within $\pm 0.01\%$ of the operating frequency		Pass	Section 7.5
15.207	AC Conducted Emissions 150kHz - 30MHz	FCC 15.207 limits	Line Conducted	Pass	Section 7.6

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. Field Strength of Fundamental Emissions Measurement

7.2.1. Test Limit

FCC Part 15.225 Limits				
Frequency (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705 – 13.110	30	29.5	48.58	69.5
13.110 – 13.410	106	40.5	59.98	80.5
13.410 – 13.553	334	50.5	69.58	90.5
13.553 – 13.567	15848	84	103.08	124
13.567 – 13.710	334	50.5	69.58	90.5
13.710 – 14.010	106	40.5	59.98	80.5
14.010 – 30.000	30	29.5	48.58	69.5

7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10-2013 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10-2013 - Section 11.12.2.5 (average power measure

Test Setting


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz


7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

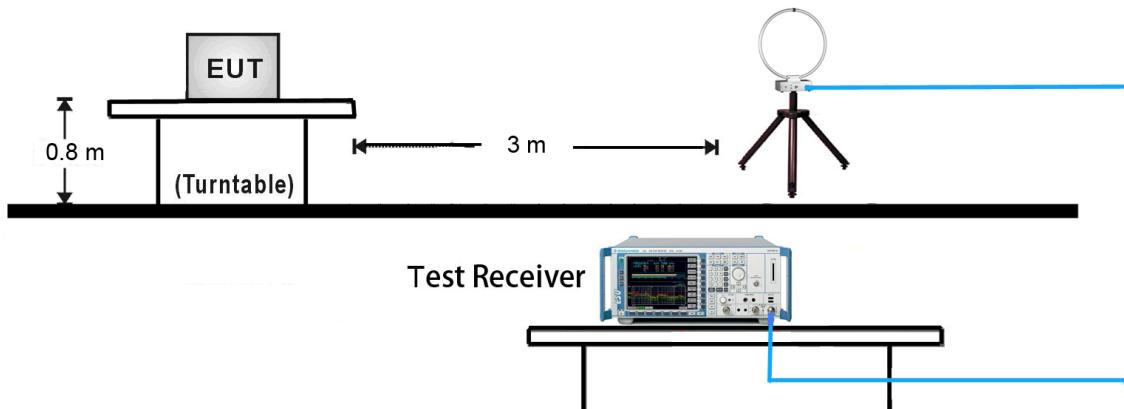

7.2.4. Test Result

EUT	GT-500	Date of Test	2016/10/05
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	25°C / 57%
Polarity	--	Site / Test Engineer	AC1 / Kevin
Test Mode	Mode1	Test Voltage	By Battery (DC 3.7V)

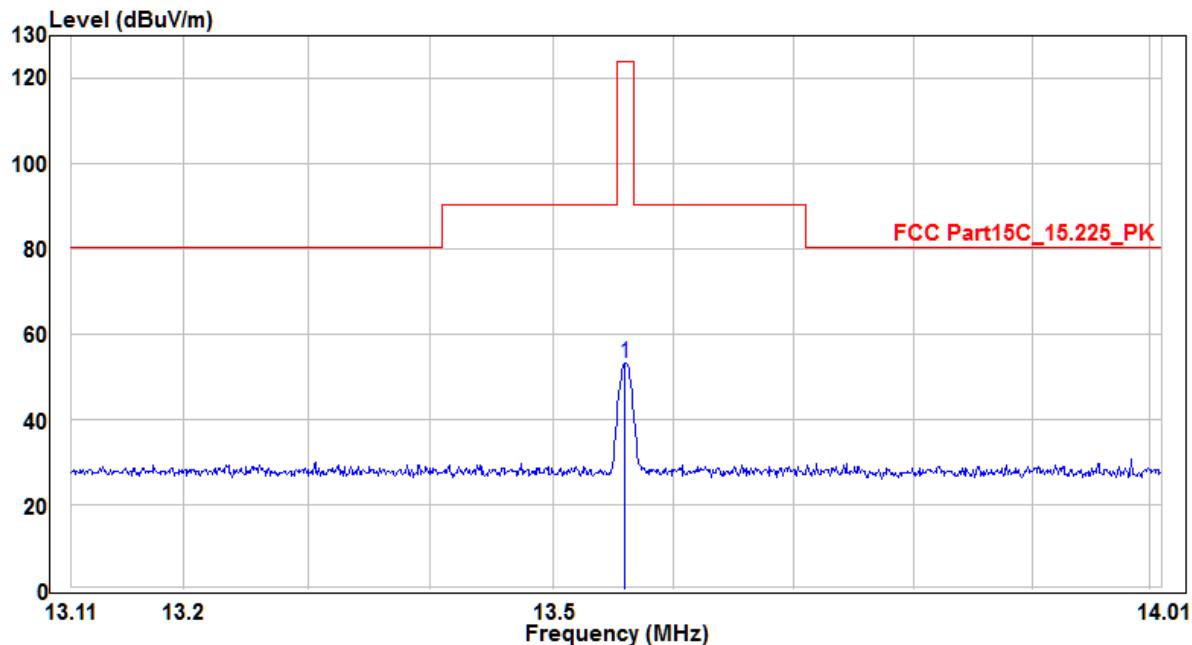

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	13.56	32.55	20.67	53.22	-70.78	124	100	400	Peak

Note:

1. ** means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) - Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

7.3. Radiated Spurious Emissions Measurement

7.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note : The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

7.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10-2013 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10-2013 - Section 11.12.2.5 (average power measurements)

Test Setting

Peak Power Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 \times$ RBW
4. Detector = peak
5. Sweep time = auto couple

Table 1 - RBW as a function of frequency


Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz
30 MHz ~ 1000 MHz	100 kHz ~ 120 kHz
> 1000 MHz	1 MHz

7.3.3. Test Setup

9kHz ~ 30MHz Test Setup:

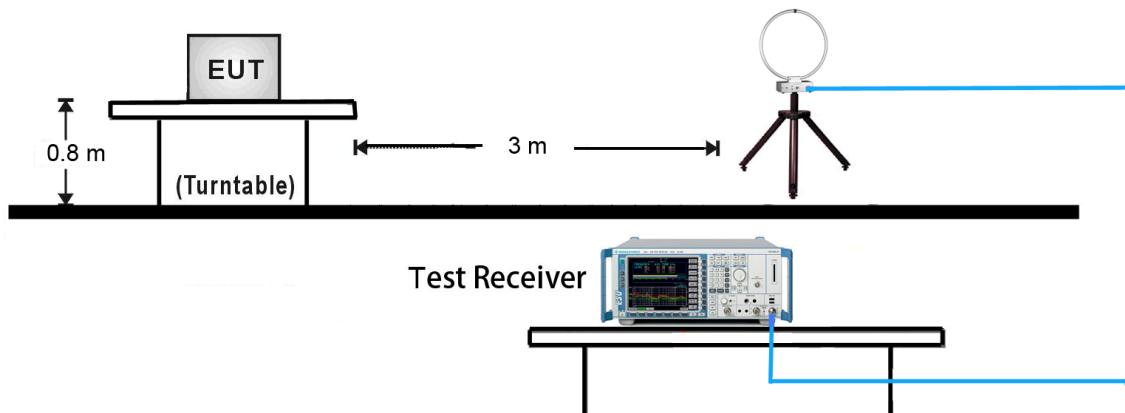


30MHz ~ 1GHz Test Setup:

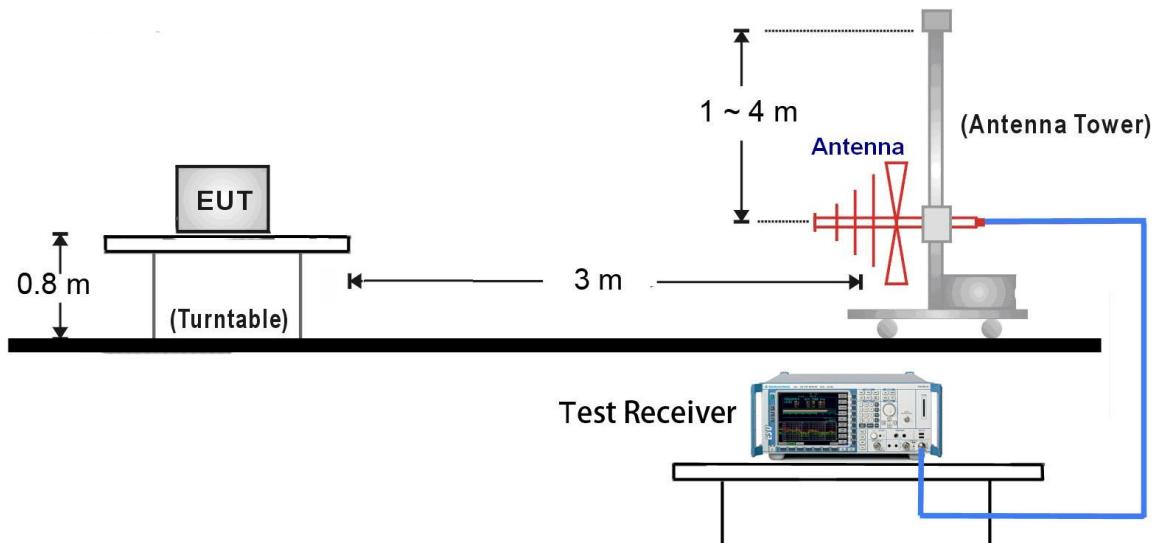

7.3.4. Test Result

EUT	GT-500	Date of Test	2016/10/05
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	25°C / 57%
Polarity	--	Site / Test Engineer	AC1 / Kevin
Test Mode	Mode1	Test Voltage	By Battery (DC 3.7V)

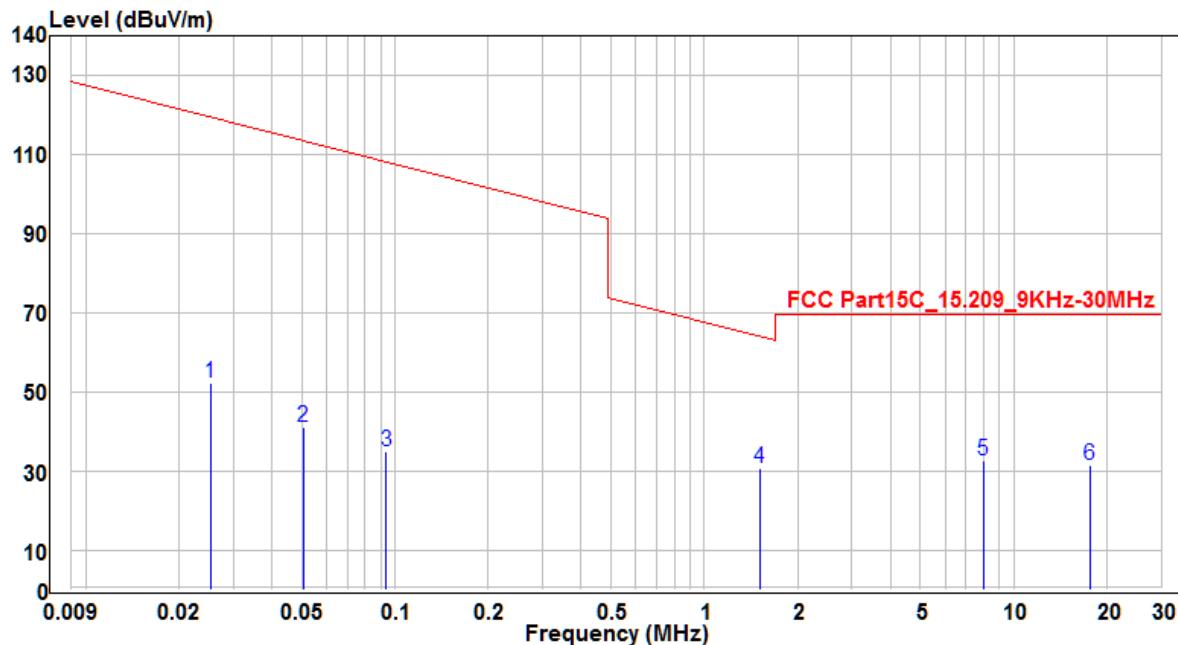


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		0.0253	31.87	20.5	52.37	-67.17	119.54	100	400	Peak
2		0.0505	20.48	20.5	40.98	-72.55	113.53	100	400	Peak
3		0.0938	14.58	20.38	34.96	-73.19	108.15	100	400	Peak
4	*	1.507	10.56	20.3	30.86	-33.21	64.07	100	400	Peak
5		7.978	12.15	20.55	32.7	-36.8	69.5	100	400	Peak
6		17.61	10.69	20.68	31.37	-38.13	69.5	100	400	Peak

Note:

1. ** means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) - Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	GT-500	Date of Test	2016/10/05
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25°C / 57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin
Test Mode	Mode1	Test Voltage	By Battery (DC 3.7V)

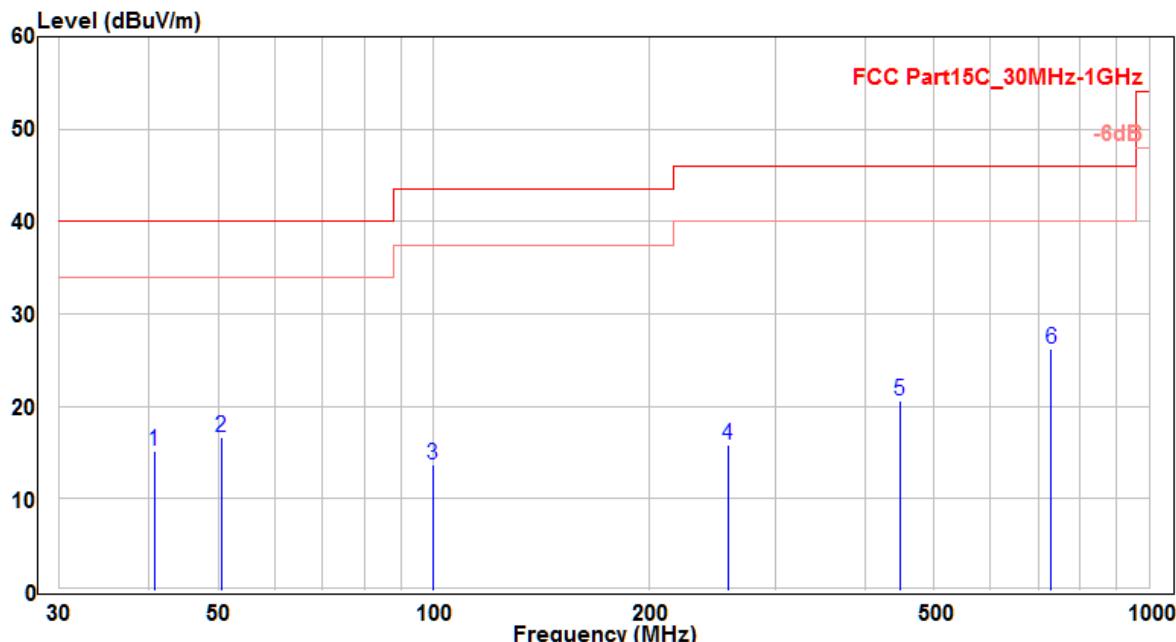


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		40.7	1.08	14.11	15.19	-24.81	40	400	400	Peak
2		50.49	1.58	15.15	16.73	-23.27	40	400	400	Peak
3		99.6	0.42	13.21	13.63	-29.87	43.5	400	400	Peak
4		257.59	1.82	14.01	15.83	-30.17	46	400	400	Peak
5		447.62	2.92	17.61	20.53	-25.47	46	400	400	Peak
6	*	729.92	3.88	22.28	26.16	-19.84	46	400	400	Peak

Note:

1. **, means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	GT-500	Date of Test	2016/10/05
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25°C / 57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin
Test Mode	Mode1	Test Voltage	By Battery (DC 3.7V)

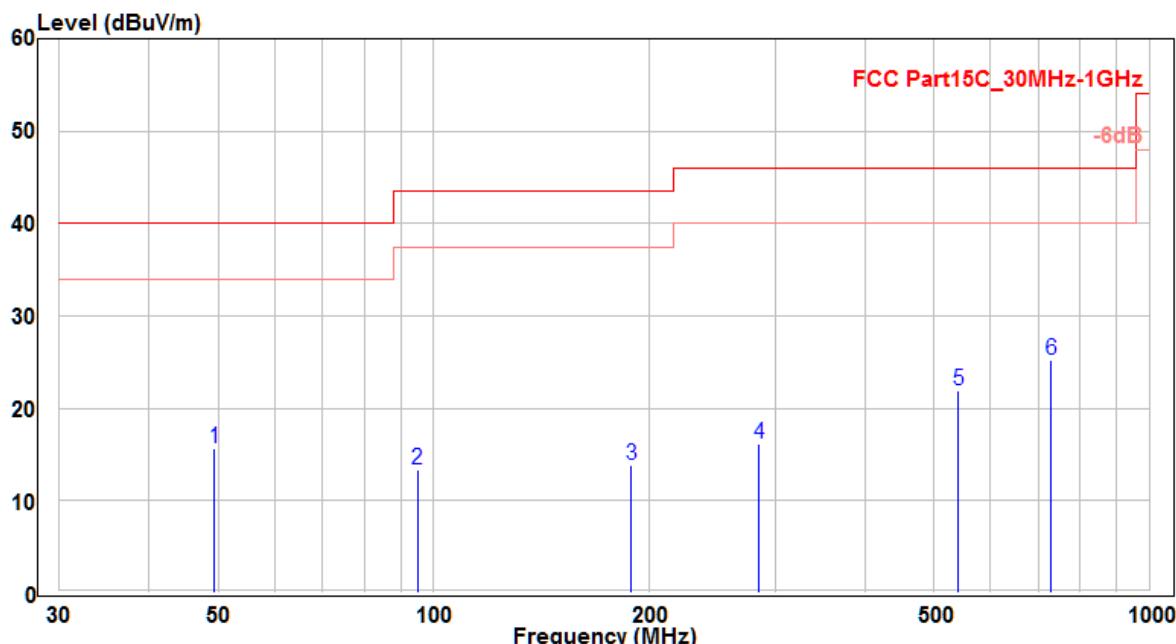

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		49.43	0.5	15.19	15.69	-24.31	40	400	400	Peak
2		95.02	0.85	12.56	13.41	-30.09	43.5	400	400	Peak
3		189.02	1.98	11.85	13.83	-29.67	43.5	400	400	Peak
4		285.23	1.69	14.45	16.14	-29.86	46	400	400	Peak
5		540.95	2.81	19.19	22	-24	46	400	400	Peak
6	*	729.16	3.02	22.27	25.29	-20.71	46	400	400	Peak

Note:

1. ** means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

7.4. 20dB Bandwidth Measurement

7.4.1. Test Limit

N/A


7.4.2. Test Procedure Used

KDB 789033 D02v01r01 – Section C.1

7.4.3. Test Setting


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.4.4. Test Setup

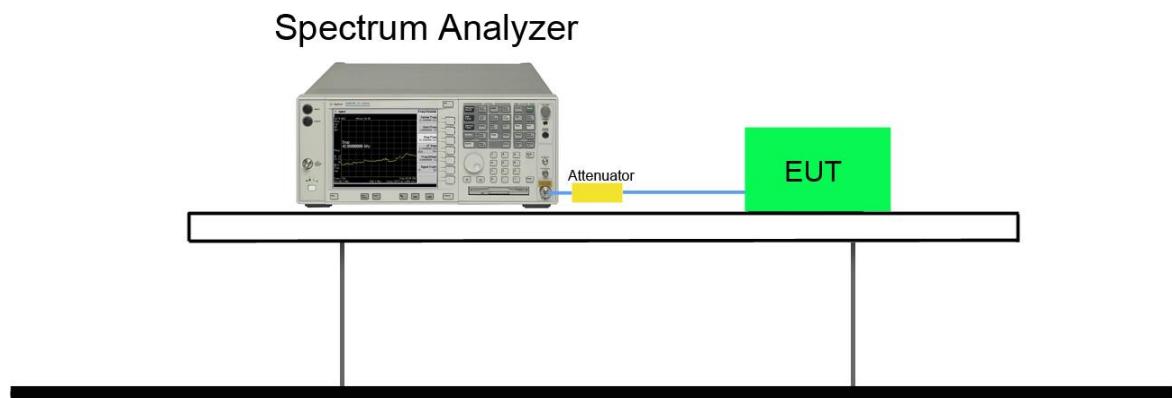

7.4.5. Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
NFC	13.65	2.867	2.439

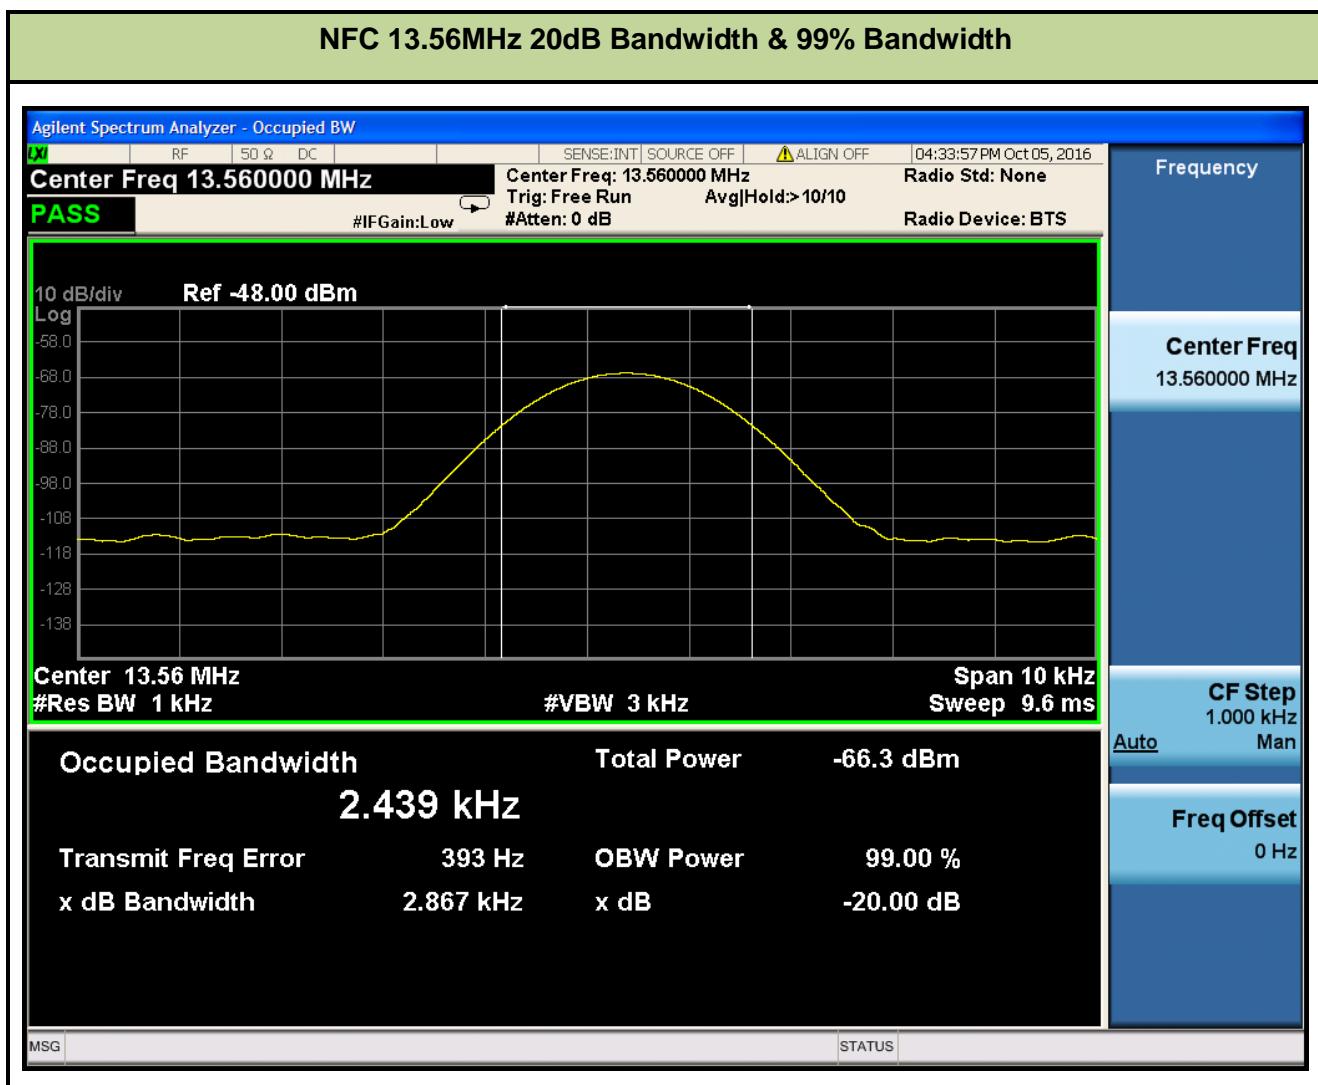

7.5. Frequency Stability Measurement

7.5.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.5.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.5.3. Test Setup

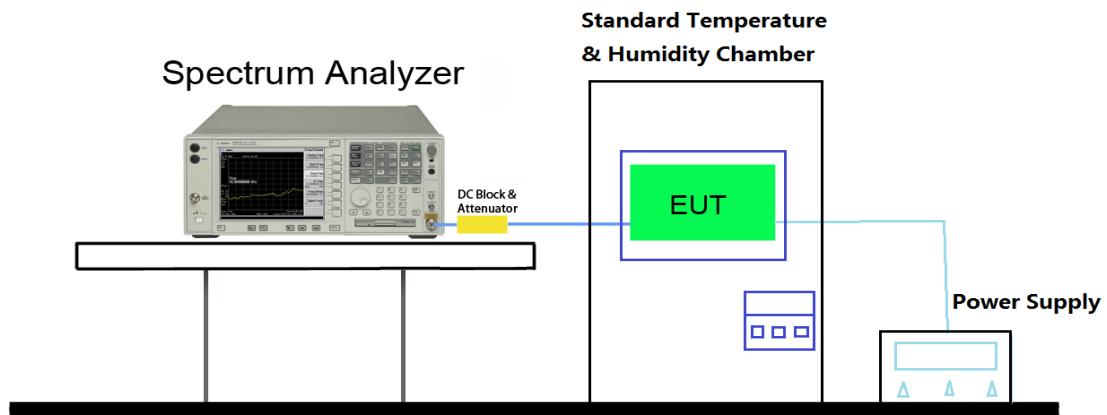

7.5.4. Test Result

Test Engineer	Kevin	Temperature	-20 ~ 50°C
Test Time	2016/10/05	Relative Humidity	58%RH

NFC 13.56MHz Frequency Stability						
Temperature vs. Frequency Stability						
Voltage (%)	Power (VAC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)	
100%	120V/60Hz	- 20	13.560416	30.68	±100	
		- 10	13.560421	31.05	±100	
		0	13.560416	30.68	±100	
		+ 10	13.560312	23.01	±100	
		+ 20 (Ref)	13.560333	24.56	±100	
		+ 30	13.560832	61.36	±100	
		+ 40	13.560341	25.15	±100	
		+ 50	13.560712	52.51	±100	
Test Result		PASS				
Voltage vs. Frequency Stability						
Voltage (%)	Power (VAC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)	
100%	120V/60Hz	+ 20	13.560311	22.94	±100	
115%	138V/60Hz	+ 20	13.560467	34.44	±100	
85%	102V/60Hz	+ 20	13.560581	42.85	±100	
Test Result		PASS				

Note:

Test Power by Notebook PC Adapter

Frequency Tolerance (ppm) = {[Measured Frequency (Hz) – Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.


7.6. AC Conducted Emissions Measurement

7.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50


Note 1: The lower limit shall apply at the transition frequencies.
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.6.2. Test Setup

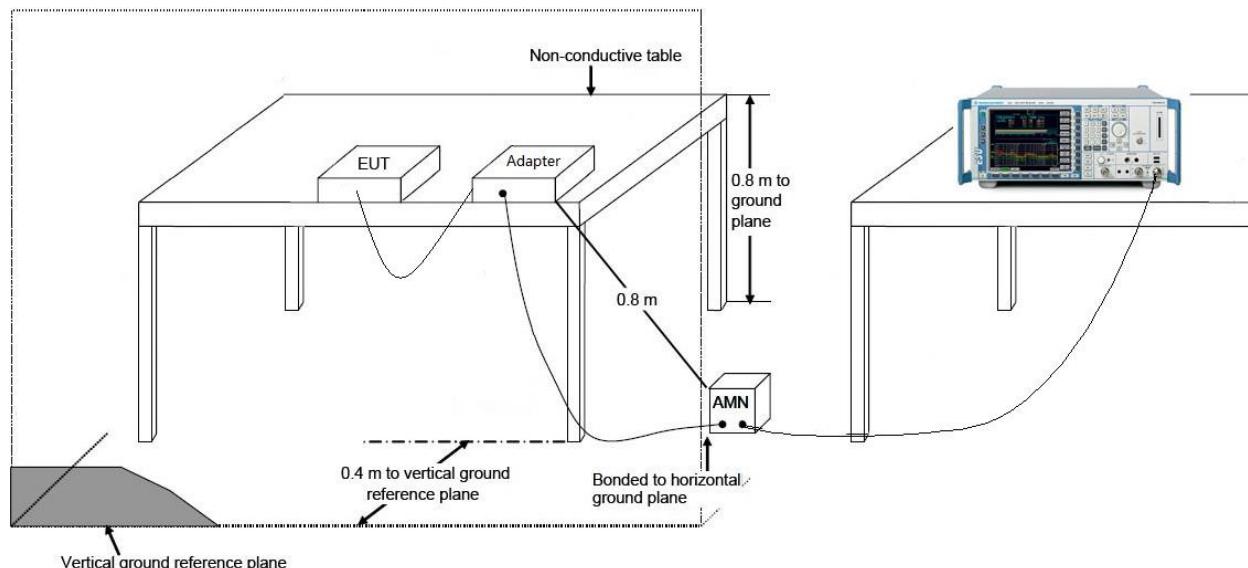

7.6.3. Test Result

EUT	GT-500	Date of Test	2016/10/06
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 68%
Polarity	Line1	Site / Test Engineer	SR2 / Kevin
Test Mode	Mode1	Test Voltage	AC 120V/60Hz

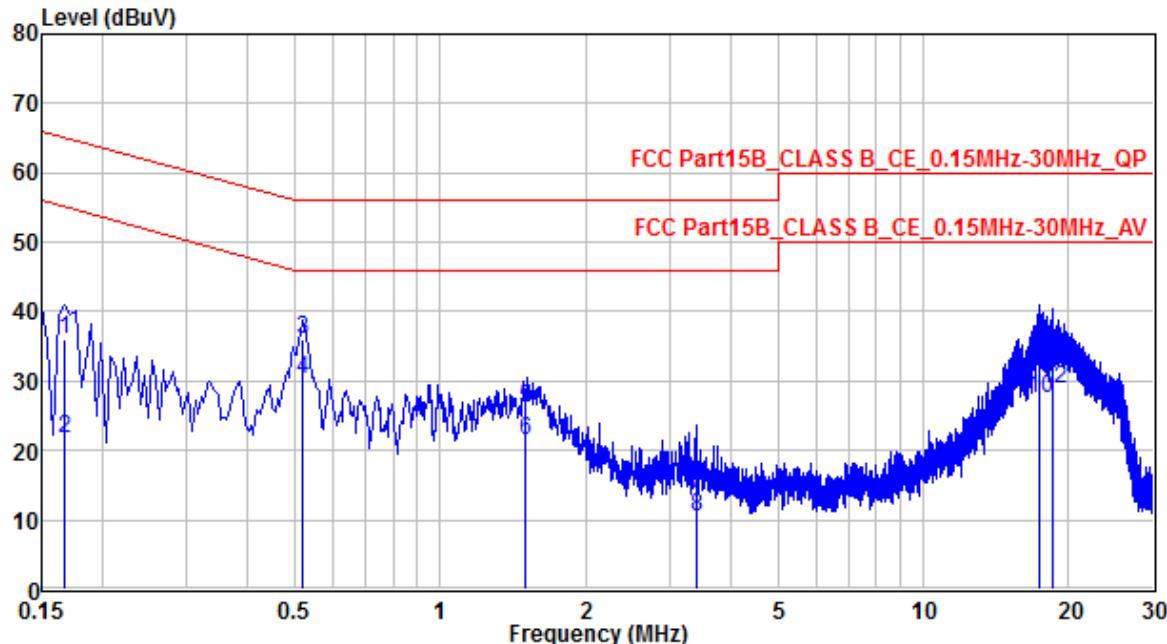


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.168	26.01	10.1	36.11	-28.95	65.06	QP
2		0.168	11.65	10.1	21.75	-33.31	55.06	Average
3	*	0.519	25.94	10.08	36.02	-19.98	56	QP
4	*	0.519	20.11	10.08	30.19	-15.81	46	Average
5		1.509	16.26	9.88	26.14	-29.86	56	QP
6		1.509	11.56	9.88	21.44	-24.56	46	Average
7		3.39	4.06	9.81	13.87	-42.13	56	QP
8		3.39	0.62	9.81	10.43	-35.57	46	Average
9		17.401	24.35	9.98	34.33	-25.67	60	QP
10		17.401	17.54	9.98	27.52	-22.48	50	Average
11	*	18.571	23.34	10	33.34	-26.66	60	QP
12	*	18.571	18.82	10	28.82	-21.18	50	Average

Note: Test Voltage By Notebook PC Adapter

1. **, means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB)
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor)

EUT	GT-500	Date of Test	2016/10/06
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C / 68%
Polarity	Neutral	Site / Test Engineer	SR2 / Kevin
Test Mode	Mode1	Test Voltage	AC 120V/60Hz

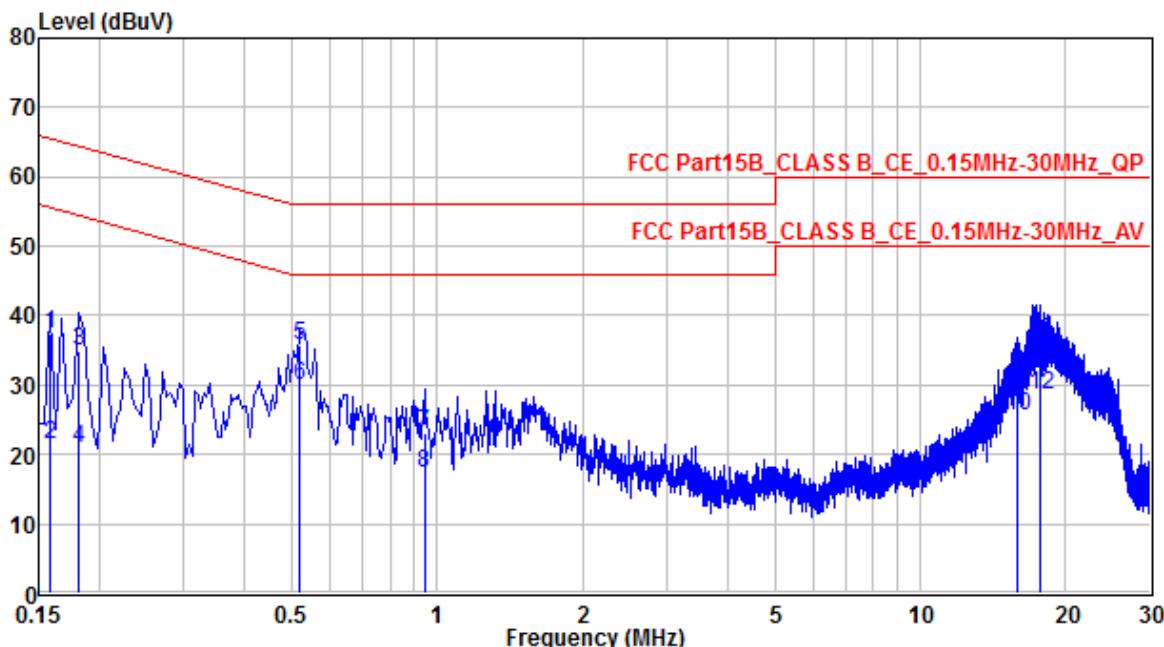

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.159	27.41	10.05	37.46	-28.06	65.52	QP
2		0.159	11.33	10.05	21.38	-34.14	55.52	Average
3		0.1815	24.7	10.11	34.81	-29.61	64.42	QP
4		0.1815	10.76	10.11	20.87	-33.55	54.42	Average
5	*	0.519	25.76	10.11	35.87	-20.13	56	QP
6	*	0.519	19.98	10.11	30.09	-15.91	46	Average
7		0.9419	13.17	9.91	23.08	-32.92	56	QP
8		0.9419	7.37	9.91	17.28	-28.72	46	Average
9		15.871	21.9	10.01	31.91	-28.09	60	QP
10		15.871	15.5	10.01	25.51	-24.49	50	Average
11		17.739	26.57	10.04	36.61	-23.39	60	QP
12		17.739	18.6	10.04	28.64	-21.36	50	Average

Note: Test Voltage By Notebook PC Adapter

1. ** means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB)
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **5" Rugged Android™ Handheld Device with LTE solution** FCC ID: **2ACC5-GT500** is in compliance with Part 15.225 of the FCC Rules.