

The Photos of SAR test

No. I14Z49056-SEM01

For

TCL Communication Ltd

HSUPA/HSDPA/UMTS triband / GSM quadbands/LTE triband mobile phone

Model Name: 5042T,5042N

With

Hardware Version: PIO1

Software Version: A1H

FCC ID: 2ACCJA002

Issued Date: 2015-01-29



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email: cttl terminals@catr.cn, website: www.chinattl.com



Picture 1: Constituents of the sample



Picture 2: Left Hand Touch Cheek Position

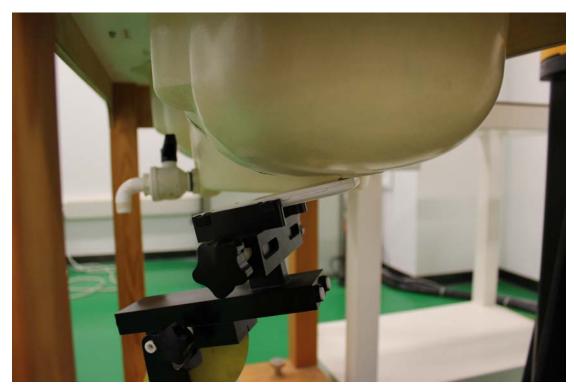

Picture 3: Left Hand Tilt 15° Position



Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:



Picture 6: Front – 10mm

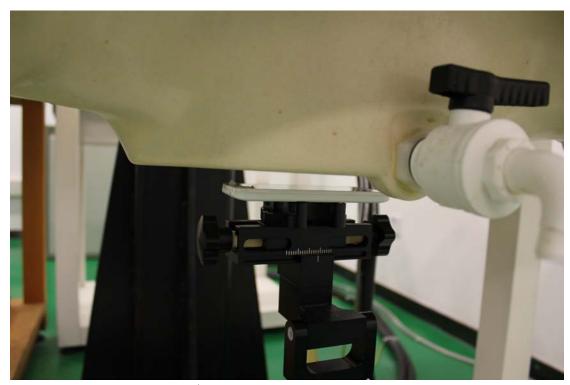

Picture 6-1: Front – 15mm



Picture 7: Rear – 10mm



Picture 7-1: Rear – 15mm




Picture 8: Left Edge – 10mm




Picture 8-1: Left Edge – 15mm




Picture 9: Right Edge – 10mm

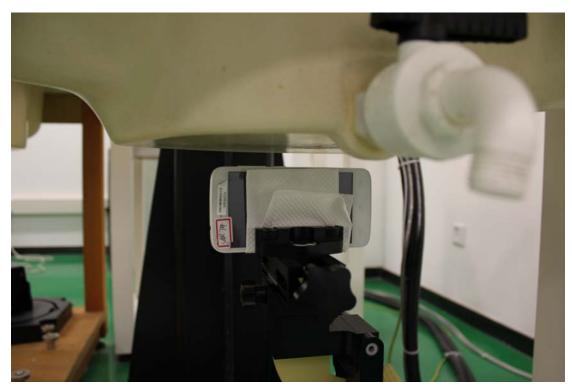


Picture 9-1: Right Edge – 15mm

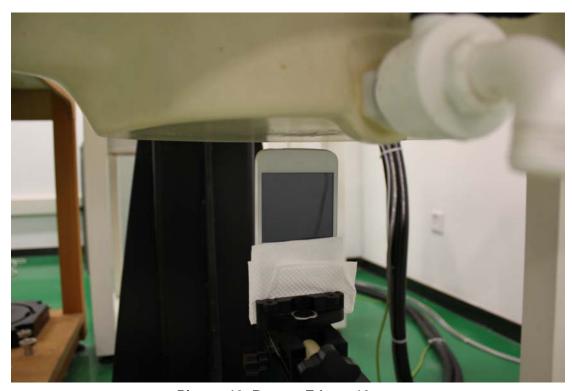

Picture 10: Bottom Edge – 10mm

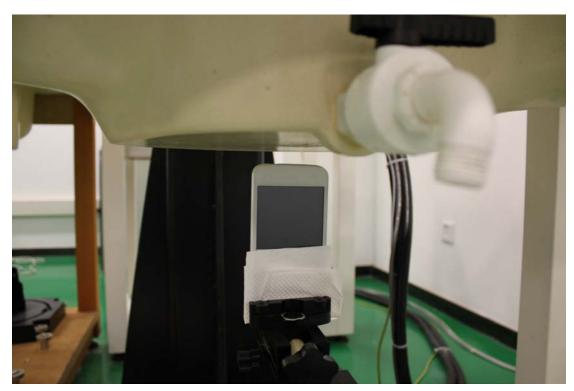

Picture 10-1: Bottom Edge – 15mm

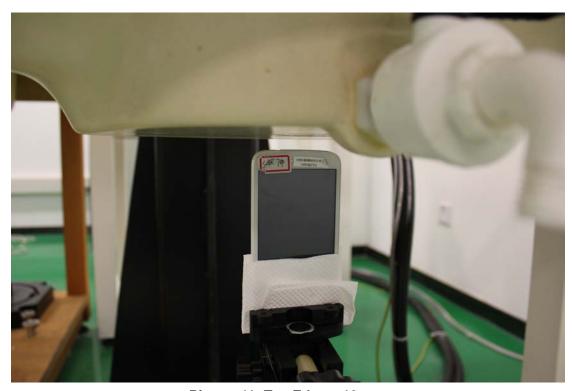

Picture 11: Top Edge – 10mm