

## #System Check\_Body\_5250MHz\_160118

**DUT: D5GHzV2 - SN:1167**

Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1

Medium: MSL\_5250\_160513 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.29$  S/m;  $\epsilon_r = 50.923$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.8 °C**

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.2, 4.2, 4.2); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 22.0 W/kg


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.65 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 37.0 W/kg

**SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 22.8 W/kg

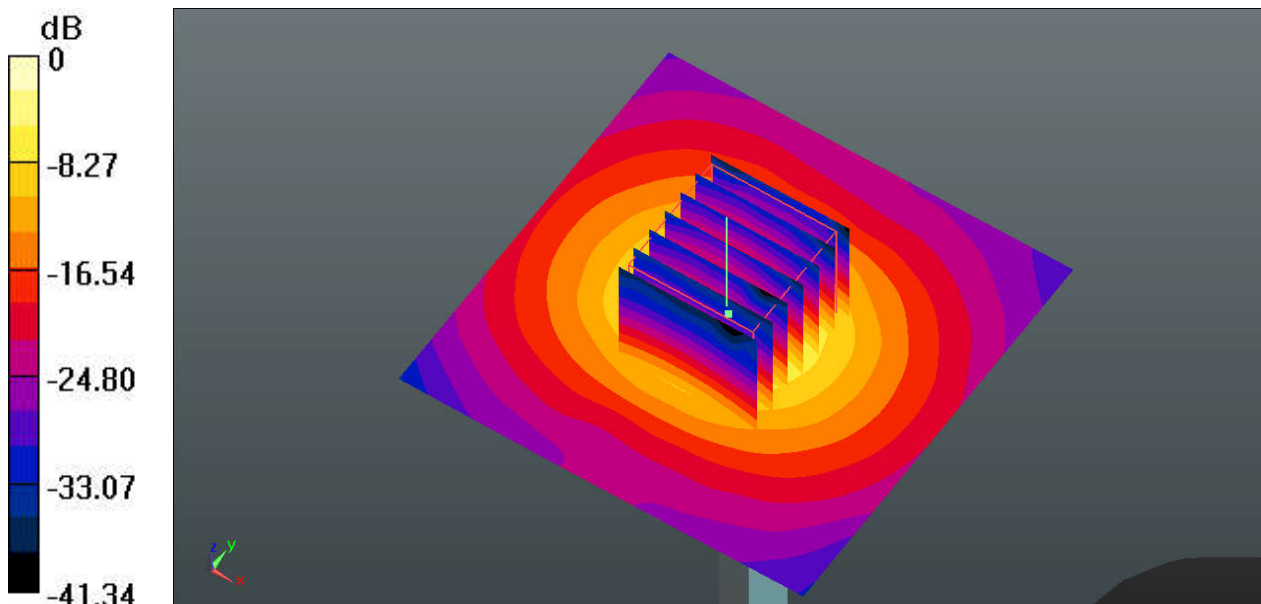

0 dB = 22.0 W/kg

### #System Check\_Body\_5600MHz\_160513

**DUT: D5GHzV2 - SN:1167**

Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium: MSL\_5600\_160513 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.884$  S/m;  $\epsilon_r = 50.283$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.7 °C**

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.67, 3.67, 3.67); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 21.8 W/kg


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.03 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 36.0 W/kg

**SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.37 W/kg**

Maximum value of SAR (measured) = 22.8 W/kg

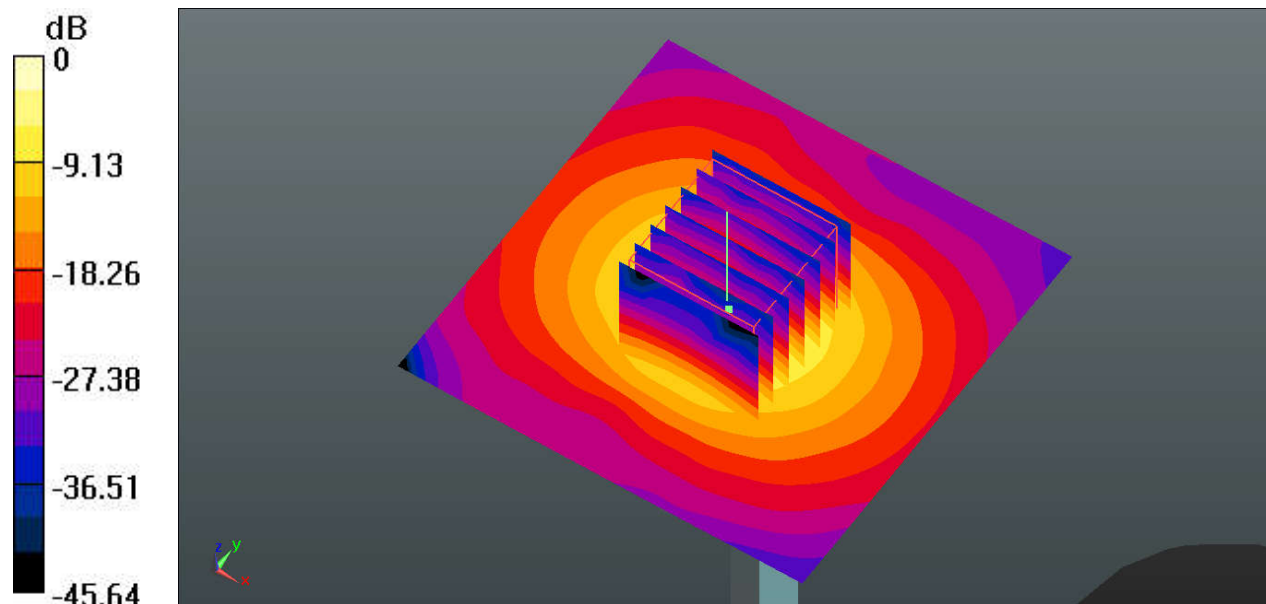

0 dB = 21.8 W/kg

### #System Check\_Body\_5750MHz\_160513

**DUT: D5GHzV2 - SN:1167**

Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1  
Medium: MSL\_5750\_160513 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.113$  S/m;  $\epsilon_r = 49.934$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature: 23.2 °C ; Liquid Temperature: 22.9 °C**

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.73, 3.73, 3.73); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 18.1 W/kg


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.14 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.8 W/kg

**SAR(1 g) = 7.27 W/kg; SAR(10 g) = 1.98 W/kg**

Maximum value of SAR (measured) = 18.6 W/kg

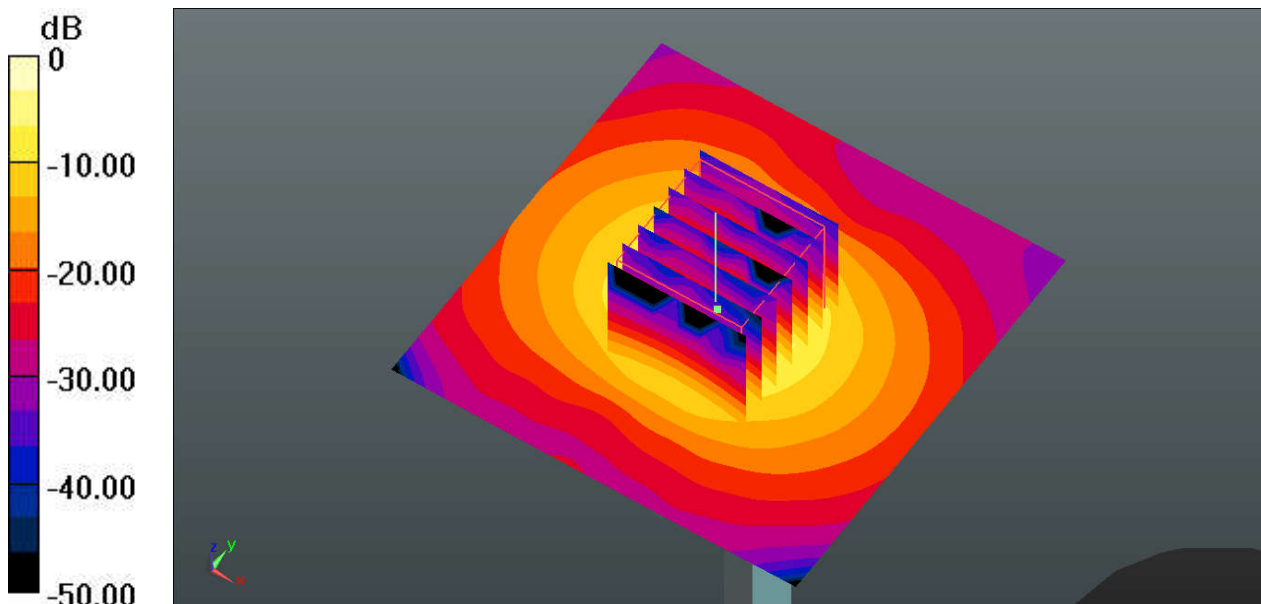

0 dB = 18.1 W/kg



---

**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### #01\_GSM850\_GPRS(3 Tx slots)\_Left Cheek\_Ch189

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.77  
Medium: HSL\_835\_160427 Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 41.516$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch189/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 W/kg


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.211 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.384 W/kg

**SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.247 W/kg**

Maximum value of SAR (measured) = 0.356 W/kg

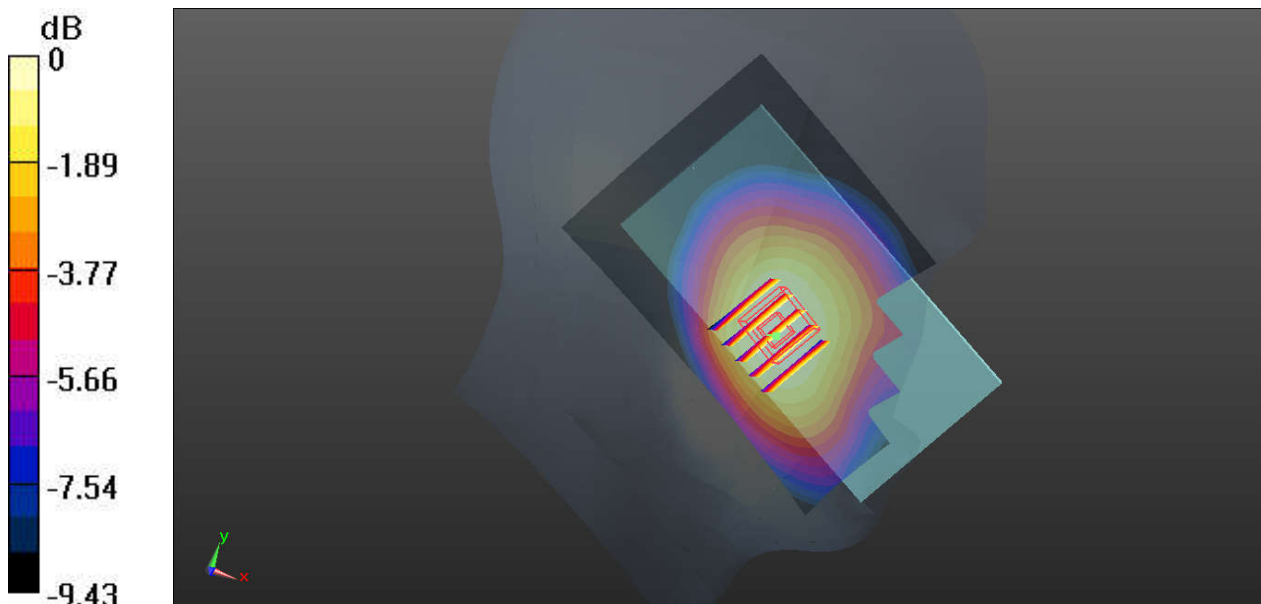

0 dB = 0.363 W/kg

## #02\_GSM1900\_GPRS(4 Tx slots)\_Right Cheek\_Ch810

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:2.08  
Medium: HSL\_1900\_160427 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 40.972$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.483 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.267 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.399 W/kg

**SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.320 W/kg

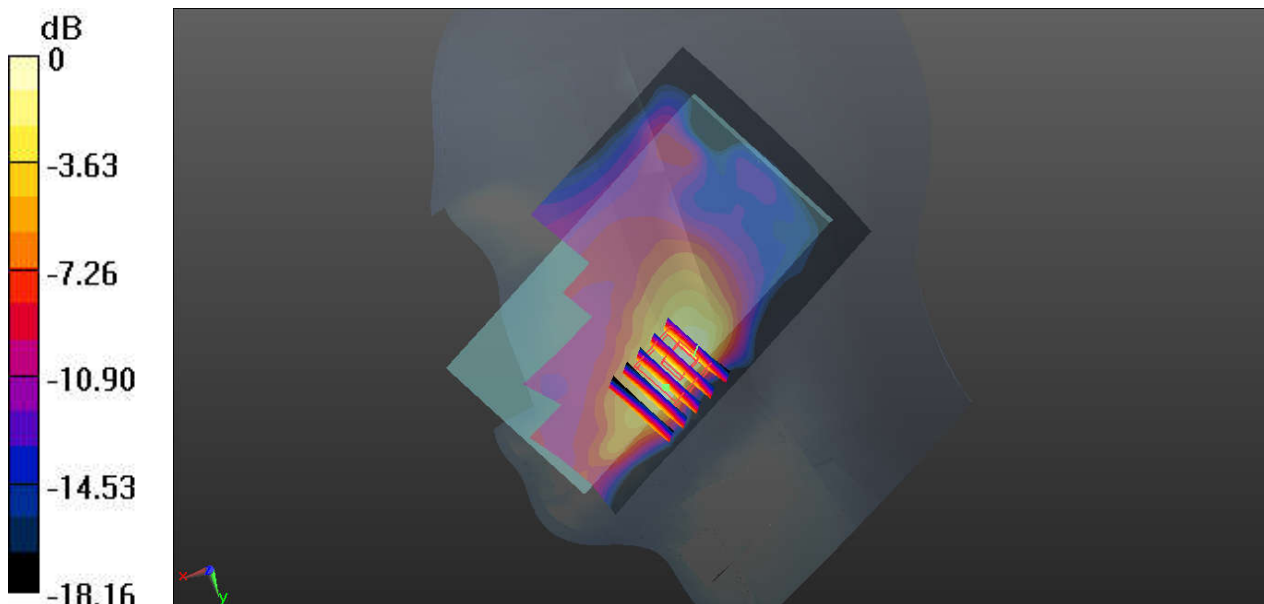

0 dB = 0.483 W/kg

### #03\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_Ch4233

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz;Duty Cycle: 1:1  
Medium: HSL\_835\_160427 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 41.415$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.305 W/kg


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.410 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.325 W/kg

**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.209 W/kg**

Maximum value of SAR (measured) = 0.301 W/kg

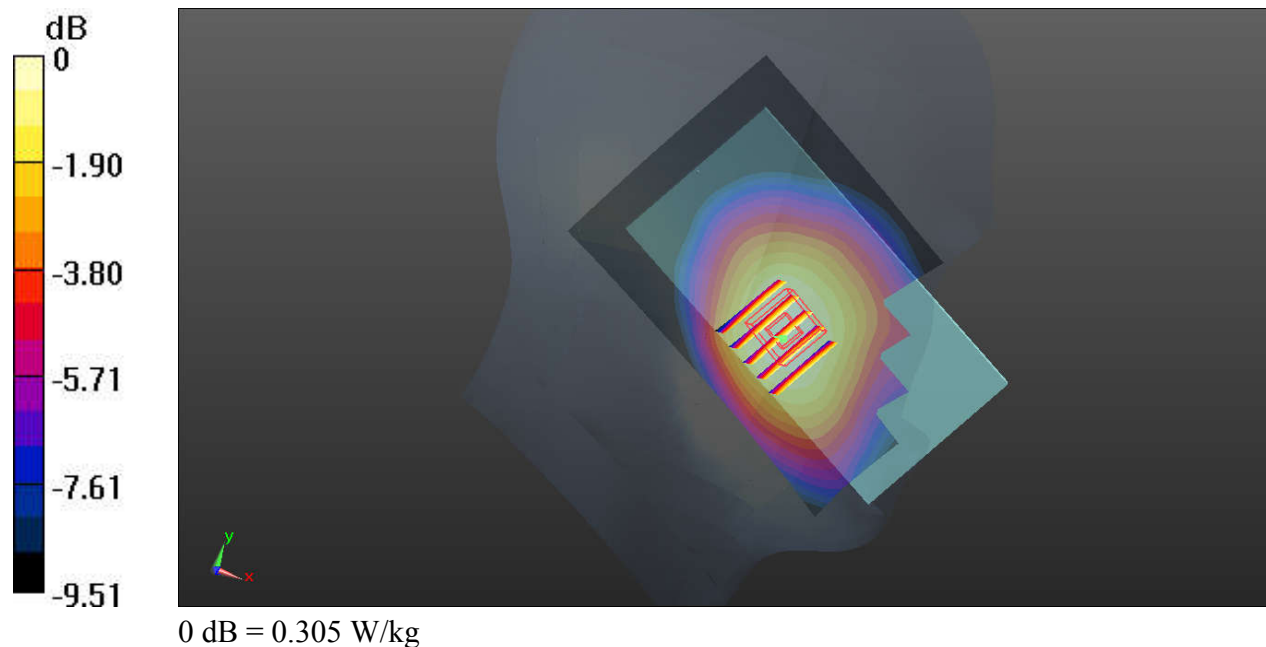

### #04\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1  
Medium: HSL\_1800\_160426 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 39.877$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.519 W/kg


**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.051 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.855 W/kg

**SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.166 W/kg**

Maximum value of SAR (measured) = 0.588 W/kg

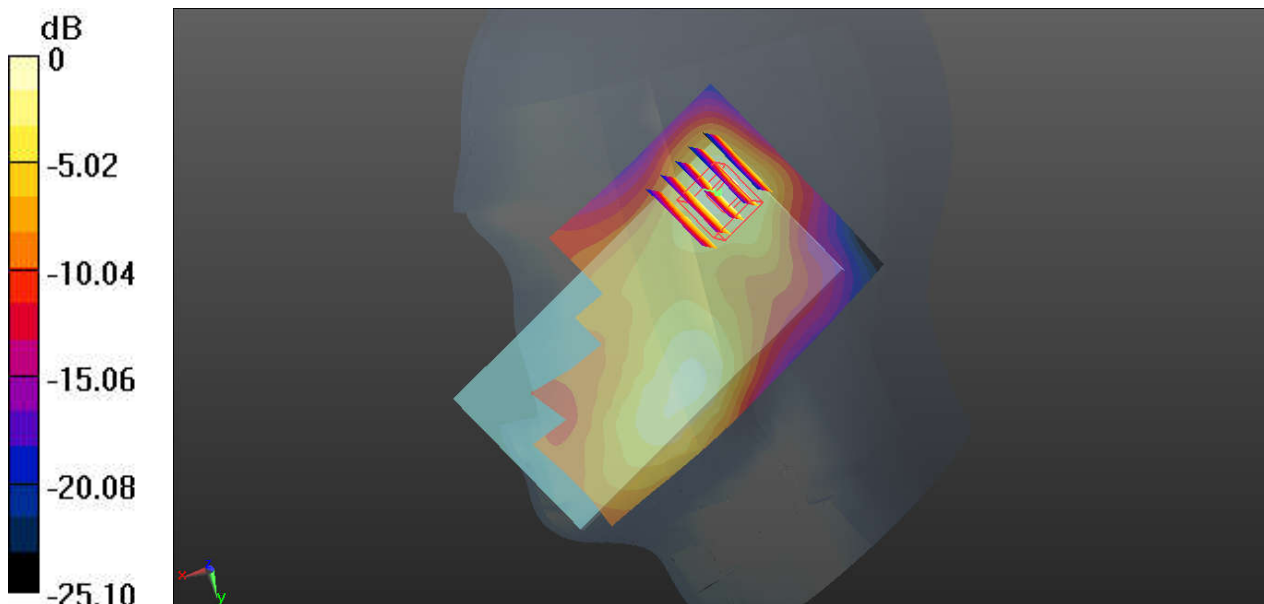

0 dB = 0.519 W/kg



**#05\_WCDMA II\_RMC 12.2Kbps\_Right Cheek\_Ch9400**

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_160427 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.392$  S/m;  $\epsilon_r = 41.101$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9400/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.448 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.009 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.200 W/kg**

Maximum value of SAR (measured) = 0.445 W/kg

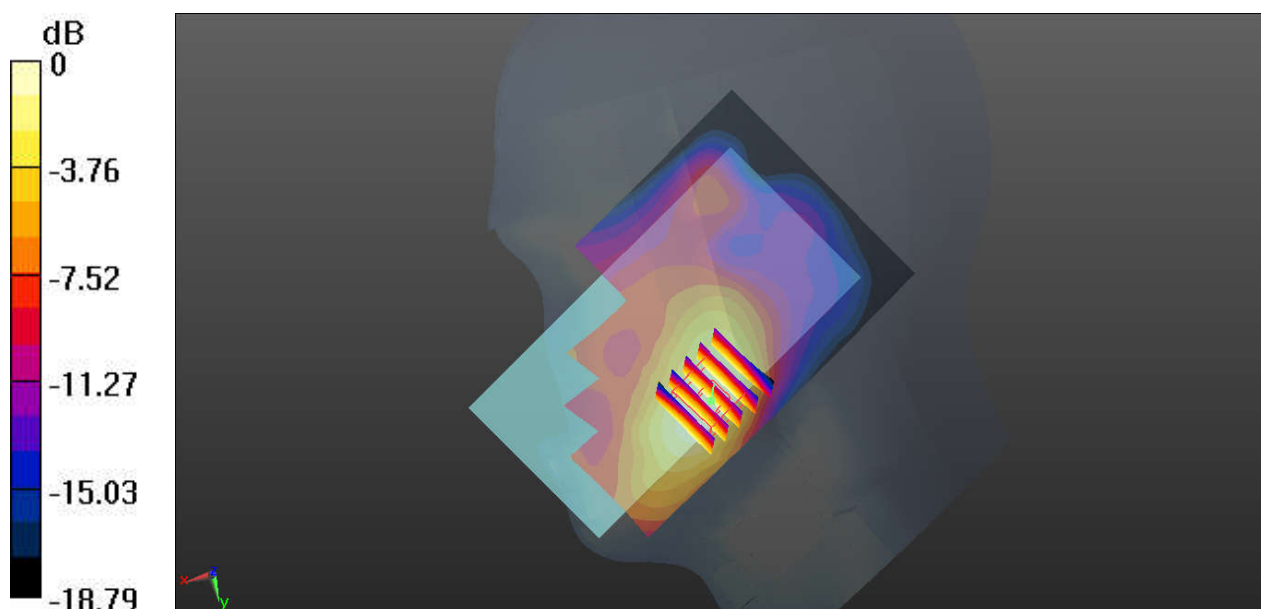

0 dB = 0.448 W/kg

### #06\_LTE Band 12\_10M\_QPSK\_1RB\_25Offset\_Left Cheek\_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium: HSL\_750\_160427 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.72, 10.72, 10.72); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)


**Ch23095/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.131 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 0.5480 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.129 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

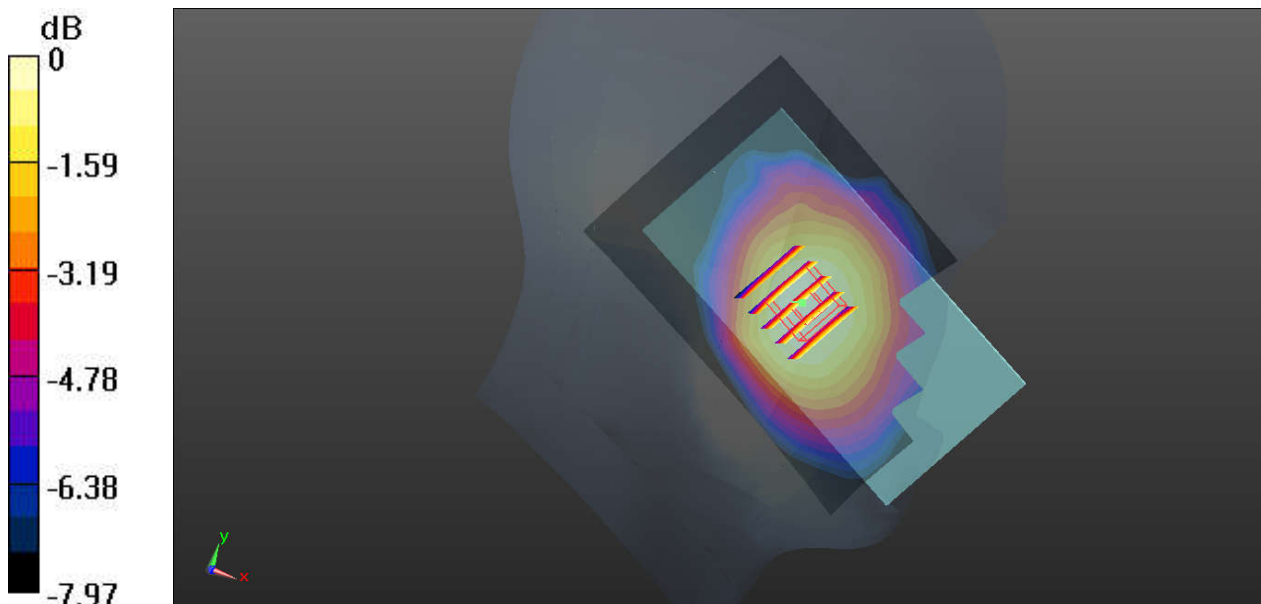

### #07\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Left Cheek\_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
Medium: HSL\_835\_160427 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 41.516$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 W/kg


**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6760 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 0.266 W/kg

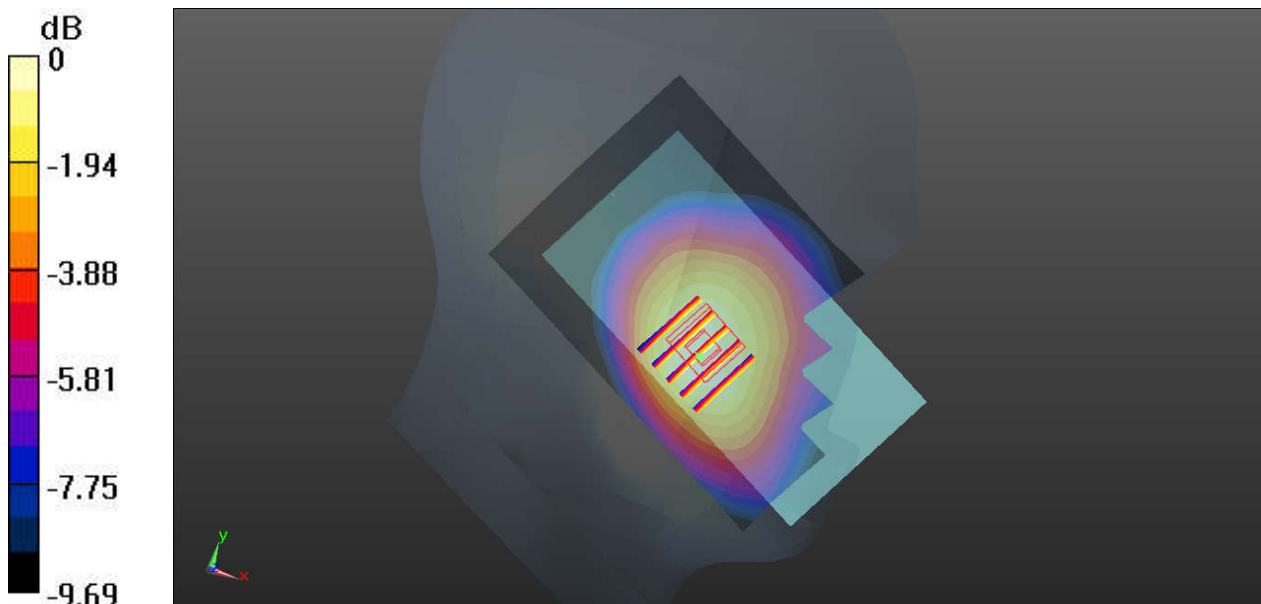

### #08\_LTE Band 4\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_Ch20175

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1800\_160426 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 39.945$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.3 °C ; **Liquid Temperature:** 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.535 W/kg


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.008 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.651 W/kg

**SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.271 W/kg**

Maximum value of SAR (measured) = 0.552 W/kg

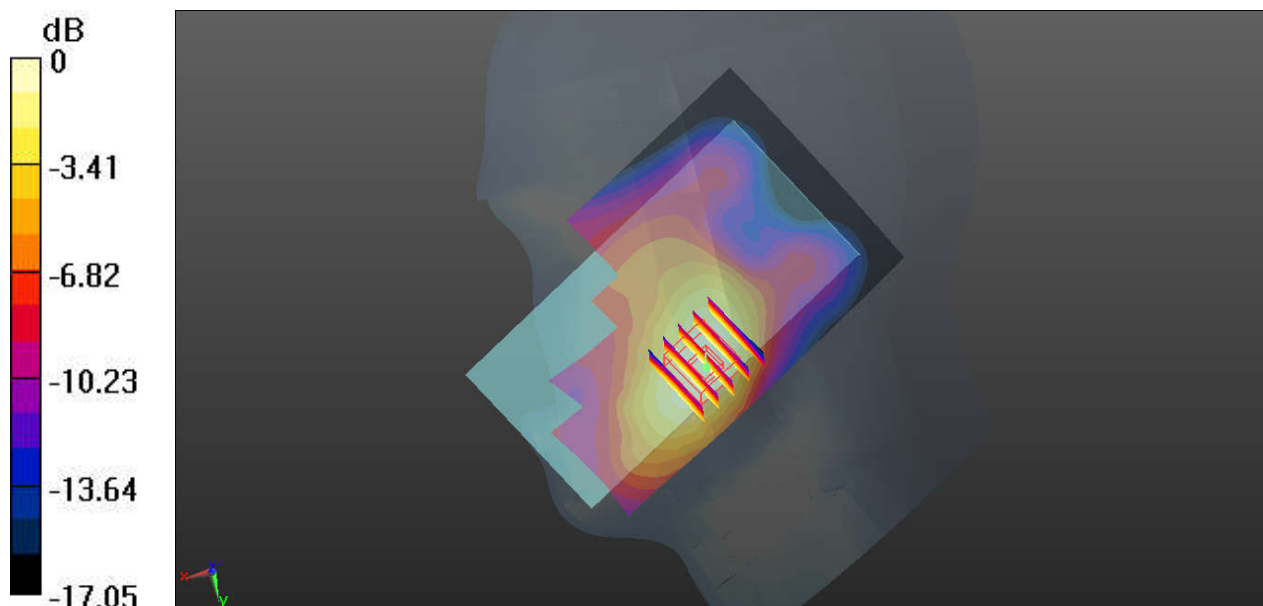

0 dB = 0.535 W/kg

### #09\_LTE Band 2\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium: HSL\_1900\_160528 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.407$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.1.7
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.750 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.106 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.23 W/kg  
**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.201 W/kg**  
Maximum value of SAR (measured) = 0.857 W/kg

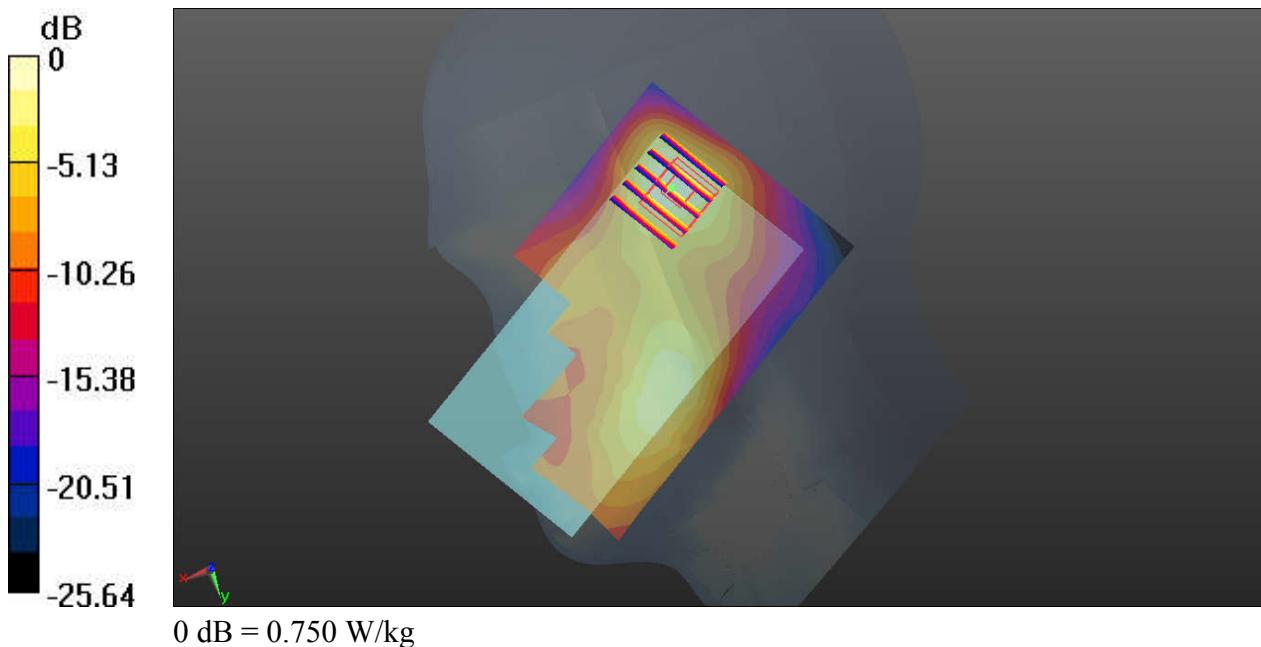

### #10\_LTE Band 7\_20M\_QPSK\_1RB\_49Offset\_Left Cheek\_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1  
Medium: HSL\_2600\_160428 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.949$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.26, 7.26, 7.26); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)


**Ch20850/Area Scan (81x151x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.235 W/kg

**Ch20850/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.992 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.230 W/kg

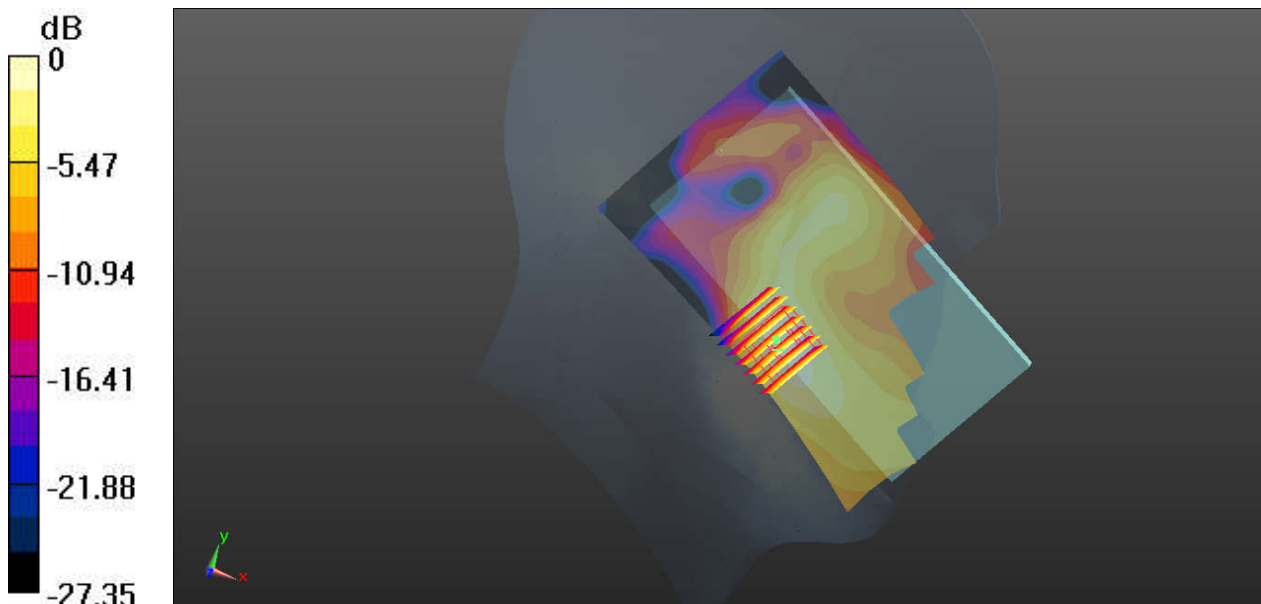

0 dB = 0.235 W/kg

### #11\_WLAN2.4GHz\_802.11b 1Mbps\_Right Cheek\_Ch1

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz;Duty Cycle: 1:1.021  
Medium: HSL\_2450\_160510 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.782$  S/m;  $\epsilon_r = 39.791$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.6 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(7.58, 7.58, 7.58); Calibrated: 2015.07.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch1/Area Scan (81x151x1):** Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.45 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8520 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.468 W/kg**

Maximum value of SAR (measured) = 1.81 W/kg

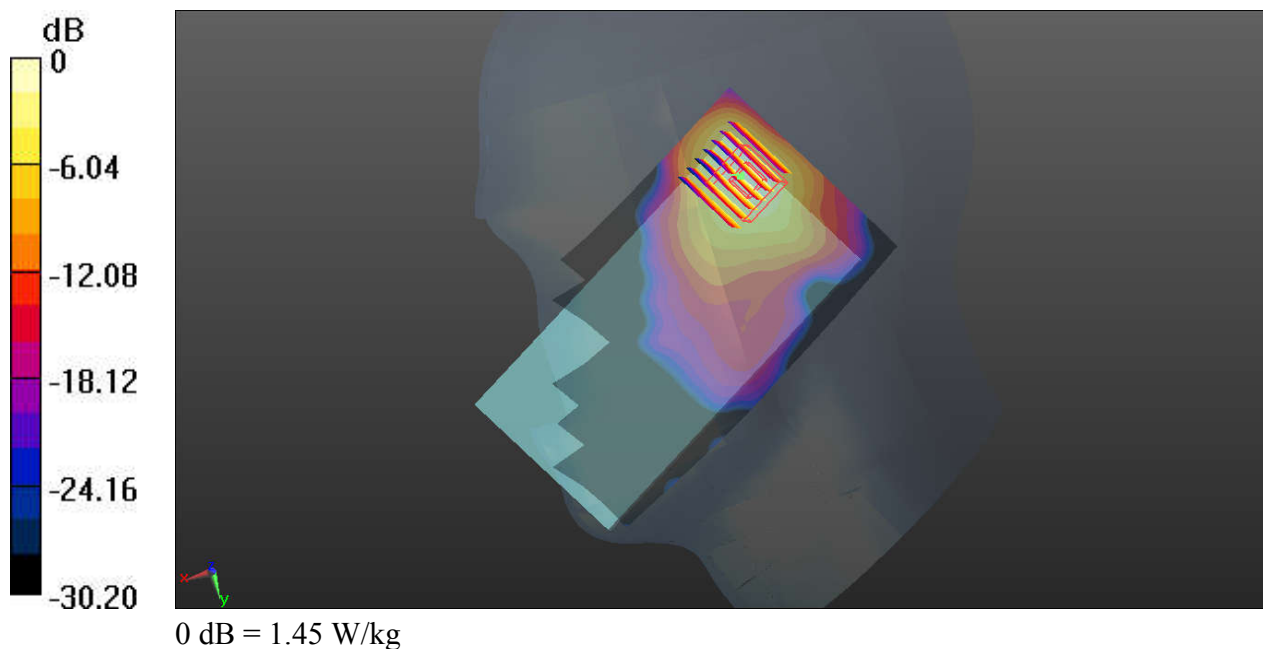

### #12\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz;Duty Cycle: 1:1.143  
Medium: HSL\_5250\_160513 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.64$  S/m;  $\epsilon_r = 37.029$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.7 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(5.77, 5.77, 5.77); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch52/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.609 W/kg


**Ch52/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.469 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.896 W/kg

**SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.559 W/kg

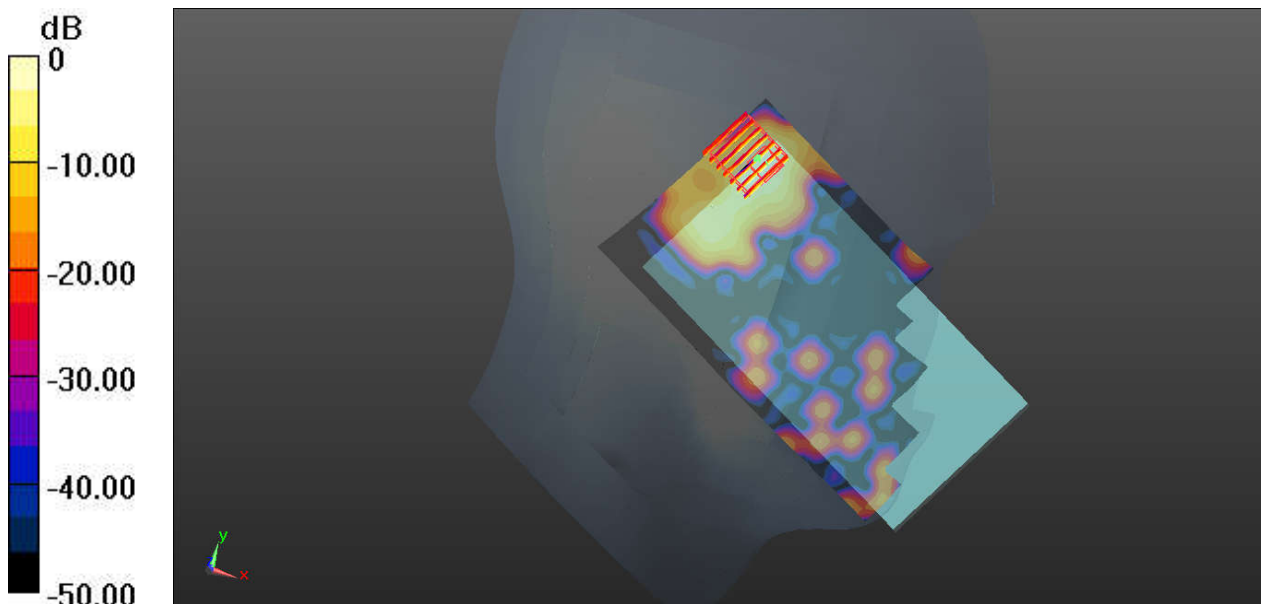

0 dB = 0.609 W/kg



### #13\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_Ch100

Communication System: UID 0, WIFI (0); Frequency: 5500 MHz;Duty Cycle: 1:1.143  
Medium: HSL\_5600\_160513 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.919$  S/m;  $\epsilon_r = 36.678$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.8 °C ; **Liquid Temperature:** 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(4.95, 4.95, 4.95); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch100/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.485 W/kg


**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.207 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

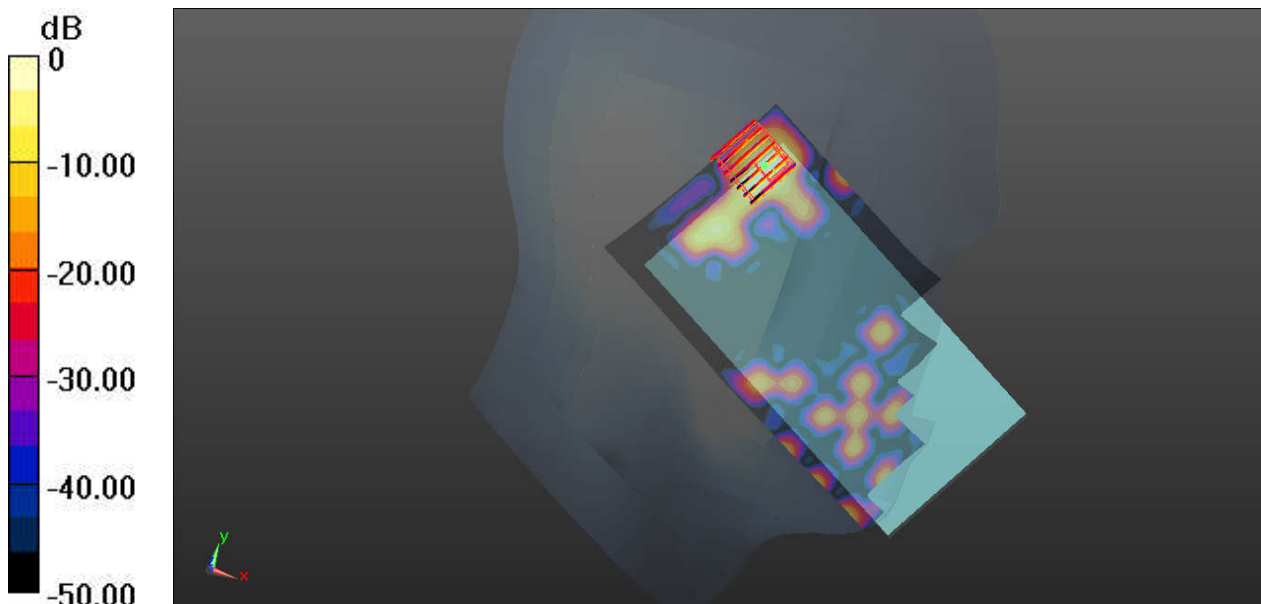

0 dB = 0.485 W/kg

### #14\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz;Duty Cycle: 1:1.143  
Medium: HSL\_5750\_160513 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 5.195 \text{ S/m}$ ;  $\epsilon_r = 36.264$ ;  
 $\rho = 1000 \text{ kg/m}^3$

**Ambient Temperature:** 23.8 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(5.15, 5.15, 5.15); Calibrated: 2015.7.23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.444 W/kg


**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.386 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.248 W/kg

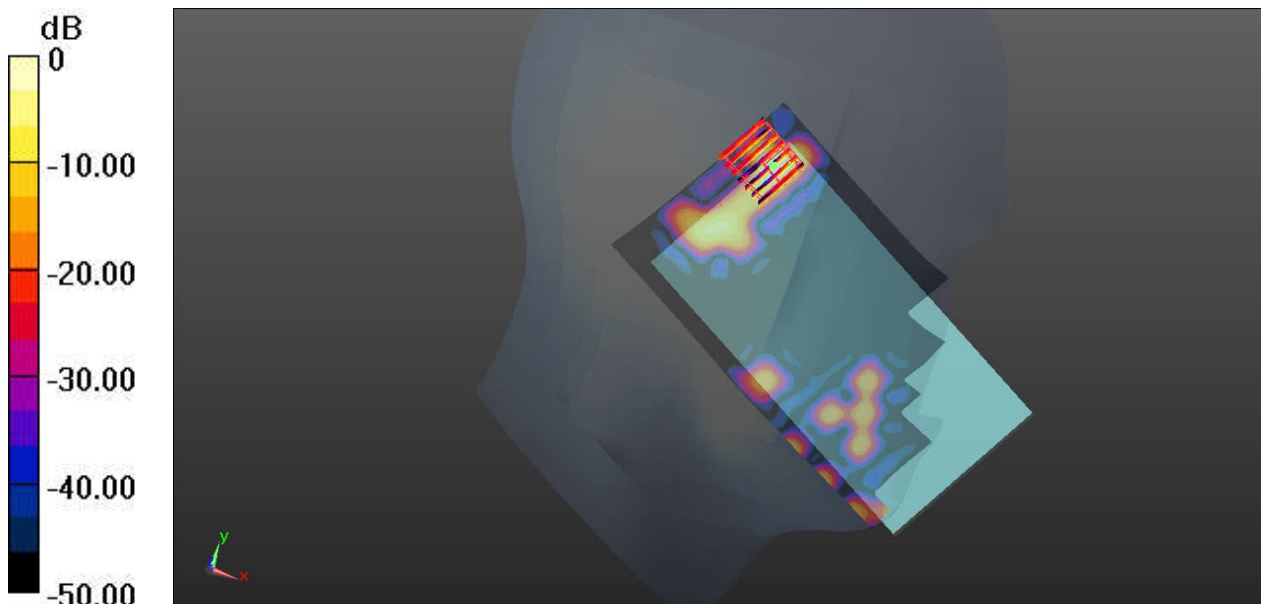

0 dB = 0.444 W/kg

### #15\_GSM850\_GPRS(3 Tx slots)\_Back\_10mm\_Ch251

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.77  
Medium: MSL\_835\_160510 Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.989$  S/m;  $\epsilon_r = 54.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(9.99, 9.99, 9.99); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch251/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.965 W/kg


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.123 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.421 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

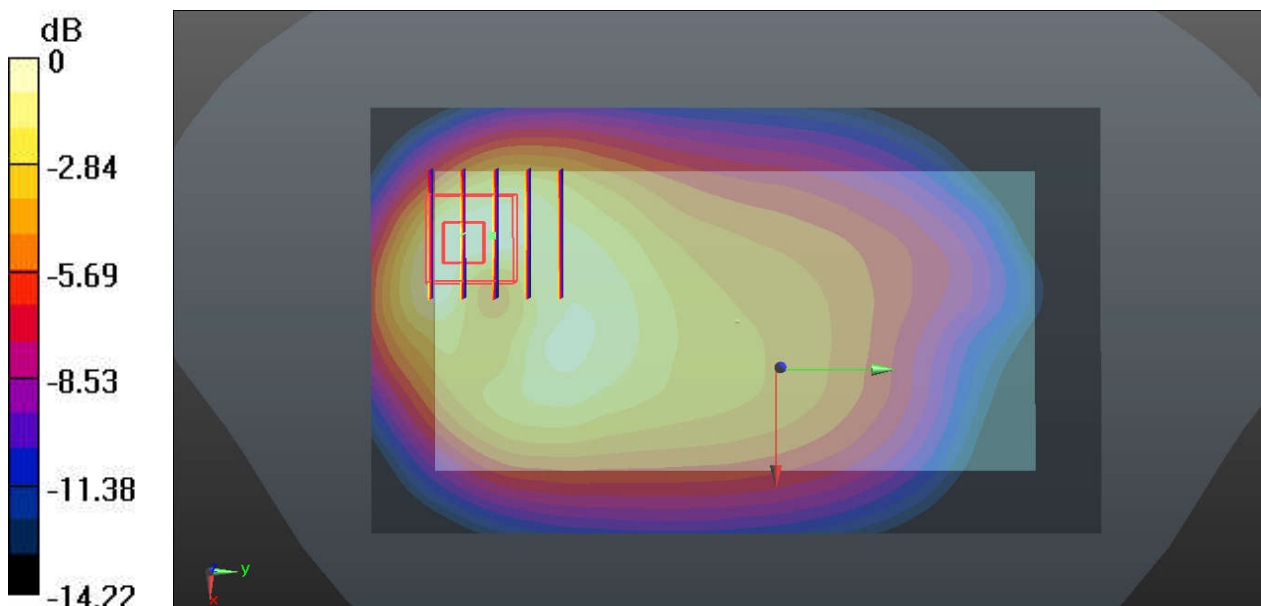

0 dB = 0.965 W/kg

### #16\_GSM1900\_GPRS(2 Tx slots)\_Bottom Side\_10mm\_Ch810

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:2.15  
Medium: MSL\_1900\_160511 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.587$  S/m;  $\epsilon_r = 54.183$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (41x81x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.37 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.469 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.467 W/kg**

Maximum value of SAR (measured) = 1.35 W/kg

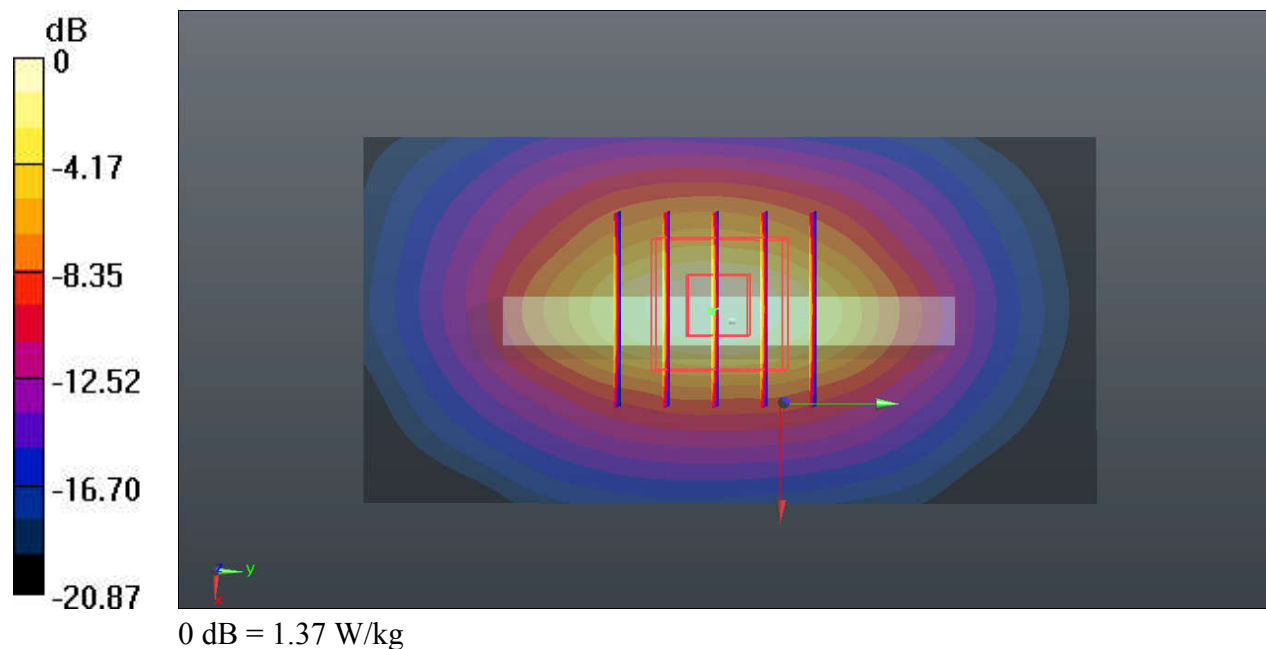

### #17\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4233

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz;Duty Cycle: 1:1  
Medium: MSL\_835\_160510 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.988$  S/m;  $\epsilon_r = 54.272$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(9.99, 9.99, 9.99); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.802 W/kg


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.849 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.352 W/kg**

Maximum value of SAR (measured) = 0.844 W/kg

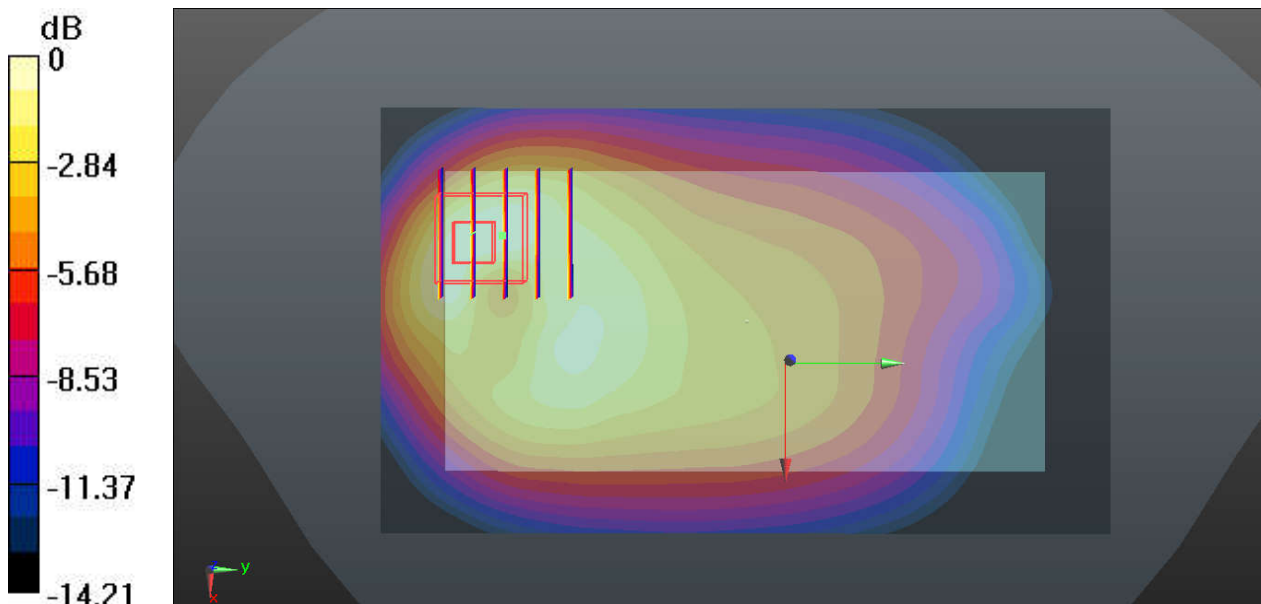

0 dB = 0.802 W/kg

### #18\_WCDMA IV\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch1413

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1  
Medium: MSL\_1800\_160511 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.506$  S/m;  $\epsilon_r = 52.08$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature: 23.5 °C ; Liquid Temperature: 22.8 °C**

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.01, 8.01, 8.01); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch1413/Area Scan (41x81x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.39 W/kg


**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.324 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.510 W/kg**

Maximum value of SAR (measured) = 1.39 W/kg

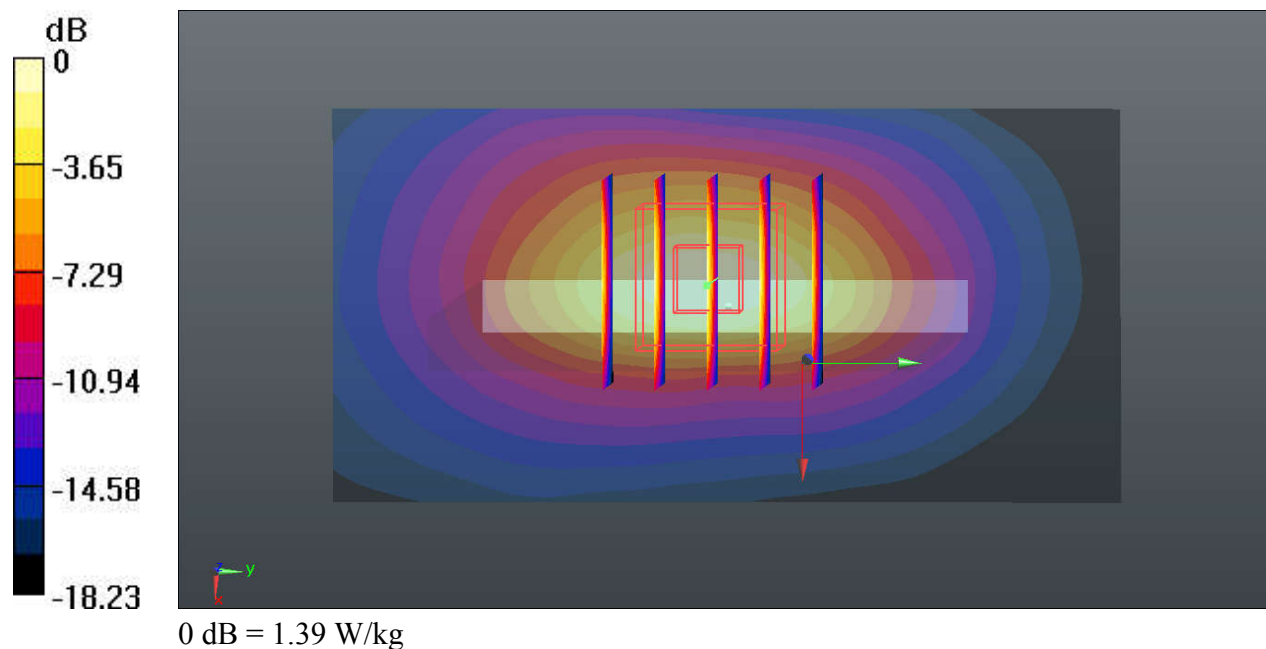

### #19\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_160511 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.554$  S/m;  $\epsilon_r = 54.289$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch9400/Area Scan (41x81x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.849 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.311 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 0.863 W/kg

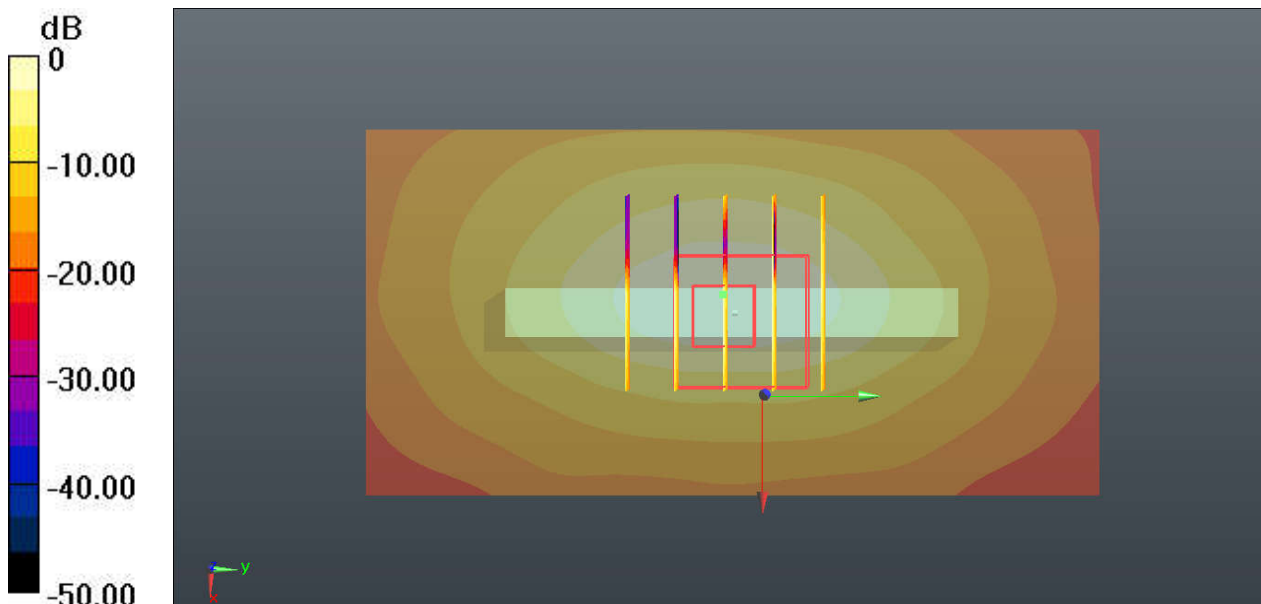

0 dB = 0.849 W/kg

### #20\_LTE Band 12\_10M\_QPSK\_1RB\_25Offset\_Back\_10mm\_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium: MSL\_750\_160510 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 55.184$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.05, 10.05, 10.05); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.405 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.968 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.492 W/kg  
**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.186 W/kg**  
Maximum value of SAR (measured) = 0.391 W/kg

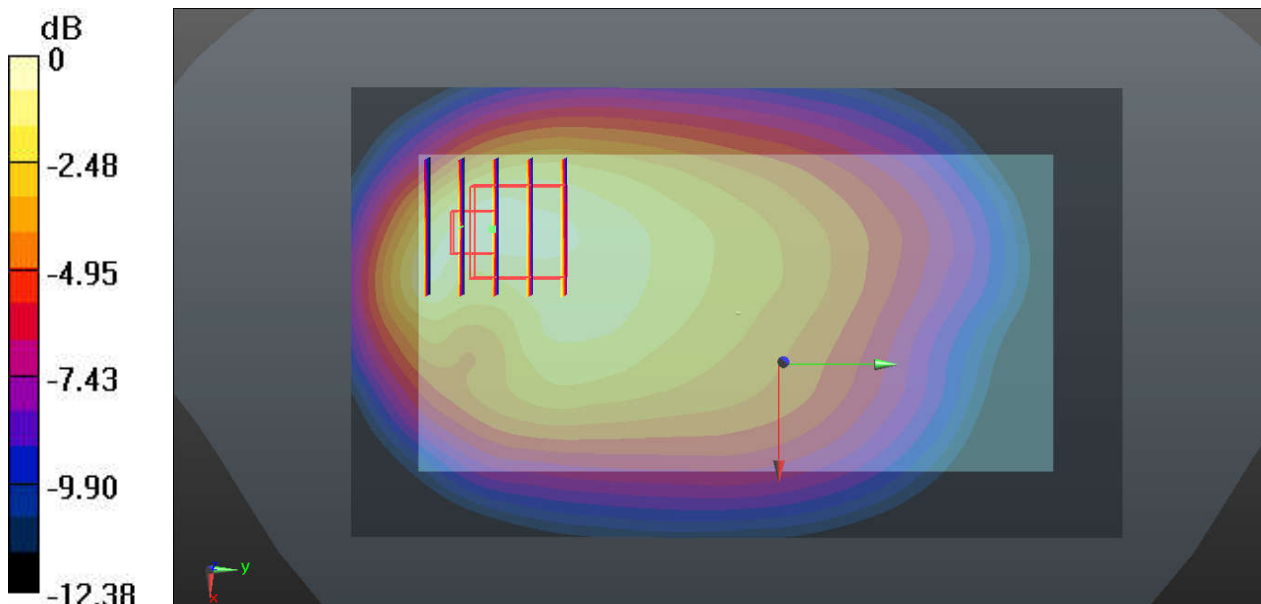

0 dB = 0.405 W/kg



### #21\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Back\_10mm\_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
Medium: MSL\_835\_160510 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.978$  S/m;  $\epsilon_r = 54.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(9.99, 9.99, 9.99); Calibrated: 2015.7.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.2.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.694 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.927 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.899 W/kg  
**SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.301 W/kg**  
Maximum value of SAR (measured) = 0.697 W/kg

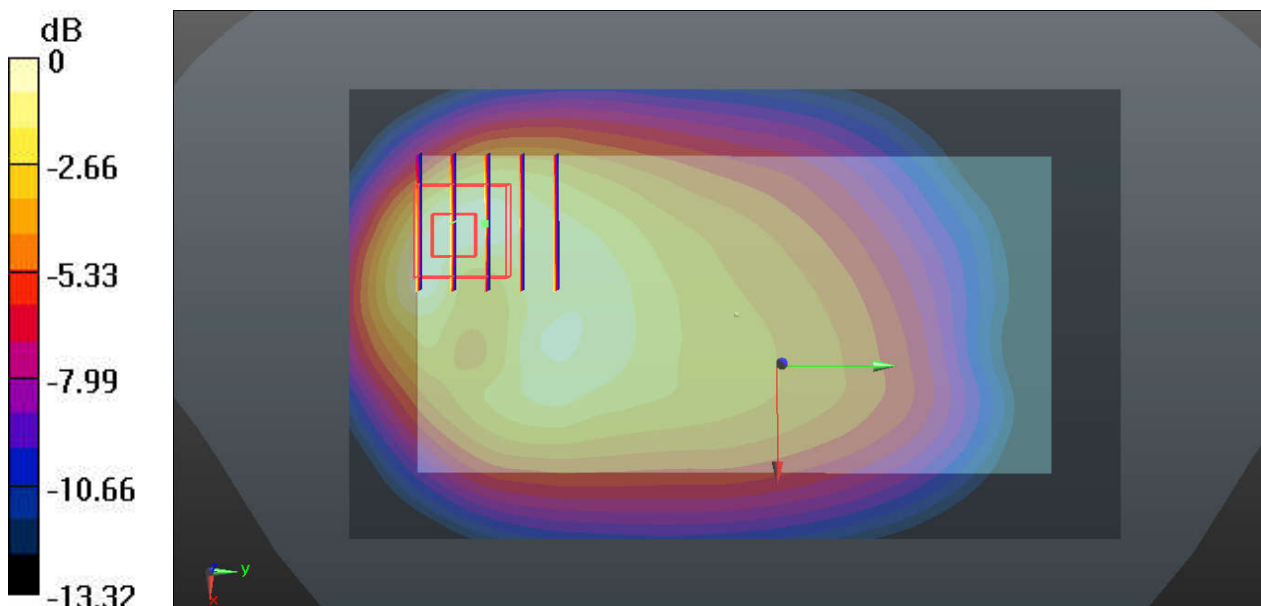

0 dB = 0.694 W/kg

**#22\_LTE Band 4\_20M\_QPSK\_50RB\_0Offset\_Bottom Side\_10mm\_Ch20175**

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1800\_160511 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.506$  S/m;  $\epsilon_r = 52.082$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.01, 8.01, 8.01); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (41x81x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 W/kg


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.939 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.436 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

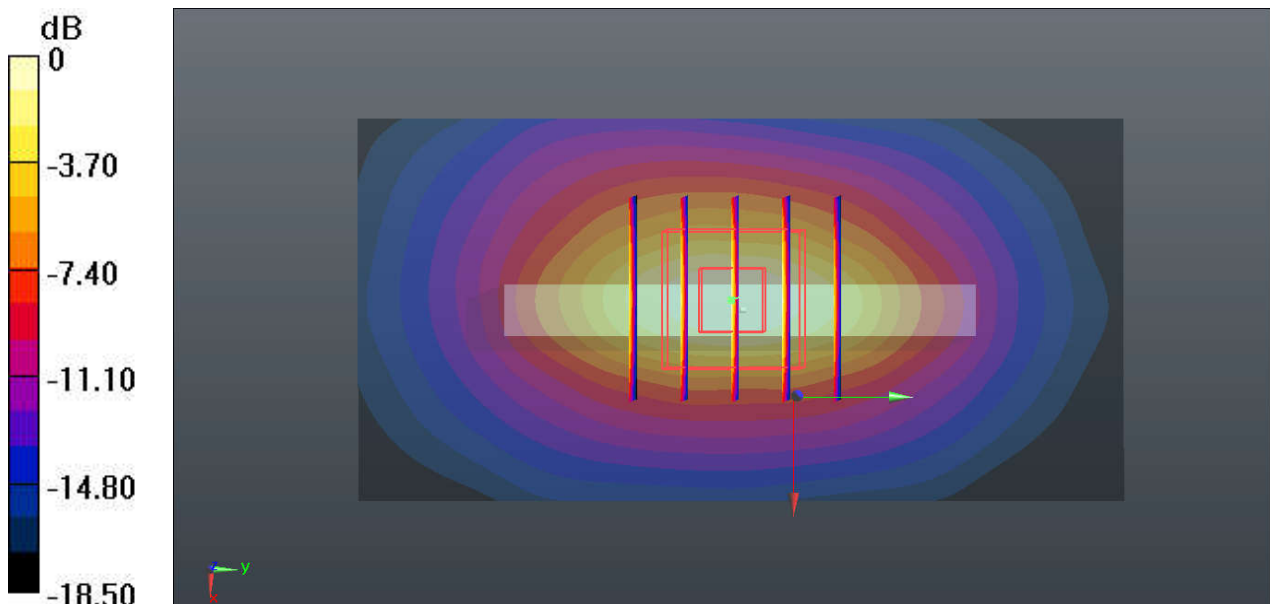

0 dB = 1.20 W/kg

### #23\_LTE Band 2\_20M\_QPSK\_50RB\_0Offset\_Bottom Side\_10mm\_Ch19100

Communication System: UID 0, LTE (0); Frequency: 1900 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_160511 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.576$  S/m;  $\epsilon_r = 54.215$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch19100/Area Scan (41x81x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.775 W/kg


**Ch19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.046 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.969 W/kg

**SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.262 W/kg**

Maximum value of SAR (measured) = 0.768 W/kg

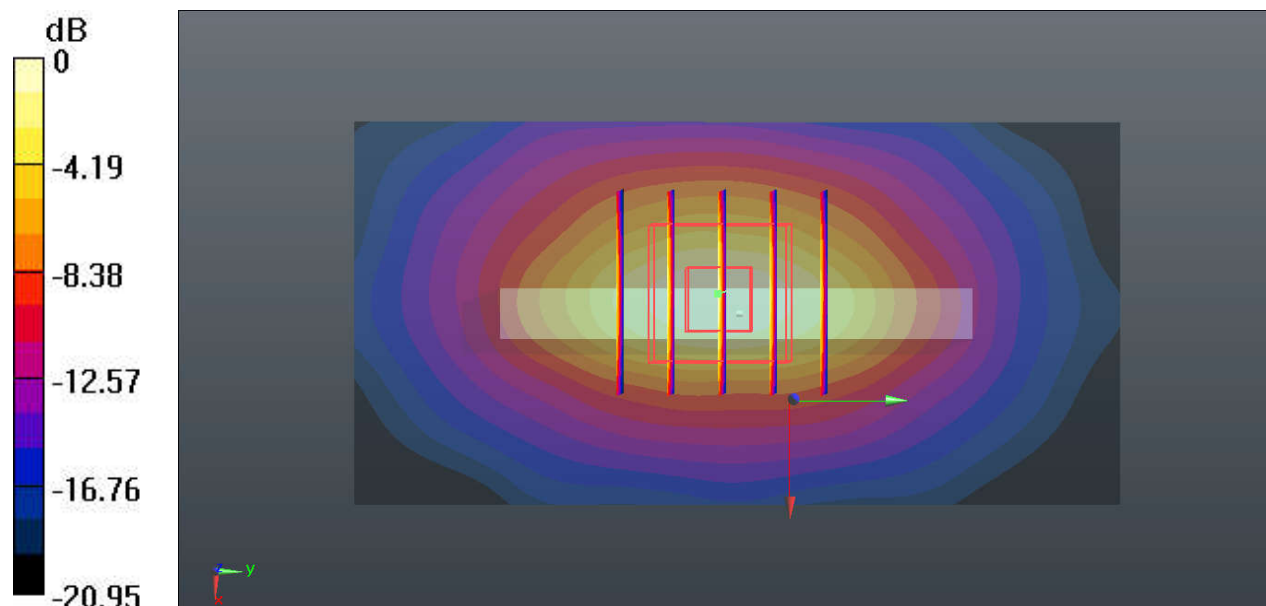

0 dB = 0.775 W/kg

### #24\_LTE Band 7\_20M\_QPSK\_50RB\_0Offset\_Bottom Side\_10mm\_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1  
Medium: MSL\_2600\_160512 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 2.085$  S/m;  $\epsilon_r = 52.993$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.7 °C ; **Liquid Temperature:** 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.14, 7.14, 7.14); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch20850/Area Scan (41x91x1):** Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.44 W/kg


**Ch20850/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.134 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.430 W/kg**

Maximum value of SAR (measured) = 1.41 W/kg

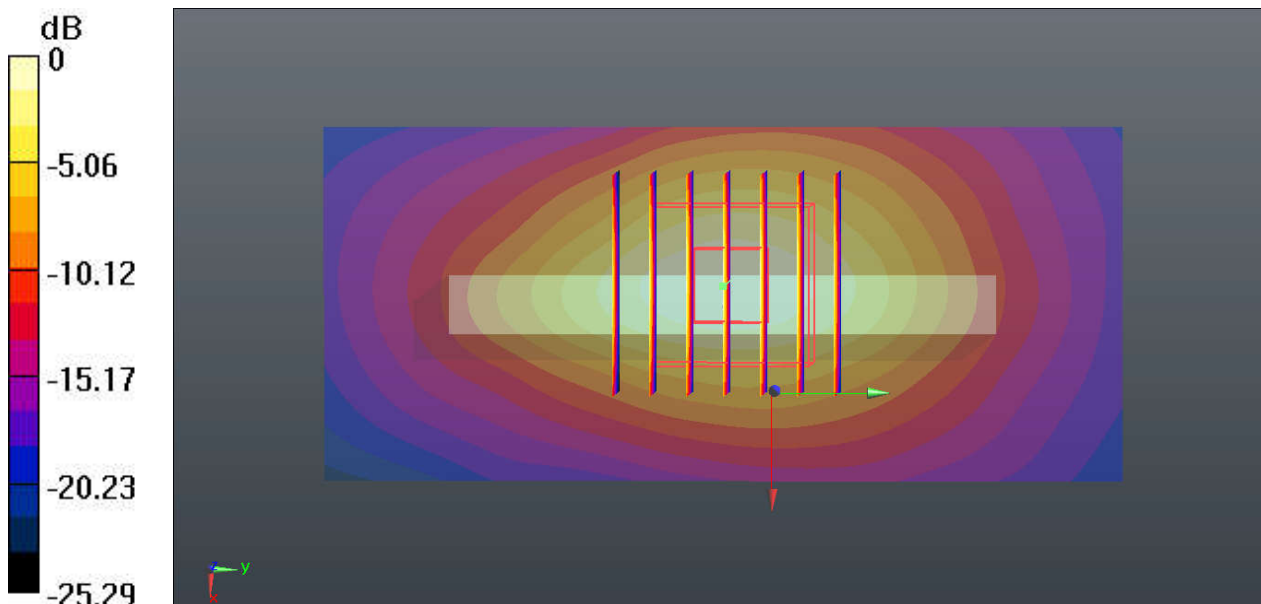

### #25\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1.021  
Medium: MSL\_2450\_160511 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.012$  S/m;  $\epsilon_r = 52.245$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.34, 7.34, 7.34); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (81x151x1):** Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.764 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6060 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.205 W/kg**

Maximum value of SAR (measured) = 0.775 W/kg

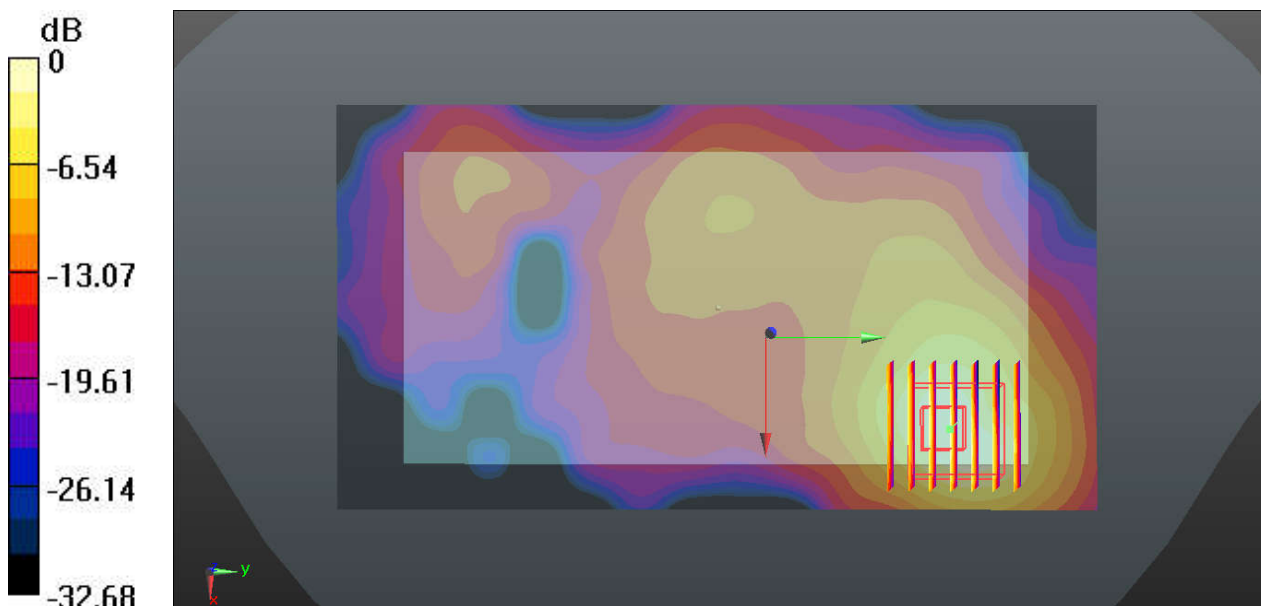

0 dB = 0.764 W/kg

### #26\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch48

Communication System: UID 0, WIFI (0); Frequency: 5240 MHz;Duty Cycle: 1:1.143  
Medium: MSL\_5250\_160513 Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.271$  S/m;  $\epsilon_r = 50.934$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.2, 4.2, 4.2); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch48/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.507 W/kg


**Ch48/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9880 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.984 W/kg

**SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.566 W/kg

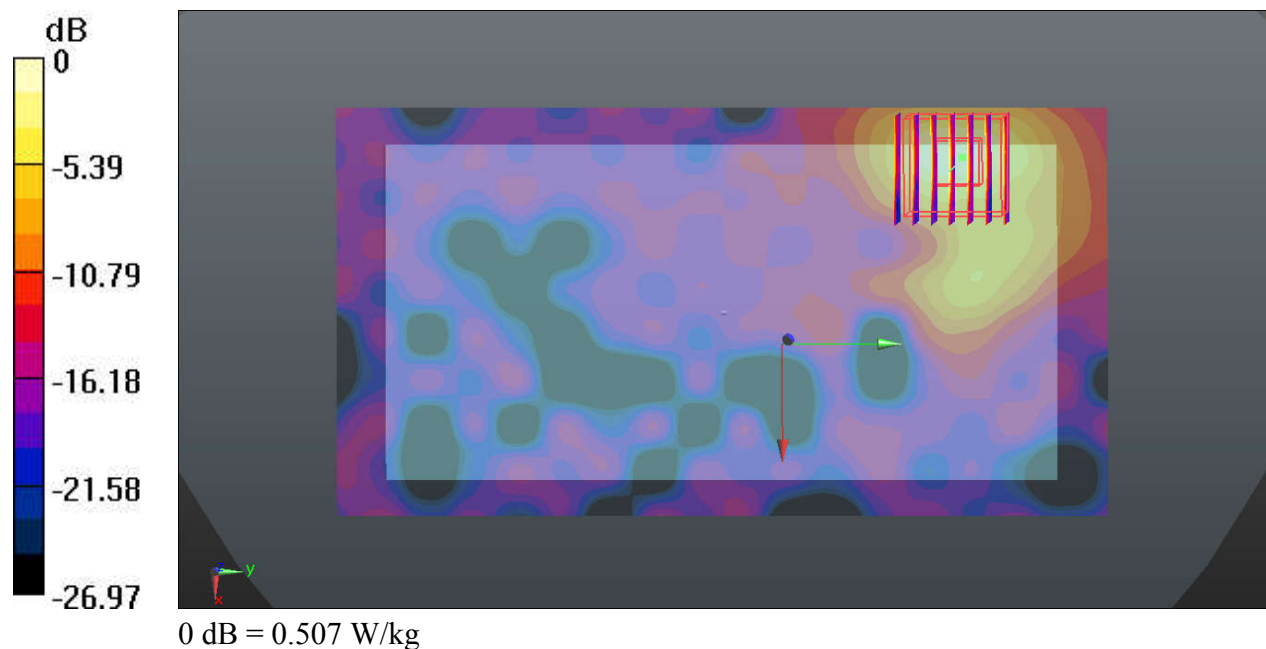

### #27\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz;Duty Cycle: 1:1.143  
Medium: MSL\_5750\_160513 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.105$  S/m;  $\epsilon_r = 49.947$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.73, 3.73, 3.73); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.288 W/kg


**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.035 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.416 W/kg

**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

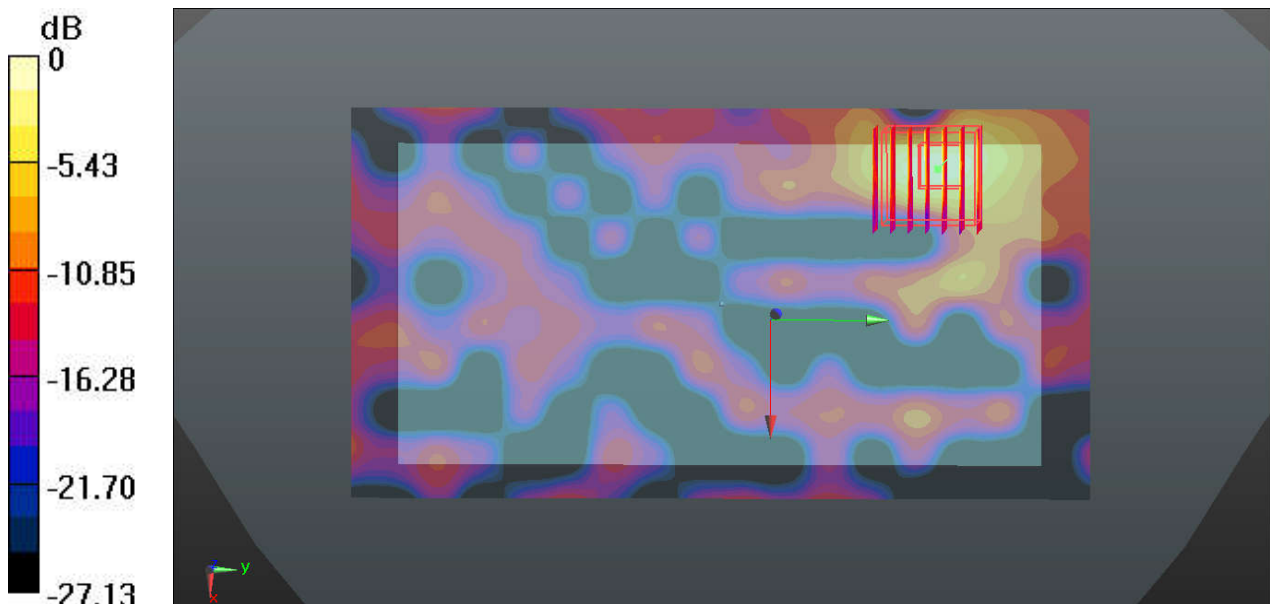

0 dB = 0.288 W/kg

### #28\_GSM850\_GPRS(3 Tx slots)\_Back\_15mm\_Ch189

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08  
Medium: MSL\_835\_160428 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 54.429$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch189/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.617 W/kg


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.572 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.671 W/kg

**SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.394 W/kg**

Maximum value of SAR (measured) = 0.609 W/kg

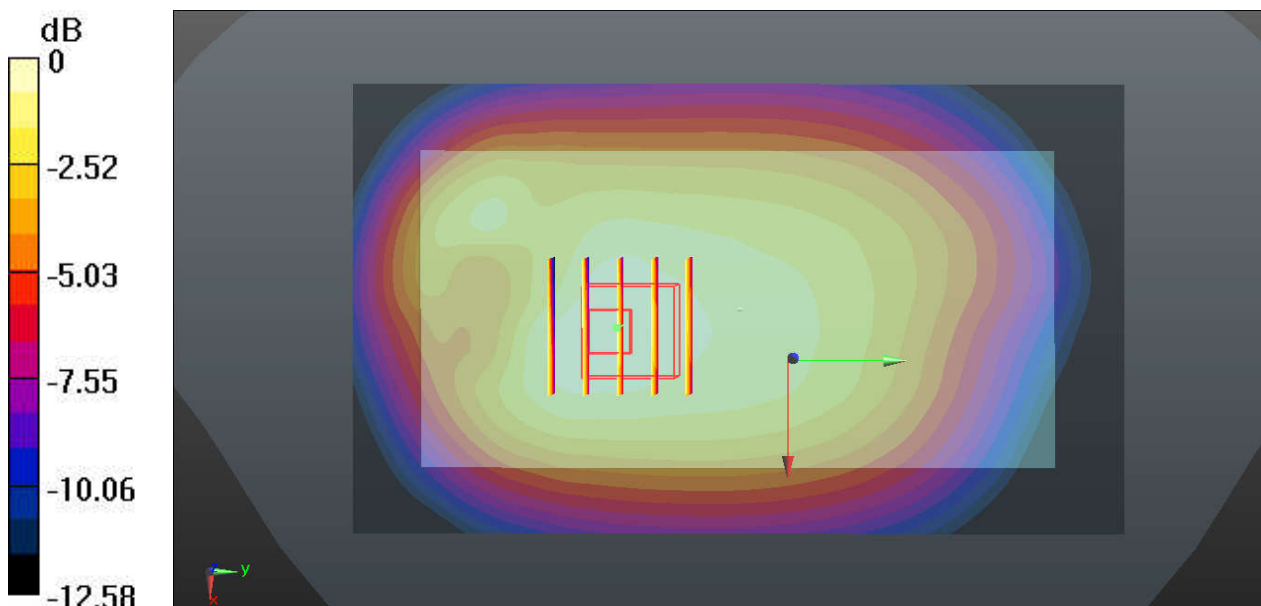

0 dB = 0.617 W/kg



### #29\_GSM1900\_GPRS(4 Tx slots)\_Back\_15mm\_Ch810

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:2.08  
Medium: MSL\_1900\_160429 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.559$  S/m;  $\epsilon_r = 54.548$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.749 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.121 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.988 W/kg

**SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.328 W/kg**

Maximum value of SAR (measured) = 0.805 W/kg

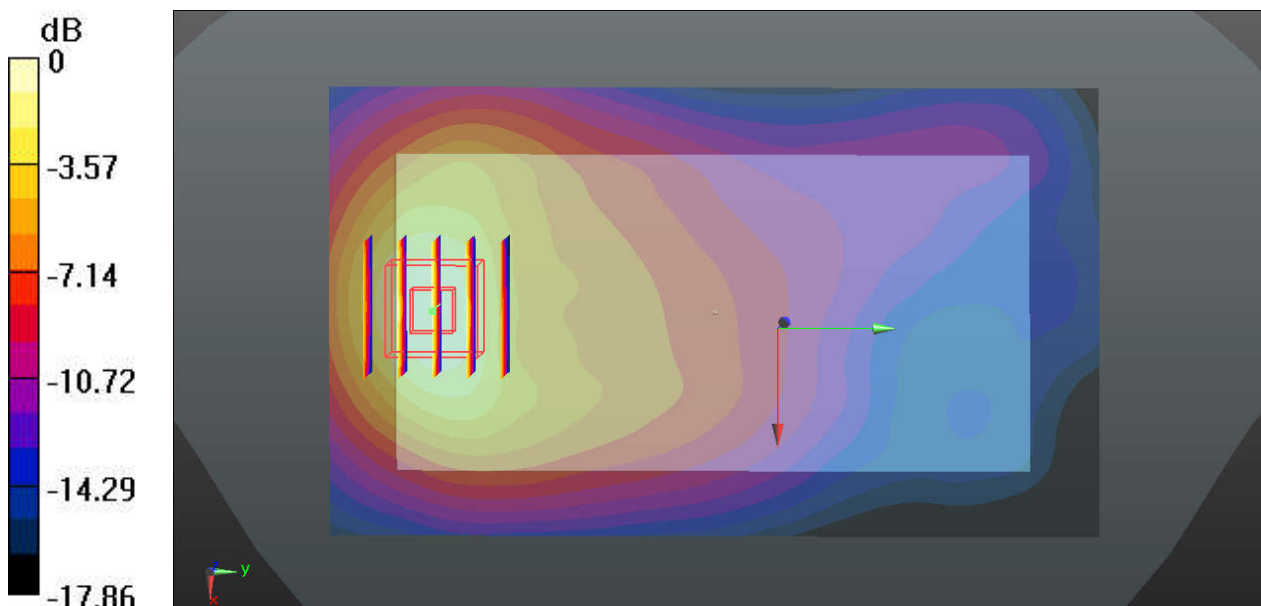

0 dB = 0.749 W/kg

### #30\_WCDMA V\_RMC 12.2Kbps\_Back\_15mm\_Ch4233

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz;Duty Cycle: 1:1  
Medium: MSL\_835\_160428 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.992$  S/m;  $\epsilon_r = 54.346$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.460 W/kg


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.083 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.293 W/kg**

Maximum value of SAR (measured) = 0.457 W/kg

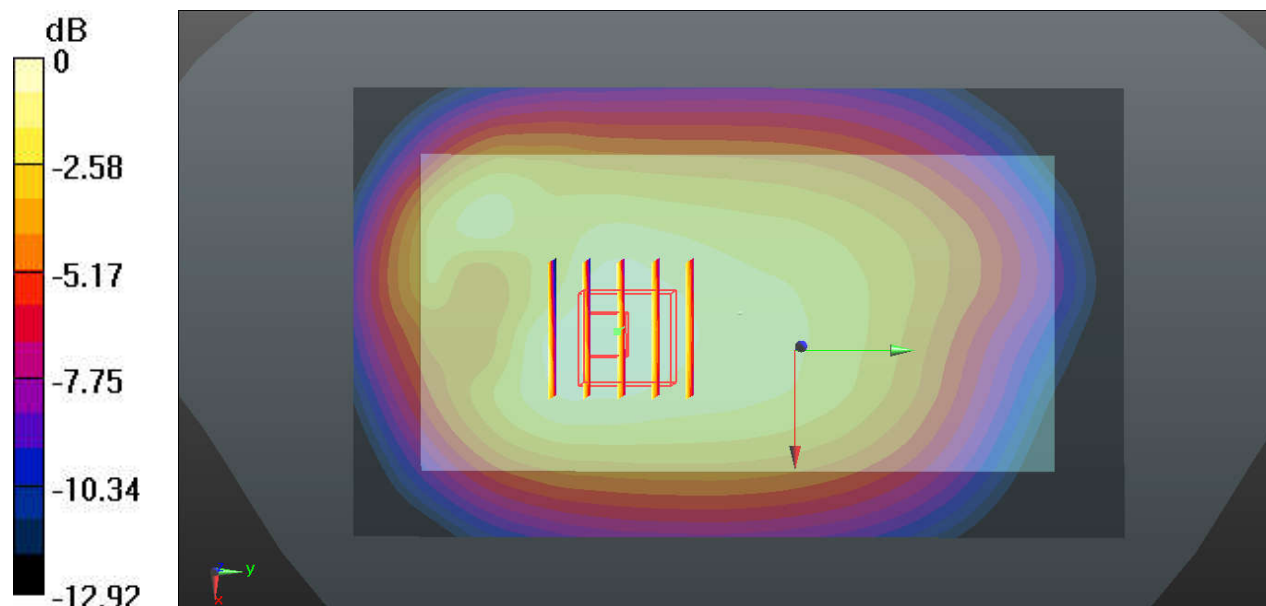

0 dB = 0.460 W/kg

### #31\_WCDMA IV\_RMC 12.2Kbps\_Back\_15mm\_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1  
Medium: MSL\_1800\_160426 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 55.723$ ;  $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.753 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.610 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.950 W/kg  
**SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.343 W/kg**  
Maximum value of SAR (measured) = 0.793 W/kg

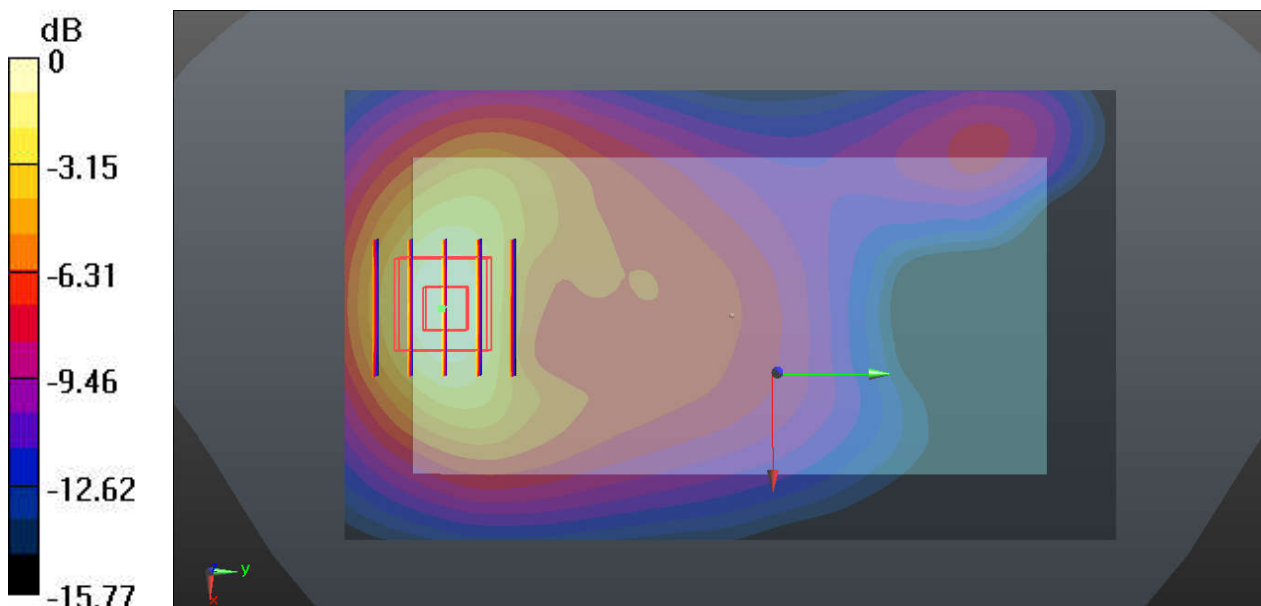

0 dB = 0.753 W/kg

### #32\_WCDMA II\_RMC 12.2Kbps\_Back\_15mm\_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_160429 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 54.665$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch9400/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.841 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.590 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.370 W/kg**

Maximum value of SAR (measured) = 0.897 W/kg

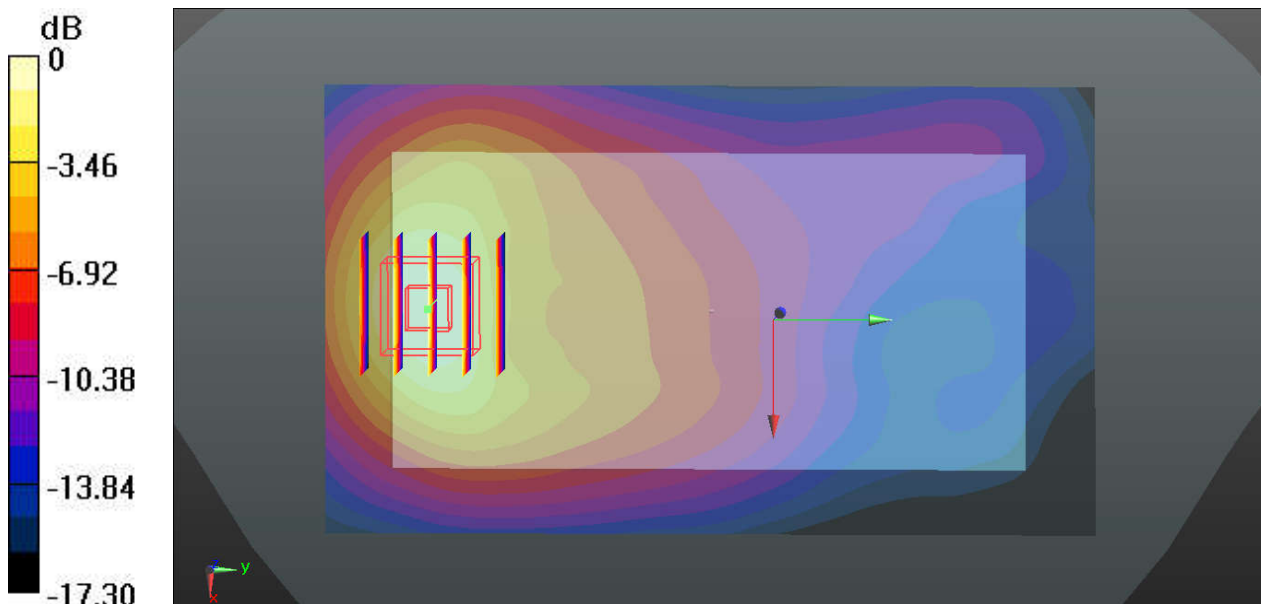

0 dB = 0.841 W/kg

### #33\_LTE Band 12\_10M\_QPSK\_1RB\_25Offset\_Back\_15mm\_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium: MSL\_750\_160428 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 55.833$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.59, 10.59, 10.59); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.253 W/kg


**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.290 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.253 W/kg

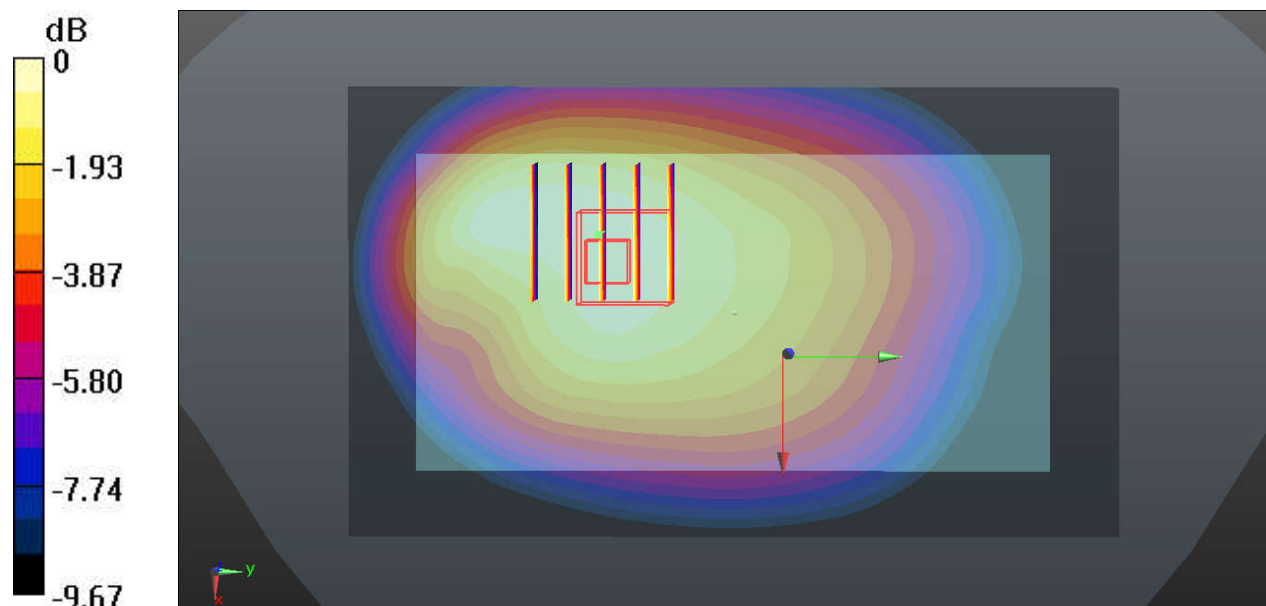

0 dB = 0.253 W/kg

### #34\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Back\_15mm\_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835\_160428 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 54.428$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.445 W/kg


**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.375 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.487 W/kg

**SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 0.440 W/kg

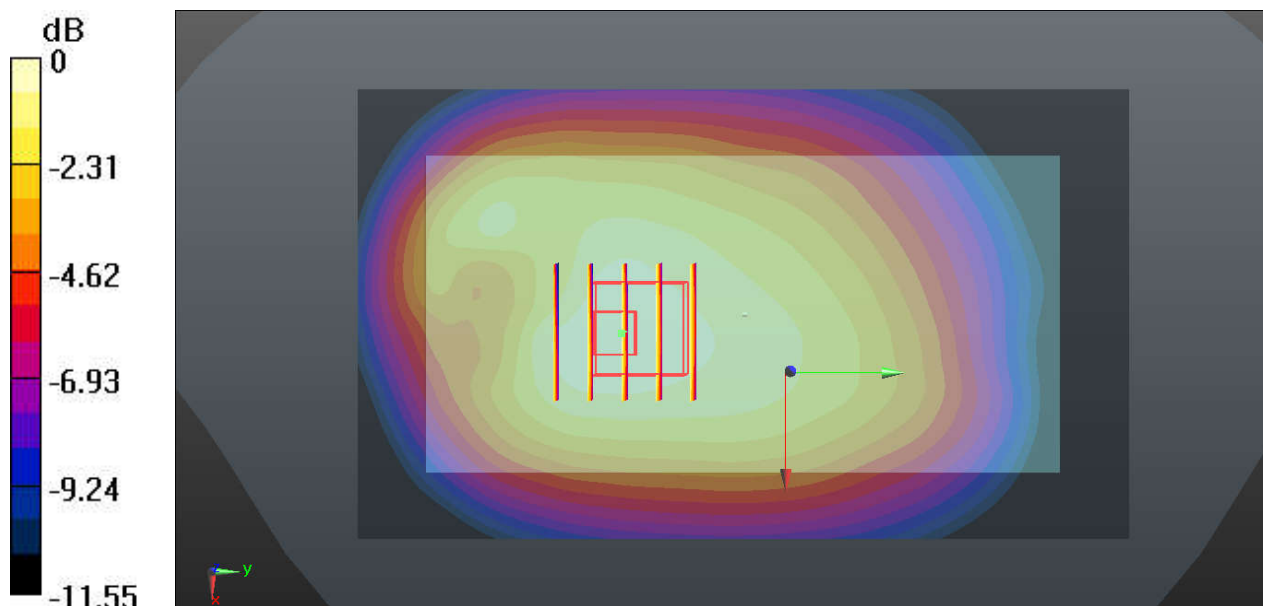

0 dB = 0.445 W/kg

### #35\_LTE Band 4\_20M\_QPSK\_1RB\_49Offset\_Back\_15mm\_Ch20175

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1  
Medium: MSL\_1800\_160426 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.491$  S/m;  $\epsilon_r = 55.756$ ;  $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.4 °C ; **Liquid Temperature:** 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.743 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.173 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.933 W/kg  
**SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.342 W/kg**  
Maximum value of SAR (measured) = 0.781 W/kg

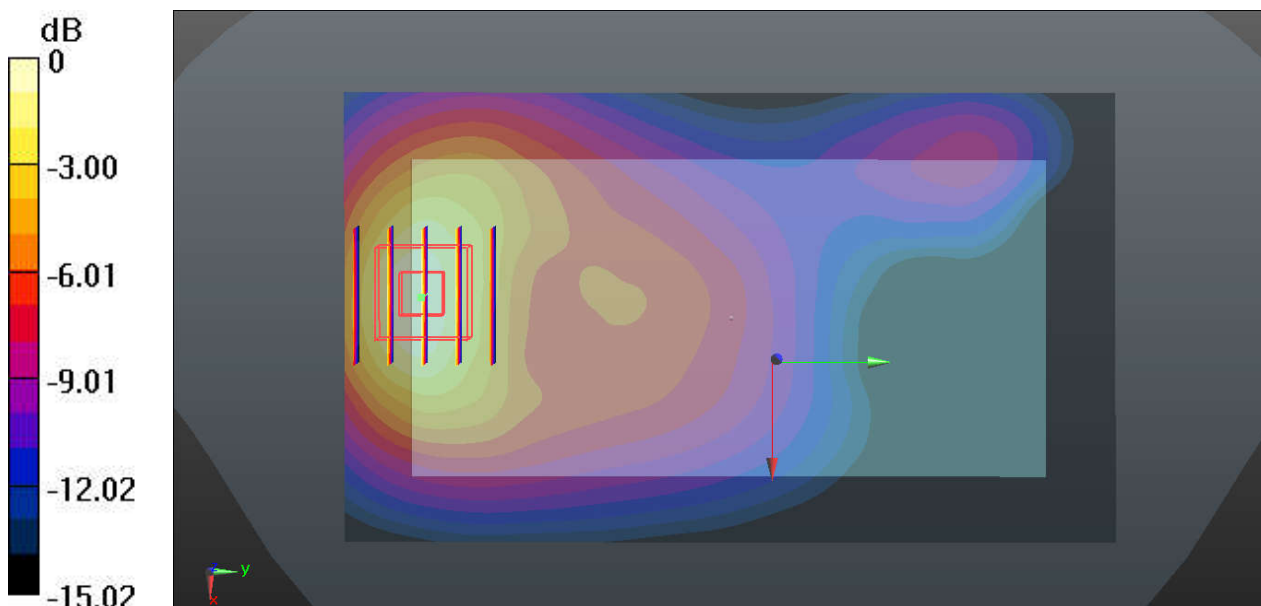

0 dB = 0.743 W/kg

### #36\_LTE Band 2\_20M\_QPSK\_1RB\_49Offset\_Back\_15mm\_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_160528 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.554$  S/m;  $\epsilon_r = 54.286$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.1.7
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (71x121x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.792 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.800 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.992 W/kg  
**SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.339 W/kg**  
Maximum value of SAR (measured) = 0.815 W/kg

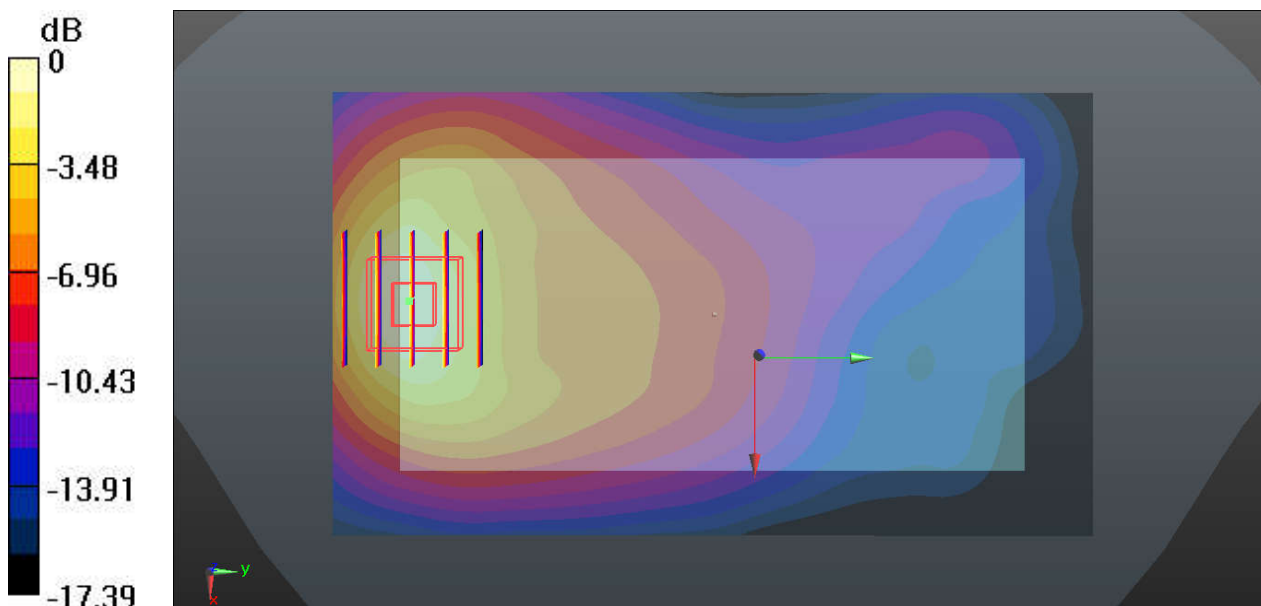

0 dB = 0.792 W/kg



### #37\_LTE Band 7\_20M\_QPSK\_1RB\_49Offset\_Front\_15mm\_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1  
Medium: MSL\_2600\_160429 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 2.071$  S/m;  $\epsilon_r = 53.993$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>


**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.37, 7.37, 7.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch20850/Area Scan (81x151x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.691 W/kg

**Ch20850/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.241 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.930 W/kg  
**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.256 W/kg**  
Maximum value of SAR (measured) = 0.702 W/kg

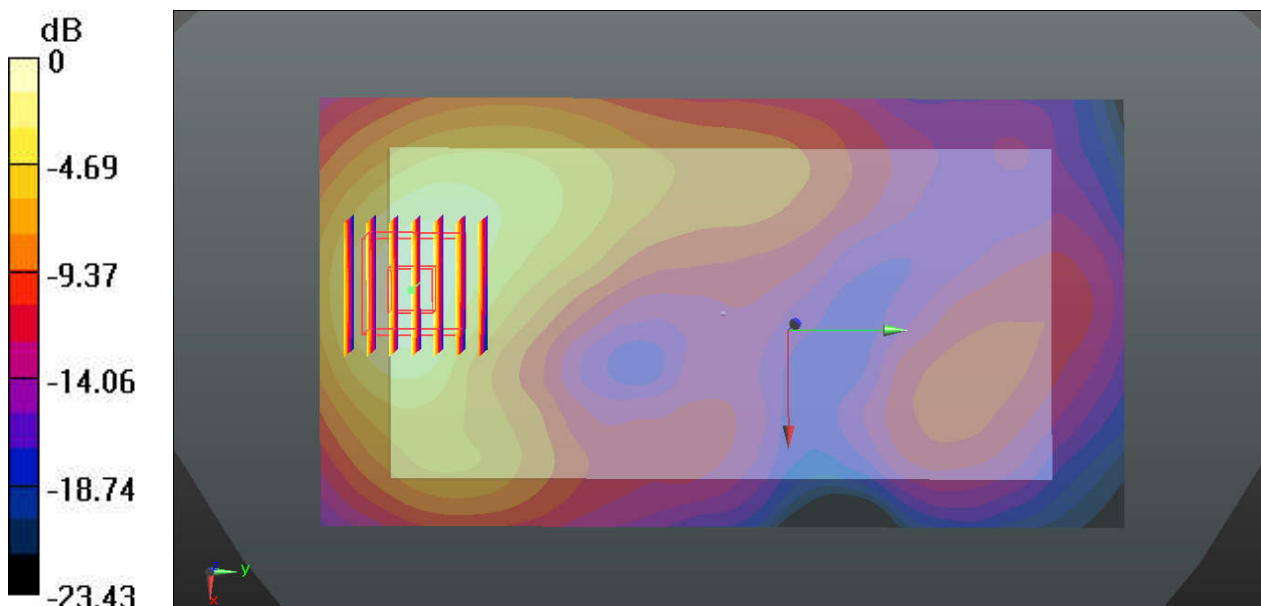

0 dB = 0.691 W/kg

### #38\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_15mm\_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1.021  
Medium: MSL\_2450\_160511 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.012$  S/m;  $\epsilon_r = 52.245$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.5 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.34, 7.34, 7.34); Calibrated: 2015.10.1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (81x151x1):** Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.208 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6140 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.304 W/kg

**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.219 W/kg

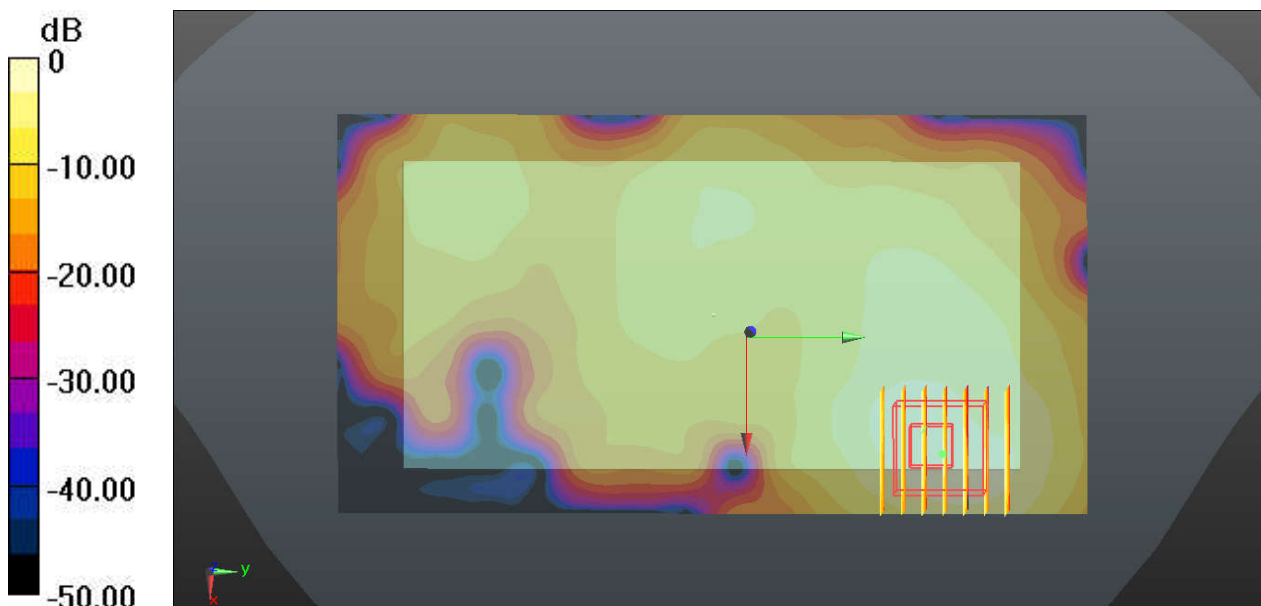

0 dB = 0.208 W/kg

### #39\_WLAN5GHz\_802.11a 6Mbps\_Back\_15mm\_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz;Duty Cycle: 1:1.143  
Medium: MSL\_5250\_160513 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 5.309$  S/m;  $\epsilon_r = 50.918$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.2, 4.2, 4.2); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch52/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Ch52/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.463 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.180 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.111 W/kg

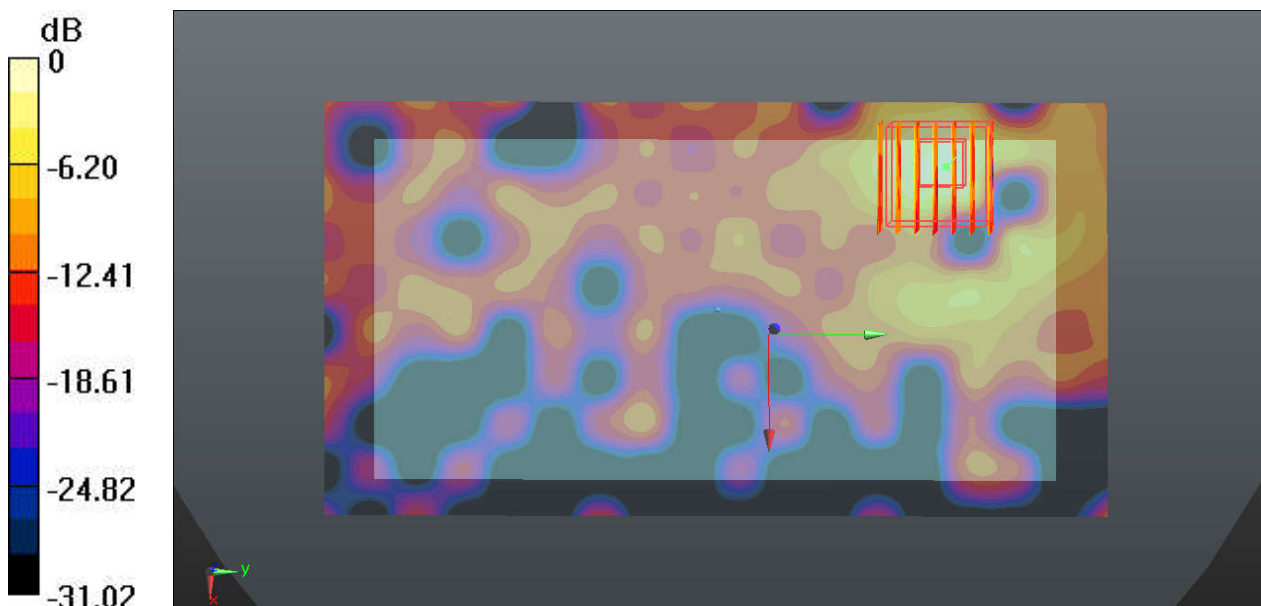

0 dB = 0.172 W/kg

### #40\_WLAN5GHz\_802.11a 6Mbps\_Back\_15mm\_Ch100

Communication System: UID 0, WIFI (0); Frequency: 5500 MHz;Duty Cycle: 1:1.143  
Medium: MSL\_5600\_160513 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.718$  S/m;  $\epsilon_r = 50.529$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.67, 3.67, 3.67); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch100/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.205 W/kg


**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.364 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

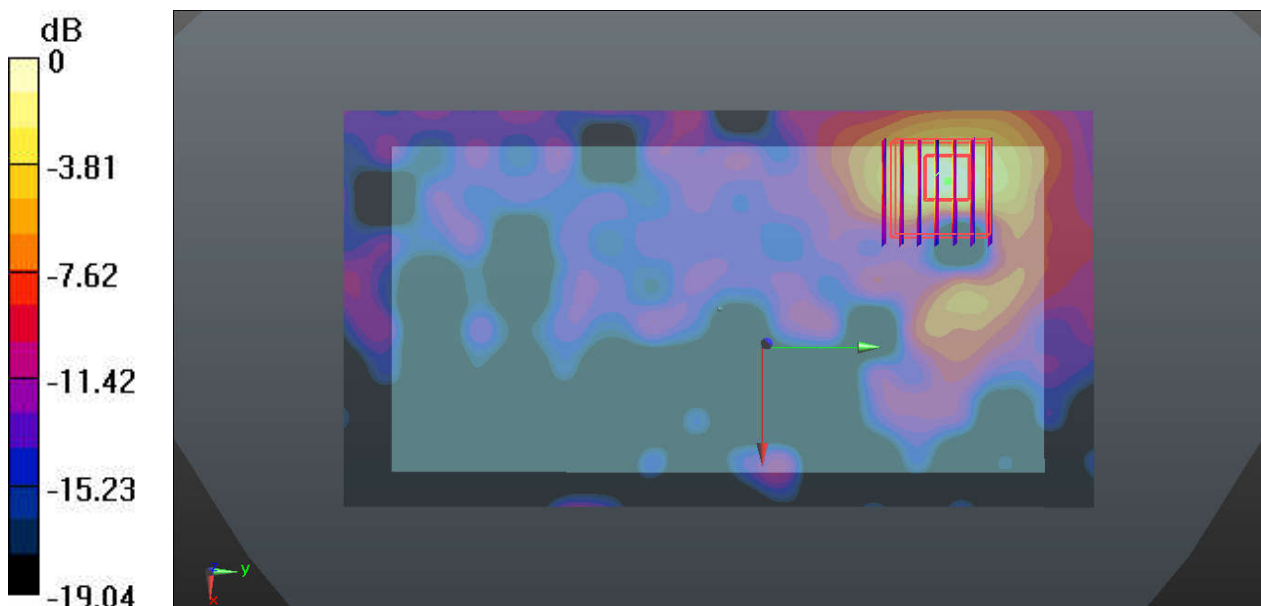

0 dB = 0.205 W/kg

### #41\_WLAN5GHz\_802.11a 6Mbps\_Back\_15mm\_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz;Duty Cycle: 1:1.143  
Medium: MSL\_5750\_160513 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.105$  S/m;  $\epsilon_r = 49.947$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

**Ambient Temperature:** 23.2 °C ; **Liquid Temperature:** 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.73, 3.73, 3.73); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2015.11.24
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x171x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.119 W/kg


**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.128 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.205 W/kg

**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

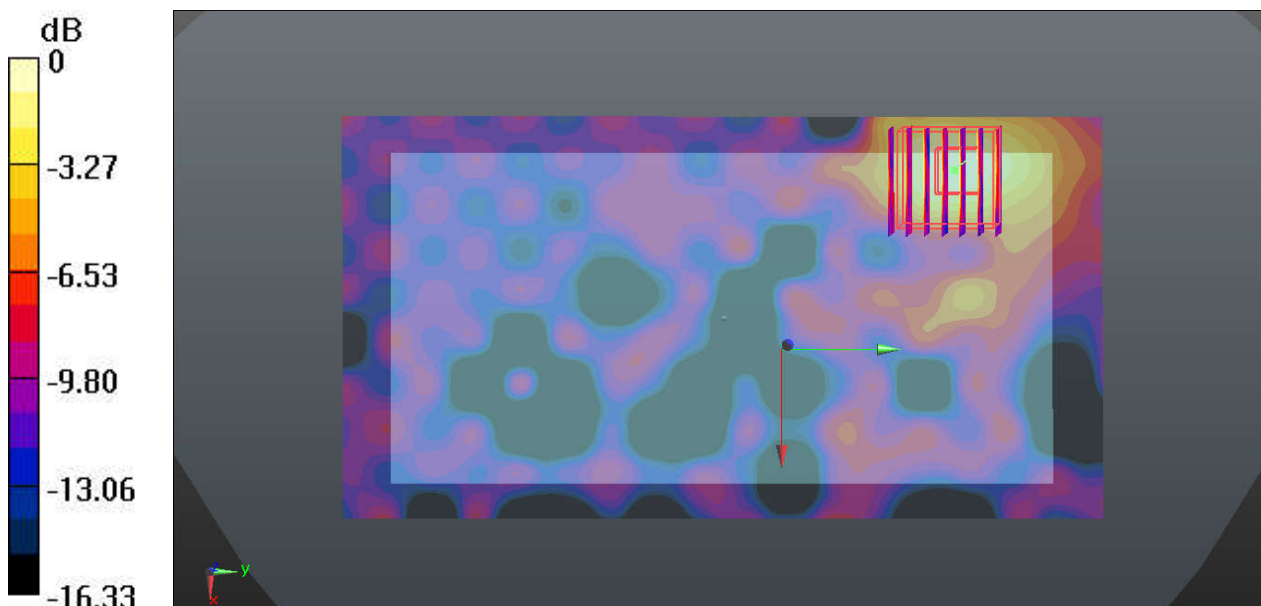



---

**Appendix C. DASYS Calibration Certificate**

The DASYS calibration certificates are shown as follows.