

FCC PART 15 TEST REPORT

No. I17Z60265-SRD07

for

TCL Communication Ltd

SIMBA6 CRICKET

6060C

With

FCC ID: 2ACCJA021

Hardware Version: 10

Software Version: 2A5TUCT0

Issued Date: 2017-04-28



Note: The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z60265-SRD07	Rev.0	1st edition	2017-04-28



CONTENTS

CONTE	NTS	3
1.	TEST LATORATORY	4
1.1.	TESTING LOCATION	4
1.2.	TESTING ENVIRONMENT	4
1.3.	PROJECT DATA	4
1.4.	SIGNATURE	4
2.	CLIENT INFORMATION	5
2.1.	APPLICANT INFORMATION	5
2.2.	MANUFACTURER INFORMATION	5
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	6
3.1.	ABOUT EUT	6
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3.	GENERAL DESCRIPTION	6
4.	REFERENCE DOCUMENTS	7
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	7
4.2.	REFERENCE DOCUMENTS FOR TESTING	7
5.	LABORATORY ENVIRONMENT	7
6.	SUMMARY OF TEST RESULTS	7
6.1.	SUMMARY OF TEST RESULTS	7
6.2.	STATEMENTS	7
7.	TEST EQUIPMENTS UTILIZED	8
ANNEX	A: MEASUREMENT RESULTS	9
A.1. N	MEASUREMENT METHOD	9
A.2. C	CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	11
	JON-OCCUPANCY PERIOD	
A3.1 A	ASSOCIATED TEST	14
ANNEX	B: PHOTOGRAPHS OF THE TEST SET-UP	17
ANNEX	C: ACCREDITATION CERTIFICATE	18



1. TEST LATORATORY

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,

Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: $15-35^{\circ}$ C Extreme Temperature: $-10/+55^{\circ}$ C Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-03-20 Testing End Date: 2017-04-28

1.4. Signature

Jiang Xue

(Prepared this test report)

Zheng Wei

(Reviewed this test report)

Lv Songdong

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd

Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,

Pudong Area Shanghai, P.R. China. 201203

City: Shanghai Postal Code: 201203 Country: China

Contact Gong Zhizhou
Telephone: +358-408036126
Fax: 0086-21-6146060

2.2. Manufacturer Information

Company Name: TCL Communication Ltd

Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,

Pudong Area Shanghai, P.R. China. 201203

City: Shanghai Postal Code: 201203 Country: China

Contact Gong Zhizhou
Telephone: +358-408036126
Fax: 0086-21-6146060



3. <u>EQUIPMENT UNDER TEST (EUT) AND ANCILLARY</u>

EQUIPMENT(AE)

3.1. About EUT

Description SIMBA6 CRICKET

Model name 6060C

FCC ID 2ACCJA021 WLAN Frequency Range ISM Band:

-5250MHz~5350MHz -5470MHz~5725MHz

Type of modulation OFDM

Antenna Integral Antenna
Extreme vol. Limits 3.85V DC by Battery

Device Type (DFS)

Client without radar detection(only support client mode)

TPC mechanism Not support

3.2. Internal Identification of EUT used during the test

 EUT ID*
 S/N
 HW Version
 SW Version

 EUT1
 014889000002618
 10
 2A5TUCT0

*EUT ID: is used to identify the test sample in the lab internally.

3.3. General Description

The Equipment Under Test (EUT) is a model of SIMBA6 CRICKET with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.



FCC 06-96

4. REFERENCE DOCUMENTS

4.1. <u>Documents supplied by applicant</u>

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Title 47 of the Code of Federal Regulations; Chapter I

2015

FCC Part15 Part 15 - Radio frequency devices

Subpart E – UNII Devices

Revision of Parts 2 and 15 of the Commission's Rules to

Permit Unlicensed National Information Infrastructure 2006

(U-NII) devices in the 5 GHz band

5. LABORATORY ENVIRONMENT

Measurement is performed in shielding room.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Verdict
Channel move time and channel closing	15.407 (h)(2)(iii)	P
transmission time	101101 (11)(2)(111)	•
Non-Occupancy Period	15.407 (h)(2) (iv)	Р

Please refer to ANNEX A for detail.

Terms used in Verdict column

Р	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the
	standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deal with the UNII DFS functions among the features described in section 3, and The EUT met all requirements of the reference documents.

The end user is not available to get and modify the parameters of the detected Radar Waveforms in this product.



Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above is tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	26℃
Voltage	V nom	3.8V(By battery)
Humidity	H nom	44%
Air Pressure	A nom	1010hPa

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial	Manufacturer	Calibration	Calibration
NO.	Equipment	Wiodei	Number	Wallulacture	Date	Due Date
1	Vector Sign	FSQ40	200089	Rohde &	2016-06-07	2017-06-06
I	Analyzer	F3Q40	200069	Schwarz	2016-06-07	2017-06-06
2	Vector Sign	SMU200A	103752	Rohde &	2016-06-07	2017-06-06
	General	SIVIUZUUA	103/32	Schwarz	2016-06-07	2017-06-06
3	Shielding Room	S81	/	ETS-Lindgren	/	/




ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

The below figure shows the DFS setup, where the EUT is a RLAN device operating in slave mode, without Radar Interference Detection function. This setup also contains a device operating in master mode. The radar test signals are injected into the master device. The EUT (slave device) is associated with the master device. WLAN traffic is generated by streaming the mpeg file from the master to the slave in full monitor video mode using the media player.

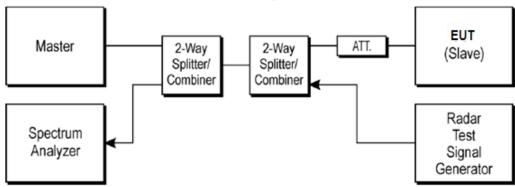

Note:

- 1) All Measurements are performed with the EUT's narrowest channel bandwidth.
- 2) The master device information is as follows

Vendor: Cisco

Model: AIR-AP1252AG-A-K9 FCC ID: LDK102061, 1DK102062

3) The software of radar signal generator (R&S SMU200A) is completely designed based on FCC-06-96A1/NTIA requirement.

A.1.2. Parameters of DFS test signal

1). Interference threshold values, master or client incorporation in service monitoring. For device power less than 23dBm (E.I.R.P.), the threshold level is -62 dBm at the antenna port after correction for antenna gain and procedural adjustments.

Because of conducted measurement performed, the calibration power from radar signal generator to antenna port of DFS test equipment is -62 dBm.

Maximum Transmit Power	Value
> 200 mW	-64 dBm
< 200 mW	-62 dBm



2). DFS requirement values

The required values are as the following table.

Parameter	Value	
Non-occupancy	> 1800 s	
Channel Availability Check Time	60 s	
Channel Move Time	10 s	
Channel Closing Transmission Time	200 ms + 60 ms	
U-NII Detection Bandwidth	Minimum 80% of the 99%	
O-Mil Detection Bandwidth	transmission power bandwidth	

As the EUT is IP based system, the MPEG video file from NTIA website is used to steam to EUT via the Master device.

A.1.3. Measurement Uncertainty

Item	Measurement Uncertainty
Time	0.70 ms
Power	0.75 dBm




A.2. Channel move time and channel closing transmission time

Measurement Limit:

Test Items	Limit
channel closing transmission time	< 200 ms + 60 ms
Channel move time	< 10 s

Measurement Results:


HT20 Frequency Band: 5250MHz ~ 5350MHz

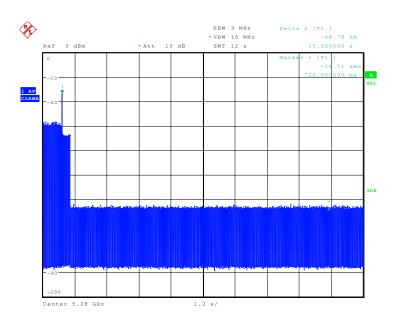

Date: 23.APR.2017 13:40:13

The channel move time is as the figure. It shows the time of the radar and the client pulses. The figure shows that the client stops transmission within 10 seconds, and no transmissions occur after 10 seconds later of the radar burst signal.



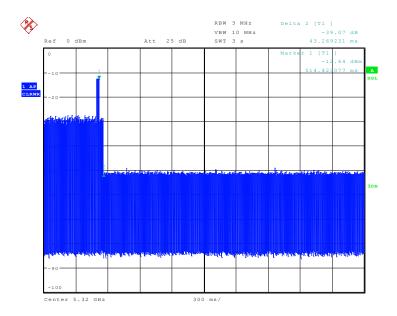


Date: 26.APR.2017 18:24:47

The closing transmission time is as the figure, and the result is 43.27ms.

Conclusion: PASS


HT80 Frequency Band 5470MHz ~ 5725MHz

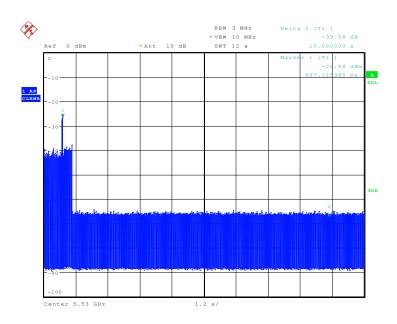

Date: 23.APR.2017 14:35:47

The channel move time is as the figure. It shows the time of the radar and the client pulses. The figure shows that the client stops transmission within 10 seconds, and no transmissions occur after 10 seconds later of the radar burst signal.



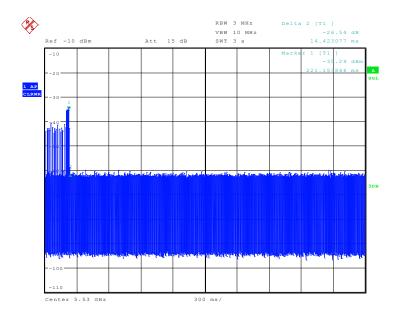


Date: 26.APR.2017 16:21:26

The closing transmission time is as the figure, and the result is 14.42ms

Conclusion: PASS


HT40 Frequency Band 5600MHz ~ 5650MHz

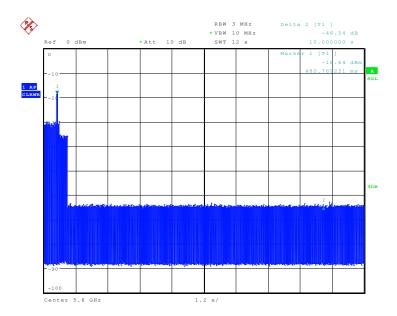

Date: 23.APR.2017 16:05:45

The channel move time is as the figure. It shows the time of the radar and the client pulses. The figure shows that the client stops transmission within 10 seconds, and no transmissions occur after 10 seconds later of the radar burst signal.



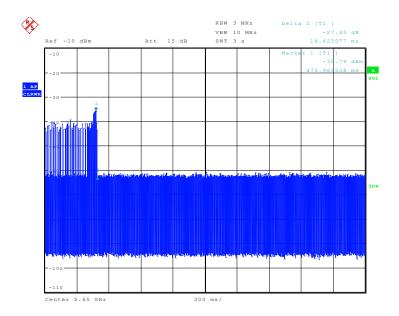

Date: 26.APR.2017 17:56:27

The closing transmission time is as the figure, and the result is 14.42ms

Conclusion: PASS

A.3. Non-Occupancy Period

Measurement Limit:


Test Items	Limit
Non-Occupancy Period	> 1800 s

A3.1 Associated test

Associate the master and client, transmit specified stream between the master and client; monitor the analyzer on the operating frequency to make sure no beacons have been transmitted for 1800 seconds.

HT20 Frequency Band: 5250MHz ~ 5350MHz




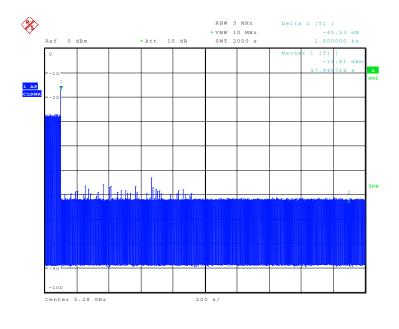

Date: 23.APR.2017 15:59:38

The figure above shows that the client does not transmit any emission within 1800 seconds after getting the order of "stop transmits" from the DFS master (access point).

HT80 Frequency Band: 5470MHz ~ 5725MHz

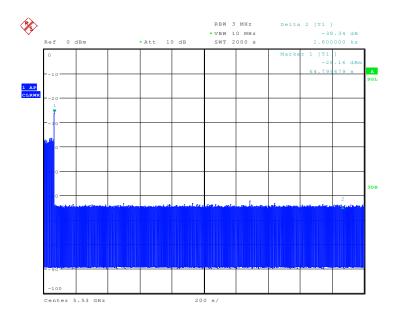


Date: 23.APR.2017 15:20:36

The figure above shows that the client does not transmit any emission within 1800 seconds after getting the order of "stop transmits" from the DFS master (access point).

HT20 Frequency Band: 5600MHz ~ 5650MHz



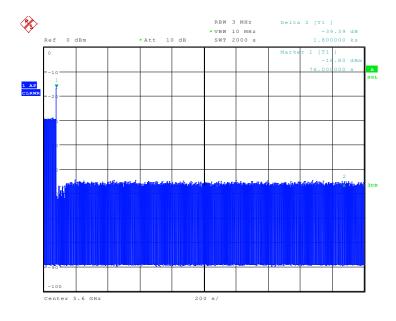

Date: 23.APR.2017 16:43:59

The figure above shows that the client does not transmit any emission within 1800 seconds after getting the order of "stop transmits" from the DFS master (access point).

Conclusion: PASS



ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP

Layout of Conducted Test





ANNEX C: Accreditation Certificate





China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE (Registration No. CNAS L0570)

Telecommunication Technology Labs,
Academy of Telecommunication Research, MIIT

No.52, Huayuan North Road, Haidian District, Beijing, China

No.51, Xueyuan Road, Haidian District, Beijing, China

TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan

District, Shenzhen, Guangdong Province

is accredited in accordance with ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence to undertake testing and calibration service as described in the schedule attached to this certificate.

The scope of accreditation is detailed in the attached schedule bearing the same registration number as above. The schedule form an integral part of this certificate.

Date of Issue: 2015-11-13
Date of Expiry: 2017-06-19

Date of Initial Accreditation: 1998-07-03

Signed on behalf of China National Accreditation Service for Conformity Assessment



China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is a signatory of the International Laboratory Accreditation Cooperation Mutual Recognition Arrangement (ILAC MRA) and the Asia Pacific Laboratory Accreditation Cooperation Mutual Recognition Arrangement (APLAC MRA). The validity of the certificate can be checked on CNAS website at http://www.cnas.org.cn/english/findanaccreditedbody/index.shtml

*** END OF REPORT BODY ***