# **FCC SAR Test Report**

APPLICANT : TCL Communication Ltd.

**EQUIPMENT** : HSDPA/HSUPA/UMTS triple band / GSM

quad band Mobile phone

**MODEL NAME: 4024E** 

**FCC ID** : 2ACCJB030

**STANDARD** : FCC 47 CFR Part 2 (2.1093)

**ANSI/IEEE C95.1-1992** 

IEEE 1528-2013

We, SPORTON INTERNATIONAL (XI'AN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (XI'AN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager





**Report No. : FA582702** 

## SPORTON INTERNATIONAL (XI'AN) INC.

1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. China

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date: Sep. 28, 2015 Form version.: 150415 FCC ID: 2ACCJB030 Page 1 of 42

## **Table of Contents**

1. Statement of Compliance	
2. Administration Data	
3. Guidance Standard	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 Specification of Accessory	7
5. RF Exposure Limits	
5.1 Uncontrolled Environment	
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	
6.1 Introduction	
6.2 SAR Definition	
7. System Description and Setup	
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	
8.2 Power Reference Measurement	
8.3 Area Scan	
8.4 Zoom Scan	
8.5 Volume Scan Procedures	13
8.6 Power Drift Monitoring	
9. Test Equipment List	
10. System Verification	
10.1 Tissue Verification	
10.2 System Performance Check Results.	
11. RF Exposure Positions	
11.1 Ear and handset reference point	17
11.2 Definition of the cheek position	12
11.3 Definition of the tilt position.	
11.4 Body Worn Accessory	
11.5 Wireless Router	
12. Conducted RF Output Power (Unit: dBm)	
13. Bluetooth Exclusions Applied	20
14. Antenna Location	
15. SAR Test Results	
15.1 Head SAR	
15.2 Hotspot SAR	
15.3 Body Worn Accessory SAR	
15.4 Repeated SAR Measurement	
16. Simultaneous Transmission Analysis	აა
16.1 Head Exposure Conditions	
16.2 Hotspot Exposure Conditions	ან
16.3 Body-Worn Accessory Exposure Conditions	39
18. References	42
Appendix B. Plots of High SAR Measurement Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

## **Revision History**

**Report No. : FA582702** 

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA582702	Rev. 01	Initial issue of report	Sep. 28, 2015

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date : Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030

### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd., HSDPA/HSUPA/UMTS triple band / GSM quad band Mobile phone, 4024E are as follows.

**Report No. : FA582702** 

		Highest SAR Summary				
Equipment Class	Frequency Band	Head (Separation 0mm) 1g SAR (W/kg)	Body-worn (Separation 10mm) 1g SAR (W/kg)	Wireless Router (Separation 10mm) 1g SAR (W/kg)	Highest Simultaneous Transmission 1g SAR (W/kg)	
PCE	GSM850	0.67	1.12	1.12	1.22	
	GSM1900	0.44	0.68	0.68		
	WCDMA Band V	0.53	0.73	0.73	1.22	
	WCDMA Band II	0.70	1.12	1.12		
DTS	WLAN 2.4GHz Band	0.31	0.10	0.10	1.22	
Date of Testing:		Sep. 20, 2015 ~ Sep. 23, 2015				

#### Note:

The SAR value list above are all rounded to two decimal digits.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date: Sep. 28, 2015 Form version.: 150415 FCC ID: 2ACCJB030

### 2. Administration Data

Testing Laboratory					
Test Site SPORTON INTERNATIONAL (XI'AN) INC.					
Test Site Location	1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. C. TEL: +86-029-8860-8767 FAX: +86-029-8860-8791				

**Report No. : FA582702** 

Applicant			
Company Name TCL Communication Ltd.			
Address	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R. China		

Manufacturer Manufacturer			
Company Name TCL Communication Ltd.			
Address	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area,Shanghai,201203,P.R.China		

### 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- · IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D06 Hotspot Mode SAR v02

## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

	Product Feature & Specification
Equipment Name	HSDPA/HSUPA/UMTS triple band / GSM quad band Mobile phone
Model Name	4024E
FCC ID	2ACCJB030
IMEI Code	SIM1: 014461000010072 SIM2: 014461000010080
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS(Downlink Only) RMC/AMR 12.2Kbps HSDPA HSUPA IEEE802.11b/g/n-HT20 Bluetooth v2.1+EDR
HW Version	PIO
SW Version	V1.0
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
_	

**Report No. : FA582702** 

- 1. This device 2.4GHz WLAN supports Hotspot operation.
- 2. 802.11n-HT40 is not supported in 2.4GHz WLAN.
- 3. This device supported VoIP in GPRS, WCDMA (e.g. 3rd party VoIP).
- 4. This device supports GRPS/EGPRS mode up to multi-slot class 12 and EGPRS downlink only.
- This device does not support DTM operation.
- 6. There are two SIM cards for EUT. SIM card 1 supports GSM and WCDMA functions, and SIM card 2 only supports GSM function. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform SAR test.

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015

FCC ID: 2ACCJB030 Form version.: 150415 Page 6 of 42

### 4.2 Specification of Accessory

Specification of Accessory						
	Brand Name	ALCATEL	Model Name	A75A-500550-US		
AC Adapter 1	Power Rating	I/P: 100-240Vac	I/P: 100-240Vac, 150mA, O/P: 5Vdc, 550mA			
	P/N	CBA3007AG0C	4			
	Brand Name	ALCATEL	Model Name	TUUS050055-B00		
AC Adapter 2	Power Rating	I/P: 100-240Vac	, 150mA, O/P: 5Vdc	, 550mA		
	P/N	CBA3007AG0C	1			
	Brand Name	ALCATEL onetouch	Model Name	TLi014C7		
Battery	Power Rating	3.7Vdc, 1450m/	3.7Vdc, 1450mAh			
	P/N	CAB1450001C7				
USB Cable	Brand Name	JIAYIKANG	Model Name	CDA0000030C3		
USB Cable	Signal Line Type	1.0m, shielded o	1.0m, shielded cable, without core			
Earnhone 1	Brand Name	SHENGHUA	Model Name	CCB3160A11C6		
Earphone 1	Signal Line Type	1.0m, non-shield	ded cable, without co	ore		
Earphone 2	Brand Name	JIAYIKANG	Model Name	CCB0010A11C7		
	Signal Line Type	1.0m, non-shield	ded cable, without co	ore		

**Report No. : FA582702** 

### 5. RF Exposure Limits

#### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Report No.: FA582702** 

#### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

#### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015 Form version.: 150415 FCC ID: 2ACCJB030

Page 8 of 42

### 6. Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

**Report No.: FA582702** 

#### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

### 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

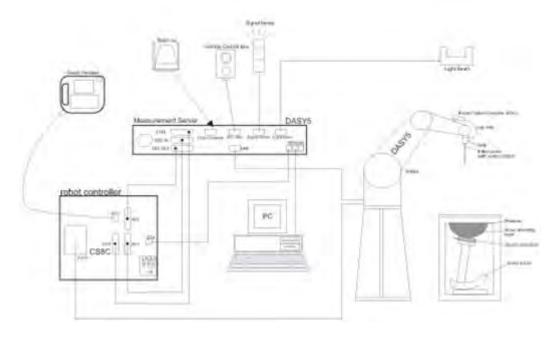

**Report No. : FA582702** 

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing,
   AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps,
- The phantom, the device holder and other accessories according to the targeted measurement.

FCC ID: 2ACCJB030 Page 10 of 42 Form version.: 150415

### 8. Measurement Procedures

The measurement procedures are as follows:

#### <Conducted power measurement>

For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

**Report No.: FA582702** 

- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

#### <SAR measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power
- Place the EUT in the positions as Appendix D demonstrates. (b)
- Set scan area, grid size and other setting on the DASY software. (c)
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band (e)
- Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement (a)
- (b) Area scan
- (c) Zoom scan
- Power drift measurement

SPORTON INTERNATIONAL (XI'AN) INC.

#### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and (b) measurement parameters)
- Generation of a high-resolution mesh within the measured volume (c)
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface (e)
- Calculation of the averaged SAR within masses of 1g and 10g

FCC ID: 2ACCJB030 Page 11 of 42

#### 8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$	
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°	
	$\leq$ 2 GHz: $\leq$ 15 mm 2 – 3 GHz: $\leq$ 12 mm	$3 - 4 \text{ GHz} \le 12 \text{ mm}$ $4 - 6 \text{ GHz} \le 10 \text{ mm}$	
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 FCC ID: 2ACCJB030

Page 12 of 42

Issued Date: Sep. 28, 2015 Form version.: 150415

**Report No.: FA582702** 

#### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

**Report No. : FA582702** 

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq$ 2 GHz: $\leq$ 8 mm 2 – 3 GHz: $\leq$ 5 mm <sup>*</sup>	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$	
	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	$\begin{array}{c} \Delta z_{Zoom}(1)\text{: between} \\ 1^{st} \text{ two points closest} \\ \text{to phantom surface} \\ \\ \Delta z_{Zoom}(n>1)\text{:} \\ \text{between subsequent} \\ \text{points} \end{array}$	1st two points closest	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		≤ 1.5·∆z	Zoom(n-1)	
Minimum zoom scan volume	X V 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

#### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

FCC ID : 2ACCJB030 Page 13 of 42 Form version. : 150415

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is  $\leq 1.4 \text{ W/kg}$ ,  $\leq 8 \text{ mm}$ ,  $\leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Medel	Serial Number	Calib	ration	
Manufacturer	Name of Equipment	Type/Model	Serial Nulliber	Last Cal.	Due Date	
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 21, 2014	Nov. 20, 2015	
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2014	Nov. 20, 2015	
SPEAG	2450MHz System Validation Kit	D2450V2	840	Nov. 19, 2014	Nov. 18, 2015	
SPEAG	Data Acquisition Electronics	DAE4	679	Apr. 13, 2015	Apr. 12, 2016	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	Aug. 06, 2015	Aug. 05, 2016	
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR	
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR	
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR	
Agilent	Wireless Communication Test Set	E5515C	MY52102600	Dec. 09, 2014	Dec. 08, 2015	
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Dec. 09, 2014	Dec. 08, 2015	
Agilent	Dielectric Probe Kit	85070E	MY44300751	NCR	NCR	
Anritsu	Power Senor	MA2411B	0917070	Jan. 23, 2015	Jan. 22, 2016	
Anritsu	Power Meter	ML2495A	1005002	Jan. 23, 2015	Jan. 22, 2016	
Anritsu	Power Sensor	MA2411B	1207253	Jan. 28, 2015	Jan. 27, 2016	
Anritsu	Power Meter	ML2495A	1218010	Jan. 28, 2015	Jan. 27, 2016	
R&S	Spectrum Analyzer	FSP7	101045	Dec. 09, 2014	Dec. 08, 2015	
Agilent	Dual Directional Coupler	778D	50422	No	te1	
Woken	Attenuator 1	WK0602-XX	N/A	No	te1	
PE	Attenuator 2	PE7005-10	N/A	No	te1	
PE	Attenuator 3	PE7005-3	N/A	No	te1	
AR	Power Amplifier	5S1G4M2	0328767	Note1		
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note1		
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	No	te1	

**Report No. : FA582702** 

#### **General Note:**

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030

### 10. System Verification

### 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

**Report No. : FA582702** 

tissue parameters required for routine SAR evaluation.

Frequency	Water	Sugar	Cellulose	Salt	Preventol	DGBE	Conductivity	Permittivity
(MHz)	(%)	(%)	(%)	(%)	(%)	(%)	(σ)	(εr)
				For Head				
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
				For Body				
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

#### <Tissue Dielectric Parameter Check Results>

<u> </u>	<del>- 10100</del>			oun noou						
Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
835	Head	22.6	0.913	40.859	0.90	41.50	1.44	-1.54	±5	Sep. 21, 2015
1900	Head	22.7	1.454	40.846	1.40	40.00	3.86	2.11	±5	Sep. 21, 2015
2450	Head	22.6	1.845	37.668	1.80	39.20	2.50	-3.91	±5	Sep. 22, 2015
835	Body	22.6	0.972	53.975	0.97	55.20	0.21	-2.22	±5	Sep. 21, 2015
1900	Body	22.7	1.556	55.358	1.52	53.30	2.37	3.86	±5	Sep. 20, 2015
2450	Body	22.6	2.001	52.089	1.95	52.70	2.62	-1.16	±5	Sep. 23, 2015


TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015 Form version. : 150415

FCC ID: 2ACCJB030 Page 15 of 42

### 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
Sep. 21, 2015	835	Head	250	4d091	3898	679	2.40	9.11	9.6	5.38
Sep. 21, 2015	1900	Head	250	5d118	3898	679	10.10	40.10	40.4	0.75
Sep. 22, 2015	2450	Head	250	840	3898	679	13.50	52.30	54	3.25
Sep. 21, 2015	835	Body	250	4d091	3898	679	2.45	9.60	9.8	2.08
Sep. 20, 2015	1900	Body	250	5d118	3898	679	10.30	40.00	41.2	3.00
Sep. 23, 2015	2450	Body	250	840	3898	679	12.80	51.00	51.2	0.39

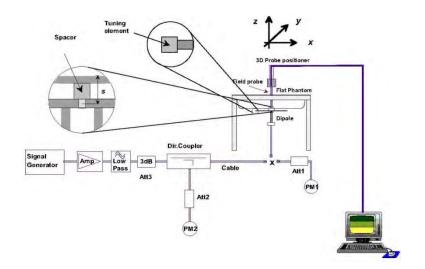



**Report No. : FA582702** 

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date : Sep. 28, 2015 FCC ID: 2ACCJB030 Page 16 of 42

Form version.: 150415

### 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

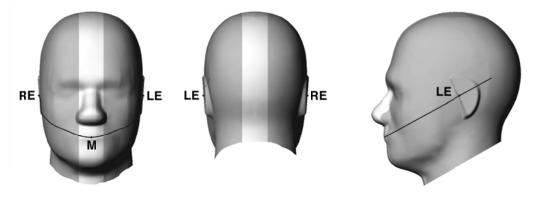


Fig 9.1.1 Front, back, and side views of SAM twin phantom





Fig 9.1.2 Close-up side view of phantom showing the ear region.



**Report No. : FA582702** 

Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015

FCC ID : 2ACCJB030 Page 17 of 42 Form version. : 150415

#### 11.2 Definition of the cheek position

- 1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
- 2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width wt of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
- 3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- 4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
- 5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
- 6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
- 7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

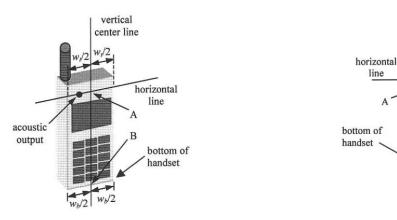


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case

Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

vertical

center line

acoustic output

**Report No.: FA582702** 

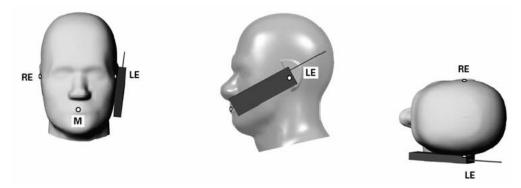


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

 SPORTON INTERNATIONAL (XI'AN) INC.

 TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791
 Issued Date: Sep. 28, 2015

### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.

**Report No. : FA582702** 

- 2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
- 3. Rotate the handset around the horizontal line by 15°.
- 4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

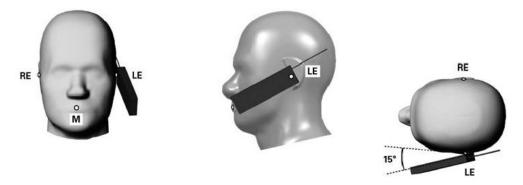


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

#### 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessorv SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

**Report No. : FA582702** 

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

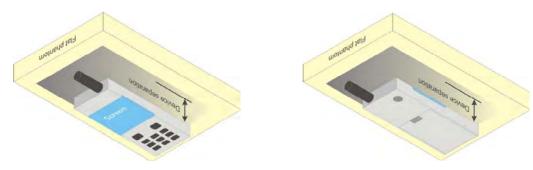


Fig 9.4 Body Worn Position

#### 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined form general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030

### 12. Conducted RF Output Power (Unit: dBm)

#### <GSM Conducted Power>

#### **General Note:**

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.

**Report No. : FA582702** 

- 2. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT were set in GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900.
- 3. Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT were set in GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900.

#### SIM1:

Band GSM850	Burst Ave	erage Pov	ver (dBm)	Tune-up	Frame-Av	erage Pov	wer (dBm)	Tune-up
TX Channel	128	189	251	Limit	128	189	251	Limit
Frequency (MHz)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
GSM (GMSK, 1 Tx slot)	32.04	31.98	<mark>32.34</mark>	33.00	23.04	22.98	23.34	24.00
GPRS (GMSK, 1 Tx slot)	32.03	31.97	32.33	33.00	23.03	22.97	23.33	24.00
GPRS (GMSK, 2 Tx slots)	30.83	30.78	30.79	31.00	<mark>24.83</mark>	24.78	24.79	25.00
GPRS (GMSK, 3 Tx slots)	28.91	28.90	28.88	29.00	24.65	24.64	24.62	24.74
GPRS (GMSK, 4 Tx slots)	27.09	27.05	27.07	27.50	24.09	24.05	24.07	24.50
Band GSM1900	Burst Ave	erage Pov	ver (dBm)	Tune-un	Frame-Av	erage Po	ver (dRm)	Tupo up
The state of the s			( ,	i dilo dp		olago i o	WCI (GDIII)	i une-up
TX Channel	512	661	810	Limit	512	661	810	Limit
TX Channel Frequency (MHz)								
2 27 2	512	661	810	Limit	512	661	810	Limit
Frequency (MHz)	512 1850.2	661 1880	810 1909.8	Limit (dBm)	512 1850.2	661 1880	810 1909.8	Limit dBm)
Frequency (MHz) GSM (GMSK, 1 Tx slot)	512 1850.2 <b>29.30</b>	661 1880 29.28	810 1909.8 29.27	Limit (dBm) 30.00	512 1850.2 20.30	661 1880 20.28	810 1909.8 20.27	Limit (dBm)
Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot)	512 1850.2 <b>29.30</b> 29.28	661 1880 29.28 29.20	810 1909.8 29.27 29.22	Limit (dBm) 30.00 30.00	512 1850.2 20.30 20.28	661 1880 20.28 20.20	810 1909.8 20.27 20.22	Limit (dBm) 21.00 21.00
Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) GPRS (GMSK, 2 Tx slots)	512 1850.2 <b>29.30</b> 29.28 27.38	661 1880 29.28 29.20 27.38	810 1909.8 29.27 29.22 27.37	Limit (dBm) 30.00 30.00 28.00	512 1850.2 20.30 20.28 21.38	661 1880 20.28 20.20 21.38	810 1909.8 20.27 20.22 21.37	Limit (dBm) 21.00 21.00 22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (XI'AN) INC.



SIM2.

### FCC SAR Test Report

**Report No. : FA582702** 

SIIVIZ:								
Band GSM850	Burst Ave	erage Pov	ver (dBm)	Tune-up	Frame-Av	erage Pov	wer (dBm)	Tune-up
TX Channel	128	189	251	Limit	128	189	251	Limit
Frequency (MHz)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
GSM (GMSK, 1 Tx slot)	32.03	31.98	<b>32.33</b>	33.00	23.03	22.98	23.33	24.00
GPRS (GMSK, 1 Tx slot)	32.01	31.95	32.31	33.00	23.01	22.95	23.31	24.00
GPRS (GMSK, 2 Tx slots)	30.83	30.78	30.78	31.00	<mark>24.83</mark>	24.78	24.78	25.00
GPRS (GMSK, 3 Tx slots)	28.90	28.88	28.88	29.00	24.64	24.62	24.62	24.74
GPRS (GMSK, 4 Tx slots)	27.09	27.03	27.06	27.50	24.09	24.03	24.06	24.50
Band GSM1900	Burst Ave	erage Pov	ver (dBm)	Tune-up	Frame-Av	erage Pov	wer (dBm)	Tune-up
TX Channel	512	661	810	Limit	512	661	810	Limit
Frequency (MHz)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8	(dBm)
GSM (GMSK, 1 Tx slot)	<mark>29.27</mark>	29.26	29.25	30.00	20.27	20.26	20.25	21.00
GPRS (GMSK, 1 Tx slot)	29.25	29.20	29.22	30.00	20.25	20.20	20.22	21.00
GPRS (GMSK, 2 Tx slots)	27.37	27.37	27.36	28.00	21.37	21.37	21.36	22.00
GPRS (GMSK, 3 Tx slots)	25.85	25.83	25.80	26.50	<mark>21.59</mark>	21.57	21.54	22.24
GPRS (GMSK, 4 Tx slots)	23.76	23.75	23.72	24.00	20.76	20.75	20.72	21.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791 Issued Date: Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030 Page 22 of 42

#### <WCDMA Conducted Power>

- 1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
- 2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

**Report No. : FA582702** 

A summary of these settings are illustrated below:

#### **HSDPA Setup Configuration:**

Note 3:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

βc	βd	β <sub>d</sub> (SF)	β₀/βа	βнs (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
2/15	15/15	64	2/15	4/15	0.0	0.0
12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
15/15	8/15	64	15/8	30/15	1.5	0.5
15/15	4/15	64	15/4	30/15	1.5	0.5
or the HS-D	PCCH powe	r mask requi	rement test in cl			
	2/15 12/15 (Note 4) 15/15 15/15 AACK, ANACK &	2/15 15/15 12/15 15/15 (Note 4) (Note 4) 15/15 8/15 15/15 4/15 AACK, ΔΝΑCK and ΔCQI = 30 For the HS-DPCCH powe	2/15 15/15 64 12/15 15/15 64 (Note 4) (Note 4) 15/15 8/15 64 15/15 4/15 64 Δαςκ, Δηαςκ and Δαςι = 30/15 with $β_{ls}$ For the HS-DPCCH power mask requi	2/15 15/15 64 2/15 12/15 15/15 64 12/15 (Note 4) (Note 4) (Note 4) 15/15 64 15/15 15/15 8/15 64 15/8 15/15 4/15 64 15/4 15/4 15/4 15/4 15/4 15/4 15/4 15/	(SF) (Note 1, Note 2)  2/15 15/15 64 2/15 4/15  12/15 15/15 64 12/15 24/15  (Note 4) (Note 4) (Note 4)  15/15 8/15 64 15/8 30/15  15/15 4/15 64 15/4 30/15  ΔαCK, ΔΝΑCK and $\Delta$ CQI = 30/15 with $\beta$ Is = 30/15 * $\beta$ C. For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7	(SF)         (Note 1, Note 2)         (Note 3)           2/15         15/15         64         2/15         4/15         0.0           12/15         15/15         64         12/15         24/15         1.0           (Note 4)         (Note 4)         (Note 4)         30/15         1.5           15/15         8/15         64         15/8         30/15         1.5           15/15         4/15         64         15/4         30/15         1.5

with  $\beta_{ls}$  = 24/15 \*  $\beta_c$ . CM = 1 for  $\beta_c/\beta_d$  =12/15,  $\beta_{hs}/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that

support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 11/15 and  $\beta_d$  = 15/15.

Setup Configuration

#### **HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \*:
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121

**Report No.: FA582702** 

- iii. Set Cell Power = -86 dBm
- iv. Set Channel Type = 12.2k + HSPA
- v. Set UE Target Power
- vi. Power Ctrl Mode= Alternating bits
- vii. Set and observe the E-TFCI
- viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub- test	βс	βa	β <sub>d</sub> (SF)	βc/βd	βнs (Note1)	βес	β <sub>ed</sub> (Note 5) (Note 6)	β <sub>ed</sub> (SF)	β <sub>ed</sub> (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β <sub>ed</sub> 1: 47/15 β <sub>ed</sub> 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI}$  = 30/15 with  $\beta_{hs}$  = 30/15 \*  $\beta_c$ .
- Note 2: CM = 1 for  $\beta_0/\beta_d = 12/15$ ,  $\beta_{1s}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 10/15 and  $\beta_d$  = 15/15.
- Note 4: For subtest 5 the  $\beta_0/\beta_0$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by
- setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 14/15 and  $\beta_d$  = 15/15. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 6: β<sub>ed</sub> can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration** 

FCC ID : 2ACCJB030 Page 24 of 42 Form version. : 150415



### <WCDMA Conducted Power>

#### **General Note:**

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

**Report No. : FA582702** 

2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

#### SIM1:

SIIVI I .									
	Band	WC	DMA Ban	d V	_	WC	DMA Bar	nd II	_
TX	Channel	4132	4182	4233	Tune-up Limit	9262	9400	9538	Tune-up
Rx	Rx Channel		4407	4458	(dBm)	9662	9800	9938	Limit (dBm)
Frequ	Frequency (MHz)		836.4	846.6	(3.2)	1852.4	1880	1907.6	(32)
3GPP Rel 99	AMR 12.2Kbps	22.32	22.55	22.35	23.00	22.29	22.28	22.27	23.00
3GPP Rel 99	RMC 12.2Kbps	22.33	<mark>22.57</mark>	22.37	23.00	<mark>22.31</mark>	22.30	22.29	23.00
3GPP Rel 6	HSDPA Subtest-1	21.69	21.32	21.64	22.00	21.02	21.30	21.05	22.00
3GPP Rel 6	HSDPA Subtest-2	21.52	21.11	21.50	22.00	20.90	21.19	20.87	22.00
3GPP Rel 6	HSDPA Subtest-3	21.61	21.12	21.53	22.00	21.14	21.35	20.98	22.00
3GPP Rel 6	HSDPA Subtest-4	21.57	21.12	21.55	22.00	21.09	21.33	21.03	22.00
3GPP Rel 6	HSUPA Subtest-1	19.52	19.75	19.65	20.00	19.74	19.63	19.60	20.00
3GPP Rel 6	HSUPA Subtest-2	19.55	19.68	19.50	20.00	19.59	19.55	19.52	20.00
3GPP Rel 6	HSUPA Subtest-3	20.12	20.03	19.98	21.00	20.03	19.95	19.89	21.00
3GPP Rel 6	HSUPA Subtest-4	20.10	20.12	19.94	21.00	19.89	19.75	19.73	20.00
3GPP Rel 6	HSUPA Subtest-5	19.78	19.68	19.69	20.00	19.76	19.69	19.66	20.00



#### <WLAN Conducted Power>

#### **General Note:**

1. Per KDB 248227 D01v02r01, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.

**Report No. : FA582702** 

- 2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
- 3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
- 4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

**SPORTON INTERNATIONAL (XI'AN) INC.**TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

### <2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		CH 1	2412		11.20	12.00	
	802.11b	CH 6	2437	1Mbps	11.81	12.00	100.00
2.4GHz WLAN		CH 11	2462		12.04	12.50	
2.4GHZ WLAIN		CH 1	2412		10.98	11.50	
	802.11g	CH 6	2437	6Mbps	11.76	12.00	96.51
		CH 11	2462		11.31	11.50	
		CH 1	2412		11.19	11.50	
	802.11n-HT20	CH 6	2437	MCS0	11.05	11.50	95.59
		CH 11	2462		10.99	11.50	

**Report No. : FA582702** 

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date : Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030 Page 27 of 42

### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)
IVIOUE Ballu	Bluetooth v2.1+EDR
2.4GHz Bluetooth	11.0

**Report No. : FA582702** 

#### Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
11.0	10	2.48	2.1

#### Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.1 which is <= 3, SAR testing is not required.

SPORTON INTERNATIONAL (XI'AN) INC.

### 14. Antenna Location

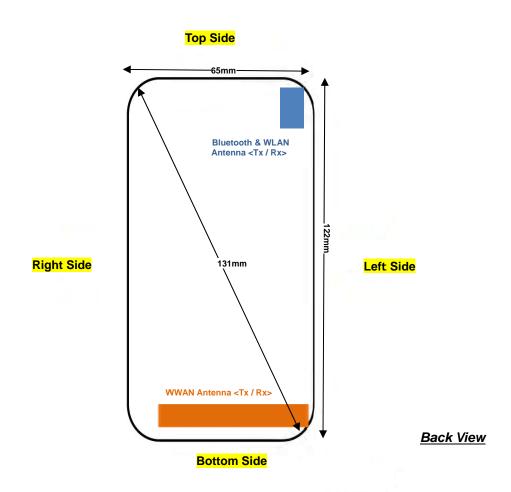

Report No.: FA582702

	Distanc	e of the Antenna	to the EUT surface	ce/edge										
Antennas	Antennas Back Front Top Side Bottom Side Right Side Left Side													
WWAN Main	≤ 25mm	≤ 25mm	106mm	≤ 25mm	≤ 25mm	≤ 25mm								
BT&WLAN	BT&WLAN ≤ 25mm ≤ 25mm 103mm 52mm ≤ 25mm													

	Po	ositions for SAR to	ests; Hotspot mod	de		
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

#### **General Note:**

Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date : Sep. 28, 2015 FCC ID: 2ACCJB030 Form version.: 150415 Page 29 of 42

### 15. SAR Test Results

#### **General Note:**

- 1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

**Report No. : FA582702** 

- b. Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
- 2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - · ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

#### **GSM Note:**

- 1. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT were set in GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900.
- Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT were set in GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900.

#### **UMTS Note:**

- 1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

#### **WLAN Note:**

- 1. Per KDB 248227 D01v02r01, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions /
  configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all
  required channels are tested.
- 4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

 SPORTON INTERNATIONAL (XI'AN) INC.

 TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791
 Issued Date: Sep. 28, 2015

FCC ID : 2ACCJB030 Page 30 of 42 Form version. : 150415



### 15.1 Head SAR

### <GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#01	GSM850	GPRS (2 Tx slots)	Right Cheek	128	824.2	30.83	31.00	1.040	0.15	0.648	<mark>0.674</mark>
	GSM850	GPRS (2 Tx slots)	Right Tilted	128	824.2	30.83	31.00	1.040	-0.05	0.438	0.455
	GSM850	GPRS (2 Tx slots)	Left Cheek	128	824.2	30.83	31.00	1.040	0.07	0.604	0.628
	GSM850	GPRS (2 Tx slots)	Left Tilted	128	824.2	30.83	31.00	1.040	0.11	0.434	0.451
#02	GSM1900	GPRS (3 Tx slots)	Right Cheek	512	1850.2	25.85	26.50	1.161	0.04	0.376	0.437
	GSM1900	GPRS (3 Tx slots)	Right Tilted	512	1850.2	25.85	26.50	1.161	0.06	0.079	0.092
	GSM1900	GPRS (3 Tx slots)	Left Cheek	512	1850.2	25.85	26.50	1.161	0.16	0.242	0.281
	GSM1900	GPRS (3 Tx slots)	Left Tilted	512	1850.2	25.85	26.50	1.161	0.09	0.078	0.091

**Report No. : FA582702** 

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4182	836.4	22.57	23.00	1.104	0.06	0.481	<mark>0.531</mark>
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4182	836.4	22.57	23.00	1.104	0.02	0.330	0.364
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4182	836.4	22.57	23.00	1.104	0.05	0.446	0.492
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4182	836.4	22.57	23.00	1.104	0.19	0.321	0.354
#04	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9262	1852.4	22.31	23.00	1.172	0.07	0.597	0.700
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9262	1852.4	22.31	23.00	1.172	0.06	0.123	0.144
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	22.31	23.00	1.172	0.16	0.382	0.448
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9262	1852.4	22.31	23.00	1.172	0.09	0.129	0.151

### <WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#05	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	11	2462	12.04	12.50	1.112	0.416	0.01	0.274	0.305
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	12.04	12.50	1.112	0.320			
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	11	2462	12.04	12.50	1.112	0.260			
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	11	2462	12.04	12.50	1.112	0.211			

FCC ID : 2ACCJB030 Page 31 of 42 Form version. : 150415



### 15.2 Hotspot SAR

### <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm )	Ch.	Freq. (MHz)	Average Power (dBm)	Tune- Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measur ed 1g SAR (W/kg)	Reporte d 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Front	10	128	824.2	30.83	31.00	1.040	0.01	0.748	0.778
#06	GSM850	GPRS (2 Tx slots)	Back	10	128	824.2	30.83	31.00	1.040	0.01	1.080	<mark>1.123</mark>
	GSM850	GPRS (2 Tx slots)	Left side	10	128	824.2	30.83	31.00	1.040	0.06	0.506	0.526
	GSM850	GPRS (2 Tx slots)	Right side	10	128	824.2	30.83	31.00	1.040	0.04	0.681	0.708
	GSM850	GPRS (2 Tx slots)	Bottom side	10	128	824.2	30.83	31.00	1.040	-0.02	0.098	0.102
	GSM850	GPRS (2 Tx slots)	Back	10	189	836.4	30.78	31.00	1.052	-0.03	0.955	1.005
	GSM850	GPRS (2 Tx slots)	Back	10	251	848.8	30.79	31.00	1.050	0.02	0.918	0.963
	GSM1900	GPRS (3 Tx slots)	Front	10	512	1850.2	25.85	26.50	1.161	0.02	0.441	0.512
#07	GSM1900	GPRS (3 Tx slots)	Back	10	512	1850.2	25.85	26.50	1.161	0.07	0.582	<mark>0.676</mark>
	GSM1900	GPRS (3 Tx slots)	Left side	10	512	1850.2	25.85	26.50	1.161	-0.01	0.058	0.067
	GSM1900	GPRS (3 Tx slots)	Right side	10	512	1850.2	25.85	26.50	1.161	-0.01	0.165	0.192
	GSM1900	GPRS (3 Tx slots)	Bottom side	10	512	1850.2	25.85	26.50	1.161	-0.01	0.525	0.610

**Report No. : FA582702** 

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date : Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030 Page 32 of 42



### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	10	4182	836.4	22.57	23.00	1.104	0.06	0.419	0.463
#08	WCDMA Band V	RMC12.2Kbps	Back	10	4182	836.4	22.57	23.00	1.104	0.01	0.659	<mark>0.728</mark>
	WCDMA Band V	RMC12.2Kbps	Left side	10	4182	836.4	22.57	23.00	1.104	0.05	0.314	0.347
	WCDMA Band V	RMC12.2Kbps	Right side	10	4182	836.4	22.57	23.00	1.104	-0.07	0.430	0.475
	WCDMA Band V	RMC12.2Kbps	Bottom side	10	4182	836.4	22.57	23.00	1.104	0.17	0.051	0.056
	WCDMA Band II	RMC12.2Kbps	Front	10	9262	1852.4	22.31	23.00	1.172	0.06	0.646	0.757
#09	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.31	23.00	1.172	-0.01	0.953	1.117
	WCDMA Band II	RMC12.2Kbps	Left side	10	9262	1852.4	22.31	23.00	1.172	0.02	0.095	0.111
	WCDMA Band II	RMC12.2Kbps	Right side	10	9262	1852.4	22.31	23.00	1.172	0.08	0.292	0.342
	WCDMA Band II	RMC12.2Kbps	Bottom side	10	9262	1852.4	22.31	23.00	1.172	0.01	0.857	1.005
	WCDMA Band II	RMC12.2Kbps	Back	10	9400	1880	22.30	23.00	1.175	-0.02	0.932	1.095
	WCDMA Band II	RMC12.2Kbps	Back	10	9538	1907.6	22.29	23.00	1.178	0.01	0.906	1.067
	WCDMA Band II	RMC12.2Kbps	Bottom side	10	9400	1880	22.30	23.00	1.175	0.05	0.840	0.987
	WCDMA Band II	RMC12.2Kbps	Bottom side	10	9538	1907.6	22.29	23.00	1.178	0.02	0.800	0.942

Report No. : FA582702

### <WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	11	2462	12.04	12.50	1.112	0.091			
#10	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2462	12.04	12.50	1.112	0.128	0.17	0.088	0.098
	WLAN 2.4GHz	802.11b 1Mbps	Left side	10	11	2462	12.04	12.50	1.112	0.094			
	WLAN 2.4GHz	802.11b 1Mbps	Top side	10	11	2462	12.04	12.50	1.112	0.080			



### 15.3 Body Worn Accessory SAR

### <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm )	Ch.	Freq. (MHz)	Average Power (dBm)	Tune- Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measur ed 1g SAR (W/kg)	Reporte d 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Front	10	128	824.2	30.83	31.00	1.040	0.01	0.748	0.778
#06	GSM850	GPRS (2 Tx slots)	Back	10	128	824.2	30.83	31.00	1.040	0.01	1.080	<mark>1.123</mark>
	GSM850	GPRS (2 Tx slots)	Back	10	189	836.4	30.78	31.00	1.052	-0.03	0.955	1.005
	GSM850	GPRS (2 Tx slots)	Back	10	251	848.8	30.79	31.00	1.050	0.02	0.918	0.963
	GSM1900	GPRS (3 Tx slots)	Front	10	512	1850.2	25.85	26.50	1.161	0.02	0.441	0.512
#07	GSM1900	GPRS (3 Tx slots)	Back	10	512	1850.2	25.85	26.50	1.161	0.07	0.582	<mark>0.676</mark>

Report No.: FA582702

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	10	4182	836.4	22.57	23.00	1.104	0.06	0.419	0.463
#08	WCDMA Band V	RMC12.2Kbps	Back	10	4182	836.4	22.57	23.00	1.104	0.01	0.659	<mark>0.728</mark>
	WCDMA Band II	RMC12.2Kbps	Front	10	9262	1852.4	22.31	23.00	1.172	0.06	0.646	0.757
#09	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.31	23.00	1.172	-0.01	0.953	<mark>1.117</mark>
	WCDMA Band II	RMC12.2Kbps	Back	10	9400	1880	22.30	23.00	1.175	-0.02	0.932	1.095
	WCDMA Band II	RMC12.2Kbps	Back	10	9538	1907.6	22.29	23.00	1.178	0.01	0.906	1.067

### <WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	11	2462	12.04	12.50	1.112	0.091			
#10	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2462	12.04	12.50	1.112	0.128	0.17	0.088	0.098



SPORTON LAB. FCC SAR Test Report

### 15.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	u.n	Freq. (MHz)	Average Power (dBm)		Tune-up Scaling Factor		Measured 1g SAR (W/kg)		Reported 1g SAR (W/kg)
1st	GSM850	GPRS (2 Tx slots)	Back	10	128	824.2	30.83	31.00	1.040	0.01	1.080	1	1.123
2nd	GSM850	GPRS (2 Tx slots)	Back	10	128	824.2	30.83	31.00	1.040	0.02	1.010	1.069	1.050
1st	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.31	23.00	1.172	-0.01	0.953	1	1.117
2nd	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.31	23.00	1.172	0.03	0.893	1.067	1.047

**Report No. : FA582702** 

#### **General Note:**

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- 2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
NO.		Head	Body-worn	Hotspot	Note
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
4.	GSM Voice + Bluetooth		Yes		
5.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
6.	WCDMA+ Bluetooth		Yes		WWAN VoIP

#### **General Note:**

- 1. This device supported VoIP in GPRS, WCDMA (e.g. 3rd party VoIP).
- 2. This device 2.4GHz WLAN supports hotspot operation.
- 3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- 4. EUT will choose each GSM and WCDMA according to the network signal condition; therefore, they will not operate simultaneously at any moment.

**Report No.: FA582702** 

- 5. For WLAN SAR chose the worse SAR for co-located with WWAN and it is very conservatively evaluated.
- 6. The reported SAR summation is calculated based on the same configuration and test position.
- 7. The Scaled SAR summation is calculated based on the same configuration and test position.
- 8. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR = (SAR<sub>1</sub> + SAR<sub>2</sub>)<sup>1.5</sup> / (*min. separation distance, mm*), and the peak separation distance is determined from the square root of [(x<sub>1</sub>-x<sub>2</sub>)<sup>2</sup> + (y<sub>1</sub>-y<sub>2</sub>)<sup>2</sup> + (z<sub>1</sub>-z<sub>2</sub>)<sup>2</sup>], where (x<sub>1</sub>, y<sub>1</sub>, z<sub>1</sub>) and (x<sub>2</sub>, y<sub>2</sub>, z<sub>2</sub>) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- 9. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
  - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[ $\sqrt{f(GHz)/x}$ ] W/kg for test separation distances  $\leq$  50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth	Exposure Position	Body worn	
Max Power	Test separation	10 mm	
11.0 dBm	Estimated SAR (W/kg)	0.273 W/kg	



# 16.1 Head Exposure Conditions

## <WWAN + WLAN 2.4GHz>

			WWAN	WLAN	Summed		
WWAN Band		Exposure Position	Max. Max. WWAN SAR WLAN SAR (W/kg) (W/kg)		SAR (W/kg)	SPLSR	Case No
		Right Cheek	0.674	0.305	0.98		
	GSM850	Right Tilted	0.455	0.305	0.76		
	G91/1920	Left Cheek	0.628	0.305	0.93		
GSM		Left Tilted	0.451	0.305	0.76		
GSIM	GSM1900	Right Cheek	0.437	0.305	0.74		
		Right Tilted	0.092	0.305	0.40		
		Left Cheek	0.281	0.305	0.59		
		Left Tilted	0.091	0.305	0.40		
	Band V	Right Cheek	0.531	0.305	0.84		
		Right Tilted	0.364	0.305	0.67		
		Left Cheek	0.492	0.305	0.80		
WCDMA		Left Tilted	0.354	0.305	0.66		
		Right Cheek	0.700	0.305	1.01		
	Band II	Right Tilted	0.144	0.305	0.45		
	Dailu II	Left Cheek	0.448	0.305	0.75		
		Left Tilted	0.151	0.305	0.46		

Report No. : FA582702

# 16.2 Hotspot Exposure Conditions

### <WWAN + WLAN 2.4GHz>

	F WLAN 2.40		WWAN	WLAN	Summed		
WWA	N Band	Exposure Position	Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	SAR (W/kg)	SPLSR	Case No
		Front	0.778	0.098	0.88		
		Back	1.123	0.098	<mark>1.22</mark>		
	GSM850	Left side	0.526	0.098	0.62		
	GSIVIOSU	Right side	0.708		0.71		
		Top side		0.098	0.10		
GSM		Bottom side	0.102		0.10		
GSIVI	GSM1900	Front	0.512	0.098	0.61		
		Back	0.676	0.098	0.77		
		Left side	0.067	0.098	0.17		
		Right side	0.192		0.19		
		Top side		0.098	0.10		
		Bottom side	0.610		0.61		
	Band V	Front	0.463	0.098	0.56		
		Back	0.728	0.098	0.83		
		Left side	0.347	0.098	0.45		
		Right side	0.475		0.48		
		Top side		0.098	0.10		
WCDMA		Bottom side	0.056		0.06		
WCDIVIA	Band II	Front	0.757	0.098	0.86		
		Back	1.117	0.098	1.22		
		Left side	0.111	0.098	0.21		
	Dallu II	Right side	0.342		0.34		
		Top side		0.098	0.10		
		Bottom side	1.005		1.01		

Report No. : FA582702



## 16.3 Body-Worn Accessory Exposure Conditions

### <WWAN + WLAN 2.4GHz>

WWAN Band			WWAN	WLAN	Summed	SPLSR	
		Exposure Position	Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	SAR (W/kg)		Case No
	GSM850	Front	0.778	0.098	0.88		
GSM	GSIVIOSO	Back	1.123	0.098	1.22		
GSIVI	GSM1900	Front	0.512	0.098	0.61		
		Back	0.676	0.098	0.77		
	Band V	Front	0.463	0.098	0.56		
WCDMA	Dailu V	Back	0.728	0.098	0.83		
WCDMA	Dandll	Front	0.757	0.098	0.86		
	Band II	Back	1.117	0.098	1.22		

**Report No. : FA582702** 

### <WWAN + Bluetooth>

			WWAN	Bluetooth	Summed		
WWAN Band		Exposure Position	Max. WWAN SAR (W/kg)	Estimated (W/kg)	SAR (W/kg)	SPLSR	Case No
	GSM850	Front	0.778	0.273	1.05		
GSM	GSIVIOSU	Back	1.123	0.273	1.40		
GSIVI	GSM1900	Front	0.512	0.273	0.79		
		Back	0.676	0.273	0.95		
	Band V	Front	0.463	0.273	0.74		
WCDMA	Dallu V	Back	0.728	0.273	1.00		
WCDIMA	Band II	Front	0.757	0.273	1.03		
		Back	1.117	0.273	1.39		

Test Engineer: Kat Yin

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date: Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030 Page 39 of 42

## 17. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

**Report No.: FA582702** 

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $\kappa$  is the coverage factor

### **Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

**Report No. : FA582702** 

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Cor	nbined Std. Un	ncertainty				11.4%	11.4%
Co	verage Factor	for 95 %				K=2	K=2
Exp	22.9%	22.7%					

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

TEL: +86-029-8860-8767 / FAX: +86-029-8860-8791

Issued Date : Sep. 28, 2015 Form version. : 150415 FCC ID: 2ACCJB030 Page 41 of 42

## 18. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

**Report No. : FA582702** 

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r01, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Jun 2015.
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.

# Appendix A. Plots of System Performance Check

**Report No. : FA582702** 

The plots are shown as follows.

SPORTON INTERNATIONAL (XI'AN) INC.

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2015/9/21

## System Check Head 835MHz 150921

### DUT: D835V2-SN:4d091

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_150921 Medium parameters used: f = 835 MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 40.859$ ;  $\rho = 0.913$  S/m;  $\epsilon_r = 40.859$ ;  $\epsilon_r = 40.859$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.81, 9.81, 9.81); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.10 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 56.27 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 3.06 W/kg

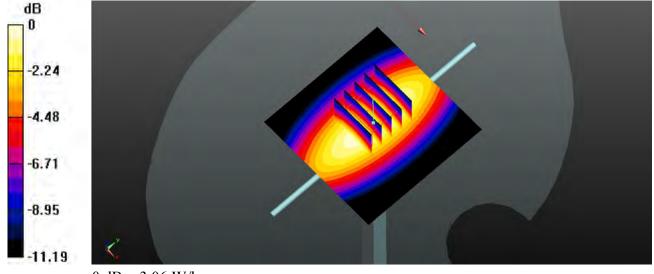

0 dB = 3.06 W/kg

## System Check\_Head\_1900MHz\_150921

### DUT: D1900V2-SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_150921 Medium parameters used: f = 1900 MHz;  $\sigma = 1.454$  S/m;  $\epsilon_r = 40.846$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

### DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(8.01, 8.01, 8.01); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.4 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 87.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.25 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

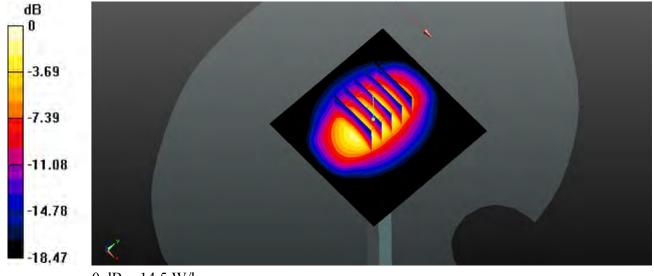

0 dB = 14.5 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2015/9/22

## System Check Head 2450MHz 150922

#### **DUT: D2450V2-SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_150922 Medium parameters used: f = 2450 MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 37.668$ ;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C


## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.24, 7.24, 7.24); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 20.7 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 82.94 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.2 W/kgMaximum value of SAR (measured) = 20.8 W/kg

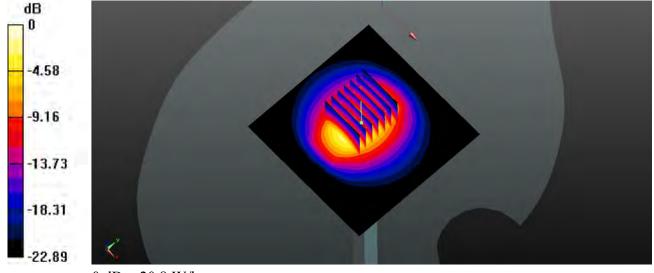

0 dB = 20.8 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2015/9/21

## System Check Body 835MHz 150921

#### DUT: D835V2-SN:4d091

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_150921 Medium parameters used: f = 835 MHz;  $\sigma = 0.972$  S/m;  $\epsilon_r = 53.975$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C


## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.97, 9.97, 9.97); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.05 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 50.05 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.59 W/kgMaximum value of SAR (measured) = 3.11 W/kg

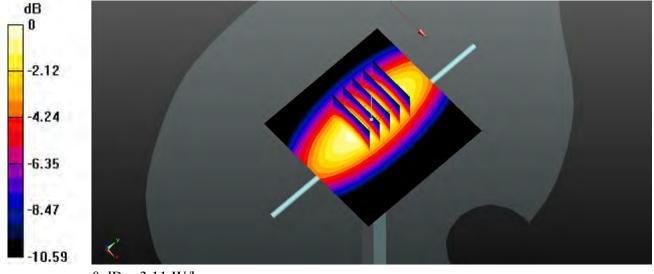

0 dB = 3.11 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2015/9/20

## System Check Body 1900MHz 150920

### DUT: D1900V2-SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 150920 Medium parameters used: f = 1900 MHz;  $\sigma = 1.556$  S/m;  $\epsilon_r = 55.358$ ;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.71, 7.71, 7.71); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 78.84 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.34 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

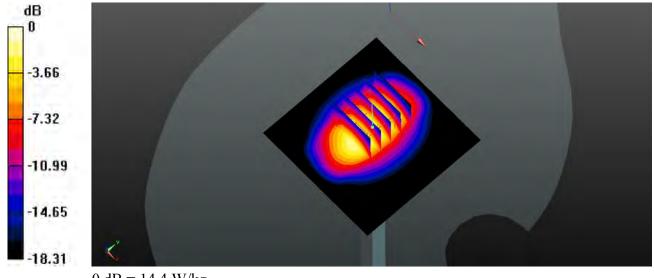

0 dB = 14.4 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2015/9/23

## System Check Body 2450MHz 150923

### **DUT: D2450V2-SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_150923 Medium parameters used: f = 2450 MHz;  $\sigma$  = 2.001 S/m;  $\epsilon_r$  = 52.089;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.35, 7.35, 7.35); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 19.5 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 80.29 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 26.0 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.98 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

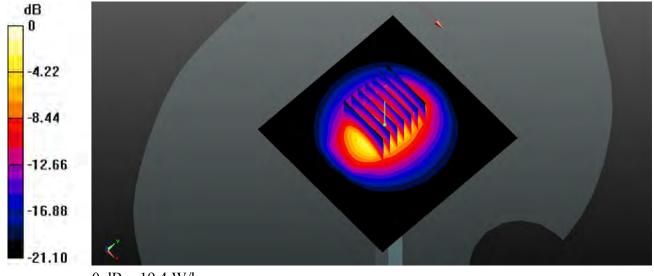

0 dB = 19.4 W/kg

# Appendix B. Plots of High SAR Measurement

**Report No. : FA582702** 

The plots are shown as follows.

SPORTON INTERNATIONAL (XI'AN) INC.

## #01 GSM850 GPRS (2 Tx slots) Right Cheek Ch128

Communication System: UID 0, GPRS (GMSK 2 Tx slot) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Date: 2015/9/21

Medium: HSL 835 150921 Medium parameters used: f = 824.2 MHz;  $\sigma = 0.903$  S/m;  $\varepsilon_r = 40.977$ ;  $\rho$  $= 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.81, 9.81, 9.81); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

# Ch128/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.749 W/kg


## Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.452 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 0.738 W/kg

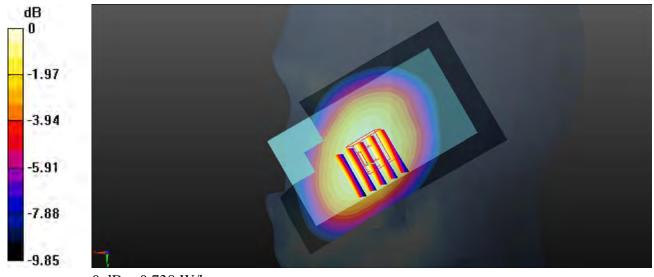

0 dB = 0.738 W/kg

## #02\_GSM1900\_GPRS (3 Tx slots)\_Right Cheek\_Ch512

Communication System: UID 0, GPRS (GMSK 3 Tx slot) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Date: 2015/9/21

Medium: HSL\_1900\_150921 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.401$  S/m;  $\varepsilon_r = 41.062$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C


## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(8.01, 8.01, 8.01); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

# **Ch512/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.491 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.841 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.231 W/kgMaximum value of SAR (measured) = 0.473 W/kg

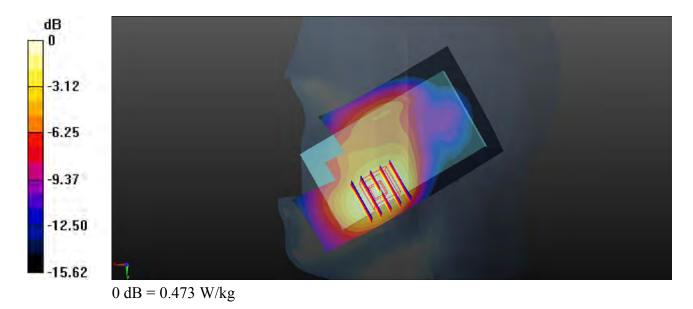

## #03 WCDMA Band V RMC 12.2Kbps Right Cheek Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1 Medium: HSL\_835\_150921 Medium parameters used: f = 836.4 MHz;  $\sigma = 0.914$  S/m;  $\epsilon_r = 40.842$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2015/9/21


Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.81, 9.81, 9.81); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.546 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.859 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.604 W/kg SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.367 W/kg Maximum value of SAR (measured) = 0.550 W/kg

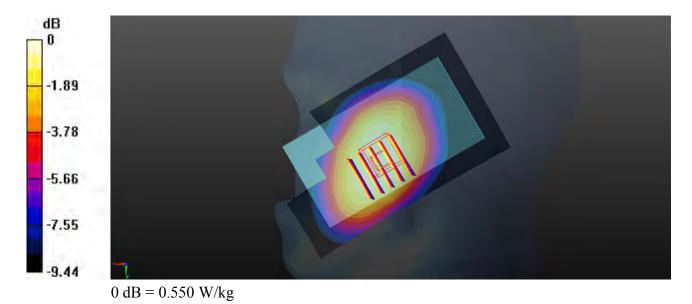

## #04 WCDMA Band II RMC 12.2Kbps Right Cheek Ch9262

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_150921 Medium parameters used: f = 1852.4 MHz;  $\sigma = 1.404$  S/m;  $\varepsilon_r = 41.054$ ;  $\sigma = 1000$  kg/m<sup>3</sup>

Date: 2015/9/21

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C


## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(8.01, 8.01, 8.01); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.783 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.807 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.916 W/kg SAR(1 g) = 0.597 W/kg: SAR(10 g) = 0.366 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.366 W/kgMaximum value of SAR (measured) = 0.759 W/kg

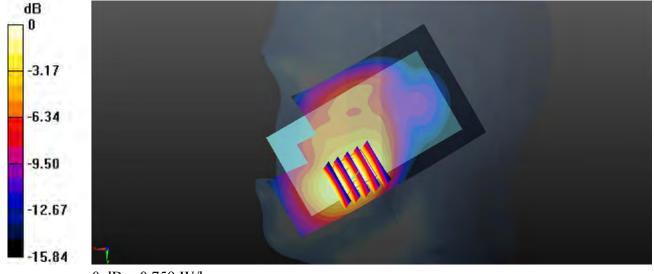

0 dB = 0.759 W/kg

## #05\_WLAN 2.4GHz\_802.11b 1Mbps\_Right Cheek\_Ch11

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_150922 Medium parameters used: f = 2462 MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 37.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2015/9/22

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C


## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.24, 7.24, 7.24); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (71x121x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.416 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 9.472 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.137 W/kgMaximum value of SAR (measured) = 0.401 W/kg

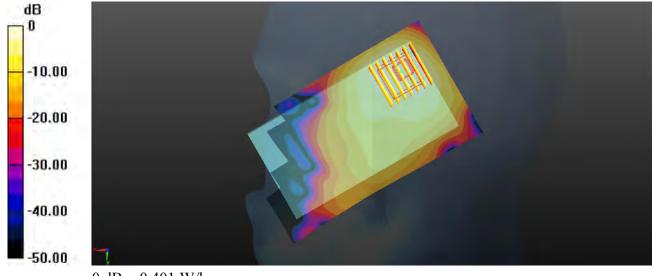

0 dB = 0.401 W/kg

## #06\_GSM850\_GPRS (2 Tx slots)\_Back\_10mm\_Ch128

Communication System: UID 0, GPRS (GMSK 2 Tx slot) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: MSL\_835\_150921 Medium parameters used: f = 824.2 MHz;  $\sigma = 0.961$  S/m;  $\varepsilon_r = 54.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.97, 9.97, 9.97); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

# Ch128/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 W/kg

## Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.785 W/kg

Maximum value of SAR (measured) = 1.28 W/kg


## Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.73 V/m: Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.35 W/kg

### SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.539 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

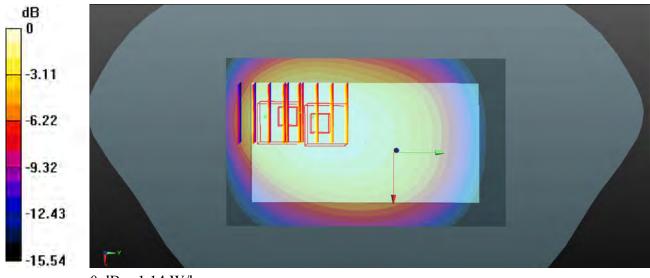

0 dB = 1.14 W/kg

## #07\_GSM1900\_GPRS (3 Tx slots)\_Back\_10mm\_Ch512

Communication System: UID 0, GPRS (GMSK 3 Tx slot) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Date: 2015/9/20

Medium: MSL\_1900\_150920 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.508$  S/m;  $\epsilon_r = 55.505$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.71, 7.71, 7.71); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

# Ch512/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.775 W/kg


## Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.917 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.753 W/kg

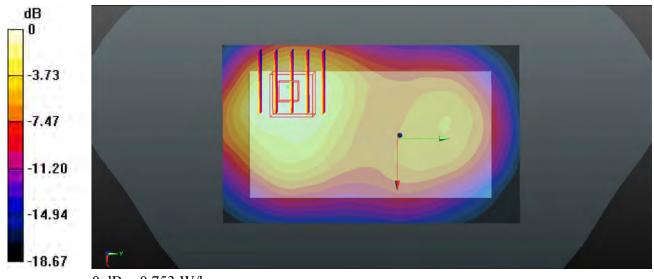

0 dB = 0.753 W/kg

## #08 WCDMA Band V RMC 12.2Kbps Back 10mm Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1 Medium: MSL\_835\_150921 Medium parameters used: f = 836.4 MHz;  $\sigma = 0.974$  S/m;  $\epsilon_r = 53.962$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2015/9/21


Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(9.97, 9.97, 9.97); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4182/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.800 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 22.45 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.917 W/kg SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.472 W/kg Maximum value of SAR (measured) = 0.797 W/kg

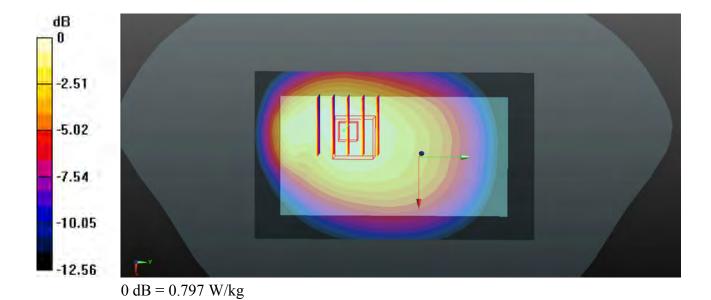

## #09 WCDMA Band II RMC 12.2Kbps Back 10mm Ch9262

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL 1900 150920 Medium parameters used: f = 1852.4 MHz;  $\sigma = 1.511$  S/m;  $\varepsilon_r = 55.505$ ;

Date: 2015/9/20

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.71, 7.71, 7.71); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.26 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.548 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

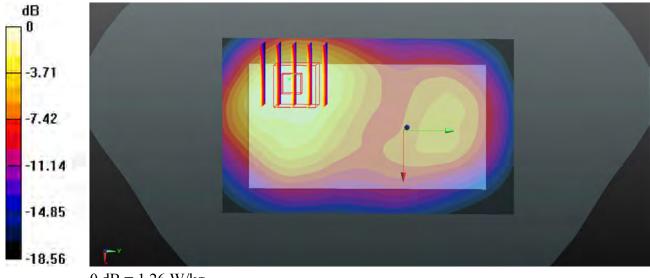

0 dB = 1.26 W/kg

## #10 WLAN 2.4GHz 802.11b 1Mbps Back 10mm Ch11

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL 2450 150923 Medium parameters used: f = 2462 MHz;  $\sigma = 2.017$  S/m;  $\varepsilon_r = 52.043$ ;  $\rho$ 

Date: 2015/9/23

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

## DASY5 Configuration:

- Probe: EX3DV4 SN3898; ConvF(7.35, 7.35, 7.35); Calibrated: 2015/8/6;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2015/4/13
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (71x121x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.128 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.288 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.127 W/kg



0 dB = 0.127 W/kg