

# The Photos of SAR test

## No. I15Z42998-SEM01

For

**TCL Communication Ltd.** 

### GSM Quad-band / UMTS Tril-band / LTE 5-band mobile phone

Model name: 50560

With

Hardware Version: 04

**Software Version: vH55** 

FCC ID: 2ACCJB043

Issued Date: 2016-1-19



#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.


#### **Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email: <a href="mailto:cttl">cttl</a> terminals@catr.cn, website: <a href="mailto:www.chinattl.com">www.chinattl.com</a>



Picture 1: Constituents of the sample

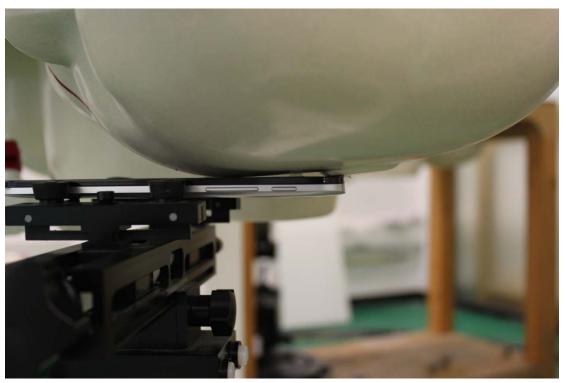

**Picture 2: Left Hand Touch Cheek Position** 

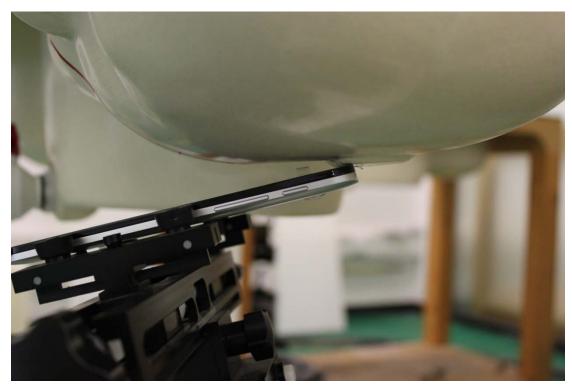

Picture 3: Left Hand Tilt 15° Position




Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

## Test positions for body:


The Body SAR is tested at the following 5 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:

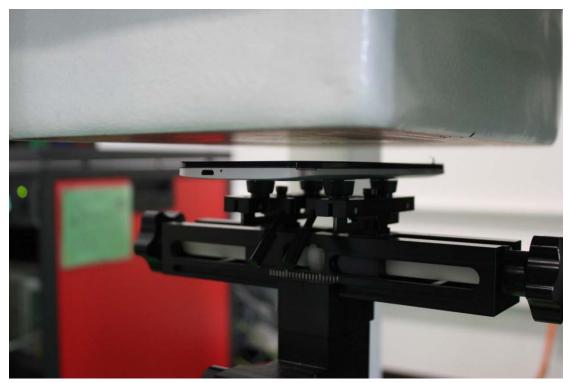

Picture 6: Front - 10mm

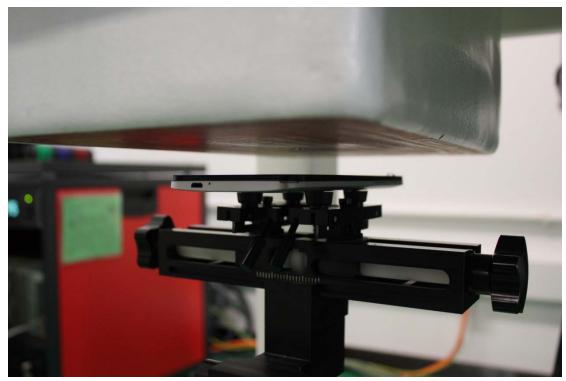


Picture 6-1: Front - 15mm

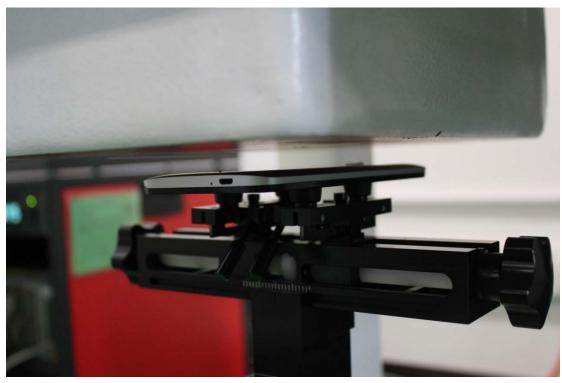


Picture 7: Rear – 10mm



Picture 7-1: Rear – 15mm

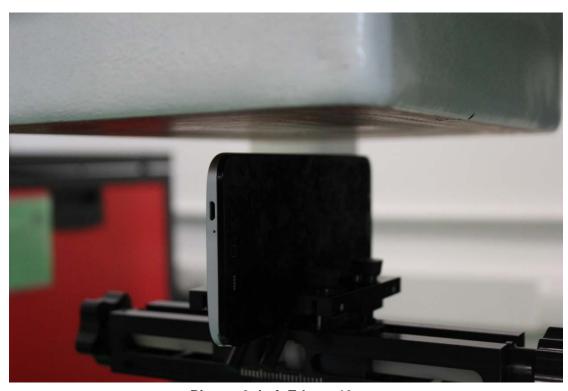

Picture 8: Left Edge – 10mm

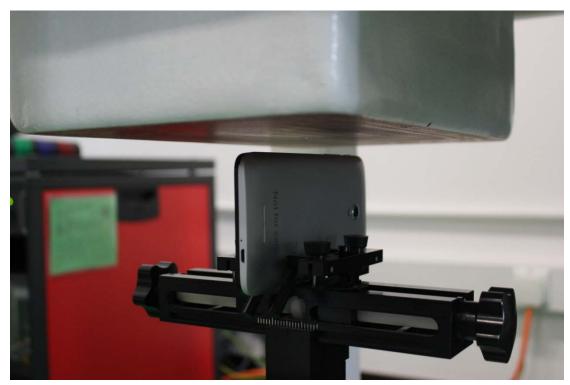

Picture 9: Right Edge – 10mm



Picture 10: Bottom Edge – 10mm



Picture 11: Top Edge – 10mm