

TEST REPORT No. I16Z42183-EMC01

for

TCL Communication Ltd.

CDMA EVDO BC0/BC1/LTE 2 band Moblie phone

Model Name: A577VL

FCC ID: 2ACCJB076

with

Hardware Version: PIO

Software Version: v6SV3

Issued Date: 2016-12-08

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I16Z42183-EMC01	Rev.0	1st edition	2016-12-08



CONTENTS

1.	TEST LABORATORY	4
1.1.	TESTING LOCATION	4
1.2.	TESTING ENVIRONMENT	4
1.3.	PROJECT DATA	4
1.4.	SIGNATURE	4
2.	CLIENT INFORMATION	5
2.1.	APPLICANT INFORMATION	5
2.2.	MANUFACTURER INFORMATION	5
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1.	ABOUT EUT	6
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4.	EUT SET-UPS	6
4.	REFERENCE DOCUMENTS	7
4.1.	REFERENCE DOCUMENTS FOR TESTING	7
5.	LABORATORY ENVIRONMENT	8
6.	SUMMARY OF TEST RESULTS	9
7.	TEST EQUIPMENTS UTILIZED	. 10
A NIR	NEY A: MEASIDEMENT DESILITS	11



1. Test Laboratory

1.1. Testing Location

CTTL(BDA District)

Address: No. 18 Jia Kangding Street, BDA District, Beijing, P. R. China

100191

1.2. <u>Testing Environment</u>

Normal Temperature: $15-35^{\circ}$ C Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-11-23 Testing End Date: 2016-12-02

1.4. Signature

Zhang Hui

(Prepared this test report)

Qu Pengfei

(Reviewed this test report)

Liu Baodian

Deputy Director of the laboratory

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.

Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,

Pudong Area Shanghai, P.R. China.

City: Shanghai Postal Code: 201203 Country: China

Contact Person: Gong Zhizhou

Contact Email zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.

Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,

Pudong Area Shanghai, P.R. China.

City: Shanghai Postal Code: 201203 Country: China

Telephone: 0086-21-31363544 Fax: 0086-21-61460602



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

CDMA EVDO BC0/BC1/LTE 2 band Moblie phone Description

Model Name A577VL FCC ID 2ACCJB076

Extreme vol. Limits 3.6VDC to 4.35VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	354349080001442	PIO	v6SV3

^{*}EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	USB Cable	/	1642183DC001
AE3	Travel charger	/	1642183CH001
AE1			
Model		TLp024CJ	
Manufac	cturer	Coslight	
Capacita	ance	2400mAh	
Nominal	voltage	3.85V	
AE2			
Model		CDA3122005C1	
Manufac	cturer	JUWEI	
Length of	of cable	101cm	
AE3			
Model		CBA0058AGAC2	
Manufac	cturer	JUWEI	
Length of	of cable	/	
*AE ID: is	used to identify the te	est sample in the lab internal	lly.

^{*}AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT3 + AE1 + AE2 + AE3	Charging mode
Set.2	EUT3 + AE1 + AE2	USB mode



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2015
ANSI C63.4	Methods of Measurement of Radio-Noise	2014
	Emissions from Low - Voltage Electrical and	
	Electronic Equipment in the Range of 9 kHz to 40	
	GHz	

Note: The test methods used have no deviation with standards above.



5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10.0 m x 6.7 m x 6.15 m) did not exceed following limits along the EMC testing:

- · · · · · · · · · · · · · · · · · · ·	
Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness 0.014MHz-1MHz, >60dB;	
	1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance
Site voltage standing-wave ratio (S _{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C	
Relative humidity	Min. = 20 %, Max. = 75 %	
Shielding effectiveness	0.014MHz-1MHz, >60dB;	
	1MHz-1000MHz, >90dB.	
Electrical insulation	> 2 MΩ	
Ground system resistance	<4 Ω	



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column P NA F		Pass
		Not applicable
		Fail
Location Column	1	The test is performed in test location 1 which are described in section 1.1 of this report

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	Р	1
2	Conducted Emission	15.107(a)	Р	1



7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2017-10-31	1 year
2	Test Receiver	ESCI	100766	R&S	2017-03-30	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2017-01-27	1 year
4	AMN	ESH2-Z5	829991/012	R&S	2017-04-11	1 year
5	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2017-11-24	3 years
6	EMI Antenna	3117	00139065	ETS	2017-09-21	3 years

Test Software Utilized

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S



ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range	Field strength limit (μV/m)					
(MHz)	Quasi-peak	Average	Peak			
30-88	100					
88-216	150					
216-960	200					
960-1000	500					
>1000		500	5000			

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average



A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

Result = $P_{Mea} + A_{Rpl} = P_{Mea} + G_A + G_{PL}$

Where

G_A: Antenna factor of receive antenna

G_{PL}: Path Loss

P_{Mea}: Measurement result on receiver.

Measurement uncertainty (worst case):

30MHz-1GHz: U = 4.86 dB, k=2, 1GHz-18GHz: U = 5.26 dB, k=2

.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB _μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dBµV)	Polarity
17655.000	47.8	-13.1	41.1	19.801	V
17280.750	47.8	-14.0	41.2	20.568	Н
17595.750	47.7	-13.4	41.1	19.991	V
17629.500	47.7	-13.0	41.1	19.627	V
17631.750	47.7	-13.0	41.1	19.603	Н
17647.500	47.7	-13.0	41.1	19.636	Н

Charging Mode/Peak detector

Frequency(MHz)	Result(dB _μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dBµV)	Polarity
17607.750	59.7	-13.3	41.1	31.911	Н
17508.000	59.7	-14.4	41.2	32.865	Н
17610.000	59.7	-13.3	41.1	31.817	V
17365.500	59.6	-14.4	41.2	32.758	V
17577.000	59.5	-13.6	41.1	31.934	V
17690.250	59.5	-13.2	41.0	31.559	Н

Measurement results for Set.2:

USB Mode/Average detector

Frequency(MHz)	Result(dBμV/m)	G _{PL} (dB)	G _A (dB/m)	$P_{Mea}(dB\mu V)$	Polarity
17653.500	47.8	-13.1	41.1	19.786	V
17967.750	47.8	-13.6	40.8	20.589	V
17648.250	47.8	-13.0	41.1	19.746	Н
17634.750	47.8	-13.0	41.1	19.686	V
17623.500	47.8	-13.1	41.1	19.767	Н
17625.000	47.8	-13.1	41.1	19.751	Н



USB Mode/Peak detector

Frequency(MHz)	Result(dB _μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dBµV)	Polarity
17715.000	60.3	-13.2	41.0	32.510	V
17752.500	60.2	-13.3	41.0	32.520	Н
17939.250	60.1	-13.6	40.8	32.818	V
17615.250	59.8	-13.2	41.1	31.920	Н
17707.500	59.7	-13.2	41.0	31.827	Н
17717.250	59.5	-13.2	41.0	31.739	V

Sample calculation: Average detector, 17715MHz

Result = P_{Mea} + A_{Rpl} = P_{Mea} (32.51 dBuV) + G_A (41.0dB/m)+ G_{PL} (-13.2dB) = 60.3dBuV/m



Charging Mode, Set.1



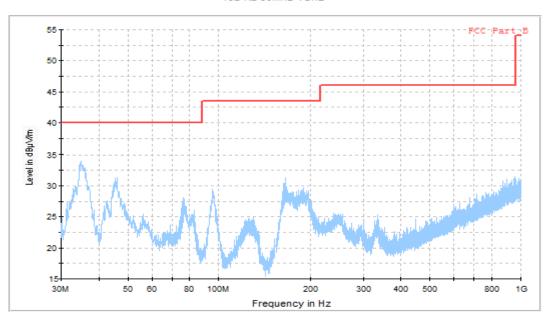


Fig.1 Radiated Emission from 30MHz to 1GHz



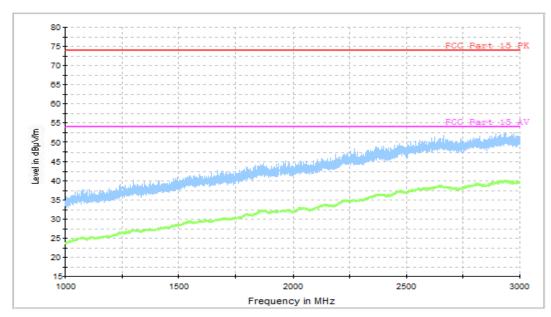


Fig.2 Radiated Emission from 1GHz to 3GHz



15b RE - 3GHz-18GHz

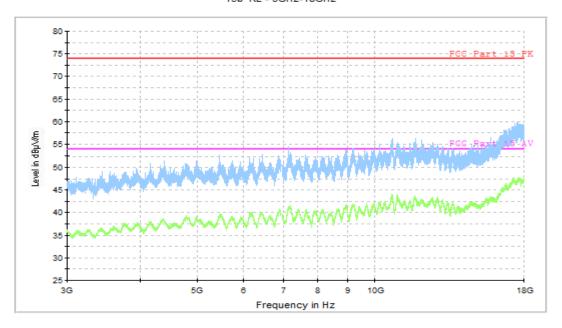


Fig.3 Radiated Emission from 3GHz to 18GHz

USB Mode, Set.2

15B RE 30MHz-1GHz

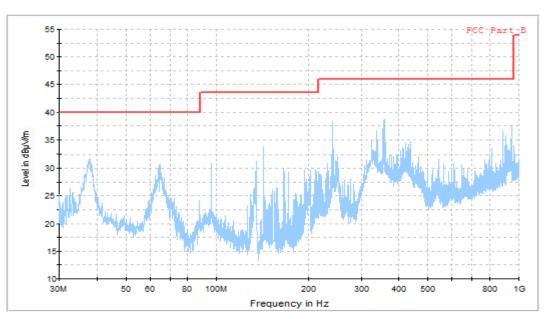


Fig.4 Radiated Emission from 30MHz to 1GHz



15B RE - 1GHz-3GHz

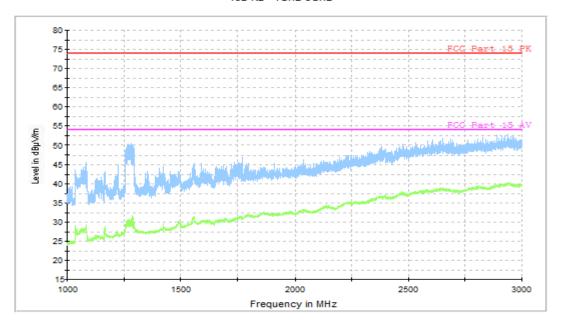


Fig.5 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

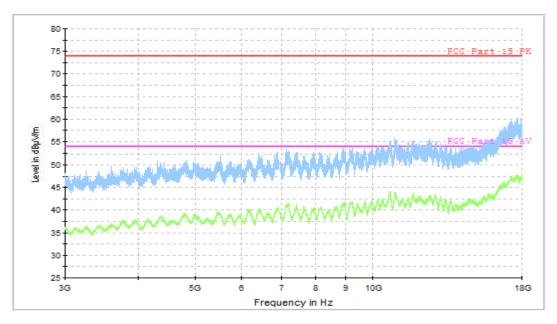


Fig.6 Radiated Emission from 3GHz to 18GHz



A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 7.2.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBµV)				
	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30 60 50					
*Decreases with the logarithm of the frequency					

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)		
120	60		

RBW/IF bandwidth	Sweep Time(s)
9kHz	1



A.2.5 Measurement Results

Measurement uncertainty: *U*= 3.38 dB, *k*=2.

Charging Mode, Set.1

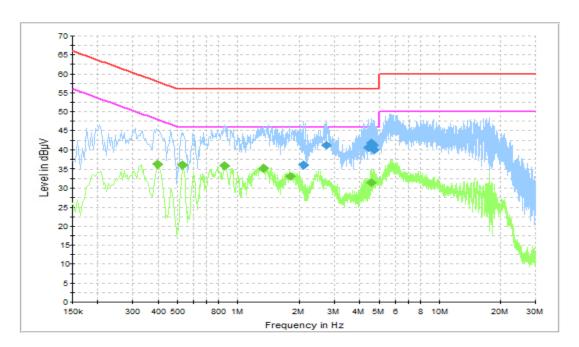


Fig.7 Conducted Emission

Final Result 1

Frequency	QuasiPeak	PE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
2.094000	36.1	GND	N	10.5	19.9	56.0
2.715000	41.2	GND	L1	10.4	14.8	56.0
4.411500	40.6	GND	L1	10.5	15.4	56.0
4.551000	41.8	GND	L1	10.5	14.2	56.0
4.677000	41.2	GND	L1	10.5	14.8	56.0
4.744500	40.0	GND	L1	10.5	16.0	56.0

Final Result 2

Frequency	Average	PE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.397500	36.2	GND	L1	10.3	11.7	47.9
0.532500	36.1	GND	L1	10.3	9.9	46.0
0.861000	35.9	GND	L1	10.3	10.1	46.0
1.342500	35.1	GND	L1	10.3	10.9	46.0
1.815000	33.1	GND	L1	10.4	12.9	46.0
4.578000	31.5	GND	L1	10.5	14.5	46.0



USB Mode, Set.2

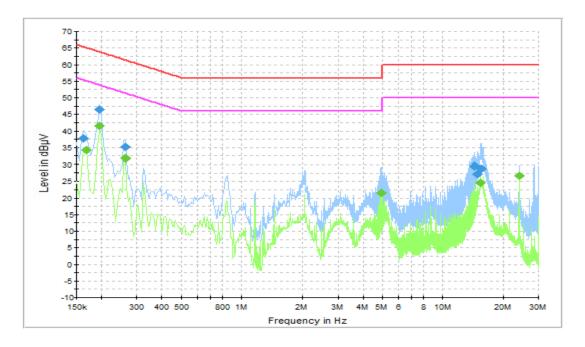


Fig.8 Conducted Emission

Final Result 1

I IIIai Itocait						
Frequency	QuasiPeak	PE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.163500	37.9	GND	L1	10.3	27.4	65.3
0.195000	46.5	GND	L1	10.3	17.3	63.8
0.262500	35.2	GND	L1	10.3	26.1	61.4
14.329500	29.5	GND	N	10.9	30.5	60.0
14.838000	27.1	GND	N	10.9	32.9	60.0
15.612000	28.9	GND	L1	11.0	31.1	60.0

Final Result 2

I mai resoure						
Frequency	Average	PE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.168000	34.3	GND	L1	10.3	20.7	55.1
0.195000	41.5	GND	L1	10.3	12.3	53.8
0.262500	31.9	GND	L1	10.3	19.4	51.4
4.951500	21.5	GND	L1	10.5	24.5	46.0
15.355500	24.6	GND	L1	11.0	25.4	50.0
24.040500	26.8	GND	L1	11.3	23.2	50.0

END OF REPORT