



# FCC PART 15C TEST REPORT No.I22Z61632-IOT05

for

**TCL Communication Ltd.**

**Tablet PC**

**9137W**

With

**FCC ID: 2ACCJB190**

**Hardware Version: 04**

**Software Version: HUS1**

**Issued Date: 2022-10-01**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z61632-IOT05	Rev.0	1st edition	2022-10-01

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY.....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	6
1.4. PROJECT DATE .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
3.4. GENERAL DESCRIPTION.....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS .....	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS .....	10
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
8.1. TRANSMITTER OUTPUT POWER .....	12
8.2. PEAK POWER SPECTRAL DENSITY .....	12
8.3. OCCUPIED 6DB BANDWIDTH.....	12
8.4. BAND EDGES COMPLIANCE .....	12
8.5. SPURIOUS EMISSIONS .....	12
<b>8.6. AC POWER-LINE CONDUCTED EMISSION .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>13</b>
A.1. MEASUREMENT METHOD .....	13
A.2. MAXIMUM PEAK OUTPUT POWER .....	14
A.2.1 ANTENNA GAIN.....	14

A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	14
A.3. PEAK POWER SPECTRAL DENSITY .....	16
A.4. OCCUPIED 6DB BANDWIDTH .....	17
A.5. TRANSMITTER SPURIOUS EMISSION .....	22
A.5.1 TRANSMITTER SPURIOUS EMISSION – RADIATED .....	22
A.6. BAND EDGES COMPLIANCE .....	34
A6.1 BAND EDGES - RADIATED.....	34
FIG. 10 BAND EDGES (802.11A CH149,5745MHZ).....	35
FIG. 11 BAND EDGES (802.11A CH165, 5825MHZ).....	35
FIG. 12 BAND EDGES (802.11N-HT20 CH149, 5745MHZ).....	35
FIG. 13 BAND EDGES (802.11N-HT20 CH165, 5825MHZ).....	36
FIG. 14 BAND EDGES (802.11N-HT40 CH151, 5755MHZ).....	36
FIG. 15 BAND EDGES (802.11N-HT40 CH159, 5795MHZ).....	36
FIG. 16 BAND EDGES (802.11AC-HT20 CH149, 5745MHZ).....	37
FIG. 17 BAND EDGES (802.11AC-HT20 CH165, 5825MHZ).....	37
FIG. 18 BAND EDGES (802.11AC-HT40 CH151, 5755MHZ).....	37
FIG. 19 BAND EDGES (802.11AC-HT40 CH159, 5795MHZ).....	38
FIG. 20 BAND EDGES (802.11AC-HT80 CH155, 5775MHZ).....	38
FIG. 21 BAND EDGES (802.11AC-HT80, 5775MHZ).....	38
A.7. AC POWERLINE CONDUCTED EMISSION.....	39
FIG. 22 AC POWER LINE CONDUCTED EMISSION-802.11A .....	40
FIG. 23 AC POWER LINE CONDUCTED EMISSION-IDLE.....	41
<b>ANNEX B: EUT PARAMETERS.....</b>	<b>42</b>
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>42</b>



## **1. TEST LABORATORY**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
100191, P. R. China

### 1.3. TestingEnvironment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2022-08-30

Testing End Date: 2022-10-01


### 1.5. Signature



---

Xie Xiuzhen

( Prepared this test report )



---

Zheng Wei

(Reviewed this test report)



---

Pang Shuai

(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Contact: Annie Jiang  
Email: nianxiang.jiang@tcl.com  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Contact: Annie Jiang  
Email: nianxiang.jiang@tcl.com  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY**

#### **EQUIPMENT(AE)**

##### **3.1. About EUT**

Description	Tablet PC
Model name	9137W
FCC ID	2ACCJB190
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85V

##### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
UT58a	016307000001033	04	HUS1
UT32a	016307000001132	04	HUS1

\*EUT ID: is used to identify the test sample in the lab internally.

UT32a is used for Conduction test, UT58a is used for Radiation test.

##### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>Type</b>	<b>SN</b>
AE1	Battery	/	/
AE2	Battery	/	/
AE3	USB Cable	/	/
AE4	Charger	/	/

###### **AE1**

Model	TLp040M7
Manufacturer	veken
Capacity	4080mAh
Nominal Voltage	3.85V

###### **AE2**

Model	TLp040M1
Manufacturer	BYD
Capacity	4080mAh
Nominal Voltage	3.85V

###### **AE3**

Model	CDA0000123C1
Manufacturer	JUWEI
Length of cable	/

###### **AE4**

Model	UC13US
Manufacturer	PUAN



Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. General Description

Equipment Under Test (EUT) is a model of Tablet PC with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## 4. REFERENCE DOCUMENTS

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	<b>P</b>
Peak Power Spectral Density	15.407 (a)	/	<b>P</b>
Occupied 6dB Bandwidth	15.407 (e)	/	<b>P</b>
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	<b>P</b>
Transmitter Spurious Emission - Conducted	15.407	/	<b>P</b>
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	/	<b>P</b>

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/matrix manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2023-06-29
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2023-03-21
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	R&S	1 year	2022-10-28
2	Dual-Ridge Waveguide Horn Antenna	3115	00167250	ETS-Lindgren	1 year	2022-12-28
3	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	1 year	2023-07-25

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.15
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

### 8.6. AC Power-line Conducted Emission


Measurement Uncertainty: 3.08dB, k=2

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

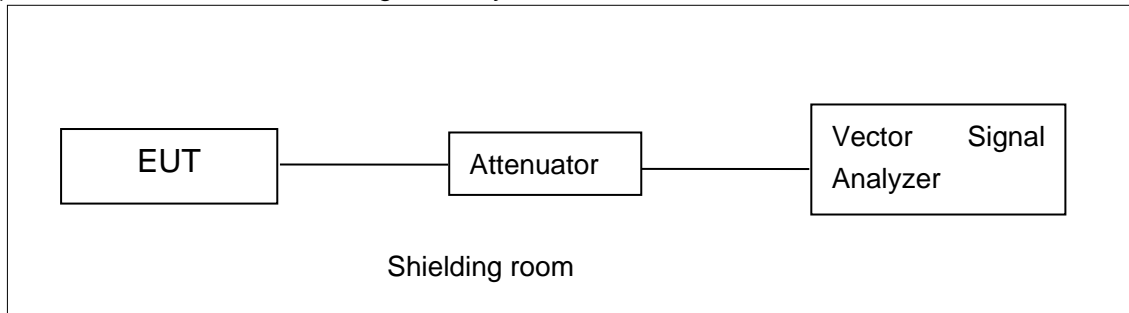


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

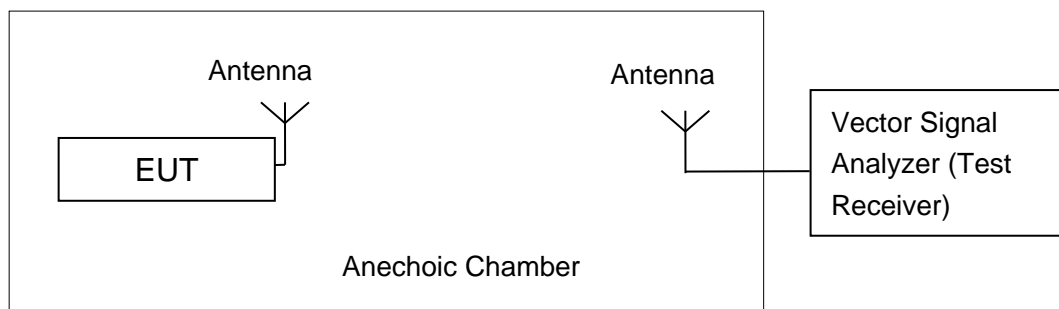

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## A.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

### A.2.1 Antenna Gain

Antenna gain is 1.75dBi and the value is supplied by the applicant or manufacturer.

### A.2.2. Maximum Average Output Power-Conducted

#### Measurement Results:

#### 802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	18.05	18.08	17.99

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	17.49	17.82	18.32

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	17.05	17.13	17.02

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	16.03	16.19

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

**802.11ac-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	16.02	16.16

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

**802.11ac-HT80 mode**

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	14.01

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

**Conclusion: PASS**

### A.3. Peak Power Spectral Density

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

#### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Results:

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	4.23	P
	157	4.26	P
	165	4.41	P
802.11n HT20	149	4.23	P
	157	4.38	P
	165	4.50	P
802.11n HT40	151	0.10	P
	159	0.00	P
802.11ac HT80	155	-5.29	P

**Conclusion: PASS**



### A.4. Occupied 6dB Bandwidth

#### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

#### Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------

#### Measurement Result:


Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11a	149	Fig.1	16.35	P
	157	Fig.2	16.35	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	17.55	P
	157	Fig.5	17.55	P
	165	Fig.6	17.60	P
802.11n HT40	151	Fig.7	36.16	P
	159	Fig.8	36.00	P
802.11ac HT80	155	Fig.9	76.00	P

**Conclusion: PASS**


Test graphs as below:

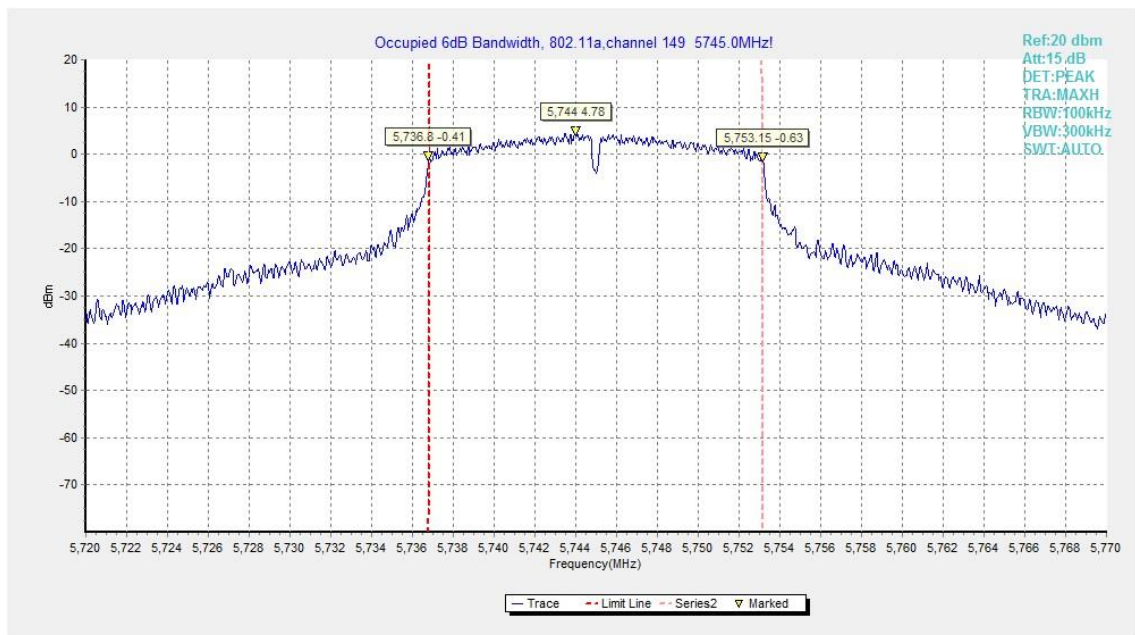


**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

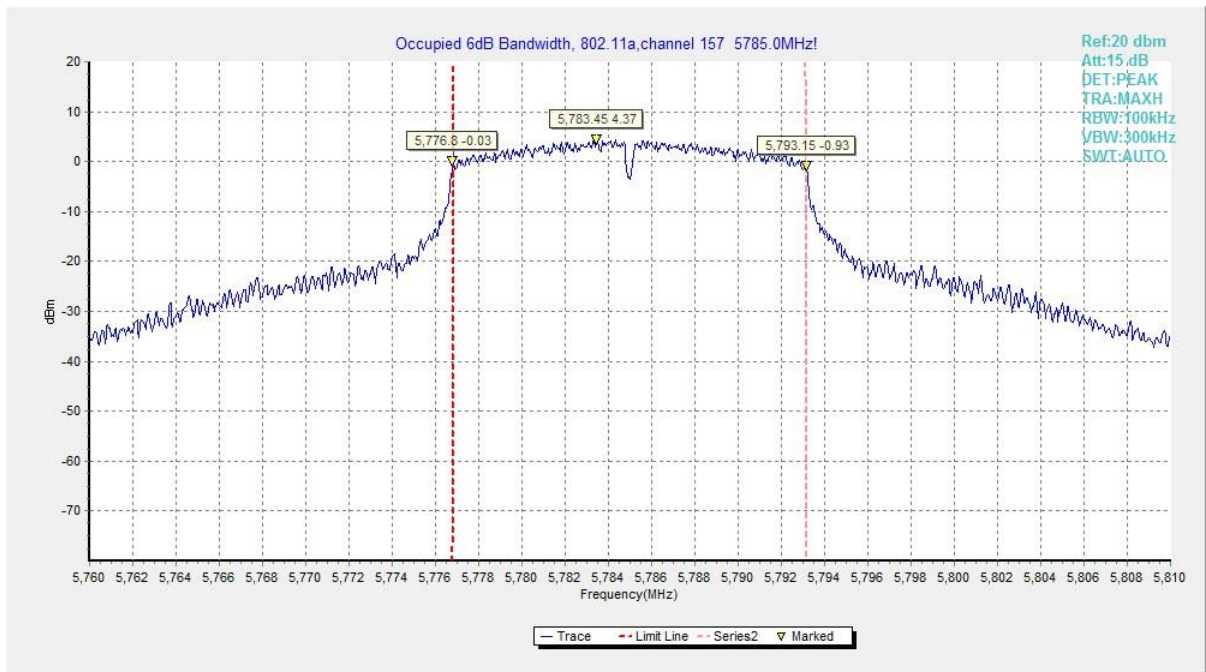


**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

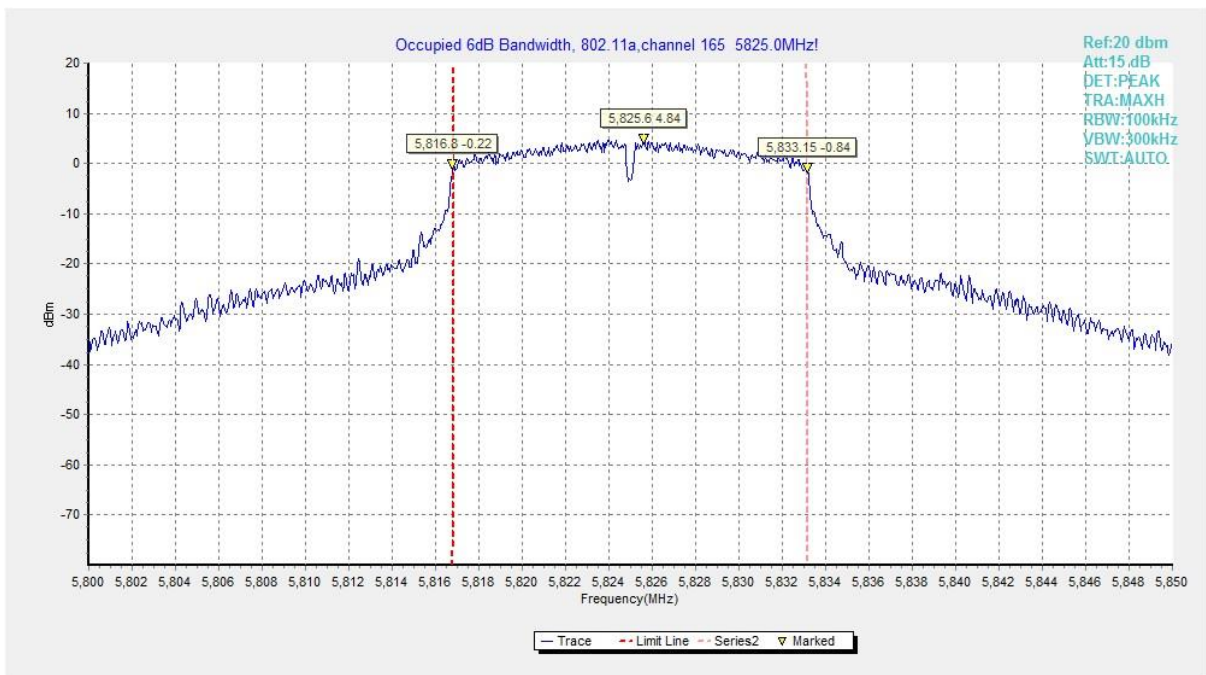


**Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)**

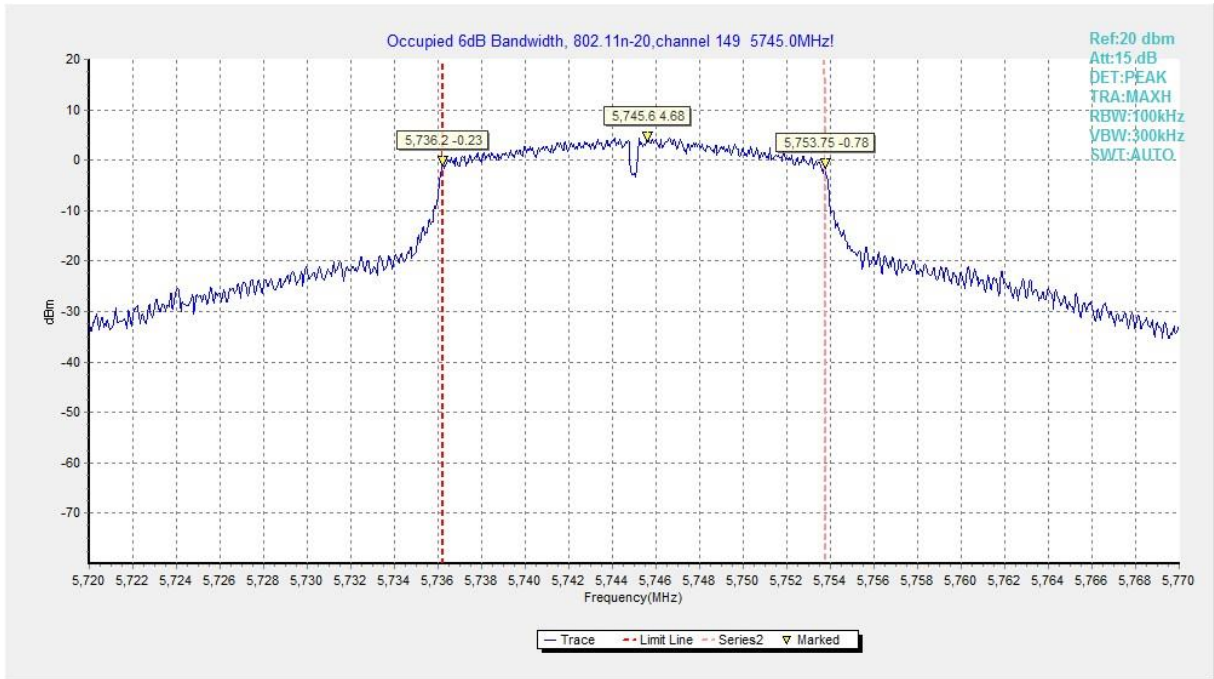


**Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)**

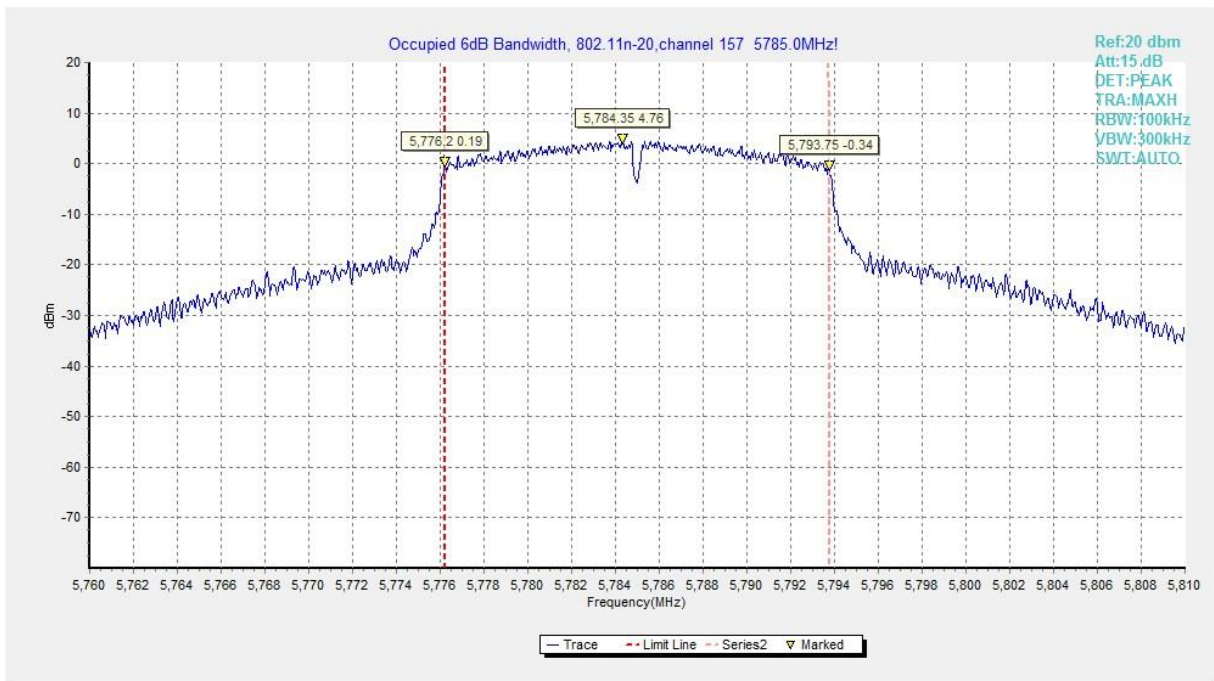

**Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)**

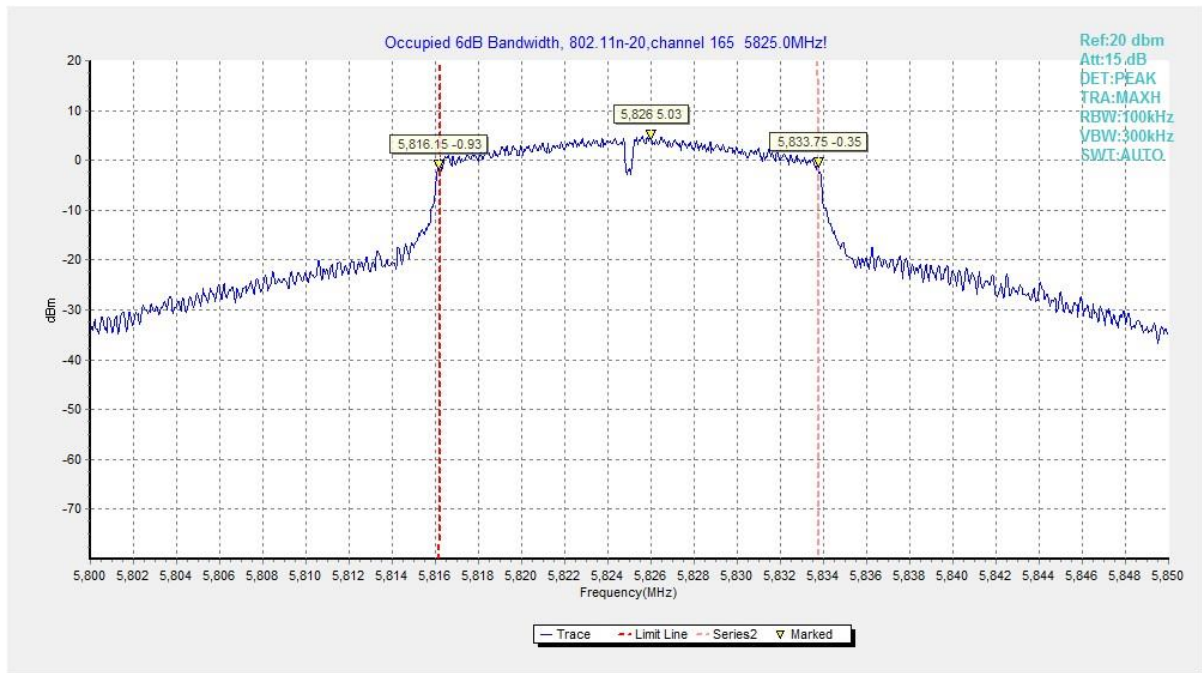


**Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)**

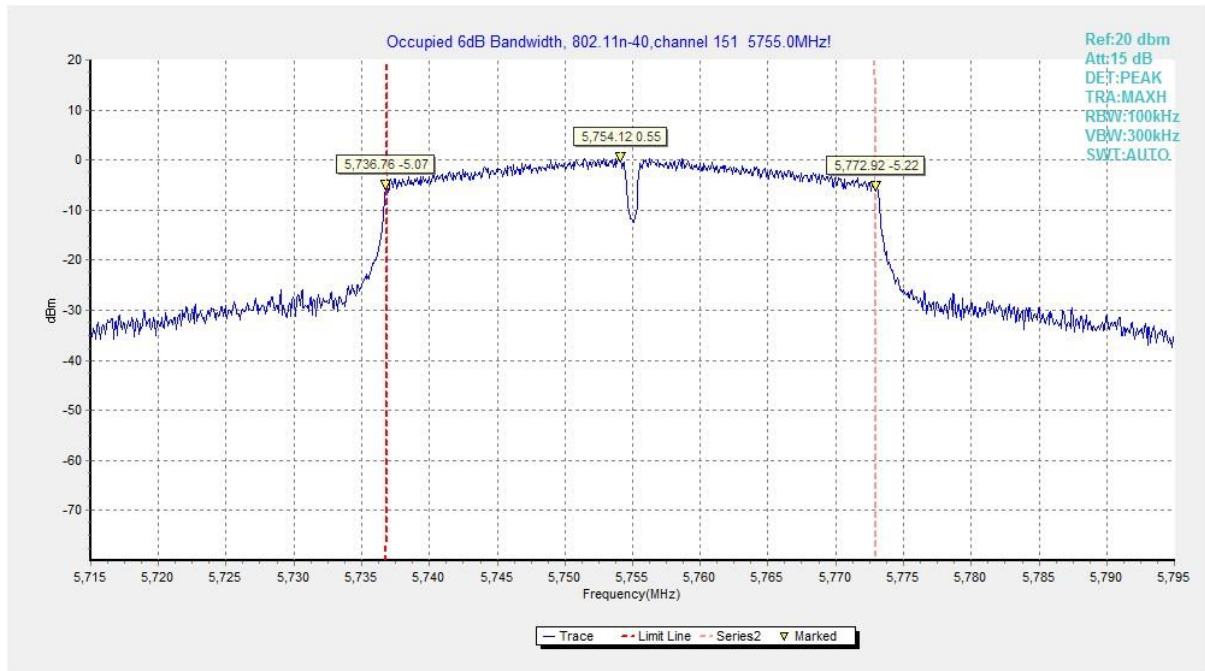


**Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**



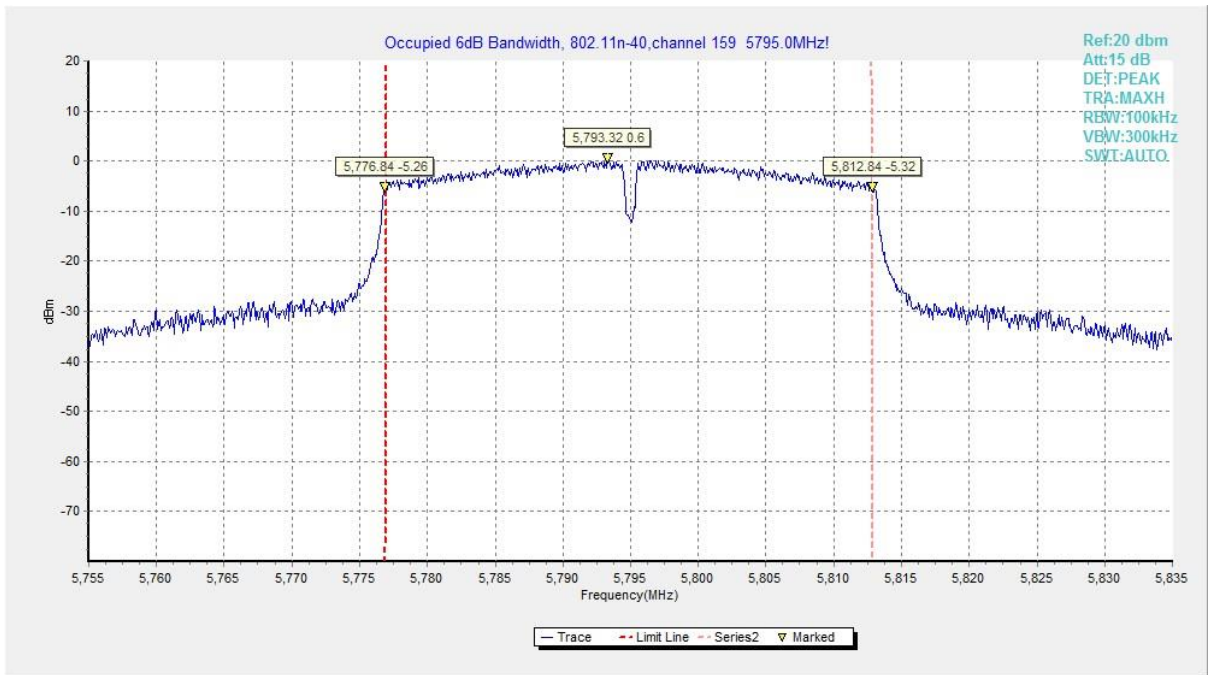

**Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**

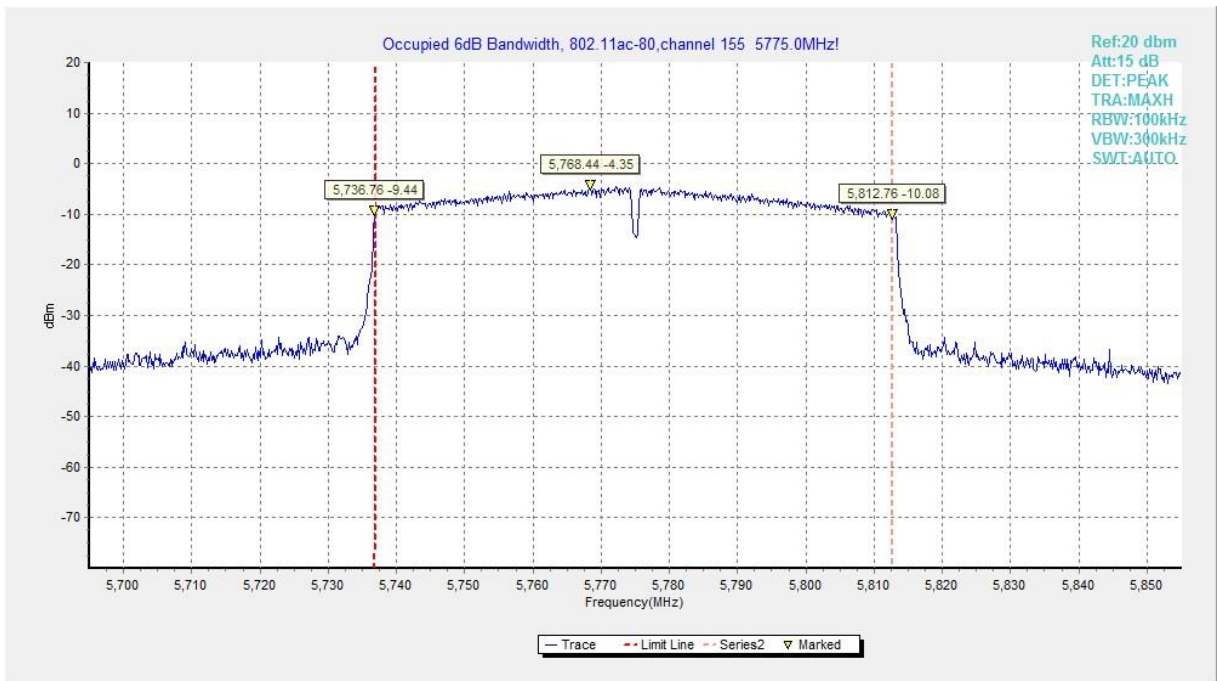

**Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)**

## A.5. Transmitter Spurious Emission

### A.5.1 Transmitter Spurious Emission – Radiated

#### Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: Increasing linearly from point to point.	

The measurement is made according to KDB 789033

#### Measurement Results:

##### 802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

##### 802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	165	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	165	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT80 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT80)	155	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P

		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

**Average Results:**

**802.11a**

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17701.900	38.98	-25.74	45.95	18.77	54.00	15.02	V
17829.500	38.85	-25.50	46.66	17.69	54.00	15.15	V
16156.400	36.71	-26.77	38.93	24.55	54.00	17.29	H
14475.600	36.68	-28.59	42.46	22.81	54.00	17.32	V
9191.750	35.93	-33.85	38.08	31.70	54.00	18.07	H
10864.850	35.77	-32.33	38.59	29.51	54.00	18.23	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17801.450	39.20	-25.50	46.66	18.04	54.00	14.80	V
17799.800	39.15	-25.50	46.66	17.99	54.00	14.85	H
14481.100	37.12	-28.59	42.46	23.25	54.00	16.88	H
16149.250	36.85	-26.77	38.93	24.69	54.00	17.15	H
11529.250	36.42	-32.26	38.84	29.85	54.00	17.58	V
11902.700	35.91	-31.85	39.05	28.71	54.00	18.09	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17714.550	39.11	-25.74	45.95	18.90	54.00	14.89	V
17709.050	39.01	-25.74	45.95	18.80	54.00	14.99	V
14476.700	36.80	-28.59	42.46	22.93	54.00	17.20	V
16133.300	36.77	-26.77	38.93	24.61	54.00	17.23	V
10858.800	36.04	-32.33	38.59	29.78	54.00	17.96	H
10653.650	35.77	-32.76	38.38	30.15	54.00	18.23	V



**802.11n-HT20**

## Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17723.900	38.88	-25.74	45.95	18.67	54.00	15.12	V
17806.400	38.80	-25.50	46.66	17.64	54.00	15.20	H
14476.700	36.99	-28.59	42.46	23.12	54.00	17.01	V
14487.700	36.46	-28.59	42.46	22.59	54.00	17.54	V
11925.800	35.93	-31.48	39.09	28.32	54.00	18.07	V
10855.500	35.85	-32.33	38.59	29.59	54.00	18.15	V

## Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17902.650	38.82	-25.50	46.66	17.66	54.00	15.18	V
17803.650	38.58	-25.50	46.66	17.42	54.00	15.42	V
14473.400	36.67	-28.59	42.46	22.80	54.00	17.33	H
14499.250	36.50	-28.59	42.46	22.63	54.00	17.50	H
11945.050	36.24	-31.48	39.09	28.63	54.00	17.76	V
11522.650	35.66	-32.26	38.84	29.09	54.00	18.34	V

## Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17733.250	38.91	-25.74	45.95	18.70	54.00	15.09	H
17739.850	38.77	-25.50	46.66	17.61	54.00	15.23	V
14495.950	37.37	-28.59	42.46	23.50	54.00	16.63	V
14490.450	37.10	-28.59	42.46	23.23	54.00	16.90	V
10852.750	36.05	-32.33	38.59	29.79	54.00	17.95	V
11943.400	35.74	-31.48	39.09	28.13	54.00	18.26	V

**802.11n-HT40**

## Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17774.500	39.06	-25.50	46.66	17.90	54.00	14.94	H
17795.400	39.06	-25.50	46.66	17.90	54.00	14.94	V
14496.500	36.88	-28.59	42.46	23.01	54.00	17.12	H
16150.350	36.70	-26.77	38.93	24.54	54.00	17.30	V
10765.300	36.11	-32.77	38.49	30.39	54.00	17.89	H
11888.950	36.00	-31.85	39.05	28.80	54.00	18.00	V

## Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17815.200	39.10	-25.50	46.66	17.94	54.00	14.90	H
17894.400	39.02	-25.50	46.66	17.86	54.00	14.98	H
16143.200	37.36	-26.77	38.93	25.20	54.00	16.64	H
16160.250	37.08	-26.77	38.93	24.92	54.00	16.92	V
10857.150	35.84	-32.33	38.59	29.58	54.00	18.16	V
11515.500	35.77	-32.26	38.84	29.20	54.00	18.23	V

**802.11ac-HT20**

## Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17841.050	38.98	-25.50	46.66	17.82	54.00	15.02	V
17821.800	38.88	-25.50	46.66	17.72	54.00	15.12	H
14488.800	36.87	-28.59	42.46	23.00	54.00	17.13	V
16147.050	36.80	-26.77	38.93	24.64	54.00	17.20	V
10746.050	36.30	-32.77	38.49	30.58	54.00	17.70	H
9191.750	35.77	-33.85	38.08	31.54	54.00	18.23	H

## Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17764.600	38.84	-25.50	46.66	17.68	54.00	15.16	V
17849.300	38.76	-25.50	46.66	17.60	54.00	15.24	V
14491.550	37.25	-28.59	42.46	23.38	54.00	16.75	V
14482.750	36.81	-28.59	42.46	22.94	54.00	17.19	H
11904.900	35.78	-31.85	39.05	28.58	54.00	18.22	V
10683.900	35.64	-32.77	38.49	29.92	54.00	18.36	V

## Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17714.000	39.19	-25.74	45.95	18.98	54.00	14.81	V
17793.200	39.04	-25.50	46.66	17.88	54.00	14.96	V
16145.400	37.06	-26.77	38.93	24.90	54.00	16.94	V
14498.700	36.59	-28.59	42.46	22.72	54.00	17.41	H
10966.600	35.92	-32.82	38.70	30.04	54.00	18.08	V
11997.850	35.81	-31.48	39.09	28.20	54.00	18.19	H

**802.11ac-HT40**

## Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17769.550	38.94	-25.50	46.66	17.78	54.00	15.06	V
17702.450	38.85	-25.74	45.95	18.64	54.00	15.15	V
16154.750	36.92	-26.77	38.93	24.76	54.00	17.08	V
15483.750	36.60	-27.36	38.73	25.23	54.00	17.40	H
10757.600	35.71	-32.77	38.49	29.99	54.00	18.29	H
10791.150	35.67	-32.33	38.59	29.41	54.00	18.33	V

## Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17869.100	39.50	-25.50	46.66	18.34	54.00	14.50	V
17851.500	39.41	-25.50	46.66	18.25	54.00	14.59	H
16156.400	37.32	-26.77	38.93	25.16	54.00	16.68	H
14498.700	37.01	-28.59	42.46	23.14	54.00	16.99	V
10856.600	36.03	-32.33	38.59	29.77	54.00	17.97	V
11907.650	35.87	-31.85	39.05	28.67	54.00	18.13	V

**802.11ac-HT80**

## Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17700.250	39.78	-25.74	45.95	19.57	54.00	14.22	H
17934.550	39.74	-25.50	46.66	18.58	54.00	14.26	H
16104.700	38.58	-26.77	38.93	26.42	54.00	15.42	H
16147.600	37.96	-26.77	38.93	25.80	54.00	16.04	H
11909.850	36.36	-31.85	39.05	29.16	54.00	17.64	V
10762.000	36.20	-32.77	38.49	30.48	54.00	17.80	H

**Peak Results:**
**802.11a**

## Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17721.700	49.42	-25.74	45.95	29.21	74.00	24.58	H
16853.800	49.41	-26.62	41.49	34.54	68.20	18.79	V
17853.150	49.38	-25.50	46.66	28.22	74.00	24.62	H
16276.850	49.05	-27.10	39.31	36.84	68.20	19.15	V
8592.250	46.70	-34.38	37.93	43.15	68.20	21.50	V
7225.500	46.43	-35.50	36.45	45.48	68.20	21.77	H

## Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17818.500	50.21	-25.50	46.66	29.05	74.00	23.79	H
16865.900	49.77	-26.62	41.49	34.90	68.20	18.43	V
17473.100	49.66	-26.85	45.25	31.26	68.20	18.54	V
16759.750	49.54	-26.62	41.49	34.67	68.20	18.66	H
10475.450	46.81	-32.99	38.27	41.52	68.20	21.39	H
10694.900	46.23	-32.77	38.49	40.51	74.00	27.77	H

## Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17718.950	50.48	-25.74	45.95	30.27	74.00	23.52	V
17237.150	50.03	-25.95	44.35	31.62	68.20	18.17	V
16781.200	49.08	-26.62	41.49	34.21	68.20	19.12	V
16747.100	49.02	-26.62	41.49	34.15	68.20	19.18	V
10456.750	45.95	-33.22	38.19	40.98	68.20	22.25	V
10031.600	45.86	-33.63	38.11	41.38	68.20	22.34	H

**802.11n-HT20**

## Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17219.000	50.30	-25.95	44.35	31.89	68.20	17.90	H
17697.500	49.85	-25.74	45.95	29.64	68.20	18.35	V
16933.550	48.96	-26.32	42.36	32.91	68.20	19.24	V
16813.650	48.85	-26.62	41.49	33.98	68.20	19.35	V
10626.700	45.96	-32.76	38.38	40.34	74.00	28.04	H
10878.600	45.88	-32.33	38.59	39.62	74.00	28.12	V

## Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17696.950	49.74	-25.74	45.95	29.53	68.20	18.46	H
17820.700	49.47	-25.50	46.66	28.31	74.00	24.53	H
16765.250	49.17	-26.62	41.49	34.30	68.20	19.03	H
16771.850	48.86	-26.62	41.49	33.99	68.20	19.34	H
10756.500	46.39	-32.77	38.49	40.67	74.00	27.61	H
11627.700	46.35	-32.31	38.91	39.76	74.00	27.65	H

## Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
16754.800	50.55	-26.62	41.49	35.68	68.20	17.65	H
16756.450	50.53	-26.62	41.49	35.66	68.20	17.67	H
17639.200	49.54	-25.74	45.95	29.33	68.20	18.66	V
17651.850	49.43	-25.74	45.95	29.22	68.20	18.77	V
11813.600	46.82	-31.85	39.05	39.62	74.00	27.18	H
10845.050	46.70	-32.33	38.59	40.44	74.00	27.30	V

**802.11n-HT40**

## Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17781.100	49.78	-25.50	46.66	28.62	74.00	24.22	H
17745.350	49.73	-25.50	46.66	28.57	74.00	24.27	H
16766.900	49.29	-26.62	41.49	34.42	68.20	18.91	H
16753.150	49.02	-26.62	41.49	34.15	68.20	19.18	V
11848.250	46.44	-31.85	39.05	39.24	74.00	27.56	V
11398.900	46.34	-32.42	38.79	39.97	74.00	27.66	V

## Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17356.500	49.82	-25.95	44.35	31.41	68.20	18.38	H
17236.600	49.78	-25.95	44.35	31.37	68.20	18.42	V
16840.600	49.69	-26.62	41.49	34.82	68.20	18.51	H
16755.350	49.58	-26.62	41.49	34.71	68.20	18.62	V
10740.550	46.04	-32.77	38.49	40.32	74.00	27.96	H
9996.400	45.95	-33.63	38.11	41.47	68.20	22.25	V

**802.11ac-HT20**

## Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17168.950	49.84	-26.60	43.36	33.08	68.20	18.36	V
17876.800	49.44	-25.50	46.66	28.28	74.00	24.56	H
16768.550	49.21	-26.62	41.49	34.34	68.20	18.99	H
16834.550	49.15	-26.62	41.49	34.28	68.20	19.05	H
9836.900	46.31	-33.52	38.05	41.78	68.20	21.89	V
11445.100	46.10	-32.42	38.79	39.73	74.00	27.90	H

## Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17234.400	49.79	-25.95	44.35	31.38	68.20	18.41	V
17555.050	49.73	-26.85	45.25	31.33	68.20	18.47	V
16966.000	49.08	-26.32	42.36	33.03	68.20	19.12	V
16769.100	48.68	-26.62	41.49	33.81	68.20	19.52	H
11393.950	46.50	-32.42	38.79	40.13	74.00	27.50	H
11862.550	46.49	-31.85	39.05	39.29	74.00	27.51	V

## Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17534.700	49.79	-26.85	45.25	31.39	68.20	18.41	V
16856.000	49.55	-26.62	41.49	34.68	68.20	18.65	V
17309.750	49.49	-25.95	44.35	31.08	68.20	18.71	V
16791.650	49.33	-26.62	41.49	34.46	68.20	18.87	V
11126.100	47.20	-32.60	38.75	41.06	74.00	26.80	H
10863.200	46.41	-32.33	38.59	40.15	74.00	27.59	H



**802.11ac-HT40**

## Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17360.900	50.53	-25.95	44.35	32.12	68.20	17.67	V
16774.050	49.80	-26.62	41.49	34.93	68.20	18.40	V
16841.150	49.80	-26.62	41.49	34.93	68.20	18.40	H
17335.050	49.51	-25.95	44.35	31.10	68.20	18.69	V
10964.950	46.74	-32.82	38.70	40.86	74.00	27.26	V
8690.150	46.42	-34.42	38.00	42.83	68.20	21.78	H

## Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17258.050	51.17	-25.95	44.35	32.76	68.20	17.03	H
17443.950	50.24	-26.85	45.25	31.84	68.20	17.96	H
16873.050	50.05	-26.62	41.49	35.18	68.20	18.15	V
16853.250	49.98	-26.62	41.49	35.11	68.20	18.22	V
11929.650	46.33	-31.48	39.09	38.72	74.00	27.67	H
10755.400	46.08	-32.77	38.49	40.36	74.00	27.92	V

**802.11ac-HT80**

## Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17801.450	51.26	-25.50	46.66	30.10	74.00	22.74	V
16931.350	50.87	-26.32	42.36	34.82	68.20	17.33	V
16736.100	50.77	-26.62	41.49	35.90	68.20	17.43	V
17469.250	50.75	-26.85	45.25	32.35	68.20	17.45	V
11921.950	46.84	-31.48	39.09	39.23	74.00	27.16	V
10561.250	46.76	-32.99	38.27	41.47	68.20	21.44	V

## A.6. Band Edges Compliance

### A6.1 Band Edges - Radiated

#### Measurement Limit:


Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

#### Measurement Result:


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.10	P
	5825 MHz	Fig.11	P
802.11n HT20	5745 MHz	Fig.12	P
	5825 MHz	Fig.13	P
802.11n HT40	5755 MHz	Fig.14	P
	5795 MHz	Fig.15	P
802.11ac HT20	5745 MHz	Fig.16	P
	5825 MHz	Fig.17	P
802.11ac HT40	5755 MHz	Fig.18	P
	5795 MHz	Fig.19	P
802.11ac HT80	5775 MHz	Fig.20 Fig.21	P

**Conclusion: PASS**


**Test graphs as below:**

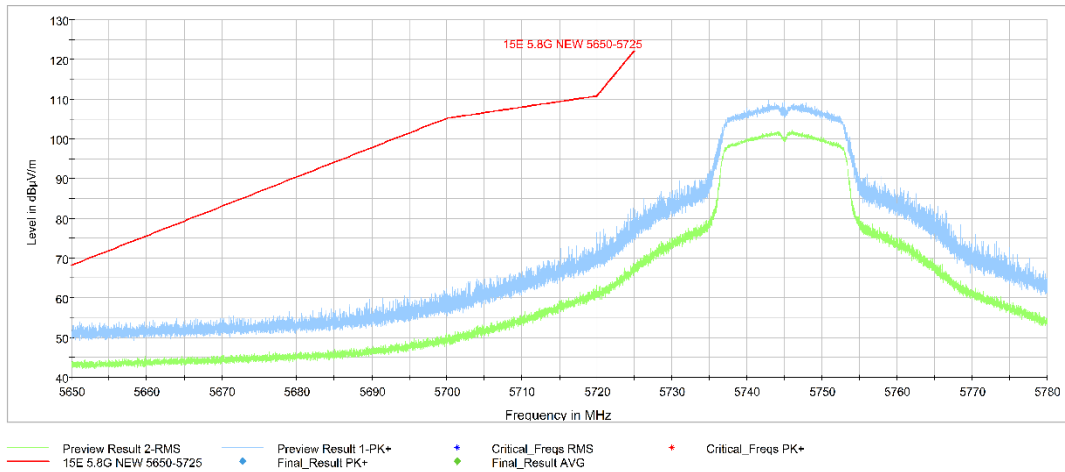


**Fig. 10 Band Edges (802.11a Ch149,5745MHz)**

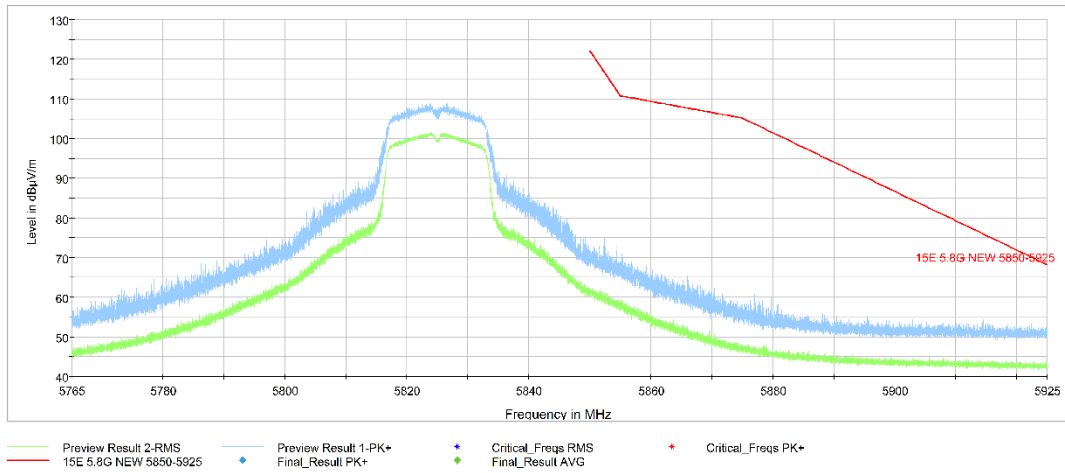


**Fig. 11 Band Edges (802.11a Ch165, 5825MHz)**

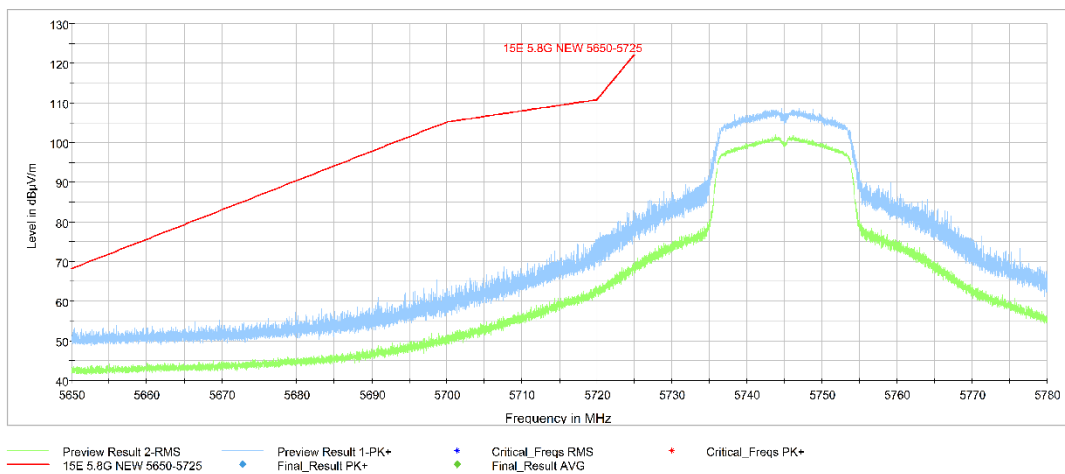


**Fig. 12 Band Edges (802.11n-HT20 Ch149, 5745MHz)**

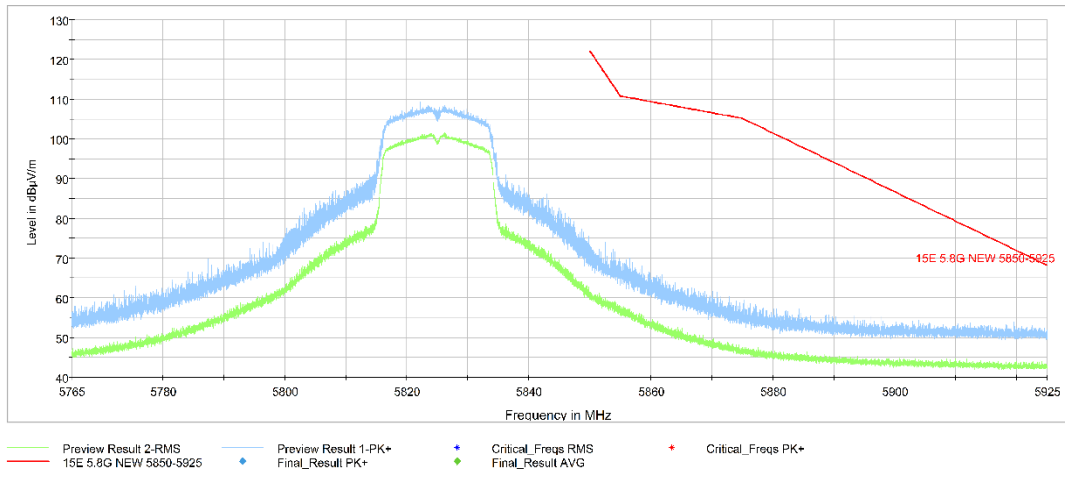


**Fig. 13 Band Edges (802.11n-HT20 Ch165, 5825MHz)**

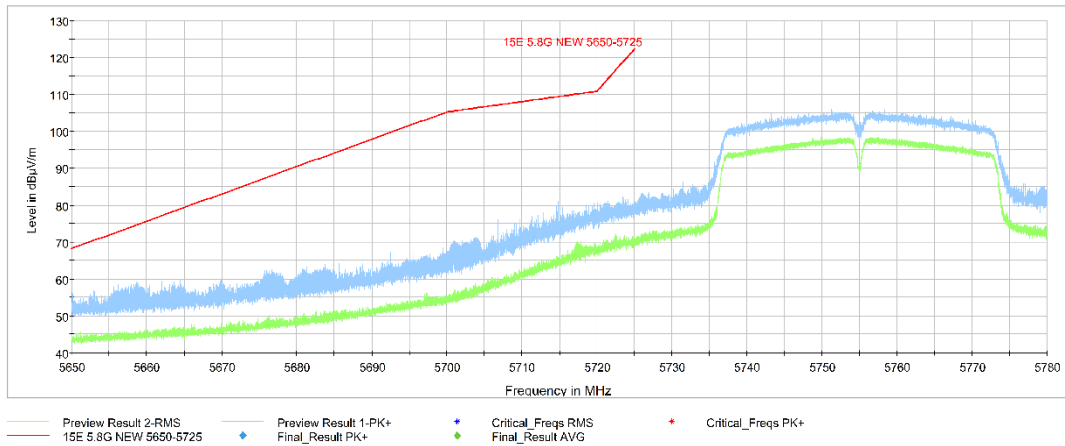


**Fig. 14 Band Edges (802.11n-HT40 Ch151, 5755MHz)**

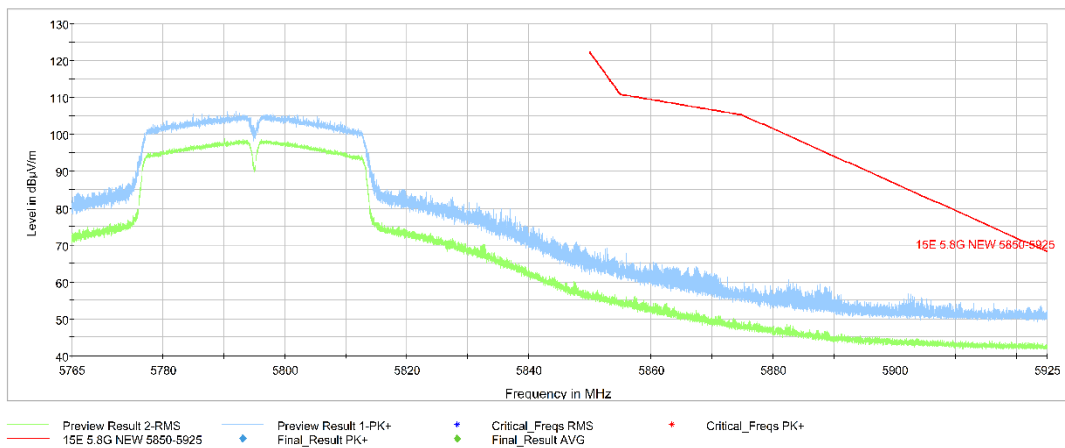


**Fig. 15 Band Edges (802.11n-HT40 Ch159, 5795MHz)**

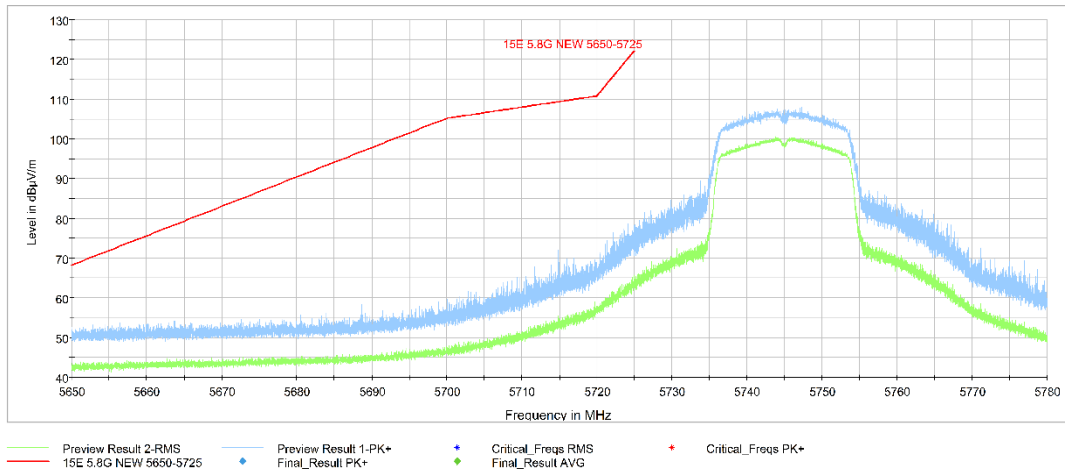


**Fig. 16 Band Edges (802.11ac-HT20 Ch149, 5745MHz)**

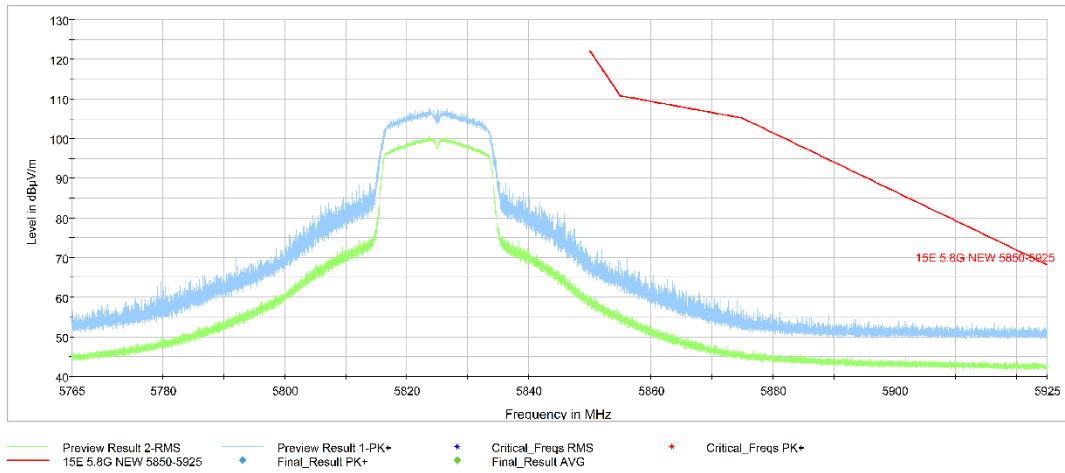


**Fig. 17 Band Edges (802.11ac-HT20 Ch165, 5825MHz)**

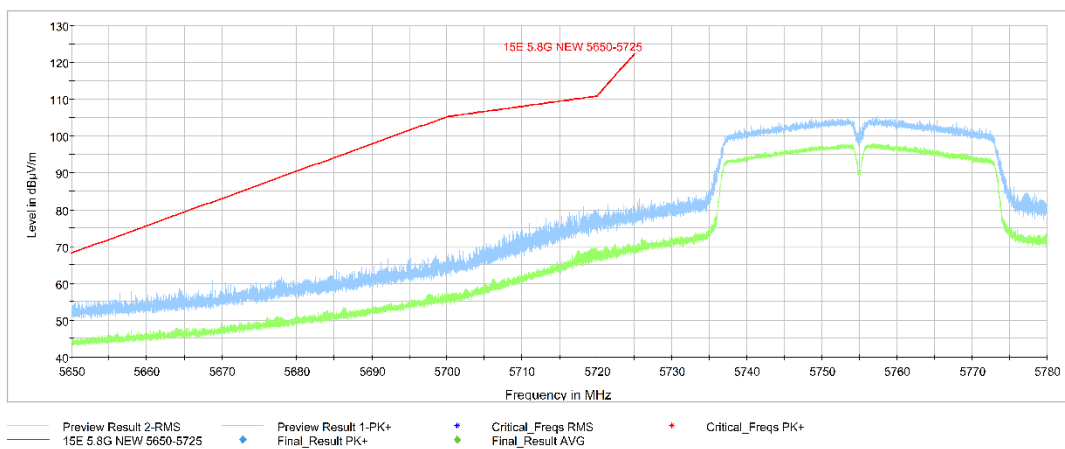

**Fig. 18 Band Edges (802.11ac-HT40 Ch151, 5755MHz)**

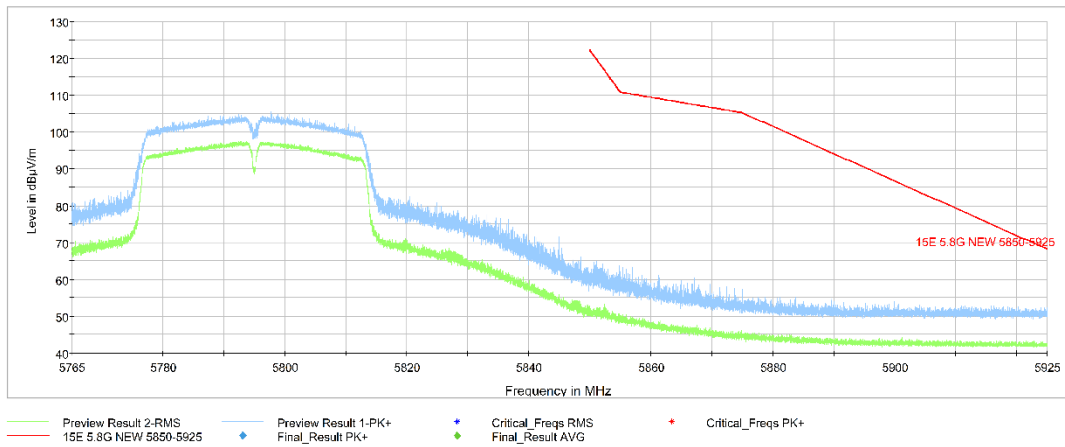


**Fig. 19 Band Edges (802.11ac-HT40 Ch159, 5795MHz)**

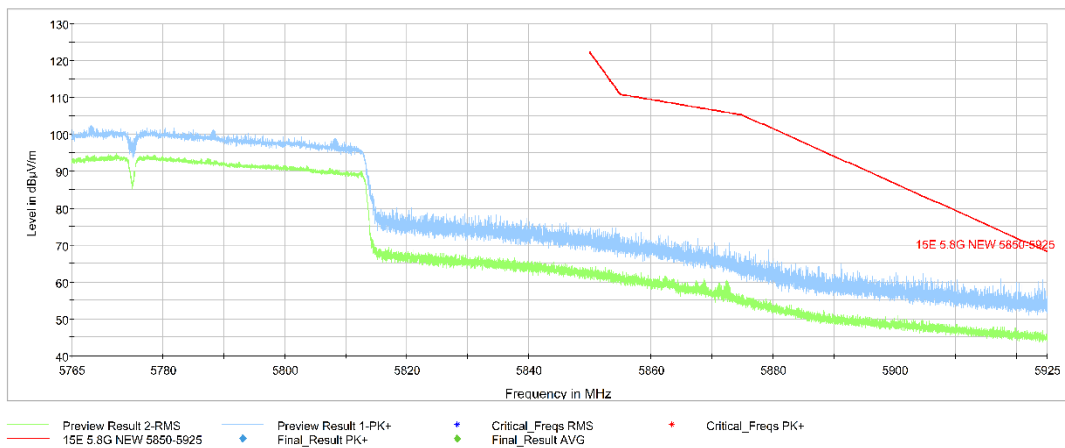

**Fig. 20 Band Edges (802.11ac-HT80 Ch155, 5775MHz)**

Full Spectrum

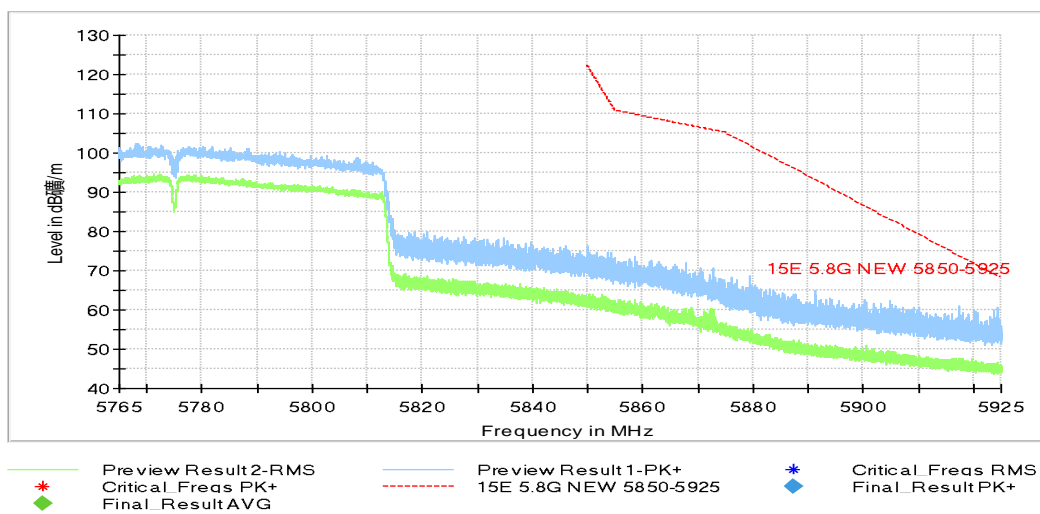

**Fig. 21 Band Edges (802.11ac-HT80, 5775MHz)**

## A.7. AC Powerline Conducted Emission

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Measurement uncertainty:

Expanded measurement uncertainty for this test item is  $U = 3.08\text{dB}$ ,  $k=2$ .

### Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.22	Fig.23	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.22	Fig.23	P
0.5 to 5	46			
5 to 30	50			


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10.

**Conclusion: PASS**

**Test graphs as below:**

Traffic:

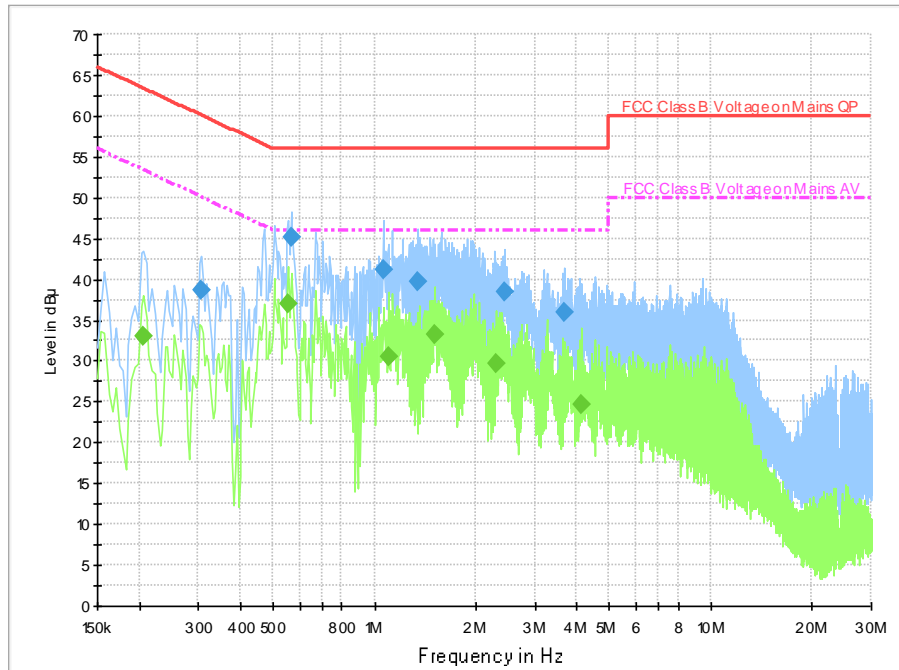

**Fig. 22 AC Power line Conducted Emission-802.11a**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.306000	38.7	2000.	9.000	On	L1	19.7	21.3	60.1	
0.566000	45.2	2000.	9.000	On	L1	19.7	10.8	56.0	
1.062000	41.2	2000.	9.000	On	L1	19.7	14.8	56.0	
1.350000	39.7	2000.	9.000	On	N	19.6	16.3	56.0	
2.438000	38.4	2000.	9.000	On	L1	19.6	17.6	56.0	
3.678000	36.0	2000.	9.000	On	L1	19.6	20.0	56.0	


**Final Result 2**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.206000	33.0	2000.	9.000	On	L1	19.7	20.3	53.4	
0.554000	37.0	2000.	9.000	On	N	19.7	9.0	46.0	
1.098000	30.5	2000.	9.000	On	L1	19.6	15.5	46.0	
1.514000	33.1	2000.	9.000	On	L1	19.6	12.9	46.0	
2.302000	29.8	2000.	9.000	On	L1	19.6	16.2	46.0	
4.146000	24.6	2000.	9.000	On	L1	19.6	21.4	46.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers



Idle:

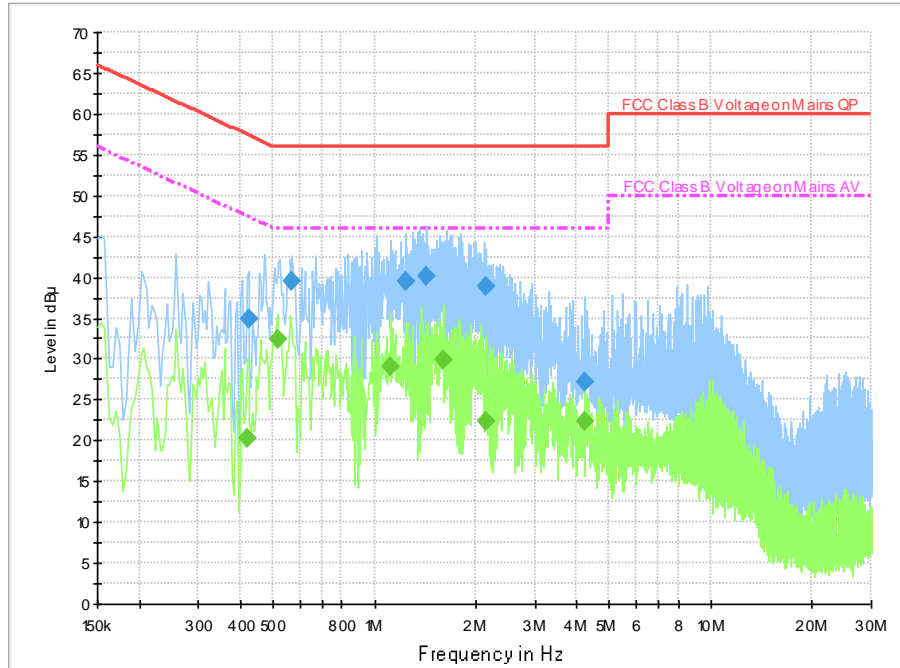

**Fig. 23 AC Power line Conducted Emission-Idle**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.422000	34.9	2000.	9.000	On	L1	19.7	22.5	57.4	
0.570000	39.4	2000.	9.000	On	L1	19.7	16.6	56.0	
1.234000	39.4	2000.	9.000	On	L1	19.6	16.6	56.0	
1.434000	40.2	2000.	9.000	On	L1	19.7	15.8	56.0	
2.142000	38.9	2000.	9.000	On	N	19.6	17.1	56.0	
4.206000	27.2	2000.	9.000	On	N	19.6	28.8	56.0	

**Final Result 2**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.418000	20.2	2000.0	9.000	On	N	19.7	27.3	47.5	
0.514000	32.4	2000.0	9.000	On	L1	19.7	13.6	46.0	
1.118000	29.1	2000.0	9.000	On	L1	19.6	16.9	46.0	
1.598000	29.9	2000.0	9.000	On	L1	19.6	16.1	46.0	
2.142000	22.3	2000.0	9.000	On	N	19.6	23.7	46.0	
4.242000	22.3	2000.0	9.000	On	L1	19.6	23.7	46.0	

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

## ANNEX B: EUT parameters

Disclaimer: The worse case and antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX C: Accreditation Certificate

<p><b>United States Department of Commerce National Institute of Standards and Technology</b></p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 2em; font-weight: bold; letter-spacing: 0.5em;">NVLAP<sup>®</sup></div><div style="text-align: center;"></div></div> <hr/> <p style="font-size: 1.2em; font-weight: bold; text-align: center;">Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr/> <p style="text-align: center;">NVLAP LAB CODE: 600118-0</p> <p style="text-align: center; font-weight: bold;">Telecommunication Technology Labs, CAICT</p> <p style="text-align: center;">Beijing China</p> <p style="text-align: center; font-size: 0.8em;"><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p style="text-align: center; font-weight: bold;">Electromagnetic Compatibility &amp; Telecommunications</p> <p style="text-align: center; font-size: 0.8em;"><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <div style="display: flex; justify-content: space-between; align-items: center; margin-top: 20px;"><div style="text-align: center;"><hr style="width: 20%;"/><p style="font-size: 0.8em;">2022-10-01 through 2023-09-30 <i>Effective Dates</i></p></div><div style="text-align: center;"></div><div style="text-align: center;"><hr style="width: 20%;"/><p style="font-size: 0.8em;"><i>For the National Voluntary Laboratory Accreditation Program</i></p></div></div>	
--	--

\*\*\* END OF REPORT BODY \*\*\*