



24T04Z102302-012



SAR TEST REPORT

No. 24T04Z102302-012

For

TCL Communication Ltd.

GSM/UMTS/LTE mobile phone

Model name: T509A

With

Hardware Version: 05

Software Version: BL3F

FCC ID: 2ACCJB228

Issued Date: 2024-11-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Issue Date	Description
24T04Z102302-012	Rev.0	2024-11-15	Initial creation of test report
24T04Z102302-012	Rev.1	2024-11-18	1. Add description about NFC on page7. 2. Revise power table of GSM850 and GSM1900 on section 11.1 from page27 to page30. 3. Revise power table of WB4(Power Level B1) on page32.
24T04Z102302-012	Rev.2	2024-11-19	1. Revise SAR value for GSM850 body on page66.
24T04Z102302-012	Rev.3	2024-11-20	1. Revise a typo on page7.

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 INTRODUCTION & ACCREDITATION	5
1.2 TESTING LOCATION	5
1.3 TESTING ENVIRONMENT.....	5
1.4 PROJECT DATA	5
1.5 SIGNATURE.....	6
2 STATEMENT OF COMPLIANCE	7
3 CLIENT INFORMATION.....	9
3.1 APPLICANT INFORMATION	9
3.2 MANUFACTURER INFORMATION	9
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
4.1 ABOUT EUT	10
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	11
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	11
5 TEST METHODOLOGY	12
5.1 APPLICABLE LIMIT REGULATIONS	12
5.2 APPLICABLE MEASUREMENT STANDARDS	12
6 SPECIFIC ABSORPTION RATE (SAR).....	13
6.1 INTRODUCTION.....	13
6.2 SAR DEFINITION	13
7 TISSUE SIMULATING LIQUIDS	14
7.1 TARGETS FOR TISSUE SIMULATING LIQUID.....	14
7.2 DIELECTRIC PERFORMANCE	15
8 SYSTEM VERIFICATION.....	17
8.1 SYSTEM SETUP.....	17
8.2 SYSTEM VERIFICATION.....	18
9 MEASUREMENT PROCEDURES	19
9.1 TESTS TO BE PERFORMED	19
9.2 GENERAL MEASUREMENT PROCEDURE.....	21
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	22
9.4 SAR MEASUREMENT FOR LTE.....	23
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	25
9.6 POWER DRIFT	25
10 AREA SCAN BASED 1-G SAR	26
10.1 REQUIREMENT OF KDB.....	26

10.2 FAST SAR ALGORITHMS	26
11 CONDUCTED OUTPUT POWER.....	27
11.1 GSM MEASUREMENT RESULT	27
11.2 WCDMA MEASUREMENT RESULT	31
11.3 LTE MEASUREMENT RESULT	33
11.4 WI-FI AND BT MEASUREMENT RESULT	60
12 ANTENNA LOCATION.....	62
12.1 TRANSMIT ANTENNA SEPARATION DISTANCES.....	62
12.2 SAR MEASUREMENT POSITIONS	62
12.3 EVALUATION OF SIMULTANEOUS	62
13 SAR TEST RESULT.....	63
13.1 SAR RESULTS FOR CELLULAR	66
13.2 SAR RESULTS FOR WLAN	70
13.3 SAR RESULTS FOR BT	71
13.4 SAR RESULTS FOR PHABLET	72
15 SAR MEASUREMENT VARIABILITY.....	73
16 MEASUREMENT UNCERTAINTY	74
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHZ~3GHZ)	74
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHZ)	75
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHZ~3GHZ)	76
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHZ)	77
17 MAIN TEST INSTRUMENTS	79
APPENDIXES	80

1 Test Laboratory

1.1 Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2 Testing Location

Company Name:	CTTL
Address:	No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

1.3 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.4 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Yao Juming
Testing Start Date:	October 25, 2024
Testing End Date:	November 13, 2024


1.5 Signature



Yao Juming
(Prepared this test report)



Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd. GSM/UMTS/LTE mobile phone T509A are as follows:

Table 2.1: Highest Reported SAR -Standalone(1g)

Mode		Highest Reported SAR (1g)				Equipment Class
		Head (Separation Distance 0mm)	Body-Worn (Separation Distance 10mm)	Hotspot (Separation Distance 10mm)	Phablet SAR(10g) (Separation Distance 0mm)	
GSM	GSM 850	1.07	0.46	0.46	\	PCE
	PCS 1900	0.45	0.72	1.19	\	
WCDMA	UMTS B2	0.37	0.89	1.15	\	
	UMTS B4	0.22	0.90	1.17	\	
	UMTS B5	0.50	0.26	0.26	\	
LTE	LTE B2	0.34	0.91	1.14	\	
	LTE B7	0.39	0.61	1.18	\	
	LTE B12/B17	0.43	0.20	0.20	\	
	LTE B13	0.47	0.21	0.21	\	
	LTE B5/B26	0.74	0.25	0.25	\	
	LTE B38/B41	0.28	0.77	1.01	\	
	LTE B4/B66	0.09	0.54	0.64	\	
WLAN 2.4 GHz		0.62	0.29	0.29	\	\
WLAN 5 GHz		0.71	0.12	0.30	\	\
BT		0.09	0.03	0.03	\	\

Note1: This DUT has NFC operations. The NFC antenna is integrated into the device for this model. According to KDB 447498 D01 v06 and KDB 648474 D04 v01r03 chapter 8, all SAR tests were performed and evaluated with the device which already incorporates the NFC antenna.

Note2: The device have similar frequency in some LTE bands: LTE Band38/41, LTE Band4/66, LTE Band5/26 and LTE Band12/17 since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands and the channel bandwidth and other operating parameters for the smaller band be fully supported by the larger band, therefore, only larger LTE bands were required to be tested for SAR.

Note3: We use 10mm Hotspot SAR to replace 15mm Body-worn SAR, which was more conservatively.

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm for hotspot and 15mm for body worn between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are:

Head: 1.07 W/kg(1g)

Body-Worn: 0.91 W/kg(1g)

Hotspot: 1.19 W/kg(1g).

The device have similar frequency in some LTE bands: LTE Band38/41, LTE Band4/66, LTE Band5/26 and LTE Band12/17 since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands and the channel bandwidth and other operating parameters for the smaller band be fully supported by the larger band, therefore, only larger LTE bands were required to be tested for SAR.

Table 2.2: The sum of SAR values for Main antenna + WiFi

	Position	Main antenna	WiFi 5G	BT	Sum
Highest SAR value for Head	Right head, Cheek (GSM850)	1.07	0.34 (WIFI5G)	0.03	1.44
Highest SAR value for Body	Rear 10mm (LTE B2)	0.91	0.29 (WIFI2.4G)	\	1.20

According to the above tables, The sum of reported SAR values is <1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

According to the above tables, the highest sum of reported SAR values is **1.44W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 12.3.

3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person:	Ting Wang
E-mail:	ting.wang.hz@tcl.com
Telephone:	+86 752 2639091
Fax:	0086-755-36612000-81722

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person:	Ting Wang
E-mail:	ting.wang.hz@tcl.com
Telephone:	+86 752 2639091
Fax:	0086-755-36612000-81722

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	GSM/UMTS/LTE mobile phone	
Model name:	T509A	
Tested Band:	GSM850/1900, WCDMA B2/4/5 LTE Band FDD:2/4/5/7/12/13/17/26/38/41/66 BT, Wi-Fi(2.4G), Wi-Fi(5G)	
Tested Tx Frequency:	824 – 849 MHz (GSM 850)	
	1850 – 1910 MHz (GSM 1900)	
	824–849 MHz (WCDMA 850 Band V)	
	1710 – 1755 MHz (WCDMA 1700 Band IV)	
	1850–1910 MHz (WCDMA1900 Band II)	
	1850 – 1910 MHz(LTE Band 2)	
	1710 – 1755 MHz (LTE Band 4)	
	824 – 849 MHz (LTE Band 5)	
	2500 – 2570 MHz(LTE Band 7)	
	699 – 716 MHz (LTE Band 12)	
	777 –787 MHz (LTE Band 13)	
	704 –716 MHz (LTE Band 17)	
	814 – 849 MHz (LTE Band 26)	
	2570 – 2620 MHz (LTE Band 38)	
	2496 – 2690 MHz (LTE Band 41)	
	1710 – 1780 MHz (LTE Band 66)	
	2402 – 2480 MHz (Bluetooth)	
	2412 – 2462 MHz (Wi-Fi 2.4G)	
	5180 – 5240 MHz	
	5260 – 5320 MHz	
5500 – 5700 MHz		
5745 – 5825 MHz		
(Wi-Fi 5G)		
GPRS/EGPRS Multislot Class:	12	
GPRS capability Class:	B	
Antenna type:	Integrated antenna	
Hotspot mode:	Support	

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	359735331410033/359735331410041	05	BL3F
EUT2	359735331410074/359735331410082	05	BL3F
EUT3	359735331410181/359735331410173	05	BL3F
EUT4	359735331410058/359735331410066	05	BL3F
EUT5	359735331410165/359735331410157	05	BL3F

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1-3 and conducted power with the EUT4-5.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLp049B8	/	HuiZhou GanFeng LiEnergy Battery Technology Co., Ltd.
AE2	Battery	TLp049B8	/	Shenzhen Aerospace Electronic Co.,Ltd.
AE3	Headset	JWEP1295-M01R	/	Huizhou Juwei Electronics Co.,Ltd

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

The temperature of the tissue-equivalent medium used during measurement must also be within 18 °C to 25 °C and within ± 2 °C of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.94	39.8~44.0
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
1800	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
2450	Head	1.80	1.62~1.98	39.2	35.28~43.12
2600	Head	1.96	1.76~2.16	39.01	35.11~42.91
5250	Head	4.71	4.47~4.95	35.93	34.13~37.73
5600	Head	5.07	4.82~5.32	35.53	33.8~37.3
5750	Head	5.22	4.96~5.48	35.36	33.59~37.13

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2024/10/27	Head	750MHz	41.174	-1.83%	0.861	-3.26%
2024/10/25	Head	835MHz	41.232	-0.65%	0.923	2.56%
2024/11/9	Head	835MHz	41.1	-0.96%	0.93	3.33%
2024/11/2	Head	1800MHz	40.263	0.66%	1.403	0.21%
2024/11/3	Head	1900MHz	39.154	-2.11%	1.35	-3.57%
2024/11/7	Head	1900MHz	39.223	-1.94%	1.372	-2.00%
2024/11/13	Head	2450MHz	39.51	0.79%	1.782	-1.00%
2024/11/8	Head	2600MHz	39.645	1.63%	1.988	1.43%
2024/11/10	Head	2600MHz	39.4	1.00%	1.985	1.28%
2024/11/12	Head	5250MHz	36.721	2.20%	4.62	-1.91%
2024/11/12	Head	5600MHz	36.463	2.63%	4.936	-2.64%
2024/11/12	Head	5750MHz	36.121	2.15%	5.17	-0.96%

Note: The liquid temperature is 22.0°C

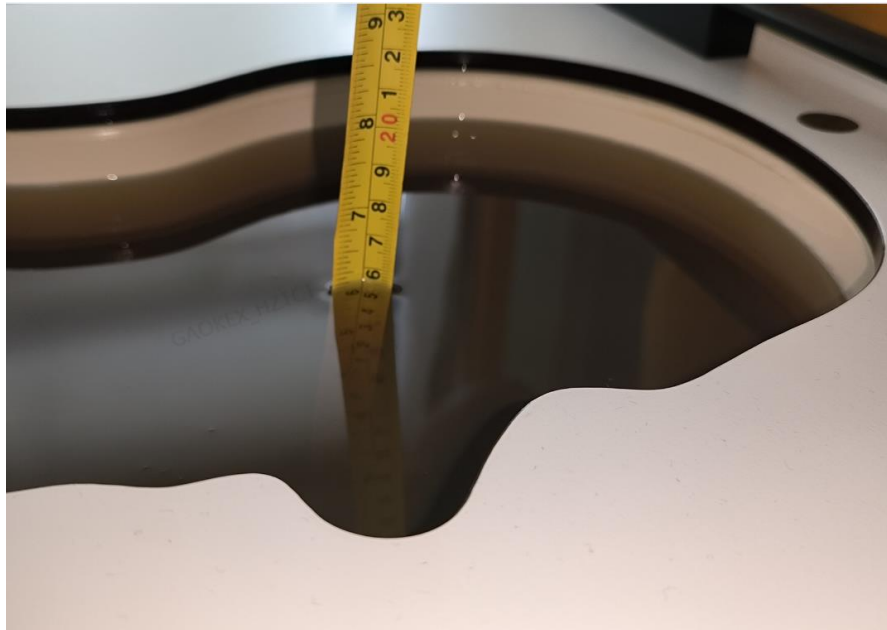

Picture 7-1 Liquid depth in the Head Phantom

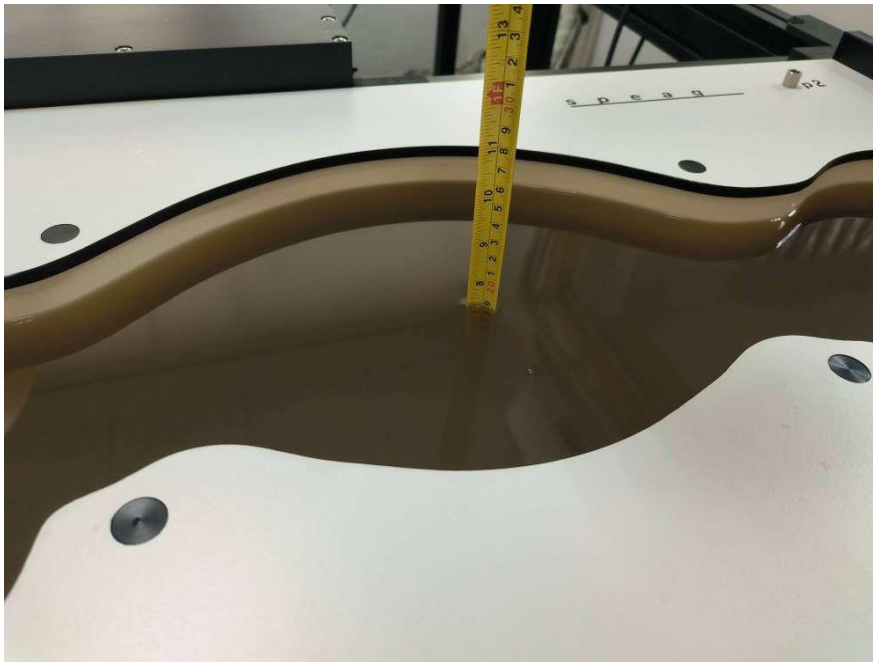


Picture 7-2 Liquid depth in the Flat Phantom

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

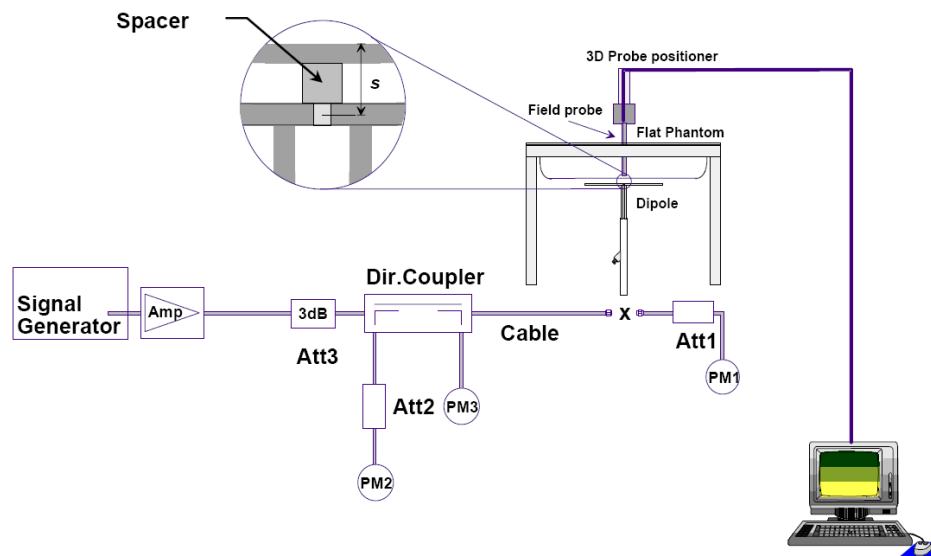

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 9.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2024/10/27	750MHz	5.53	8.52	5.32	8.2	-3.80%	-3.76%
2024/10/25	835MHz	6.09	9.47	6.2	9.64	1.81%	1.80%
2024/11/9	835MHz	6.09	9.47	5.92	9.2	-2.79%	-2.85%
2024/11/2	1800MHz	20.6	39.1	19.88	37.84	-3.50%	-3.22%
2024/11/3	1900MHz	20.6	39.1	20.72	39.24	0.58%	0.36%
2024/11/7	1900MHz	20.6	39.1	20.48	38.84	-0.58%	-0.66%
2024/11/13	2450MHz	24.5	52.2	25.16	53.64	2.69%	2.76%
2024/11/8	2600MHz	24.8	54.9	24.56	54.4	-0.97%	-0.91%
2024/11/10	2600MHz	24.8	54.9	25.12	55.52	1.29%	1.13%
2024/11/12	5250MHz	22.4	78.3	22.1	77.2	-1.34%	-1.40%
2024/11/12	5600MHz	23.2	81.7	23.4	82.6	0.86%	1.10%
2024/11/12	5750MHz	22.8	79.9	23.1	81.2	1.32%	1.63%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

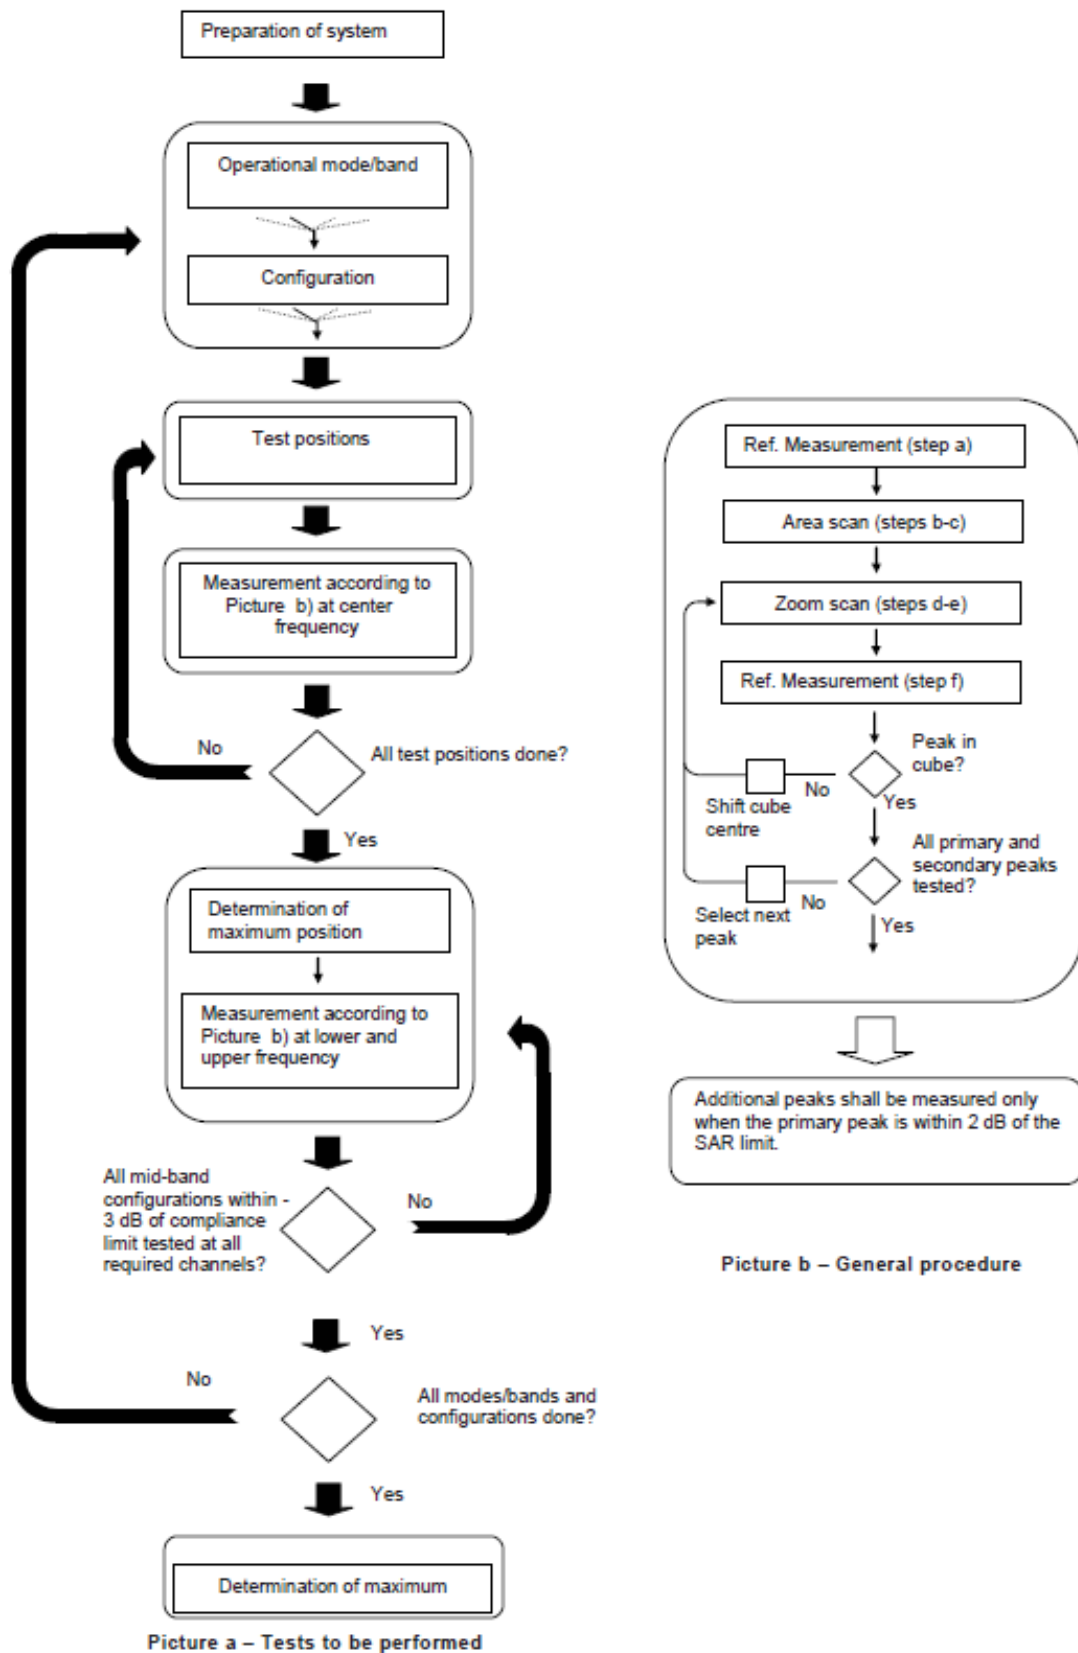

Picture 10-1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

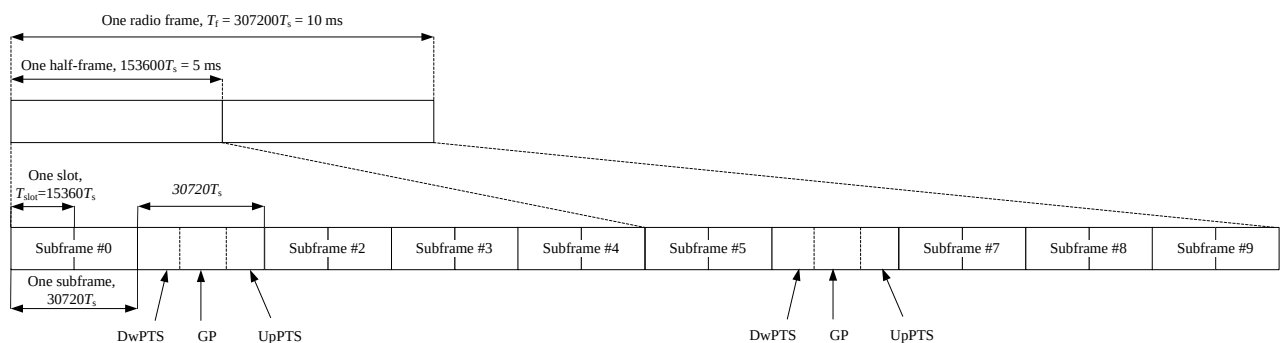


Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 9.2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Duty factor is calculated by:

$$\begin{aligned}
 \text{Duty factor} &= \text{uplink frame} \cdot 6 + \text{UpPTS} \cdot 2 / \text{one frame length} \\
 &= (30720 \cdot T_s \cdot 6 + 5120 \cdot T_s \cdot 2) / 307200 \cdot T_s \\
 &= 0.633
 \end{aligned}$$

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

This device has several different power modes for head, body SAR compliance; power selection is determined by the device's positioning and usage scenarios. The details of test scenarios categorization in the table below

Antenna	Head Receiver on	Body Receiver off
ANT0	Power Level A1	Power Level B1
ANT1	Power Level A1	Power Level B1

11.1 GSM Measurement result

GSM850(Power Level A1)

GSM 850 Speech (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	30.60	30.49	30.45	31.50	/	/	/	/
GSM 850 GPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	30.41	30.37	30.30	31.50	-9.03	21.38	21.34	21.27
2 Txslots	29.51	29.40	29.32	30.50	-6.02	23.49	23.38	23.30
3 Txslots	28.38	28.25	28.15	29.00	-4.26	24.12	23.99	23.89
4 Txslots	27.36	27.27	27.16	28.00	-3.01	24.35	24.26	24.15
GSM 850 EGPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	30.52	30.37	30.26	31.50	-9.03	21.49	21.34	21.23
2 Txslots	29.57	29.47	29.30	30.50	-6.02	23.55	23.45	23.28
3 Txslots	28.45	28.26	28.17	29.00	-4.26	24.19	24.00	23.91
4 Txslots	27.45	27.28	27.21	28.00	-3.01	24.44	24.27	24.20
GSM 850 EGPRS (8PSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	24.65	24.57	24.56	25.50	-9.03	15.62	15.54	15.53
2 Txslots	23.45	23.53	23.42	24.50	-6.02	17.43	17.51	17.40
3 Txslots	22.43	22.44	22.35	23.50	-4.26	18.17	18.18	18.09
4 Txslots	21.20	21.22	21.25	22.50	-3.01	18.19	18.21	18.24

GSM850(Power Level B1)

GSM 850 Speech (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	31.54	31.47	31.39	32.50	/	/	/	/
GSM 850 GPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	31.41	31.34	31.26	32.50	-9.03	22.38	22.31	22.23
2 Txslots	30.45	30.37	30.28	31.50	-6.02	24.43	24.35	24.26
3 Txslots	29.34	29.24	29.15	30.00	-4.26	25.08	24.98	24.89
4 Txslots	28.36	28.25	28.12	29.00	-3.01	25.35	25.24	25.11
GSM 850 EGPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	31.45	31.34	31.26	32.50	-9.03	22.42	22.31	22.23
2 Txslots	30.48	30.37	30.27	31.50	-6.02	24.46	24.35	24.25
3 Txslots	29.36	29.24	29.12	29.50	-4.26	25.10	24.98	24.86
4 Txslots	28.38	28.25	28.11	28.50	-3.01	25.37	25.24	25.10
GSM 850 EGPRS (8PSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	251	190	128			251	190	128
1 Txslot	25.03	25.10	25.19	26.00	-9.03	16.00	16.07	16.16
2 Txslots	24.03	24.07	24.19	25.00	-6.02	18.01	18.05	18.17
3 Txslots	22.43	22.44	22.35	23.50	-4.26	18.17	18.18	18.09
4 Txslots	21.21	21.30	21.40	22.50	-3.01	18.20	18.29	18.39

GSM1900(Power Level A1)

GSM 1900 Speech (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.16	29.37	29.62	30.50	/	/	/	/
GSM 1900 GPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.09	29.30	29.55	30.50	-9.03	20.06	20.27	20.52
2 Txslots	28.61	28.81	29.05	29.50	-6.02	22.59	22.79	23.03
3 Txslots	27.16	27.35	27.55	28.00	-4.26	22.90	23.09	23.29
4 Txslots	26.11	26.27	26.45	27.00	-3.01	23.10	23.26	23.44
GSM 1900 EGPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.07	29.28	29.54	30.50	-9.03	20.04	20.25	20.51
2 Txslots	28.59	28.80	29.04	29.50	-6.02	22.57	22.78	23.02
3 Txslots	27.15	27.33	27.55	28.00	-4.26	22.89	23.07	23.29
4 Txslots	26.09	26.25	26.45	27.00	-3.01	23.08	23.24	23.44
GSM 1900 EGPRS (8PSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	26.34	26.22	25.95	26.50	-9.03	17.31	17.19	16.92
2 Txslots	25.32	25.00	25.40	25.50	-6.02	19.30	18.98	19.38
3 Txslots	22.86	22.66	22.58	23.00	-4.26	18.60	18.40	18.32
4 Txslots	21.44	21.41	21.13	21.50	-3.01	18.43	18.40	18.12

GSM1900(Power Level B1)

GSM 1900 Speech (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	27.79	28.13	28.26	28.50	/	/	/	/
GSM 1900 GPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	27.94	28.19	28.31	28.50	-9.03	18.91	19.16	19.28
2 Txslots	26.89	27.14	27.21	27.50	-6.02	20.87	21.12	21.19
3 Txslots	23.95	24.18	24.22	26.00	-4.26	19.69	19.92	19.96
4 Txslots	23.94	24.18	24.19	25.00	-3.01	20.93	21.17	21.18
GSM 1900 EGPRS (GMSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	27.93	28.20	28.32	28.50	-9.03	18.90	19.17	19.29
2 Txslots	26.92	27.14	27.20	27.50	-6.02	20.90	21.12	21.18
3 Txslots	23.97	24.17	24.23	26.00	-4.26	19.71	19.91	19.97
4 Txslots	23.93	24.15	24.21	25.00	-3.01	20.92	21.14	21.20
GSM 1900 EGPRS (8PSK)	Measured timeslot-averaged output power (dBm)			Tune up	calculation	Source-based time-averaged output power (dBm)		
	810	661	512			810	661	512
1 Txslot	24.85	24.79	24.74	25.50	-9.03	15.82	15.76	15.71
2 Txslots	24.00	23.31	24.22	25.00	-6.02	17.98	17.29	18.20
3 Txslots	22.18	21.93	22.16	23.00	-4.26	17.92	17.67	17.90
4 Txslots	20.68	20.87	20.70	21.50	-3.01	17.67	17.86	17.69

11.2 WCDMA Measurement result

WCDMA1900(Power Level A1)

Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	1	23.52	23.58	23.57	24.00
HSUPA	1	20.77	20.82	20.92	21.50
	2	20.67	20.79	20.66	21.50
	3	20.60	20.75	20.77	21.50
	4	19.61	19.72	19.76	20.50
	5	20.92	20.76	20.78	22.00
DC-HSDPA	1	22.48	22.48	22.46	22.50
	2	22.51	22.58	22.52	23.00
	3	21.78	21.83	21.82	23.00
	4	22.23	22.13	22.12	23.00

WCDMA1900(Power Level B1)

Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	1	21.26	21.33	21.43	22.00
HSUPA	1	18.64	18.68	18.90	19.50
	2	18.60	18.79	18.53	19.50
	3	18.57	18.65	18.63	19.50
	4	17.57	17.57	17.60	18.50
	5	18.92	18.66	18.65	20.00
DC-HSDPA	1	20.40	20.40	20.40	20.50
	2	20.45	20.45	20.38	21.00
	3	19.58	19.78	19.76	21.00
	4	20.09	19.94	19.92	21.00

WCDMA1700(Power Level A1)

Item	band	FDDIV result			
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)	Tune up
WCDMA	1	23.66	23.68	23.62	24.00
HSUPA	1	20.73	20.65	20.79	21.50
	2	20.68	20.68	20.55	21.50
	3	21.16	21.21	21.19	22.00
	4	19.90	19.78	19.65	20.50
	5	21.04	21.12	21.06	22.00
DC-HSDPA	1	22.45	22.42	22.44	22.50
	2	22.53	22.39	22.30	23.00
	3	21.81	21.68	21.64	23.00
	4	22.07	21.93	22.04	22.50

WCDMA1700(Power Level B1)

Item	band	FDDIV result			
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)	Tune up
WCDMA	1	21.91	21.98	21.89	23.00
HSUPA	1	18.42	18.55	18.45	19.50
	2	18.70	18.58	18.54	19.50
	3	19.23	19.11	19.04	20.00
	4	17.70	17.68	17.58	19.00
	5	19.13	19.02	18.85	20.50
DC-HSDPA	1	21.40	21.47	21.42	21.00
	2	21.33	21.44	21.29	21.50
	3	20.65	20.65	20.55	21.50
	4	20.78	20.92	20.98	21.00

WCDMA850(Power Level A1/B1)

Item	band	FDDV result			
	ARFCN	4233 (846.6MHz)	4183 (836.6MHz)	4132 (826.4MHz)	Tune up
WCDMA	1	23.98	23.98	23.92	24.00
HSUPA	1	21.11	21.02	20.86	21.50
	2	21.03	20.94	20.79	21.50
	3	21.80	21.93	22.06	22.50
	4	20.75	20.62	20.67	21.00
	5	21.85	21.94	21.80	22.50
DC-HSDPA	1	22.91	23.03	23.17	23.50
	2	23.06	23.02	23.09	23.50
	3	22.39	22.47	22.40	23.00
	4	22.32	22.48	22.43	23.00

11.3 LTE Measurement result

The maximum output power(Tune-up Limit)

Band	Tune up	
	Power Level A1	Power Level B1
LTE Band 2	24.5	22.5
LTE Band 7	24.5	22.5
LTE Band 12/17	25	25
LTE Band 13	25	25
LTE Band 5/26	25	25
LTE Band 41	24.5	24.5
LTE Band 4/66	24.5	21.5

Maximum Power Reduction (MPR) for LTE

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	3

LTE Band2(Power Level A1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	23.93	23.15	22.06
		1880 (18900)	23.89	23.20	22.07
		1850.7 (18607)	23.85	23.10	22.08
	1RB-Middle (3)	1909.3 (19193)	24.02	23.13	22.19
		1880 (18900)	23.96	23.23	22.16
		1850.7 (18607)	23.96	23.23	22.07
	1RB-Low (0)	1909.3 (19193)	23.93	23.13	22.04
		1880 (18900)	23.88	23.12	22.08
		1850.7 (18607)	23.86	23.02	21.98
	3RB-High (3)	1909.3 (19193)	24.01	22.99	22.14
		1880 (18900)	23.97	22.90	22.08
		1850.7 (18607)	23.97	22.89	22.06
	3RB-Middle (1)	1909.3 (19193)	24.10	23.04	22.17
		1880 (18900)	24.05	23.00	22.10
		1850.7 (18607)	24.01	22.96	22.07
	3RB-Low (0)	1909.3 (19193)	24.02	23.00	22.05
		1880 (18900)	23.99	22.93	22.02
		1850.7 (18607)	23.91	22.90	21.99
	6RB (0)	1909.3 (19193)	23.07	22.08	21.03
		1880 (18900)	23.03	22.11	21.00
		1850.7 (18607)	22.98	22.00	20.92
3MHz	1RB-High (14)	1908.5 (19185)	24.01	23.18	22.15
		1880 (18900)	23.94	23.23	22.15
		1851.5 (18615)	23.96	23.16	22.13
	1RB-Middle (7)	1908.5 (19185)	24.11	23.36	22.29
		1880 (18900)	24.09	23.40	22.31
		1851.5 (18615)	24.01	23.35	22.27
	1RB-Low (0)	1908.5 (19185)	24.01	23.25	22.18
		1880 (18900)	23.97	23.23	22.10
		1851.5 (18615)	23.95	23.09	22.10
	8RB-High (7)	1908.5 (19185)	23.07	22.11	21.13
		1880 (18900)	23.01	22.05	21.05
		1851.5 (18615)	22.96	22.04	21.02
	8RB-Middle (4)	1908.5 (19185)	23.12	22.11	21.12
		1880 (18900)	23.03	22.11	21.09
		1851.5 (18615)	23.01	22.09	21.03
	8RB-Low (0)	1908.5 (19185)	23.12	22.10	21.12
		1880 (18900)	23.02	22.08	21.03
		1851.5 (18615)	22.99	22.03	21.02
	15RB (0)	1908.5 (19185)	23.09	22.07	21.07

		1880 (18900)	23.01	22.04	21.01
		1851.5 (18615)	23.01	21.98	20.96
5MHz	1RB-High (24)	1907.5 (19175)	23.93	23.10	22.13
		1880 (18900)	23.88	23.06	22.02
		1852.5 (18625)	23.85	23.12	22.01
	1RB-Middle (12)	1907.5 (19175)	24.23	23.46	22.33
		1880 (18900)	24.17	23.36	22.34
		1852.5 (18625)	24.15	23.47	22.33
	1RB-Low (0)	1907.5 (19175)	23.95	23.16	22.05
		1880 (18900)	23.87	23.04	22.08
		1852.5 (18625)	23.83	23.03	21.96
	12RB-High (13)	1907.5 (19175)	23.11	22.05	21.06
		1880 (18900)	23.03	22.03	21.03
		1852.5 (18625)	23.03	22.01	21.03
	12RB-Middle (6)	1907.5 (19175)	23.15	22.13	21.15
		1880 (18900)	23.07	22.05	21.08
		1852.5 (18625)	23.04	22.02	21.02
	12RB-Low (0)	1907.5 (19175)	23.14	22.08	21.10
		1880 (18900)	23.03	21.98	21.06
		1852.5 (18625)	23.00	21.98	21.01
	25RB (0)	1907.5 (19175)	23.15	22.13	21.11
		1880 (18900)	23.06	22.03	21.04
		1852.5 (18625)	23.04	22.00	21.02
10MHz	1RB-High (49)	1905 (19150)	24.01	23.19	22.17
		1880 (18900)	23.92	23.24	22.12
		1855 (18650)	23.91	23.28	22.13
	1RB-Middle (24)	1905 (19150)	24.17	23.31	22.31
		1880 (18900)	24.04	23.32	22.26
		1855 (18650)	24.03	23.31	22.26
	1RB-Low (0)	1905 (19150)	24.04	23.25	22.10
		1880 (18900)	23.96	23.19	22.15
		1855 (18650)	23.94	23.25	22.14
	25RB-High (25)	1905 (19150)	23.14	22.09	21.13
		1880 (18900)	23.10	22.09	21.09
		1855 (18650)	23.12	22.11	21.08
	25RB-Middle (12)	1905 (19150)	23.20	22.17	21.16
		1880 (18900)	23.07	22.07	21.08
		1855 (18650)	23.08	22.10	21.07
	25RB-Low (0)	1905 (19150)	23.28	22.24	21.25
		1880 (18900)	23.08	22.09	21.05
		1855 (18650)	23.07	22.06	21.07
	50RB (0)	1905 (19150)	23.20	22.17	21.21

		1880 (18900)	23.08	22.10	21.11
		1855 (18650)	23.11	22.11	21.09
15MHz	1RB-High (74)	1902.5 (19125)	23.93	23.16	22.09
		1880 (18900)	23.91	23.17	22.05
		1857.5 (18675)	23.86	23.19	22.07
	1RB-Middle (37)	1902.5 (19125)	24.03	23.26	22.18
		1880 (18900)	23.97	23.24	22.18
		1857.5 (18675)	23.96	23.31	22.16
	1RB-Low (0)	1902.5 (19125)	23.91	23.17	22.04
		1880 (18900)	23.89	23.17	21.99
		1857.5 (18675)	23.90	23.11	21.99
	36RB-High (38)	1902.5 (19125)	23.14	22.06	21.11
		1880 (18900)	23.10	22.04	21.10
		1857.5 (18675)	23.10	22.05	21.04
	36RB-Middle (19)	1902.5 (19125)	23.17	22.14	21.13
		1880 (18900)	23.07	22.05	21.06
		1857.5 (18675)	23.07	22.04	21.04
	36RB-Low (0)	1902.5 (19125)	23.18	22.09	21.14
		1880 (18900)	23.07	22.05	21.09
		1857.5 (18675)	23.04	21.98	21.05
	75RB (0)	1902.5 (19125)	23.18	22.13	21.11
		1880 (18900)	23.09	22.05	21.03
		1857.5 (18675)	23.07	22.07	21.05
20MHz	1RB-High (99)	1900 (19100)	23.79	23.03	21.97
		1880 (18900)	23.73	22.97	21.98
		1860 (18700)	23.70	22.94	21.93
	1RB-Middle (50)	1900 (19100)	24.12	23.32	22.31
		1880 (18900)	24.09	23.40	22.24
		1860 (18700)	24.13	23.26	22.32
	1RB-Low (0)	1900 (19100)	23.79	22.96	21.91
		1880 (18900)	23.76	23.08	21.95
		1860 (18700)	23.75	22.99	21.88
	50RB-High (50)	1900 (19100)	23.09	22.05	21.06
		1880 (18900)	23.15	22.11	21.11
		1860 (18700)	23.17	22.12	21.13
	50RB-Middle (25)	1900 (19100)	23.16	22.13	21.13
		1880 (18900)	23.10	22.07	21.09
		1860 (18700)	23.08	22.08	21.07
	50RB-Low (0)	1900 (19100)	23.13	22.10	21.10
		1880 (18900)	23.04	22.07	21.06
		1860 (18700)	23.06	22.06	21.06
	100RB (0)	1900 (19100)	23.10	22.05	21.03

		1880 (18900)	23.08	22.06	21.07
		1860 (18700)	23.07	22.06	21.07

LTE Band2(Power Level B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	22.10	22.31	22.21
		1880 (18900)	22.02	22.33	22.15
		1850.7 (18607)	21.98	22.23	22.18
	1RB-Middle (3)	1909.3 (19193)	22.20	22.43	22.25
		1880 (18900)	22.12	22.43	22.28
		1850.7 (18607)	22.07	22.37	22.26
	1RB-Low (0)	1909.3 (19193)	22.07	22.26	22.19
		1880 (18900)	21.99	22.33	22.21
		1850.7 (18607)	21.99	22.16	22.16
	3RB-High (3)	1909.3 (19193)	22.19	22.15	22.18
		1880 (18900)	22.10	22.13	22.22
		1850.7 (18607)	22.06	22.07	22.18
	3RB-Middle (1)	1909.3 (19193)	22.21	22.21	22.25
		1880 (18900)	22.16	22.19	22.30
		1850.7 (18607)	22.11	22.08	22.22
	3RB-Low (0)	1909.3 (19193)	22.19	22.12	22.23
		1880 (18900)	22.12	22.14	22.20
		1850.7 (18607)	22.07	22.06	22.18
	6RB (0)	1909.3 (19193)	22.21	22.25	21.15
		1880 (18900)	22.09	22.21	21.11
		1850.7 (18607)	22.09	22.20	21.03
3MHz	1RB-High (14)	1908.5 (19185)	22.17	22.30	22.35
		1880 (18900)	22.10	22.41	22.24
		1851.5 (18615)	22.08	22.31	22.29
	1RB-Middle (7)	1908.5 (19185)	22.32	22.52	22.34
		1880 (18900)	22.23	22.60	22.47
		1851.5 (18615)	22.18	22.47	22.39
	1RB-Low (0)	1908.5 (19185)	22.17	22.38	22.22
		1880 (18900)	22.09	22.40	22.26
		1851.5 (18615)	22.05	22.33	22.20
	8RB-High (7)	1908.5 (19185)	22.17	22.21	21.22
		1880 (18900)	22.11	22.20	21.15
		1851.5 (18615)	22.08	22.15	21.13
	8RB-Middle (4)	1908.5 (19185)	22.25	22.23	21.24
		1880 (18900)	22.15	22.22	21.21
		1851.5 (18615)	22.12	22.19	21.15
	8RB-Low (0)	1908.5 (19185)	22.19	22.22	21.19

		1880 (18900)	22.14	22.15	21.18
		1851.5 (18615)	22.11	22.15	21.11
	15RB (0)	1908.5 (19185)	22.21	22.19	21.16
		1880 (18900)	22.14	22.16	21.12
		1851.5 (18615)	22.09	22.11	21.12
5MHz	1RB-High (24)	1907.5 (19175)	22.09	22.35	22.22
		1880 (18900)	22.01	22.26	22.25
		1852.5 (18625)	22.00	22.34	22.10
	1RB-Middle (12)	1907.5 (19175)	22.33	22.51	22.39
		1880 (18900)	22.35	22.60	22.46
		1852.5 (18625)	22.19	22.57	22.35
	1RB-Low (0)	1907.5 (19175)	22.09	22.35	22.27
		1880 (18900)	22.01	22.31	22.15
		1852.5 (18625)	21.99	22.27	22.10
	12RB-High (13)	1907.5 (19175)	22.21	22.17	21.19
		1880 (18900)	22.15	22.17	21.18
		1852.5 (18625)	22.16	22.14	21.16
	12RB-Middle (6)	1907.5 (19175)	22.27	22.22	21.25
		1880 (18900)	22.17	22.18	21.23
		1852.5 (18625)	22.16	22.12	21.16
	12RB-Low (0)	1907.5 (19175)	22.23	22.18	21.20
		1880 (18900)	22.16	22.14	21.16
		1852.5 (18625)	22.11	22.08	21.12
	25RB (0)	1907.5 (19175)	22.23	22.23	21.21
		1880 (18900)	22.16	22.17	21.17
		1852.5 (18625)	22.11	22.12	21.14
10MHz	1RB-High (49)	1905 (19150)	22.17	22.39	22.32
		1880 (18900)	22.11	22.34	22.22
		1855 (18650)	22.08	22.38	22.33
	1RB-Middle (24)	1905 (19150)	22.32	22.47	22.43
		1880 (18900)	22.22	22.50	22.43
		1855 (18650)	22.24	22.54	22.29
	1RB-Low (0)	1905 (19150)	22.19	22.31	22.26
		1880 (18900)	22.13	22.41	22.37
		1855 (18650)	22.10	22.38	22.27
	25RB-High (25)	1905 (19150)	22.25	22.25	21.22
		1880 (18900)	22.22	22.24	21.23
		1855 (18650)	22.21	22.25	21.22
	25RB-Middle (12)	1905 (19150)	22.31	22.26	21.28
		1880 (18900)	22.18	22.19	21.19
		1855 (18650)	22.20	22.21	21.18
	25RB-Low (0)	1905 (19150)	22.38	22.33	21.34

		1880 (18900)	22.22	22.22	21.20
		1855 (18650)	22.16	22.18	21.17
	50RB (0)	1905 (19150)	22.31	22.30	21.30
		1880 (18900)	22.24	22.23	21.25
		1855 (18650)	22.21	22.23	21.21
15MHz	1RB-High (74)	1902.5 (19125)	22.12	22.41	22.20
		1880 (18900)	22.09	22.38	22.23
		1857.5 (18675)	22.03	22.34	22.14
	1RB-Middle (37)	1902.5 (19125)	22.15	22.47	22.31
		1880 (18900)	22.16	22.38	22.29
		1857.5 (18675)	22.11	22.40	22.25
	1RB-Low (0)	1902.5 (19125)	22.12	22.41	22.22
		1880 (18900)	22.03	22.24	22.23
		1857.5 (18675)	22.01	22.32	22.25
	36RB-High (38)	1902.5 (19125)	22.27	22.22	21.22
		1880 (18900)	22.20	22.17	21.17
		1857.5 (18675)	22.16	22.18	21.17
	36RB-Middle (19)	1902.5 (19125)	22.29	22.24	21.27
		1880 (18900)	22.20	22.18	21.17
		1857.5 (18675)	22.16	22.18	21.17
	36RB-Low (0)	1902.5 (19125)	22.28	22.27	21.24
		1880 (18900)	22.21	22.19	21.21
		1857.5 (18675)	22.14	22.12	21.12
	75RB (0)	1902.5 (19125)	22.29	22.26	21.26
		1880 (18900)	22.18	22.20	21.18
		1857.5 (18675)	22.17	22.18	21.15
20MHz	1RB-High (99)	1900 (19100)	21.91	22.21	21.98
		1880 (18900)	21.83	22.09	22.03
		1860 (18700)	21.83	22.17	21.93
	1RB-Middle (50)	1900 (19100)	22.19	22.51	22.39
		1880 (18900)	22.20	22.40	22.37
		1860 (18700)	22.21	22.50	22.35
	1RB-Low (0)	1900 (19100)	21.89	22.17	22.09
		1880 (18900)	21.87	22.19	22.04
		1860 (18700)	21.85	22.18	22.06
	50RB-High (50)	1900 (19100)	22.13	22.11	21.12
		1880 (18900)	22.19	22.22	21.23
		1860 (18700)	22.23	22.20	21.20
	50RB-Middle (25)	1900 (19100)	22.22	22.21	21.21
		1880 (18900)	22.16	22.16	21.17
		1860 (18700)	22.14	22.16	21.14
	50RB-Low (0)	1900 (19100)	22.18	22.17	21.19

		1880 (18900)	22.14	22.15	21.15
		1860 (18700)	22.13	22.13	21.12
	100RB (0)	1900 (19100)	22.15	22.15	21.13
		1880 (18900)	22.17	22.17	21.16
		1860 (18700)	22.18	22.16	21.14

LTE Band7(Power Level A1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2567.5 (21425)	23.47	22.77	21.61
		2535 (21100)	23.46	22.70	21.59
		2502.5 (20775)	23.76	23.05	21.85
	1RB-Middle (12)	2567.5 (21425)	23.79	22.99	22.02
		2535 (21100)	23.78	22.91	21.86
		2502.5 (20775)	24.08	23.23	22.13
	1RB-Low (0)	2567.5 (21425)	23.47	22.73	21.64
		2535 (21100)	23.53	22.69	21.71
		2502.5 (20775)	23.73	22.84	21.88
	12RB-High (13)	2567.5 (21425)	22.65	21.57	20.61
		2535 (21100)	22.61	21.53	20.62
		2502.5 (20775)	22.89	21.87	20.88
	12RB-Middle (6)	2567.5 (21425)	22.68	21.66	20.67
		2535 (21100)	22.67	21.65	20.71
		2502.5 (20775)	22.92	21.88	20.92
	12RB-Low (0)	2567.5 (21425)	22.59	21.57	20.57
		2535 (21100)	22.63	21.56	20.64
		2502.5 (20775)	22.90	21.85	20.86
	25RB (0)	2567.5 (21425)	22.62	21.62	20.61
		2535 (21100)	22.63	21.64	20.64
		2502.5 (20775)	22.90	21.86	20.88
10MHz	1RB-High (49)	2565 (21400)	23.57	22.83	21.68
		2535 (21100)	23.56	22.85	21.61
		2505 (20800)	23.86	23.13	22.00
	1RB-Middle (24)	2565 (21400)	23.72	22.97	21.82
		2535 (21100)	23.74	22.99	21.81
		2505 (20800)	24.03	23.27	22.12
	1RB-Low (0)	2565 (21400)	23.58	22.80	21.70
		2535 (21100)	23.66	22.93	21.79
		2505 (20800)	23.85	23.10	21.97
	25RB-High (25)	2565 (21400)	22.77	21.73	20.72
		2535 (21100)	22.70	21.70	20.67
		2505 (20800)	22.96	21.94	20.88
	25RB-Middle (12)	2565 (21400)	22.68	21.67	20.66

		2535 (21100)	22.70	21.69	20.72
		2505 (20800)	22.95	21.95	20.96
		2565 (21400)	22.64	21.64	20.60
	25RB-Low (0)	2535 (21100)	22.69	21.72	20.66
		2505 (20800)	23.01	21.98	20.94
		2565 (21400)	22.67	21.67	20.65
	50RB (0)	2535 (21100)	22.70	21.69	20.65
		2505 (20800)	22.98	21.95	20.93
		2565 (21400)	22.67	21.67	20.65
15MHz	1RB-High (74)	2562.5 (21375)	23.50	22.76	21.66
		2535 (21100)	23.45	22.68	21.59
		2507.5 (20825)	23.73	23.00	21.85
	1RB-Middle (37)	2562.5 (21375)	23.58	22.79	21.78
		2535 (21100)	23.63	22.88	21.76
		2507.5 (20825)	23.89	23.17	22.02
	1RB-Low (0)	2562.5 (21375)	23.48	22.70	21.69
		2535 (21100)	23.63	22.94	21.71
		2507.5 (20825)	23.78	23.05	21.94
	36RB-High (38)	2562.5 (21375)	22.70	21.63	20.66
		2535 (21100)	22.67	21.60	20.62
		2507.5 (20825)	22.94	21.88	20.86
	36RB-Middle (19)	2562.5 (21375)	22.65	21.61	20.63
		2535 (21100)	22.72	21.62	20.68
		2507.5 (20825)	22.92	21.89	20.94
	36RB-Low (0)	2562.5 (21375)	22.63	21.56	20.59
		2535 (21100)	22.69	21.62	20.64
		2507.5 (20825)	22.93	21.88	20.91
	75RB (0)	2562.5 (21375)	22.67	21.65	20.59
		2535 (21100)	22.67	21.61	20.63
		2507.5 (20825)	22.94	21.90	20.87
20MHz	1RB-High (99)	2560 (21350)	23.44	22.76	21.60
		2535 (21100)	23.49	22.77	21.56
		2510 (20850)	23.68	22.93	21.80
	1RB-Middle (50)	2560 (21350)	23.82	22.94	21.92
		2535 (21100)	23.91	23.09	22.05
		2510 (20850)	24.08	23.19	22.24
	1RB-Low (0)	2560 (21350)	23.51	22.76	21.64
		2535 (21100)	23.71	22.92	21.76
		2510 (20850)	23.67	22.95	21.83
	50RB-High (50)	2560 (21350)	22.87	21.85	20.85
		2535 (21100)	22.87	21.82	20.84
		2510 (20850)	23.05	22.05	21.05
	50RB-Middle (25)	2560 (21350)	22.83	21.79	20.81

		2535 (21100)	22.89	21.85	20.84
		2510 (20850)	23.02	21.98	21.02
	50RB-Low (0)	2560 (21350)	22.83	21.79	20.82
		2535 (21100)	22.83	21.78	20.80
		2510 (20850)	23.09	22.07	21.11
	100RB (0)	2560 (21350)	22.84	21.83	20.88
		2535 (21100)	22.86	21.79	20.81
		2510 (20850)	23.06	22.01	21.05

LTE Band7(Power Level B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2567.5 (21425)	20.47	20.84	20.60
		2535 (21100)	20.47	20.78	20.69
		2502.5 (20775)	20.78	20.97	20.86
	1RB-Middle (12)	2567.5 (21425)	20.77	21.08	20.91
		2535 (21100)	20.80	21.17	20.88
		2502.5 (20775)	21.04	21.36	21.19
	1RB-Low (0)	2567.5 (21425)	20.46	20.70	20.59
		2535 (21100)	20.52	20.79	20.72
		2502.5 (20775)	20.74	21.05	20.98
	12RB-High (13)	2567.5 (21425)	20.60	20.57	20.62
		2535 (21100)	20.58	20.59	20.59
		2502.5 (20775)	20.85	20.83	20.87
	12RB-Middle (6)	2567.5 (21425)	20.66	20.66	20.66
		2535 (21100)	20.67	20.68	20.71
		2502.5 (20775)	20.93	20.91	20.92
	12RB-Low (0)	2567.5 (21425)	20.58	20.54	20.58
		2535 (21100)	20.59	20.60	20.63
		2502.5 (20775)	20.85	20.86	20.86
	25RB (0)	2567.5 (21425)	20.61	20.62	20.61
		2535 (21100)	20.61	20.62	20.60
		2502.5 (20775)	20.86	20.85	20.83
10MHz	1RB-High (49)	2565 (21400)	20.57	20.90	20.76
		2535 (21100)	20.57	20.93	20.70
		2505 (20800)	20.83	21.13	21.00
	1RB-Middle (24)	2565 (21400)	20.73	20.94	20.83
		2535 (21100)	20.72	21.14	20.96
		2505 (20800)	21.01	21.40	21.15
	1RB-Low (0)	2565 (21400)	20.55	20.73	20.75
		2535 (21100)	20.63	21.02	20.79
		2505 (20800)	20.85	21.20	20.98

	25RB-High (25)	2565 (21400)	20.71	20.72	20.71
		2535 (21100)	20.67	20.70	20.70
		2505 (20800)	20.90	20.90	20.89
	25RB-Middle (12)	2565 (21400)	20.66	20.68	20.65
		2535 (21100)	20.69	20.70	20.71
		2505 (20800)	20.97	20.96	20.94
	25RB-Low (0)	2565 (21400)	20.61	20.63	20.60
		2535 (21100)	20.64	20.65	20.65
		2505 (20800)	20.94	20.97	20.93
	50RB (0)	2565 (21400)	20.63	20.68	20.64
		2535 (21100)	20.67	20.66	20.66
		2505 (20800)	20.93	20.92	20.92
15MHz	1RB-High (74)	2562.5 (21375)	20.49	20.78	20.58
		2535 (21100)	20.44	20.79	20.60
		2507.5 (20825)	20.70	21.06	20.84
	1RB-Middle (37)	2562.5 (21375)	20.58	20.86	20.75
		2535 (21100)	20.62	20.89	20.78
		2507.5 (20825)	20.85	21.17	21.09
	1RB-Low (0)	2562.5 (21375)	20.46	20.65	20.66
		2535 (21100)	20.63	21.02	20.81
		2507.5 (20825)	20.76	21.13	20.97
	36RB-High (38)	2562.5 (21375)	20.66	20.64	20.66
		2535 (21100)	20.62	20.63	20.66
		2507.5 (20825)	20.88	20.87	20.86
	36RB-Middle (19)	2562.5 (21375)	20.66	20.58	20.64
		2535 (21100)	20.67	20.65	20.69
		2507.5 (20825)	20.91	20.89	20.90
	36RB-Low (0)	2562.5 (21375)	20.60	20.57	20.60
		2535 (21100)	20.66	20.66	20.67
		2507.5 (20825)	20.91	20.90	20.88
	75RB (0)	2562.5 (21375)	20.62	20.63	20.61
		2535 (21100)	20.65	20.64	20.64
		2507.5 (20825)	20.89	20.89	20.90
20MHz	1RB-High (99)	2560 (21350)	20.57	20.78	20.66
		2535 (21100)	20.52	20.84	20.64
		2510 (20850)	20.66	21.02	20.86
	1RB-Middle (50)	2560 (21350)	20.81	21.12	20.91
		2535 (21100)	20.79	21.18	21.08
		2510 (20850)	21.06	21.38	21.24
	1RB-Low (0)	2560 (21350)	20.51	20.91	20.74
		2535 (21100)	20.54	21.06	20.88
		2510 (20850)	20.66	20.95	20.82

	50RB-High (50)	2560 (21350)	20.88	20.89	20.87
		2535 (21100)	20.82	20.86	20.85
		2510 (20850)	21.05	21.06	21.06
	50RB-Middle (25)	2560 (21350)	20.81	20.82	20.83
		2535 (21100)	20.88	20.91	20.87
		2510 (20850)	21.00	21.01	21.01
	50RB-Low (0)	2560 (21350)	20.82	20.86	20.85
		2535 (21100)	20.82	20.83	20.84
		2510 (20850)	21.10	21.10	21.12
	100RB (0)	2560 (21350)	20.86	20.86	20.85
		2535 (21100)	20.83	20.84	20.85
		2510 (20850)	21.07	21.06	21.07

LTE Band12(Power Level A1/B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	715.3	24.15	23.25	22.29
		707.5	24.07	23.30	22.20
		699.7	23.95	23.12	22.06
	1RB-Middle (3)	715.3	24.27	23.42	22.39
		707.5	24.20	23.44	22.34
		699.7	24.03	23.23	22.24
	1RB-Low (0)	715.3	24.13	23.20	22.34
		707.5	24.05	23.27	22.18
		699.7	23.92	23.04	22.20
	3RB-High (3)	715.3	24.20	23.10	22.29
		707.5	24.15	23.03	22.19
		699.7	24.03	22.97	22.17
	3RB-Middle (1)	715.3	24.30	23.13	22.34
		707.5	24.20	23.07	22.28
		699.7	24.10	23.01	22.19
	3RB-Low (0)	715.3	24.26	23.08	22.29
		707.5	24.12	23.00	22.23
		699.7	24.03	22.96	22.15
	6RB (0)	715.3	23.27	22.35	21.26
		707.5	23.14	22.15	21.20
		699.7	23.10	22.13	21.16
3MHz	1RB-High (14)	714.5	24.17	23.29	22.25
		707.5	24.15	23.42	22.33
		700.5	24.08	23.22	22.27
	1RB-Middle (7)	714.5	24.39	23.44	22.40
		707.5	24.32	23.48	22.48
		700.5	24.19	23.36	22.32

	1RB-Low (0)	714.5	24.19	23.32	22.36
		707.5	24.11	23.29	22.32
		700.5	24.02	23.18	22.20
	8RB-High (7)	714.5	23.17	22.26	21.27
		707.5	23.17	22.21	21.26
		700.5	23.11	22.10	21.22
	8RB-Middle (4)	714.5	23.25	22.30	21.30
		707.5	23.15	22.21	21.27
		700.5	23.11	22.13	21.23
	8RB-Low (0)	714.5	23.21	22.29	21.27
		707.5	23.17	22.25	21.29
		700.5	23.06	22.10	21.22
	15RB (0)	714.5	23.23	22.25	21.23
		707.5	23.20	22.18	21.21
		700.5	23.11	22.09	21.17
5MHz	1RB-High (24)	713.5	24.07	23.21	22.23
		707.5	24.08	23.24	22.31
		701.5	23.99	23.24	22.09
	1RB-Middle (12)	713.5	24.46	23.54	22.54
		707.5	24.24	23.52	22.43
		701.5	24.28	23.29	22.35
	1RB-Low (0)	713.5	24.09	23.20	22.27
		707.5	23.99	23.23	22.16
		701.5	23.95	23.13	22.08
	12RB-High (13)	713.5	23.18	22.19	21.19
		707.5	23.17	22.11	21.22
		701.5	23.16	22.13	21.25
	12RB-Middle (6)	713.5	23.29	22.30	21.30
		707.5	23.24	22.22	21.28
		701.5	23.19	22.13	21.26
	12RB-Low (0)	713.5	23.26	22.20	21.31
		707.5	23.21	22.17	21.29
		701.5	23.05	22.05	21.16
	25RB (0)	713.5	23.24	22.27	21.26
		707.5	23.24	22.22	21.25
		701.5	23.16	22.14	21.22
10MHz	1RB-High (49)	711	24.32	23.34	22.31
		707.5	24.15	23.30	22.24
		704	24.13	23.38	22.31
	1RB-Middle (24)	711	24.31	23.52	22.43
		707.5	24.23	23.48	22.41
		704	24.21	23.47	22.37

	1RB-Low (0)	711	24.16	23.28	22.34
		707.5	24.12	23.27	22.34
		704	24.03	23.19	22.22
	25RB-High (25)	711	23.30	22.24	21.25
		707.5	23.18	22.16	21.22
		704	23.15	22.15	21.23
	25RB-Middle (12)	711	23.25	22.24	21.30
		707.5	23.26	22.21	21.32
		704	23.20	22.21	21.25
	25RB-Low (0)	711	23.29	22.26	21.32
		707.5	23.26	22.24	21.30
		704	23.11	22.09	21.16
	50RB (0)	711	23.26	22.22	21.29
		707.5	23.24	22.20	21.28
		704	23.18	22.17	21.21

LTE Band13(Power Level A1/B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	784.5 (23255)	23.98	23.23	22.22
		782 (23230)	23.99	23.21	22.15
		779.5 (23205)	24.02	23.26	22.17
	1RB-Middle (12)	784.5 (23255)	24.20	23.41	22.48
		782 (23230)	24.29	23.51	22.48
		779.5 (23205)	24.31	23.49	22.53
	1RB-Low (0)	784.5 (23255)	24.05	23.25	22.24
		782 (23230)	24.09	23.29	22.31
		779.5 (23205)	24.10	23.29	22.28
	12RB-High (13)	784.5 (23255)	23.14	22.10	21.20
		782 (23230)	23.11	22.10	21.19
		779.5 (23205)	23.15	22.14	21.25
	12RB-Middle (6)	784.5 (23255)	23.19	22.16	21.26
		782 (23230)	23.25	22.22	21.25
		779.5 (23205)	23.23	22.23	21.32
	12RB-Low (0)	784.5 (23255)	23.21	22.20	21.29
		782 (23230)	23.23	22.21	21.27
		779.5 (23205)	23.20	22.21	21.30
	25RB (0)	784.5 (23255)	23.19	22.21	21.26
		782 (23230)	23.19	22.16	21.25
		779.5 (23205)	23.20	22.18	21.27
10MHz	1RB-High (49)	782 (23230)	24.04	23.22	22.31
	1RB-Middle (24)	782 (23230)	24.27	23.52	22.42
	1RB-Low (0)	782 (23230)	24.23	23.44	22.44

	25RB-High (25)	782 (23230)	23.20	22.21	21.25
	25RB-Middle (12)	782 (23230)	23.27	22.24	21.31
	25RB-Low (0)	782 (23230)	23.30	22.28	21.32
	50RB (0)	782 (23230)	23.26	22.25	21.29

LTE Band26(Power Level A1/B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	848.3 (27033)	24.19	23.41	22.32
		831.5 (26865)	24.13	23.27	22.39
		814.7 (26697)	24.13	23.28	22.30
	1RB-Middle (3)	848.3 (27033)	24.29	23.49	22.52
		831.5 (26865)	24.27	23.47	22.36
		814.7 (26697)	24.23	23.51	22.46
	1RB-Low (0)	848.3 (27033)	24.15	23.36	22.38
		831.5 (26865)	24.11	23.38	22.33
		814.7 (26697)	24.12	23.30	22.34
	3RB-High (3)	848.3 (27033)	24.30	23.13	22.34
		831.5 (26865)	24.24	23.18	22.30
		814.7 (26697)	24.24	23.20	22.33
	3RB-Middle (1)	848.3 (27033)	24.34	23.28	22.42
		831.5 (26865)	24.26	23.20	22.39
		814.7 (26697)	24.31	23.22	22.40
	3RB-Low (0)	848.3 (27033)	24.27	23.28	22.47
		831.5 (26865)	24.22	23.20	22.33
		814.7 (26697)	24.25	23.21	22.34
	6RB (0)	848.3 (27033)	23.34	22.42	21.34
		831.5 (26865)	23.31	22.36	21.29
		814.7 (26697)	23.33	22.41	21.31
3MHz	1RB-High (14)	847.5 (27025)	24.24	23.45	22.44
		831.5 (26865)	24.21	23.43	22.44
		815.5 (26705)	24.23	23.55	22.43
	1RB-Middle (7)	847.5 (27025)	24.47	23.74	22.69
		831.5 (26865)	24.38	23.61	22.57
		815.5 (26705)	24.37	23.63	22.63
	1RB-Low (0)	847.5 (27025)	24.25	23.56	22.52
		831.5 (26865)	24.17	23.52	22.43
		815.5 (26705)	24.21	23.47	22.46
	8RB-High (7)	847.5 (27025)	23.33	22.38	21.42
		831.5 (26865)	23.28	22.37	21.38
		815.5 (26705)	23.33	22.40	21.40
	8RB-Middle (4)	847.5 (27025)	23.33	22.42	21.41
		831.5 (26865)	23.26	22.35	21.39

			815.5 (26705)	23.33	22.39	21.38
		8RB-Low (0)	847.5 (27025)	23.33	22.44	21.41
			831.5 (26865)	23.26	22.35	21.32
			815.5 (26705)	23.32	22.37	21.39
		15RB (0)	847.5 (27025)	23.35	22.34	21.36
			831.5 (26865)	23.33	22.36	21.33
			815.5 (26705)	23.35	22.35	21.37
5MHz	1RB-High (24)		846.5 (27015)	24.12	23.25	22.24
			831.5 (26865)	24.10	23.31	22.33
			816.5 (26715)	24.11	23.31	22.39
	1RB-Middle (12)		846.5 (27015)	24.50	23.71	22.65
			831.5 (26865)	24.29	23.48	22.59
			816.5 (26715)	24.31	23.55	22.57
	1RB-Low (0)		846.5 (27015)	24.13	23.53	22.42
			831.5 (26865)	24.08	23.37	22.41
			816.5 (26715)	24.09	23.41	22.34
	12RB-High (13)		846.5 (27015)	23.33	22.32	21.37
			831.5 (26865)	23.27	22.25	21.32
			816.5 (26715)	23.27	22.28	21.29
	12RB-Middle (6)		846.5 (27015)	23.39	22.39	21.40
			831.5 (26865)	23.32	22.33	21.36
			816.5 (26715)	23.31	22.34	21.37
	12RB-Low (0)		846.5 (27015)	23.34	22.34	21.37
			831.5 (26865)	23.31	22.30	21.33
			816.5 (26715)	23.30	22.28	21.34
	25RB (0)		846.5 (27015)	23.35	22.39	21.40
			831.5 (26865)	23.35	22.34	21.36
			816.5 (26715)	23.35	22.33	21.38
10MHz	1RB-High (49)		844 (26990)	24.21	23.49	22.46
			831.5 (26865)	24.20	23.46	22.48
			820 (26750)	24.17	23.44	22.44
	1RB-Middle (24)		844 (26990)	24.35	23.60	22.64
			831.5 (26865)	24.28	23.50	22.47
			820 (26750)	24.34	23.66	22.59
	1RB-Low (0)		844 (26990)	24.24	23.57	22.51
			831.5 (26865)	24.17	23.50	22.45
			820 (26750)	24.22	23.47	22.35
	25RB-High (25)		844 (26990)	23.40	22.40	21.41
			831.5 (26865)	23.30	22.32	21.34
			820 (26750)	23.41	22.44	21.47
	25RB-Middle (12)		844 (26990)	23.40	22.40	21.44
			831.5 (26865)	23.35	22.35	21.38

			820 (26750)	23.38	22.40	21.41
		25RB-Low (0)	844 (26990)	23.44	22.44	21.45
			831.5 (26865)	23.41	22.41	21.43
			820 (26750)	23.41	22.38	21.43
		50RB (0)	844 (26990)	23.41	22.41	21.42
			831.5 (26865)	23.40	22.38	21.42
			820 (26750)	23.44	22.42	21.46
15MHz	1RB-High (74)		841.5 (26965)	24.13	23.36	22.36
			831.5 (26865)	24.14	23.47	22.41
			822.5 (26775)	24.08	23.27	22.27
	1RB-Middle (37)		841.5 (26965)	24.25	23.53	22.55
			831.5 (26865)	24.26	23.36	22.37
			822.5 (26775)	24.23	23.50	22.49
	1RB-Low (0)		841.5 (26965)	24.16	23.37	22.36
			831.5 (26865)	24.15	23.35	22.34
			822.5 (26775)	24.11	23.34	22.32
	36RB-High (38)		841.5 (26965)	23.36	22.33	21.38
			831.5 (26865)	23.32	22.30	21.33
			822.5 (26775)	23.32	22.29	21.33
	36RB-Middle (19)		841.5 (26965)	23.37	22.34	21.39
			831.5 (26865)	23.40	22.32	21.35
			822.5 (26775)	23.39	22.36	21.38
	36RB-Low (0)		841.5 (26965)	23.37	22.34	21.41
			831.5 (26865)	23.33	22.31	21.31
			822.5 (26775)	23.35	22.33	21.39
	75RB (0)		841.5 (26965)	23.39	22.39	21.38
			831.5 (26865)	23.35	22.34	21.34
			822.5 (26775)	23.33	22.30	21.31

LTE Band41(Power Level A1/B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2687.5 (41565)	24.24	23.27	21.91
		2640.3(41093)	24.10	23.16	21.74
		2593 (40620)	24.25	23.28	21.95
		2545.8(40148)	24.14	23.11	21.73
		2498.5 (39675)	24.42	23.41	22.02
	1RB-Middle (12)	2687.5 (41565)	24.40	23.46	22.11
		2640.3(41093)	24.33	23.46	21.91
		2593 (40620)	24.31	23.50	22.07
		2545.8(40148)	24.26	23.26	21.91
		2498.5 (39675)	24.40	23.41	22.22
	1RB-Low (0)	2687.5 (41565)	24.25	23.31	21.94
		2640.3(41093)	24.19	23.21	21.82
		2593 (40620)	24.29	23.35	21.97
		2545.8(40148)	24.16	23.13	21.77
		2498.5 (39675)	24.41	23.41	22.01
	12RB-High (13)	2687.5 (41565)	23.32	22.28	21.33
		2640.3(41093)	23.17	22.13	21.07
		2593 (40620)	23.43	22.30	21.35
		2545.8(40148)	23.18	22.13	21.23
		2498.5 (39675)	23.47	22.44	21.32
	12RB-Middle (6)	2687.5 (41565)	23.37	22.35	21.40
		2640.3(41093)	23.26	22.18	21.23
		2593 (40620)	23.44	22.34	21.43
		2545.8(40148)	23.28	22.16	21.25
		2498.5 (39675)	23.46	22.43	21.44
	12RB-Low (0)	2687.5 (41565)	23.34	22.27	21.38
		2640.3(41093)	23.24	22.13	21.16
		2593 (40620)	23.44	22.34	21.33
		2545.8(40148)	23.20	22.13	21.19
		2498.5 (39675)	23.44	22.38	21.48
	25RB (0)	2687.5 (41565)	23.33	22.33	21.30
		2640.3(41093)	23.19	22.20	21.13
		2593 (40620)	23.37	22.36	21.35
		2545.8(40148)	23.17	22.16	21.23
		2498.5 (39675)	23.44	22.42	21.48
10MHz	1RB-High (49)	2685 (41540)	24.31	23.30	21.96
		2639(41080)	24.17	23.21	21.84
		2593 (40620)	24.35	23.35	21.98
		2547(40160)	24.15	23.15	21.82

	1RB-Middle (24)	2501 (39700)	24.48	23.47	22.06
		2685 (41540)	24.46	23.48	22.12
		2639(41080)	24.36	23.29	22.01
		2593 (40620)	24.43	23.40	22.16
		2547(40160)	24.34	23.38	21.97
	1RB-Low (0)	2501 (39700)	24.41	23.42	22.22
		2685 (41540)	24.36	23.42	22.05
		2639(41080)	24.29	23.28	21.92
		2593 (40620)	24.37	23.45	22.05
		2547(40160)	24.25	23.25	21.89
	25RB-High (25)	2501 (39700)	24.44	23.47	22.09
		2685 (41540)	23.33	22.34	21.40
		2639(41080)	23.19	22.15	21.20
		2593 (40620)	23.41	22.37	21.41
		2547(40160)	23.23	22.22	21.28
	25RB-Middle (12)	2501 (39700)	23.49	22.45	21.39
		2685 (41540)	23.39	22.41	21.41
		2639(41080)	23.25	22.24	21.29
		2593 (40620)	23.42	22.38	21.44
		2547(40160)	23.23	22.18	21.29
	25RB-Low (0)	2501 (39700)	23.46	22.49	21.45
		2685 (41540)	23.44	22.37	21.37
		2639(41080)	23.28	22.32	21.28
		2593 (40620)	23.40	22.36	21.37
		2547(40160)	23.19	22.21	21.25
	50RB (0)	2501 (39700)	23.47	22.46	21.43
		2685 (41540)	23.26	22.37	21.31
		2639(41080)	23.21	22.23	21.15
		2593 (40620)	23.33	22.34	21.30
		2547(40160)	23.11	22.18	21.19
15MHz	1RB-High (74)	2501 (39700)	23.36	22.43	21.46
		2682.5 (41515)	24.18	23.24	21.87
		2637.8(41068)	24.09	23.10	21.70
		2593 (40620)	24.27	23.27	21.89
		2548.3(40173)	24.06	23.04	21.69
	1RB-Middle (37)	2503.5 (39725)	24.33	23.34	21.98
		2682.5 (41515)	24.33	23.39	22.00
		2637.8(41068)	24.24	23.28	21.87
		2593 (40620)	24.36	23.39	22.03
		2548.3(40173)	24.22	23.20	21.85
	1RB-Low (0)	2503.5 (39725)	24.48	23.43	22.14
		2682.5 (41515)	24.25	23.29	21.92

			2637.8(41068)	24.25	23.24	21.85
			2593 (40620)	24.31	23.32	21.92
			2548.3(40173)	24.17	23.17	21.79
			2503.5 (39725)	24.37	23.37	21.98
			2682.5 (41515)	23.34	22.29	21.33
		36RB-High (38)	2637.8(41068)	23.24	22.15	21.13
			2593 (40620)	23.43	22.33	21.33
			2548.3(40173)	23.21	22.14	21.17
			2503.5 (39725)	23.50	22.41	21.43
			2682.5 (41515)	23.35	22.33	21.29
		36RB-Middle (19)	2637.8(41068)	23.27	22.18	21.18
			2593 (40620)	23.44	22.35	21.35
			2548.3(40173)	23.21	22.10	21.18
			2503.5 (39725)	23.44	22.42	21.42
			2682.5 (41515)	23.35	22.32	21.34
		36RB-Low (0)	2637.8(41068)	23.34	22.24	21.22
			2593 (40620)	23.41	22.35	21.28
			2548.3(40173)	23.17	22.14	21.16
			2503.5 (39725)	23.41	22.37	21.41
			2682.5 (41515)	23.26	22.32	21.30
		75RB (0)	2637.8(41068)	23.22	22.20	21.15
			2593 (40620)	23.38	22.29	21.31
			2548.3(40173)	23.11	22.11	21.14
			2503.5 (39725)	23.39	22.37	21.39
			2680 (41490)	24.15	23.15	21.83
20MHz		1RB-High (99)	2636.5(41055)	24.01	23.08	21.67
			2593 (40620)	24.19	23.17	21.79
			2549.5(40185)	24.06	23.06	21.66
			2506 (39750)	24.29	23.26	21.84
			2680 (41490)	24.50	23.47	22.11
		1RB-Middle (50)	2636.5(41055)	24.45	23.49	22.05
			2593 (40620)	24.49	23.46	22.14
			2549.5(40185)	24.44	23.39	22.05
			2506 (39750)	24.49	23.44	22.26
			2680 (41490)	24.21	23.24	21.87
		1RB-Low (0)	2636.5(41055)	24.25	23.26	21.85
			2593 (40620)	24.26	23.27	21.85
			2549.5(40185)	24.26	23.20	21.84
			2506 (39750)	24.25	23.25	21.82
			2680 (41490)	23.38	22.38	21.36
		50RB-High (50)	2636.5(41055)	23.27	22.26	21.19
			2593 (40620)	23.44	22.45	21.40

		2549.5(40185)	23.27	22.27	21.33
		2506 (39750)	23.47	22.45	21.46
	50RB-Middle (25)	2680 (41490)	23.43	22.42	21.37
		2636.5(41055)	23.34	22.35	21.34
		2593 (40620)	23.38	22.38	21.33
		2549.5(40185)	23.27	22.26	21.23
		2506 (39750)	23.47	22.42	21.43
	50RB-Low (0)	2680 (41490)	23.50	22.44	21.41
		2636.5(41055)	23.40	22.41	21.38
		2593 (40620)	23.39	22.37	21.34
		2549.5(40185)	23.21	22.21	21.23
		2506 (39750)	23.38	22.39	21.37
	100RB (0)	2680 (41490)	23.41	22.45	21.46
		2636.5(41055)	23.42	22.41	21.34
		2593 (40620)	23.46	22.47	21.45
		2549.5(40185)	23.31	22.32	21.32
		2506 (39750)	23.41	22.50	21.49

LTE Band66(Power Level A1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1779.3 (132665)	20.01	20.35	20.16
		1745 (132322)	20.02	20.33	20.24
		1710.7 (131979)	19.97	20.36	20.28
	1RB-Middle (3)	1779.3 (132665)	20.13	20.47	20.38
		1745 (132322)	20.19	20.47	20.40
		1710.7 (131979)	20.11	20.47	20.31
	1RB-Low (0)	1779.3 (132665)	20.01	20.27	20.28
		1745 (132322)	20.02	20.29	20.29
		1710.7 (131979)	20.03	20.41	20.25
	3RB-High (3)	1779.3 (132665)	20.10	20.13	20.23
		1745 (132322)	20.11	20.09	20.19
		1710.7 (131979)	20.11	20.05	20.20
	3RB-Middle (1)	1779.3 (132665)	20.15	20.17	20.24
		1745 (132322)	20.15	20.13	20.32
		1710.7 (131979)	20.17	20.20	20.25
	3RB-Low (0)	1779.3 (132665)	20.06	20.16	20.19
		1745 (132322)	20.14	20.11	20.18
		1710.7 (131979)	20.12	20.17	20.20
	6RB (0)	1779.3 (132665)	20.08	20.20	20.11
		1745 (132322)	20.10	20.19	20.13
		1710.7 (131979)	20.10	20.24	20.09

3MHz	1RB-High (14)	1778.5 (132657)	20.04	20.42	20.24
		1745 (132322)	20.09	20.40	20.27
		1711.5 (131987)	20.04	20.27	20.28
	1RB-Middle (7)	1778.5 (132657)	20.21	20.64	20.43
		1745 (132322)	20.14	20.44	20.50
		1711.5 (131987)	20.23	20.64	20.53
	1RB-Low (0)	1778.5 (132657)	20.05	20.41	20.23
		1745 (132322)	20.04	20.37	20.30
		1711.5 (131987)	20.04	20.32	20.28
	8RB-High (7)	1778.5 (132657)	20.06	20.17	20.16
		1745 (132322)	20.11	20.17	20.11
		1711.5 (131987)	20.06	20.15	20.15
	8RB-Middle (4)	1778.5 (132657)	20.10	20.20	20.18
		1745 (132322)	20.13	20.20	20.19
		1711.5 (131987)	20.13	20.24	20.18
	8RB-Low (0)	1778.5 (132657)	20.06	20.17	20.14
		1745 (132322)	20.13	20.21	20.16
		1711.5 (131987)	20.08	20.17	20.17
	15RB (0)	1778.5 (132657)	20.07	20.09	20.08
		1745 (132322)	20.09	20.13	20.09
		1711.5 (131987)	20.06	20.13	20.09
5MHz	1RB-High (24)	1777.5 (132647)	19.90	20.24	20.17
		1745 (132322)	19.95	20.28	20.13
		1712.5 (131997)	19.93	20.22	20.11
	1RB-Middle (12)	1777.5 (132647)	20.28	20.50	20.38
		1745 (132322)	20.25	20.60	20.48
		1712.5 (131997)	20.19	20.59	20.42
	1RB-Low (0)	1777.5 (132647)	19.99	20.30	20.15
		1745 (132322)	19.98	20.21	20.13
		1712.5 (131997)	19.94	20.37	20.18
	12RB-High (13)	1777.5 (132647)	20.10	20.12	20.16
		1745 (132322)	20.08	20.12	20.14
		1712.5 (131997)	20.06	20.08	20.12
	12RB-Middle (6)	1777.5 (132647)	20.13	20.15	20.19
		1745 (132322)	20.16	20.16	20.19
		1712.5 (131997)	20.14	20.14	20.17
	12RB-Low (0)	1777.5 (132647)	20.11	20.09	20.15
		1745 (132322)	20.12	20.16	20.18
		1712.5 (131997)	20.10	20.11	20.15
	25RB (0)	1777.5 (132647)	20.11	20.14	20.11
		1745 (132322)	20.11	20.16	20.17
		1712.5 (131997)	20.10	20.15	20.13

10MHz	1RB-High (49)	1775 (132622)	20.00	20.34	20.27
		1745 (132322)	20.06	20.40	20.27
		1715 (132022)	20.04	20.37	20.24
	1RB-Middle (24)	1775 (132622)	20.16	20.45	20.33
		1745 (132322)	20.16	20.41	20.46
		1715 (132022)	20.17	20.43	20.38
	1RB-Low (0)	1775 (132622)	20.08	20.33	20.30
		1745 (132322)	20.07	20.32	20.22
		1715 (132022)	20.10	20.31	20.24
	25RB-High (25)	1775 (132622)	20.10	20.20	20.18
		1745 (132322)	20.05	20.18	20.16
		1715 (132022)	20.12	20.23	20.23
	25RB-Middle (12)	1775 (132622)	20.13	20.17	20.17
		1745 (132322)	20.12	20.18	20.19
		1715 (132022)	20.12	20.15	20.15
	25RB-Low (0)	1775 (132622)	20.15	20.19	20.18
		1745 (132322)	20.15	20.20	20.20
		1715 (132022)	20.08	20.18	20.17
	50RB (0)	1775 (132622)	20.14	20.18	20.20
		1745 (132322)	20.08	20.18	20.19
		1715 (132022)	20.09	20.19	20.19
15MHz	1RB-High (74)	1772.5 (132597)	19.98	20.29	20.22
		1745 (132322)	19.98	20.25	20.12
		1717.5 (132047)	19.99	20.30	20.13
	1RB-Middle (37)	1772.5 (132597)	20.14	20.46	20.31
		1745 (132322)	20.11	20.41	20.27
		1717.5 (132047)	20.10	20.42	20.25
	1RB-Low (0)	1772.5 (132597)	20.00	20.40	20.17
		1745 (132322)	20.02	20.35	20.18
		1717.5 (132047)	20.01	20.36	20.19
	36RB-High (38)	1772.5 (132597)	20.13	20.15	20.16
		1745 (132322)	20.08	20.11	20.15
		1717.5 (132047)	20.14	20.18	20.21
	36RB-Middle (19)	1772.5 (132597)	20.15	20.16	20.16
		1745 (132322)	20.12	20.10	20.15
		1717.5 (132047)	20.14	20.15	20.19
	36RB-Low (0)	1772.5 (132597)	20.18	20.17	20.19
		1745 (132322)	20.15	20.13	20.19
		1717.5 (132047)	20.13	20.10	20.14
	75RB (0)	1772.5 (132597)	20.12	20.17	20.16
		1745 (132322)	20.11	20.18	20.19
		1717.5 (132047)	20.12	20.16	20.16

20MHz	1RB-High (99)	1770 (132572)	19.74	20.07	19.92
		1745 (132322)	19.74	19.96	19.95
		1720 (132072)	19.80	20.13	20.02
	1RB-Middle (50)	1770 (132572)	20.15	20.36	20.28
		1745 (132322)	20.12	20.52	20.35
		1720 (132072)	20.14	20.43	20.34
	1RB-Low (0)	1770 (132572)	19.74	20.15	19.90
		1745 (132322)	19.72	20.12	19.95
		1720 (132072)	19.81	20.09	20.05
	50RB-High (50)	1770 (132572)	20.01	20.06	20.05
		1745 (132322)	19.99	20.08	20.08
		1720 (132072)	20.07	20.11	20.12
	50RB-Middle (25)	1770 (132572)	20.06	20.12	20.10
		1745 (132322)	20.04	20.07	20.08
		1720 (132072)	20.06	20.11	20.13
	50RB-Low (0)	1770 (132572)	20.14	20.17	20.17
		1745 (132322)	20.10	20.12	20.12
		1720 (132072)	20.09	20.09	20.08
	100RB (0)	1770 (132572)	20.09	20.10	20.10
		1745 (132322)	20.05	20.08	20.07
		1720 (132072)	20.05	20.07	20.06

LTE Band66(Power Level B1)

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1779.3 (132665)	20.01	20.35	20.16
		1745 (132322)	20.02	20.33	20.24
		1710.7 (131979)	19.97	20.36	20.28
	1RB-Middle (3)	1779.3 (132665)	20.13	20.47	20.38
		1745 (132322)	20.19	20.47	20.40
		1710.7 (131979)	20.11	20.47	20.31
	1RB-Low (0)	1779.3 (132665)	20.01	20.27	20.28
		1745 (132322)	20.02	20.29	20.29
		1710.7 (131979)	20.03	20.41	20.25
	3RB-High (3)	1779.3 (132665)	20.10	20.13	20.23
		1745 (132322)	20.11	20.09	20.19
		1710.7 (131979)	20.11	20.05	20.20
	3RB-Middle (1)	1779.3 (132665)	20.15	20.17	20.24
		1745 (132322)	20.15	20.13	20.32
		1710.7 (131979)	20.17	20.20	20.25
	3RB-Low (0)	1779.3 (132665)	20.06	20.16	20.19
		1745 (132322)	20.14	20.11	20.18

	6RB (0)	1710.7 (131979)	20.12	20.17	20.20
		1779.3 (132665)	20.08	20.20	20.11
		1745 (132322)	20.10	20.19	20.13
		1710.7 (131979)	20.10	20.24	20.09
3MHz	1RB-High (14)	1778.5 (132657)	20.04	20.42	20.24
		1745 (132322)	20.09	20.40	20.27
		1711.5 (131987)	20.04	20.27	20.28
	1RB-Middle (7)	1778.5 (132657)	20.21	20.64	20.43
		1745 (132322)	20.14	20.44	20.50
		1711.5 (131987)	20.23	20.64	20.53
	1RB-Low (0)	1778.5 (132657)	20.05	20.41	20.23
		1745 (132322)	20.04	20.37	20.30
		1711.5 (131987)	20.04	20.32	20.28
	8RB-High (7)	1778.5 (132657)	20.06	20.17	20.16
		1745 (132322)	20.11	20.17	20.11
		1711.5 (131987)	20.06	20.15	20.15
	8RB-Middle (4)	1778.5 (132657)	20.10	20.20	20.18
		1745 (132322)	20.13	20.20	20.19
		1711.5 (131987)	20.13	20.24	20.18
	8RB-Low (0)	1778.5 (132657)	20.06	20.17	20.14
		1745 (132322)	20.13	20.21	20.16
		1711.5 (131987)	20.08	20.17	20.17
	15RB (0)	1778.5 (132657)	20.07	20.09	20.08
		1745 (132322)	20.09	20.13	20.09
		1711.5 (131987)	20.06	20.13	20.09
5MHz	1RB-High (24)	1777.5 (132647)	19.90	20.24	20.17
		1745 (132322)	19.95	20.28	20.13
		1712.5 (131997)	19.93	20.22	20.11
	1RB-Middle (12)	1777.5 (132647)	20.28	20.50	20.38
		1745 (132322)	20.25	20.60	20.48
		1712.5 (131997)	20.19	20.59	20.42
	1RB-Low (0)	1777.5 (132647)	19.99	20.30	20.15
		1745 (132322)	19.98	20.21	20.13
		1712.5 (131997)	19.94	20.37	20.18
	12RB-High (13)	1777.5 (132647)	20.10	20.12	20.16
		1745 (132322)	20.08	20.12	20.14
		1712.5 (131997)	20.06	20.08	20.12
	12RB-Middle (6)	1777.5 (132647)	20.13	20.15	20.19
		1745 (132322)	20.16	20.16	20.19
		1712.5 (131997)	20.14	20.14	20.17
	12RB-Low (0)	1777.5 (132647)	20.11	20.09	20.15
		1745 (132322)	20.12	20.16	20.18

	25RB (0)	1712.5 (131997)	20.10	20.11	20.15
		1777.5 (132647)	20.11	20.14	20.11
		1745 (132322)	20.11	20.16	20.17
		1712.5 (131997)	20.10	20.15	20.13
10MHz	1RB-High (49)	1775 (132622)	20.00	20.34	20.27
		1745 (132322)	20.06	20.40	20.27
		1715 (132022)	20.04	20.37	20.24
	1RB-Middle (24)	1775 (132622)	20.16	20.45	20.33
		1745 (132322)	20.16	20.41	20.46
		1715 (132022)	20.17	20.43	20.38
	1RB-Low (0)	1775 (132622)	20.08	20.33	20.30
		1745 (132322)	20.07	20.32	20.22
		1715 (132022)	20.10	20.31	20.24
	25RB-High (25)	1775 (132622)	20.10	20.20	20.18
		1745 (132322)	20.05	20.18	20.16
		1715 (132022)	20.12	20.23	20.23
	25RB-Middle (12)	1775 (132622)	20.13	20.17	20.17
		1745 (132322)	20.12	20.18	20.19
		1715 (132022)	20.12	20.15	20.15
	25RB-Low (0)	1775 (132622)	20.15	20.19	20.18
		1745 (132322)	20.15	20.20	20.20
		1715 (132022)	20.08	20.18	20.17
	50RB (0)	1775 (132622)	20.14	20.18	20.20
		1745 (132322)	20.08	20.18	20.19
		1715 (132022)	20.09	20.19	20.19
15MHz	1RB-High (74)	1772.5 (132597)	19.98	20.29	20.22
		1745 (132322)	19.98	20.25	20.12
		1717.5 (132047)	19.99	20.30	20.13
	1RB-Middle (37)	1772.5 (132597)	20.14	20.46	20.31
		1745 (132322)	20.11	20.41	20.27
		1717.5 (132047)	20.10	20.42	20.25
	1RB-Low (0)	1772.5 (132597)	20.00	20.40	20.17
		1745 (132322)	20.02	20.35	20.18
		1717.5 (132047)	20.01	20.36	20.19
	36RB-High (38)	1772.5 (132597)	20.13	20.15	20.16
		1745 (132322)	20.08	20.11	20.15
		1717.5 (132047)	20.14	20.18	20.21
	36RB-Middle (19)	1772.5 (132597)	20.15	20.16	20.16
		1745 (132322)	20.12	20.10	20.15
		1717.5 (132047)	20.14	20.15	20.19
	36RB-Low (0)	1772.5 (132597)	20.18	20.17	20.19
		1745 (132322)	20.15	20.13	20.19

		1717.5 (132047)	20.13	20.10	20.14
	75RB (0)	1772.5 (132597)	20.12	20.17	20.16
		1745 (132322)	20.11	20.18	20.19
		1717.5 (132047)	20.12	20.16	20.16
20MHz	1RB-High (99)	1770 (132572)	19.74	20.07	19.92
		1745 (132322)	19.74	19.96	19.95
		1720 (132072)	19.80	20.13	20.02
	1RB-Middle (50)	1770 (132572)	20.15	20.36	20.28
		1745 (132322)	20.12	20.52	20.35
		1720 (132072)	20.14	20.43	20.34
	1RB-Low (0)	1770 (132572)	19.74	20.15	19.90
		1745 (132322)	19.72	20.12	19.95
		1720 (132072)	19.81	20.09	20.05
	50RB-High (50)	1770 (132572)	20.01	20.06	20.05
		1745 (132322)	19.99	20.08	20.08
		1720 (132072)	20.07	20.11	20.12
	50RB-Middle (25)	1770 (132572)	20.06	20.12	20.10
		1745 (132322)	20.04	20.07	20.08
		1720 (132072)	20.06	20.11	20.13
	50RB-Low (0)	1770 (132572)	20.14	20.17	20.17
		1745 (132322)	20.10	20.12	20.12
		1720 (132072)	20.09	20.09	20.08
	100RB (0)	1770 (132572)	20.09	20.10	20.10
		1745 (132322)	20.05	20.08	20.07
		1720 (132072)	20.05	20.07	20.06

11.4 Wi-Fi and BT Measurement result

The maximum output power for BT

GFSK			EDR2M-4 DQPSK			EDR3M-8DPSK			Tune up
Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78	
9.31	8.45	8.50	8.53	8.04	7.63	8.52	8.43	8.07	10.50

WIFI2.4G Tune up

WiFi 802.11b			
Channel	Channel 1	Channel 7	Channel 11
Maximum Target Value (dBm)	16+/-1	16+/-1	16+/-1
WiFi 802.11g			
Channel	Channel 1	Channel 7	Channel 11
Maximum Target Value (dBm)	16+/-1	16+/-1	13+/-1
WiFi 802.11n 20M			
Channel	Channel 1	Channel 7	Channel 11
Maximum Target Value (dBm)	16+/-1	16+/-1	13+/-1
WiFi 802.11n 40M			
Channel	Channel 3	Channel 6	Channel 9
Maximum Target Value (dBm)	14.5+/-1	14.5+/-1	11+/-1

WIFI5G Tune up

WiFi 802.11a (5GHz)				
Channel	Channel 36~64	Channel 100~140		Channel 149~165
Target (dBm)	15.5+/-1	15.5+/-1		15.5+/-1
WiFi 802.11n - BW20 (5GHz)				
Channel	Channel 36~64	Channel 100~116	Channel 140	Channel 144~165
Target (dBm)	15+/-1	15+/-1	13+/-1	15+/-1
WiFi 802.11n - BW40 (5GHz)				
Channel	Channel 38~62	Channel 102	Channel 110~134	Channel 142~159
Target (dBm)	15+/-1	13+/-1	15+/-1	15+/-1
WiFi 802.11ac - BW20 (5GHz)				
Channel	Channel 36~64	Channel 100~140		Channel 149~165
Target (dBm)	15+/-1	15+/-1		15+/-1
WiFi 802.11ac - BW40 (5GHz) MCS0				
Channel	Channel 38~62	Channel 102~134		Channel 149~165
Target (dBm)	15+/-1	15+/-1		15+/-1
WiFi 802.11ac - BW80 (5GHz) MCS0				
Channel	Channel 42~58	Channel 106	Channel 122~138	Channel 149~155
Target (dBm)	15+/-1	13+/-1	15+/-1	15+/-1

The maximum output power for WiFi 2.4G

802.11b(dBm)	
Channel\data rate	1Mbps
1(2412MHz)	15.68
6(2437MHz)	15.71
11(2462MHz)	15.36
802.11g(dBm)	
Channel\data rate	6Mbps
1(2412MHz)	16.06
6(2437MHz)	15.57
11(2462MHz)	13.16
802.11n(dBm)-20MHz	
Channel\data rate	MCS0
1(2412MHz)	16.07
6(2437MHz)	15.82
11(2462MHz)	13.01
802.11n(dBm)-40MHz	
Channel\data rate	MCS0
3(2422MHz)	14.57
6(2437MHz)	14.44
9(2452MHz)	10.85

The maximum output power for WiFi 5G

802.11a(dBm)	
Channel\data rate	6Mbps
36(5180 MHz)	15.73
40(5200 MHz)	15.71
44(5220 MHz)	15.88
48(5240 MHz)	15.87
52(5260 MHz)	15.76
56(5280 MHz)	15.91
60(5300 MHz)	15.93
64(5320 MHz)	15.83
100(5500 MHz)	16.12
104(5520 MHz)	16.11
108(5540 MHz)	16.15
112(5560 MHz)	16.02
116(5580 MHz)	15.91
120(5600 MHz)	15.97
124(5620 MHz)	16.12
128(5640 MHz)	16.18
132(5660 MHz)	15.88
136(5680 MHz)	16.02
140(5700 MHz)	15.31
144(5720 MHz)	15.23
149(5745 MHz)	15.37
153(5765 MHz)	15.14
157(5785 MHz)	15.16
161(5805 MHz)	15.22
165(5825 MHz)	15.19

12 Antenna Location

12.1 Transmit Antenna Separation Distances

The detail for transmit antenna separation distances is described in the additional document:
The Photos of SAR test - 24T04Z102302-012

12.2 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
ANT0	Yes	Yes	Yes	Yes	No	Yes
ANT1	Yes	Yes	Yes	Yes	Yes	No
ANT2	Yes	Yes	No	Yes	Yes	No
ANT3	Yes	Yes	No	Yes	Yes	No

12.3 Evaluation of Simultaneous

Reported SAR 1g (W/kg)																	
State		1												2	3	4	
Head		GSM850	GSM1900	WCDMA850	WCDMA1700	WCDMA1900	LTE B2	LTE B7	LTE B12/17	LTE B13	LTE B5/26	LTE B38/41	LTE B4/66	WiFi 2.4G	WiFi 5G	BT	1+2
Cheek	Left	0.74	0.45	0.41	0.11	0.37	0.34	0.39	0.39	0.40	0.59	0.28	0.04	0.59	0.43	0.09	1.33
Tilt	Left	0.54	0.22	0.39	0.11	0.19	0.21	0.19	0.35	0.34	0.57	0.12	0.04	0.62	0.71	0.05	1.19
Cheek	Right	1.07	0.23	0.50	0.22	0.21	0.21	0.19	0.43	0.47	0.74	0.13	0.09	0.26	0.34	0.03	1.33
Tilt	Right	0.73	0.16	0.46	0.11	0.14	0.16	0.13	0.41	0.45	0.72	0.11	0.05	0.32	0.46	0.02	1.05
State		1												2	3	4	
Body		GSM850	GSM1900	WCDMA850	WCDMA1700	WCDMA1900	LTE B2	LTE B7	LTE B12/17	LTE B13	LTE B5/26	LTE B38/41	LTE B4/66	WiFi 2.4G	WiFi 5G	BT	1+2
Front	10mm	0.35	0.48	0.17	0.27	0.47	0.48	0.48	0.13	0.12	0.19	0.54	0.15	0.18	0.08	0.02	0.72
Rear	10mm	0.48	0.72	0.26	0.87	0.89	0.91	0.61	0.20	0.21	0.25	0.77	0.54	0.29	0.12	0.03	1.20
Left	10mm	0.46	0.28	0.21	0.07	0.26	0.24	0.17	0.16	0.20	0.22	0.29	0.08				0.46
Right	10mm	0.16	0.00	0.08	0.05	0.00	0.10	0.09	0.10	0.11	0.14	0.00	0.19	0.06	0.02		0.35
Bottom	10mm		1.19		0.98	1.15	1.14	1.18				1.01	0.64				1.19
Top	10mm	0.45		0.23					0.09	0.12	0.23			0.22	0.30	0.02	0.67

13 SAR Test Result

Note:

KDB 447498 D01 General RF Exposure Guidance:

For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor

For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz

≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz

≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.

When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.

Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.

Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the

group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s).

When the reported SAR for the initial test position is:

≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.

> 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.

- For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
- When it is unclear, all equivalent conditions must be tested.

For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.

- The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

Duty Cycle

Mode	Duty Cycle
Speech for GSM	1:8.3
GPRS&EGPRS 1 Slot	1:8.3
GPRS&EGPRS 2 Slot	1:4
GPRS&EGPRS 3 Slot	1:2.67
GPRS&EGPRS 4 Slot	1:2
WCDMA<E FDD	1:1
TDD PC3	1:1.58

13.1 SAR results for Cellular

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	GSM850	190	836.6	GPRS(4TX)	Cheek Left	0mm	\	27.23	28	0.617	0.74	0.418	0.50	-0.03
Head	GSM850	190	836.6	GPRS(4TX)	Tilt Left	0mm	\	27.23	28	0.45	0.54	0.269	0.32	0.05
Head	GSM850	251	848.8	GPRS(4TX)	Cheek Right	0mm	\	27.36	28	0.891	1.03	0.623	0.72	-0.11
Head	GSM850	190	836.6	GPRS(4TX)	Cheek Right	0mm	1	27.27	28	0.903	1.07	0.628	0.74	-0.15
Head	GSM850	128	824.2	GPRS(4TX)	Cheek Right	0mm	\	27.16	28	0.821	1.00	0.563	0.68	0.05
Head	GSM850	251	848.8	GPRS(4TX)	Tilt Right	0mm	\	27.36	28	0.628	0.73	0.337	0.39	-0.02
Head	GSM850	190	836.6	GPRS(4TX)	Tilt Right	0mm	\	27.27	28	0.594	0.70	0.329	0.39	0.06
Head	GSM850	128	824.2	GPRS(4TX)	Tilt Right	0mm	\	27.16	28	0.567	0.69	0.302	0.37	0.07
Head	GSM850	190	836.6	EGPRS(4TX)	Cheek Right	0mm	\	27.28	28	0.867	1.02	0.608	0.72	-0.05
Head	GSM850	190	836.6	GPRS(4TX)	Cheek Right	0mm	SIM2	27.27	28	0.898	1.06	0.623	0.74	0.03
Head	GSM850	190	836.6	GPRS(4TX)	Cheek Right	0mm	Battery2	27.27	28	0.874	1.03	0.621	0.73	-0.05
Body	GSM850	190	836.6	GPRS(4TX)	Front	10mm	\	28.25	29	0.289	0.34	0.185	0.22	0.13
Body	GSM850	251	848.8	GPRS(4TX)	Rear	10mm	2	28.36	29	0.406	0.46	0.26	0.30	0.01
Body	GSM850	190	836.6	GPRS(4TX)	Rear	10mm	\	28.25	29	0.378	0.45	0.248	0.29	-0.14
Body	GSM850	128	824.2	GPRS(4TX)	Rear	10mm	\	28.12	29	0.307	0.38	0.197	0.24	-0.13
Body	GSM850	190	836.6	GPRS(4TX)	Left	10mm	\	28.25	29	0.385	0.46	0.252	0.30	0.14
Body	GSM850	190	836.6	GPRS(4TX)	Right	10mm	\	28.25	29	0.131	0.16	0.086	0.10	0.11
Body	GSM850	190	836.6	GPRS(4TX)	Top	10mm	\	28.25	29	0.372	0.44	0.204	0.24	-0.13
Body	GSM850	190	836.6	EGPRS(4TX)	Rear	10mm	\	28.25	29	0.374	0.44	0.237	0.28	0.09
Head	GSM1900	810	1909.8	GPRS(4TX)	Cheek Left	0mm	3	26.11	27	0.369	0.45	0.232	0.28	0.01
Head	GSM1900	661	1880	GPRS(4TX)	Cheek Left	0mm	\	26.27	27	0.362	0.43	0.232	0.27	0.17
Head	GSM1900	512	1850.2	GPRS(4TX)	Cheek Left	0mm	\	26.45	27	0.322	0.37	0.207	0.23	-0.07
Head	GSM1900	661	1880	GPRS(4TX)	Tilt Left	0mm	\	26.27	27	0.186	0.22	0.116	0.14	0.11
Head	GSM1900	661	1880	GPRS(4TX)	Cheek Right	0mm	\	26.27	27	0.196	0.23	0.129	0.15	-0.18
Head	GSM1900	661	1880	GPRS(4TX)	Tilt Right	0mm	\	26.27	27	0.133	0.16	0.084	0.10	-0.06
Head	GSM1900	810	1909.8	EGPRS(4TX)	Cheek Left	0mm	\	26.25	27	0.362	0.43	0.223	0.27	0.15
Body	GSM1900	661	1880	GPRS(4TX)	Front	10mm	\	24.18	25	0.394	0.48	0.238	0.29	0.06
Body	GSM1900	661	1880	GPRS(4TX)	Rear	10mm	\	24.18	25	0.6	0.72	0.36	0.43	-0.13
Body	GSM1900	661	1880	GPRS(4TX)	Left	10mm	\	24.18	25	0.229	0.28	0.136	0.16	-0.11
Body	GSM1900	661	1880	GPRS(4TX)	Right	10mm	\	24.18	25	<0.01	<0.01	<0.01	<0.01	\
Body	GSM1900	810	1909.8	GPRS(4TX)	Bottom	10mm	\	23.94	25	0.921	1.18	0.493	0.63	0.05
Body	GSM1900	661	1880	GPRS(4TX)	Bottom	10mm	\	24.18	25	0.86	1.04	0.472	0.57	-0.07
Body	GSM1900	512	1850.2	GPRS(4TX)	Bottom	10mm	4	24.19	25	0.986	1.19	0.536	0.65	-0.02
Body	GSM1900	512	1850.2	EGPRS(4TX)	Bottom	10mm	\	24.21	25	0.973	1.17	0.527	0.63	0.08
Body	GSM1900	512	1850.2	GPRS(4TX)	Bottom	10mm	SIM2	24.19	25	0.957	1.15	0.519	0.63	0.06
Body	GSM1900	512	1850.2	GPRS(4TX)	Bottom	10mm	Battery2	24.19	25	0.968	1.17	0.524	0.63	0.1
Head	WCDMA 850	4183	836.6	RMC	Cheek Left	0mm	\	23.98	24	0.411	0.41	0.334	0.34	-0.03
Head	WCDMA 850	4183	836.6	RMC	Tilt Left	0mm	\	23.98	24	0.393	0.39	0.284	0.29	0.17
Head	WCDMA 850	4233	846.6	RMC	Cheek Right	0mm	\	23.98	24	0.47	0.47	0.382	0.38	-0.14
Head	WCDMA 850	4183	836.6	RMC	Cheek Right	0mm	5	23.98	24	0.5	0.50	0.383	0.38	0.06
Head	WCDMA 850	4132	826.4	RMC	Cheek Right	0mm	\	23.92	24	0.446	0.45	0.361	0.37	0.17
Head	WCDMA 850	4183	836.6	RMC	Tilt Right	0mm	\	23.98	24	0.455	0.46	0.32	0.32	0.03
Body	WCDMA 850	4183	836.6	RMC	Front	10mm	\	24.01	24	0.169	0.17	0.112	0.11	-0.06
Body	WCDMA 850	4233	846.6	RMC	Rear	10mm	\	23.98	24	0.251	0.25	0.162	0.16	-0.03
Body	WCDMA 850	4183	836.6	RMC	Rear	10mm	\	24.01	24	0.246	0.25	0.153	0.15	0.16
Body	WCDMA 850	4132	826.4	RMC	Rear	10mm	6	23.92	24	0.258	0.26	0.164	0.17	-0.03
Body	WCDMA 850	4183	836.6	RMC	Left	10mm	\	24.01	24	0.206	0.21	0.137	0.14	-0.11
Body	WCDMA 850	4183	836.6	RMC	Right	10mm	\	24.01	24	0.082	0.08	0.055	0.05	-0.18
Body	WCDMA 850	4183	836.6	RMC	Top	10mm	\	24.01	24	0.232	0.23	0.125	0.12	0.06
Head	WCDMA 1700	1412	1732.4	RMC	Cheek Left	0mm	\	23.68	24	0.098	0.11	0.064	0.07	-0.02
Head	WCDMA 1700	1412	1732.4	RMC	Tilt Left	0mm	\	23.68	24	0.1	0.11	0.063	0.07	0.13
Head	WCDMA 1700	1513	1752.6	RMC	Cheek Right	0mm	7	23.66	24	0.205	0.22	0.128	0.14	0.01
Head	WCDMA 1700	1412	1732.4	RMC	Cheek Right	0mm	\	23.68	24	0.171	0.18	0.106	0.11	-0.11
Head	WCDMA 1700	1312	1712.4	RMC	Cheek Right	0mm	\	23.62	24	0.14	0.15	0.084	0.09	-0.02
Head	WCDMA 1700	1412	1732.4	RMC	Tilt Right	0mm	\	23.68	24	0.106	0.11	0.063	0.07	0.03
Body	WCDMA 1700	1412	1732.4	RMC	Front	10mm	\	21.98	23	0.257	0.33	0.164	0.21	-0.03
Body	WCDMA 1700	1513	1752.6	RMC	Rear	10mm	\	21.91	23	0.689	0.89	0.403	0.52	-0.08
Body	WCDMA 1700	1412	1732.4	RMC	Rear	10mm	\	21.98	23	0.712	0.90	0.419	0.53	0.02
Body	WCDMA 1700	1312	1712.4	RMC	Rear	10mm	\	21.89	23	0.666	0.86	0.389	0.50	0.01
Body	WCDMA 1700	1412	1732.4	RMC	Left	10mm	\	21.74	23	0.067	0.09	0.042	0.06	-0.04
Body	WCDMA 1700	1412	1732.4	RMC	Right	10mm	\	21.74	23	0.046	0.06	0.029	0.04	0.13
Body	WCDMA 1700	1513	1752.6	RMC	Bottom	10mm	8	21.91	23	0.912	1.17	0.513	0.66	0.02
Body	WCDMA 1700	1412	1732.4	RMC	Bottom	10mm	\	21.98	23	0.824	1.04	0.461	0.58	-0.15
Body	WCDMA 1700	1312	1712.4	RMC	Bottom	10mm	\	21.89	23	0.711	0.92	0.397	0.51	0.17
Head	WCDMA 1900	9538	1907.6	RMC	Cheek Left	0mm	\	23.52	24	0.289	0.32	0.19	0.21	0.06
Head	WCDMA 1900	9400	1880	RMC	Cheek Left	0mm	9	23.58	24	0.333	0.37	0.217	0.24	-0.03
Head	WCDMA 1900	9262	1852.4	RMC	Cheek Left	0mm	\	23.57	24	0.287	0.32	0.189	0.21	-0.17
Head	WCDMA 1900	9400	1880	RMC	Tilt Left	0mm	\	23.58	24	0.175	0.19	0.113	0.12	0.08
Head	WCDMA 1900	9400	1880	RMC	Cheek Right	0mm	\	23.58	24	0.193	0.21	0.126	0.14	-0.16
Head	WCDMA 1900	9400	1880	RMC	Tilt Right	0mm	\	23.58	24	0.128	0.14	0.08	0.09	0.1
Body	WCDMA 1900	9400	1880	RMC	Front	10mm	\	21.33	22	0.4	0.47	0.253	0.30	0.08
Body	WCDMA 1900	9538	1907.6	RMC	Rear	10mm	\	21.26	22	0.694	0.82	0.413	0.49	-0.07
Body	WCDMA 1900	9400	1880	RMC	Rear	10mm	\	21.33	22	0.746	0.87	0.448	0.52	0.11
Body	WCDMA 1900	9262	1852.4	RMC	Rear	10mm	\	21.43	22	0.778	0.89	0.467	0.53	-0.05
Body	WCDMA 1900	9400	1880	RMC	Left	10mm	\	21.33	22	0.22	0.26	0.134	0.16	0.05
Body	WCDMA 1900	9400	1880	RMC	Right	10mm	\	21.33	22	<0.01	<0.01	<0.01	<0.01	\
Body	WCDMA 1900	9538	1907.6	RMC	Bottom	10mm	\	21.26	22	0.829	0.98	0.473	0.56	-0.04
Body	WCDMA 1900	9400	1880	RMC	Bottom	10mm	\	21.33	22	0.942	1.10	0.528	0.62	0.12
Body	WCDMA 1900	9262	1852.4	RMC	Bottom	10mm	10	21.43	22	1.01	1.15	0.566	0.65	0.07

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	LTE Band2	18700	1860	1RB-Middle	Cheek Left	0mm	11	24.13	24.5	0.316	0.34	0.205	0.22	-0.05
Head	LTE Band2	18700	1860	1RB-Middle	Tilt Left	0mm	\	24.13	24.5	0.196	0.21	0.123	0.13	0.01
Head	LTE Band2	18700	1860	1RB-Middle	Cheek Right	0mm	\	24.13	24.5	0.197	0.21	0.128	0.14	0.14
Head	LTE Band2	18700	1860	1RB-Middle	Tilt Right	0mm	\	24.13	24.5	0.151	0.16	0.094	0.10	-0.06
Head	LTE Band2	18700	1860	50RB-High	Cheek Left	0mm	\	23.17	23.5	0.238	0.26	0.155	0.17	-0.06
Head	LTE Band2	18700	1860	50RB-High	Tilt Left	0mm	\	23.17	23.5	0.152	0.16	0.094	0.10	-0.1
Head	LTE Band2	18700	1860	50RB-High	Cheek Right	0mm	\	23.17	23.5	0.15	0.16	0.098	0.11	-0.14
Head	LTE Band2	18700	1860	50RB-High	Tilt Right	0mm	\	23.17	23.5	0.114	0.12	0.071	0.08	0.01
Body	LTE Band2	18700	1860	1RB-Middle	Front	10mm	\	21.18	22.5	0.345	0.47	0.212	0.29	0.09
Body	LTE Band2	19100	1900	1RB-Middle	Rear	10mm	\	21.15	22.5	0.605	0.83	0.357	0.49	-0.08
Body	LTE Band2	18900	1880	1RB-Middle	Rear	10mm	\	21.08	22.5	0.652	0.90	0.378	0.52	0.03
Body	LTE Band2	18700	1860	1RB-Middle	Rear	10mm	\	21.18	22.5	0.668	0.91	0.394	0.53	-0.07
Body	LTE Band2	18700	1860	1RB-Middle	Left	10mm	\	21.18	22.5	0.14	0.19	0.086	0.12	0.09
Body	LTE Band2	18700	1860	1RB-Middle	Right	10mm	\	21.18	22.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band2	19100	1900	1RB-Middle	Bottom	10mm	\	21.15	22.5	0.755	1.03	0.429	0.59	0.1
Body	LTE Band2	18900	1880	1RB-Middle	Bottom	10mm	\	21.08	22.5	0.825	1.14	0.465	0.64	0.05
Body	LTE Band2	18700	1860	1RB-Middle	Bottom	10mm	12	21.18	22.5	0.844	1.14	0.474	0.64	-0.03
Body	LTE Band2	18700	1860	50RB-High	Front	10mm	\	21.13	22.5	0.351	0.48	0.221	0.30	-0.07
Body	LTE Band2	19100	1900	50RB-Middle	Rear	10mm	\	21.1	22.5	0.571	0.79	0.338	0.47	0.05
Body	LTE Band2	18900	1880	50RB-Low	Rear	10mm	\	21.11	22.5	0.657	0.90	0.387	0.53	-0.07
Body	LTE Band2	18700	1860	50RB-High	Rear	10mm	\	21.13	22.5	0.655	0.90	0.387	0.53	-0.03
Body	LTE Band2	18700	1860	50RB-High	Left	10mm	\	21.13	22.5	0.172	0.24	0.105	0.14	0.01
Body	LTE Band2	18700	1860	50RB-High	Right	10mm	\	21.13	22.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band2	19100	1900	50RB-Middle	Bottom	10mm	\	21.1	22.5	0.746	1.03	0.421	0.58	-0.18
Body	LTE Band2	18900	1880	50RB-Low	Bottom	10mm	\	21.11	22.5	0.793	1.09	0.451	0.62	-0.06
Body	LTE Band2	18700	1860	50RB-High	Bottom	10mm	\	21.13	22.5	0.824	1.13	0.468	0.64	-0.04
Body	LTE Band2	18700	1860	100RB	Rear	10mm	\	21.13	22.5	0.653	0.90	0.388	0.53	0.05
Body	LTE Band2	18700	1860	100RB	Bottom	10mm	\	21.13	22.5	0.824	1.13	0.467	0.64	0.07
Head	LTE Band7	20850	2510	1RB-Middle	Cheek Left	0mm	13	24.08	24.5	0.354	0.39	0.195	0.21	0.06
Head	LTE Band7	20850	2510	1RB-Middle	Tilt Left	0mm	\	24.08	24.5	0.175	0.19	0.09	0.10	0.16
Head	LTE Band7	20850	2510	1RB-Middle	Cheek Right	0mm	\	24.08	24.5	0.159	0.18	0.093	0.10	-0.17
Head	LTE Band7	20850	2510	1RB-Middle	Tilt Right	0mm	\	24.08	24.5	0.116	0.13	0.063	0.07	-0.04
Head	LTE Band7	20850	2510	50RB-Low	Cheek Left	0mm	\	23.09	23.5	0.27	0.30	0.149	0.16	0.09
Head	LTE Band7	20850	2510	50RB-Low	Tilt Left	0mm	\	23.09	23.5	0.134	0.15	0.069	0.08	0.15
Head	LTE Band7	20850	2510	50RB-Low	Cheek Right	0mm	\	23.09	23.5	0.119	0.13	0.07	0.08	0.05
Head	LTE Band7	20850	2510	50RB-Low	Tilt Right	0mm	\	23.09	23.5	0.087	0.10	0.048	0.05	-0.11
Body	LTE Band7	20850	2510	1RB-Middle	Front	10mm	\	21.06	22.5	0.348	0.48	0.197	0.27	-0.13
Body	LTE Band7	20850	2510	1RB-Middle	Rear	10mm	\	21.06	22.5	0.437	0.61	0.214	0.30	0.09
Body	LTE Band7	20850	2510	1RB-Middle	Left	10mm	\	21.06	22.5	0.124	0.17	0.07	0.10	0.05
Body	LTE Band7	20850	2510	1RB-Middle	Right	10mm	\	21.06	22.5	0.071	0.10	0.043	0.06	0.01
Body	LTE Band7	20350	2560	1RB-Middle	Bottom	10mm	\	20.81	22.5	0.687	1.01	0.329	0.49	0.06
Body	LTE Band7	21100	2535	1RB-Middle	Bottom	10mm	14	20.79	22.5	0.794	1.18	0.372	0.55	-0.07
Body	LTE Band7	20850	2510	1RB-Middle	Bottom	10mm	\	21.06	22.5	0.753	1.05	0.366	0.51	0.12
Body	LTE Band7	20850	2510	50RB-Low	Front	10mm	\	21.1	22.5	0.318	0.44	0.184	0.25	-0.03
Body	LTE Band7	20850	2510	50RB-Low	Rear	10mm	\	21.1	22.5	0.436	0.60	0.209	0.29	0.14
Body	LTE Band7	20850	2510	50RB-Low	Left	10mm	\	21.1	22.5	0.098	0.14	0.056	0.08	-0.04
Body	LTE Band7	20850	2510	50RB-Low	Right	10mm	\	21.1	22.5	0.049	0.07	0.031	0.04	0.06
Body	LTE Band7	20350	2560	50RB-Low	Bottom	10mm	\	20.88	22.5	0.783	1.14	0.364	0.53	-0.08
Body	LTE Band7	21100	2535	50RB-Middle	Bottom	10mm	\	20.88	22.5	0.782	1.14	0.367	0.53	-0.02
Body	LTE Band7	20850	2510	50RB-Low	Bottom	10mm	\	21.1	22.5	0.727	1.00	0.355	0.49	-0.07
Body	LTE Band7	21100	2535	100RB	Bottom	10mm	\	20.83	22.5	0.768	1.13	0.356	0.52	0.09
Head	LTE Band12	23130	711	1RB-High	Cheek Left	0mm	\	24.32	25	0.33	0.39	0.239	0.28	0.06
Head	LTE Band12	23130	711	1RB-High	Tilt Left	0mm	\	24.32	25	0.297	0.35	0.183	0.21	-0.01
Head	LTE Band12	23130	711	1RB-High	Cheek Right	0mm	15	24.32	25	0.371	0.43	0.271	0.32	-0.03
Head	LTE Band12	23130	711	1RB-High	Tilt Right	0mm	\	24.32	25	0.351	0.41	0.209	0.24	0.09
Head	LTE Band12	23130	711	25RB-High	Cheek Left	0mm	\	23.3	24	0.241	0.28	0.178	0.21	0.06
Head	LTE Band12	23130	711	25RB-High	Tilt Left	0mm	\	23.3	24	0.22	0.26	0.137	0.16	0.09
Head	LTE Band12	23130	711	25RB-High	Cheek Right	0mm	\	23.3	24	0.271	0.32	0.199	0.23	0.13
Head	LTE Band12	23130	711	25RB-High	Tilt Right	0mm	\	23.3	24	0.26	0.31	0.154	0.18	0.02
Body	LTE Band12	23130	711	1RB-High	Front	10mm	\	24.32	25	0.112	0.13	0.087	0.10	0.04
Body	LTE Band12	23130	711	1RB-High	Rear	10mm	16	24.32	25	0.175	0.20	0.137	0.16	-0.01
Body	LTE Band12	23130	711	1RB-High	Left	10mm	\	24.32	25	0.136	0.16	0.099	0.12	-0.07
Body	LTE Band12	23130	711	1RB-High	Right	10mm	\	24.32	25	0.074	0.09	0.053	0.06	-0.06
Body	LTE Band12	23130	711	1RB-High	Top	10mm	\	24.32	25	0.075	0.09	0.045	0.05	0.15
Body	LTE Band12	23130	711	25RB-High	Front	10mm	\	23.3	24	0.081	0.10	0.063	0.07	-0.13
Body	LTE Band12	23130	711	25RB-High	Rear	10mm	\	23.3	24	0.125	0.15	0.098	0.12	0.07
Body	LTE Band12	23130	711	25RB-High	Left	10mm	\	23.3	24	0.103	0.12	0.074	0.09	0.18
Body	LTE Band12	23130	711	25RB-High	Right	10mm	\	23.3	24	0.056	0.07	0.04	0.05	-0.1
Body	LTE Band12	23130	711	25RB-High	Top	10mm	\	23.3	24	0.054	0.06	0.033	0.04	0.09

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	LTE Band13	23230	782	1RB-Middle	Cheek Left	0mm	\	24.27	25	0.337	0.40	0.248	0.29	0.12
Head	LTE Band13	23230	782	1RB-Middle	Tilt Left	0mm	\	24.27	25	0.289	0.34	0.185	0.22	0.13
Head	LTE Band13	23230	782	1RB-Middle	Cheek Right	0mm	17	24.27	25	0.394	0.47	0.287	0.34	0.05
Head	LTE Band13	23230	782	1RB-Middle	Tilt Right	0mm	\	24.27	25	0.379	0.45	0.218	0.26	-0.03
Head	LTE Band13	23230	782	25RB-Low	Cheek Left	0mm	\	23.3	24	0.257	0.30	0.191	0.22	-0.03
Head	LTE Band13	23230	782	25RB-Low	Tilt Left	0mm	\	23.3	24	0.218	0.26	0.14	0.16	-0.13
Head	LTE Band13	23230	782	25RB-Low	Cheek Right	0mm	\	23.3	24	0.315	0.46	0.225	0.26	-0.01
Head	LTE Band13	23230	782	25RB-Low	Tilt Right	0mm	\	23.3	24	0.289	0.34	0.166	0.20	0.03
Body	LTE Band13	23230	782	1RB-Middle	Front	10mm	\	24.27	25	0.105	0.12	0.077	0.09	0.13
Body	LTE Band13	23230	782	1RB-Middle	Rear	10mm	18	24.27	25	0.18	0.21	0.14	0.17	-0.03
Body	LTE Band13	23230	782	1RB-Middle	Left	10mm	\	24.27	25	0.167	0.20	0.119	0.14	-0.04
Body	LTE Band13	23230	782	1RB-Middle	Right	10mm	\	24.27	25	0.083	0.10	0.058	0.07	0.1
Body	LTE Band13	23230	782	1RB-Middle	Top	10mm	\	24.27	25	0.105	0.12	0.058	0.07	-0.12
Body	LTE Band13	23230	782	25RB-Low	Front	10mm	\	23.3	24	0.08	0.09	0.058	0.07	-0.06
Body	LTE Band13	23230	782	25RB-Low	Rear	10mm	\	23.3	24	0.131	0.15	0.103	0.12	-0.12
Body	LTE Band13	23230	782	25RB-Low	Left	10mm	\	23.3	24	0.132	0.16	0.095	0.11	0.1
Body	LTE Band13	23230	782	25RB-Low	Right	10mm	\	23.3	24	0.061	0.07	0.044	0.05	-0.03
Body	LTE Band13	23230	782	25RB-Low	Top	10mm	\	23.3	24	0.079	0.09	0.049	0.06	-0.11
Head	LTE Band26	26965	841.5	1RB-Middle	Cheek Left	0mm	\	24.25	25	0.495	0.59	0.374	0.44	0.17
Head	LTE Band26	26965	841.5	1RB-Middle	Tilt Left	0mm	\	24.25	25	0.477	0.57	0.328	0.39	-0.16
Head	LTE Band26	26965	841.5	1RB-Middle	Cheek Right	0mm	19	24.25	25	0.619	0.74	0.452	0.54	-0.01
Head	LTE Band26	26965	841.5	1RB-Middle	Tilt Right	0mm	\	24.25	25	0.61	0.72	0.383	0.46	-0.08
Head	LTE Band26	26965	841.5	36RB-Middle	Cheek Left	0mm	\	23.37	24	0.416	0.48	0.316	0.37	-0.07
Head	LTE Band26	26965	841.5	36RB-Middle	Tilt Left	0mm	\	23.37	24	0.39	0.45	0.269	0.31	0.16
Head	LTE Band26	26965	841.5	36RB-Middle	Cheek Right	0mm	\	23.37	24	0.505	0.73	0.375	0.43	-0.03
Head	LTE Band26	26965	841.5	36RB-Middle	Tilt Right	0mm	\	23.37	24	0.503	0.58	0.316	0.37	0.07
Body	LTE Band26	26965	841.5	1RB-Middle	Front	10mm	\	24.25	25	0.163	0.19	0.106	0.13	-0.14
Body	LTE Band26	26965	841.5	1RB-Middle	Rear	10mm	20	24.25	25	0.212	0.25	0.135	0.16	0.03
Body	LTE Band26	26965	841.5	1RB-Middle	Left	10mm	\	24.25	25	0.182	0.22	0.121	0.14	0.06
Body	LTE Band26	26965	841.5	1RB-Middle	Right	10mm	\	24.25	25	0.09	0.11	0.06	0.07	0.13
Body	LTE Band26	26965	841.5	1RB-Middle	Top	10mm	\	24.25	25	0.197	0.23	0.11	0.13	0.12
Body	LTE Band26	26965	841.5	36RB-Middle	Front	10mm	\	23.37	24	0.136	0.16	0.087	0.10	0.07
Body	LTE Band26	26965	841.5	36RB-Middle	Rear	10mm	\	23.37	24	0.168	0.19	0.115	0.13	-0.1
Body	LTE Band26	26965	841.5	36RB-Middle	Left	10mm	\	23.37	24	0.117	0.14	0.077	0.09	0.13
Body	LTE Band26	26965	841.5	36RB-Middle	Right	10mm	\	23.37	24	0.078	0.09	0.052	0.06	-0.01
Body	LTE Band26	26965	841.5	36RB-Middle	Top	10mm	\	23.37	24	0.166	0.19	0.093	0.11	-0.14
Head	LTE Band41	41490	2680	1RB-Middle	Cheek Left	0mm	21	24.5	24.5	0.276	0.28	0.148	0.15	-0.14
Head	LTE Band41	41490	2680	1RB-Middle	Tilt Left	0mm	\	24.5	24.5	0.117	0.12	0.061	0.06	-0.08
Head	LTE Band41	41490	2680	1RB-Middle	Cheek Right	0mm	\	24.5	24.5	0.126	0.13	0.071	0.07	-0.03
Head	LTE Band41	41490	2680	1RB-Middle	Tilt Right	0mm	\	24.5	24.5	0.105	0.11	0.054	0.05	-0.04
Head	LTE Band41	41490	2680	50RB-Low	Cheek Left	0mm	\	23.5	23.5	0.212	0.21	0.113	0.11	0.07
Head	LTE Band41	41490	2680	50RB-Low	Tilt Left	0mm	\	23.5	23.5	0.085	0.09	0.044	0.04	0.15
Head	LTE Band41	41490	2680	50RB-Low	Cheek Right	0mm	\	23.5	23.5	0.097	0.10	0.055	0.06	-0.14
Head	LTE Band41	41490	2680	50RB-Low	Tilt Right	0mm	\	23.5	23.5	0.08	0.08	0.041	0.04	-0.08
Body	LTE Band41	41490	2680	1RB-Middle	Front	10mm	\	24.5	24.5	0.538	0.54	0.284	0.28	0.11
Body	LTE Band41	41490	2680	1RB-Middle	Rear	10mm	\	24.5	24.5	0.77	0.77	0.36	0.36	0.04
Body	LTE Band41	41055	2636.5	1RB-Middle	Rear	10mm	\	24.45	24.5	0.754	0.76	0.347	0.35	0.1
Body	LTE Band41	40620	2593	1RB-Middle	Rear	10mm	\	24.49	24.5	0.708	0.71	0.329	0.33	-0.14
Body	LTE Band41	40185	2549.5	1RB-Middle	Rear	10mm	\	24.44	24.5	0.68	0.69	0.318	0.32	-0.02
Body	LTE Band41	39750	2506	1RB-Middle	Rear	10mm	\	24.49	24.5	0.725	0.73	0.34	0.34	-0.01
Body	LTE Band41	41490	2680	1RB-Middle	Left	10mm	\	24.5	24.5	0.293	0.29	0.158	0.16	0.17
Body	LTE Band41	41490	2680	1RB-Middle	Right	10mm	\	24.5	24.5	0.137	0.14	0.079	0.08	-0.05
Body	LTE Band41	41490	2680	1RB-Middle	Bottom	10mm	22	24.5	24.5	1.01	1.01	0.466	0.47	-0.11
Body	LTE Band41	41055	2636.5	1RB-Middle	Bottom	10mm	\	24.45	24.5	0.953	0.96	0.421	0.43	0.07
Body	LTE Band41	40620	2593	1RB-Middle	Bottom	10mm	\	24.49	24.5	0.889	0.89	0.403	0.40	0.16
Body	LTE Band41	40185	2549.5	1RB-Middle	Bottom	10mm	\	24.44	24.5	0.881	0.89	0.404	0.41	0.02
Body	LTE Band41	39750	2506	1RB-Middle	Bottom	10mm	\	24.49	24.5	0.969	0.97	0.441	0.44	0.11
Body	LTE Band41	41490	2680	50RB-Low	Front	10mm	\	23.5	23.5	0.428	0.43	0.226	0.23	0.14
Body	LTE Band41	41490	2680	50RB-Low	Rear	10mm	\	23.5	23.5	0.432	0.43	0.204	0.20	0.03
Body	LTE Band41	41490	2680	50RB-Low	Left	10mm	\	23.5	23.5	0.178	0.18	0.094	0.09	-0.18
Body	LTE Band41	41490	2680	50RB-Low	Right	10mm	\	23.5	23.5	0.099	0.10	0.054	0.05	0.1
Body	LTE Band41	41490	2680	50RB-Low	Bottom	10mm	\	23.5	23.5	0.706	0.71	0.337	0.34	0.04
Body	LTE Band41	41055	2636.5	50RB-Low	Bottom	10mm	\	23.4	23.5	0.729	0.75	0.329	0.34	0.01
Body	LTE Band41	40620	2593	50RB-Low	Bottom	10mm	\	23.39	23.5	0.664	0.68	0.307	0.31	0.15
Body	LTE Band41	40185	2549.5	50RB-Low	Bottom	10mm	\	23.21	23.5	0.684	0.73	0.319	0.34	0.18
Body	LTE Band41	39750	2506	50RB-Low	Bottom	10mm	\	23.38	23.5	0.799	0.82	0.356	0.37	-0.04
Body	LTE Band41	41490	2680	100RB	Bottom	10mm	\	23.41	23.5	0.713	0.73	0.345	0.35	0.03

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	LTE Band66	132072	1720	1RB-Middle	Cheek Left	0mm	\	24.03	24.5	0.04	0.04	0.027	0.03	-0.03
Head	LTE Band66	132072	1720	1RB-Middle	Tilt Left	0mm	\	24.03	24.5	0.039	0.04	0.024	0.03	-0.17
Head	LTE Band66	132072	1720	1RB-Middle	Cheek Right	0mm	23	24.03	24.5	0.078	0.09	0.049	0.05	0.01
Head	LTE Band66	132072	1720	1RB-Middle	Tilt Right	0mm	\	24.03	24.5	0.041	0.05	0.025	0.03	0.03
Head	LTE Band66	132572	1770	50RB-Low	Cheek Left	0mm	\	23.01	23.5	<0.01	<0.01	<0.01	<0.01	\
Head	LTE Band66	132572	1770	50RB-Low	Tilt Left	0mm	\	23.01	23.5	<0.01	<0.01	<0.01	<0.01	\
Head	LTE Band66	132572	1770	50RB-Low	Cheek Right	0mm	\	23.01	23.5	0.057	0.06	0.035	0.04	-0.18
Head	LTE Band66	132572	1770	50RB-Low	Tilt Right	0mm	\	23.01	23.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band66	132072	1720	1RB-Middle	Front	10mm	\	20.14	21.5	0.109	0.15	0.068	0.09	0.1
Body	LTE Band66	132072	1720	1RB-Middle	Rear	10mm	\	20.14	21.5	0.393	0.54	0.228	0.31	-0.01
Body	LTE Band66	132072	1720	1RB-Middle	Left	10mm	\	20.14	21.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band66	132072	1720	1RB-Middle	Right	10mm	\	20.14	21.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band66	132072	1720	1RB-Middle	Bottom	10mm	24	20.14	21.5	0.468	0.64	0.262	0.36	-0.01
Body	LTE Band66	132572	1770	50RB-Low	Front	10mm	\	20.14	21.5	0.102	0.14	0.063	0.09	0.06
Body	LTE Band66	132572	1770	50RB-Low	Rear	10mm	\	20.14	21.5	0.361	0.49	0.209	0.29	-0.05
Body	LTE Band66	132572	1770	50RB-Low	Left	10mm	\	20.14	21.5	0.058	0.08	0.036	0.05	0.05
Body	LTE Band66	132572	1770	50RB-Low	Right	10mm	\	20.14	21.5	<0.01	<0.01	<0.01	<0.01	\
Body	LTE Band66	132072	1720	50RB-Low	Bottom	10mm	\	20.09	21.5	0.366	0.51	0.201	0.28	0.14

13.2 SAR results for WLAN


The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n ac then ax) is selected.


SAR Test reduction was applied from KDB 248227 guidance, when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

Duty factor plot

CH6

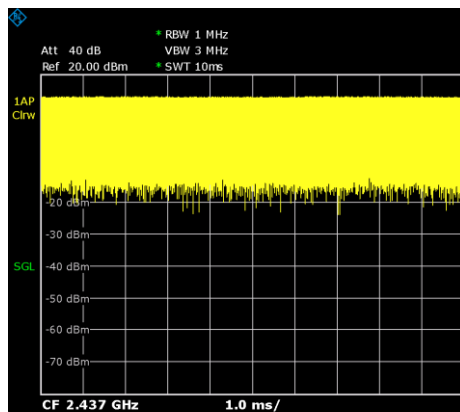

CH128

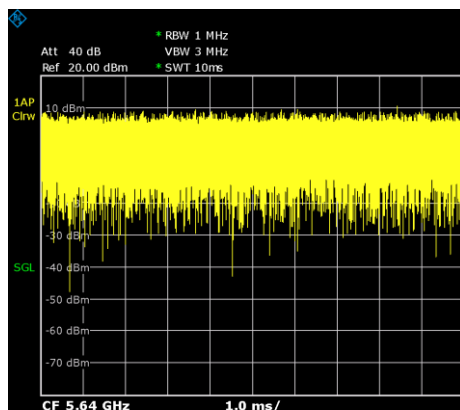

WLAN 2.4G

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	WIFI2.4G	6	2437	11b 1Mbps	Cheek Left	0mm	\	15.71	17	0.442	0.59	0.223	0.30	-0.11
Head	WIFI2.4G	6	2437	11b 1Mbps	Tilt Left	0mm	25	15.71	17	0.462	0.62	0.222	0.30	0.04
Head	WIFI2.4G	6	2437	11b 1Mbps	Cheek Right	0mm	\	15.71	17	0.190	0.26	0.101	0.14	0.05
Head	WIFI2.4G	6	2437	11b 1Mbps	Tilt Right	0mm	\	15.71	17	0.239	0.32	0.116	0.16	0.03
Body	WIFI2.4G	6	2437	11b 1Mbps	Front	10mm	\	15.71	17	0.137	0.18	0.072	0.10	-0.05
Body	WIFI2.4G	6	2437	11b 1Mbps	Rear	10mm	26	15.71	17	0.214	0.29	0.103	0.14	-0.16
Body	WIFI2.4G	6	2437	11b 1Mbps	Right	10mm	\	15.71	17	0.140	0.19	0.070	0.09	0.05
Body	WIFI2.4G	6	2437	11b 1Mbps	Top	10mm	\	15.71	17	0.161	0.22	0.081	0.11	0.1

WLAN 5G

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	WIFI5G	60	5300	11a 6Mbps	Cheek Left	0mm	\	15.93	16.5	0.374	0.43	0.093	0.11	-0.08
Head	WIFI5G	60	5300	11a 6Mbps	Tilt Left	0mm	27	15.93	16.5	0.62	0.71	0.152	0.17	-0.06
Head	WIFI5G	60	5300	11a 6Mbps	Cheek Right	0mm	\	15.93	16.5	0.294	0.34	0.085	0.10	-0.01
Head	WIFI5G	60	5300	11a 6Mbps	Tilt Right	0mm	\	15.93	16.5	0.406	0.46	0.115	0.13	-0.15
Head	WIFI5G	128	5640	11a 6Mbps	Cheek Left	0mm	\	16.18	16.5	0.29	0.31	0.087	0.09	0.12
Head	WIFI5G	128	5640	11a 6Mbps	Tilt Left	0mm	\	16.18	16.5	0.393	0.42	0.1	0.11	0.17
Head	WIFI5G	128	5640	11a 6Mbps	Cheek Right	0mm	\	16.18	16.5	0.154	0.17	0.049	0.05	0.04
Head	WIFI5G	128	5640	11a 6Mbps	Tilt Right	0mm	\	16.18	16.5	0.189	0.20	0.059	0.06	0.01
Head	WIFI5G	149	5745	11a 6Mbps	Cheek Left	0mm	\	15.37	16.5	0.179	0.23	0.061	0.08	-0.07
Head	WIFI5G	149	5745	11a 6Mbps	Tilt Left	0mm	\	15.37	16.5	0.301	0.39	0.085	0.11	0.04
Head	WIFI5G	149	5745	11a 6Mbps	Cheek Right	0mm	\	15.37	16.5	0.12	0.16	0.042	0.05	0.06
Head	WIFI5G	149	5745	11a 6Mbps	Tilt Right	0mm	\	15.37	16.5	0.152	0.20	0.055	0.07	0.07
Body	WIFI5G	60	5300	11a 6Mbps	Front	10mm	\	15.93	16.5	0.072	0.08	0.024	0.03	0.05
Body	WIFI5G	60	5300	11a 6Mbps	Rear	10mm	\	15.93	16.5	0.106	0.12	0.035	0.04	0.09
Body	WIFI5G	60	5300	11a 6Mbps	Right	10mm	\	15.93	16.5	0.042	0.05	0.007	0.01	-0.15
Body	WIFI5G	60	5300	11a 6Mbps	Top	10mm	28	15.93	16.5	0.263	0.30	0.081	0.09	0.04
Body	WIFI5G	128	5640	11a 6Mbps	Front	10mm	\	16.18	16.5	0.067	0.07	0.014	0.14	0.05
Body	WIFI5G	128	5640	11a 6Mbps	Rear	10mm	\	16.18	16.5	0.046	0.05	0.009	0.12	-0.14
Body	WIFI5G	128	5640	11a 6Mbps	Right	10mm	\	16.18	16.5	0.049	0.05	0.0126	0.14	0.12
Body	WIFI5G	128	5640	11a 6Mbps	Top	10mm	\	16.18	16.5	0.135	0.15	0.32	0.34	-0.11
Body	WIFI5G	149	5745	11a 6Mbps	Front	10mm	\	15.37	16.5	0.071	0.09	0.158	0.20	-0.15
Body	WIFI5G	149	5745	11a 6Mbps	Rear	10mm	\	15.37	16.5	0.068	0.09	0.154	0.20	-0.01
Body	WIFI5G	149	5745	11a 6Mbps	Right	10mm	\	15.37	16.5	0.047	0.06	0.089	0.12	0.05
Body	WIFI5G	149	5745	11a 6Mbps	Top	10mm	\	15.37	16.5	0.109	0.14	0.259	0.34	-0.02

13.3 SAR results for BT

RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test setup	Distance	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Head	BT	0	2402	GFSK	Cheek Left	0mm	29	9.31	10.5	0.066	0.09	0.032	0.04	0.04
Head	BT	0	2402	GFSK	Tilt Left	0mm	\	9.31	10.5	0.04	0.05	0.02	0.03	-0.12
Head	BT	0	2402	GFSK	Cheek Right	0mm	\	9.31	10.5	0.025	0.03	0.013	0.02	-0.01
Head	BT	0	2402	GFSK	Tilt Right	0mm	\	9.31	10.5	0.019	0.02	0.011	0.01	0.03
Body	BT	0	2402	GFSK	Front	10mm	\	9.31	10.5	0.013	0.02	0.006	0.01	-0.08
Body	BT	0	2402	GFSK	Rear	10mm	30	9.31	10.5	0.021	0.03	0.009	0.01	0.06
Body	BT	0	2402	GFSK	Right	10mm	\	9.31	10.5	0.013	0.02	0.006	0.01	-0.05
Body	BT	0	2402	GFSK	Top	10mm	\	9.31	10.5	0.014	0.02	0.006	0.01	0.1

13.4 SAR results for Phablet

According to the KDB648474 D04, for smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB Publication 616217 are required when the overall diagonal dimension of the device is > 20.0 cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Extremity 10-g SAR is also not required for the front (top) surface of larger form factor full size tablets. The more conservative normal tablet SAR results can be used to support phablet mode 10-g extremity SAR.
3. The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions

The 10g extremity SAR is not required for this DUT, because all the hotspot mode 1g reported SAR is less than 1.2 W/kg.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Frequency		Setup	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
	Ch.	MHz						
GSM850	190	836.6	GPRS(4)	Right Cheek	0.903	0.894	1.01	\
GSM1900	512	1850.2	GPRS(4TX)	Bottom 10mm	0.986	0.963	1.02	\
WB4	1513	1752.6	RMC	Bottom 10mm	0.912	0.881	1.04	\
WB2	9262	1852.4	RMC	Bottom 10mm	1.01	0.974	1.04	\
LTE Band2	18700	1860	1RB-Middle	Bottom 10mm	0.844	0.834	1.01	\
LTE Band41	41055	2636.5	1RB-Middle	Bottom 10mm	1.01	0.985	1.03	\

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞

20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5

17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	December 25, 2023	One year
02	Power sensor	NRP110T	101139	January 13, 2024	One year
03	Power sensor	NRP110T	101159	January 13, 2024	One year
04	Signal Generator	E4438C	MY49071430	December 25, 2023	One year
05	Dielectric Probe Kit	85070E	Agilent	No Calibration Requested	
06	Directional Coupler	778D	MY48220584	No Calibration Requested	
07	Amplifier	60S1G4	0331848	No Calibration Requested	
08	BTS	CMW500	159890	January 9, 2024	One year
09	E-field Probe	SPEAG EX3DV4	7727	September 21, 2024	One year
10	DAE	SPEAG DAE4	1745	September 13, 2024	One year
11	Dipole Validation Kit	SPEAG D750V3	1017	July 9,2024	One year
12	Dipole Validation Kit	SPEAG D835V2	4d069	July 9,2024	One year
13	Dipole Validation Kit	SPEAG D1800V2	2d145	July 11,2024	One year
14	Dipole Validation Kit	SPEAG D1900V2	5d101	July 8,2024	One year
15	Dipole Validation Kit	SPEAG D2450V2	853	July 10,2024	One year
16	Dipole Validation Kit	SPEAG D2600V2	1012	July 10,2024	One year
17	Dipole Validation Kit	SPEAG D5GHzV2	1060	June 12,2024	One year

END OF REPORT BODY

Appendixes

- ANNEX A Graph Results**
- ANNEX B System Verification Results**
- ANNEX C SAR Measurement Setup**
- ANNEX D Position of the wireless device in relation to the phantom**
- ANNEX E Equivalent Media Recipes**
- ANNEX F System Validation**
- ANNEX G Probe Calibration Certificate**
- ANNEX H Dipole Calibration Certificate**
- ANNEX I Accreditation Certificate**