

DASY5 Validation Report for Body TSL

Date: 13.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 869

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 2.03 \text{ S/m}$; $\varepsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

• Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;

• Sensor-Surface: 3mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn601; Calibrated: 30.04.2014

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002


• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 93.93 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 26.7 W/kg


SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6 W/kg Maximum value of SAR (measured) = 17.0 W/kg

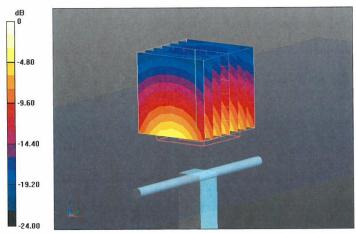

0 dB = 17.0 W/kg = 12.30 dBW/kg



Impedance Measurement Plot for Body TSL

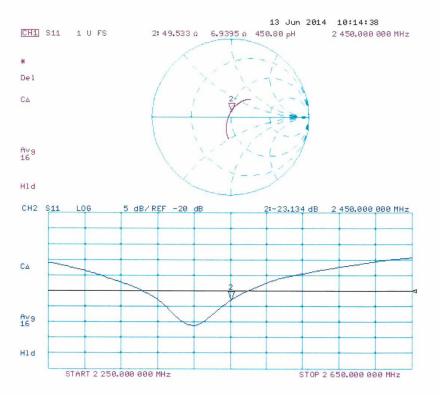



ANNEX I SPOT CHECK TEST

As the test lab for 4013E from TCL Communication Ltd, we, CTTL(Shouxiang), declare on our sole responsibility that, according to "Declaration of changes" provided by applicant, only the Spot check test should be performed. The test results are as below.

I.1 Internal Identification of EUT used during the spot check test

EUT ID*	IMEI	HW Version	SW Version
EUT 1	357018060000735	PIO	v5B4
EUT 2	357018060000255	PIO	v5B4
EUT 3	357018060000859	PIO	v5B4

^{*}EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT 1&2 and conducted power with the EUT 3.

I.2 Conducted power of selected case

Table I.1: The conducted power results for GSM850/1900

GSM		Conducted Power (dBm)	
850MHz	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
OOUIVINZ	32.32	\	\
CCM		Conducted Power (dBm)	
GSM	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
1900MHz	\	\	29.09

Table I.2: The conducted power results for GPRS

Table I.E. The	onadoted powe	i results for Ci	110	
GSM 850	Measured Power (dBm)			
GPRS (GMSK)	251	190	128	
2 Txslots	29.49 \ \			
PCS1900	Mea	sured Power (d	Bm)	
GPRS (GMSK)	810	661	512	
4 Txslots	\	\	23.72	

Table I.3: The conducted power results for WCDMA

Itom	band		FDD V result	
Item	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	١	23.82	22.98	/
Item	band		FDD II result	
item	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	١	\	22.71	\



I.3 Measurement results

SAR Values (GSM 850 MHz Band - Head)

Freque	Frequency		Test	Battery Type	SAR(1	lg) (W/kg)
MHz	Ch.	Side	Position	Battery Type	Original data	Spot check data
848.8	251	Left	Touch	CAB31P0000C1	0.602	0.531

SAR Values (GSM 850 MHz Band - Body)

Freque	ency		Test	Spacing		SAR(1	g) (W/kg)
MHz	Ch.	Mode/Band	Position	(mm)	Battery Type	Original data	Spot check data
848.8	251	GPRS	Rear	10	CAB31P0000C1	0.687	0.644

SAR Values (PCS 1900 MHz Band - Head)

Frequency		Side	Test	Pottory Type	SAR(1	lg) (W/kg)
MHz	Ch.	Side	Position	Battery Type	Original data	Spot check data
1850.2	512	Left	Touch	CAB31P0000C1	0.474	0.458

SAR Values (PCS 1900 MHz Band - Body)

Freque	ency		Test	Spacing		SAR(1g	g) (W/kg)
MHz	Ch.	Mode/Band	Position	Spacing (mm)	Battery Type	Original data	Spot check data
1850.2	512	GPRS	Rear	10	CAB31P0000C1	0.703	0.498

SAR Values (WCDMA 850 MHz Band - Head)

Frequ	Frequency		Test	Pattory Type	SAR(1	lg) (W/kg)
MHz	Ch.	Side	Position	Battery Type	Original data	Spot check data
836.4	4182	Left	Touch	CAB31P0000C1	0.652	0.545

SAR Values (WCDMA 850 MHz Band - Body)

Frequ	iency	Test	Spacing	Pattory Type	SAR(1	lg) (W/kg)
MHz	Ch.	Position	(mm)	Battery Type	Original data	Spot check data
846.6	4233	Rear	10	CAB31P0000C1	0.64	0.639

SAR Values (WCDMA 1900 MHz Band - Head)

Frequ	Frequency		Test	Battery Type	SAR(1	lg) (W/kg)
MHz	Ch.	Side	Position	вашегу туре	Original data	Spot check data
1880	9400	Left	Touch	CAB31P0000C1	0.906	0.865

SAR Values (WCDMA 1900 MHz Band - Body)

Frequ	ency	Test	Spacing	Pottory Type	SAR(1	g) (W/kg)
MHz	Ch.	Position	(mm)	Battery Type	Original data	Spot check data
1880	9400	Rear	10	CAB31P0000C1	0.737	0.679



I.4 Reported SAR Comparison

Exposure Configuration		Reported SAR	Reported SAR
	Technology Band	1g (W/Kg):	1g (W/Kg):
		original	spot check
Head (Separation Distance 0mm)	GSM 850	0.73	0.63
	PCS 1900	0.65	0.61
	UMTS FDD 5	0.73	0.69
	UMTS FDD 2	1.09	1.09
Body-worn (Separation Distance 10mm)	GSM 850	0.76	0.72
	PCS 1900	0.96	0.67
	UMTS FDD 5	0.68	0.66
	UMTS FDD 2	0.88	0.85



I.5 Graphic results

GSM850 Left Cheek High

Date: 2014-12-22

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 848.8 MHz; $\sigma = 0.909$ S/m; $\varepsilon_r = 41.036$; $\rho = 1000$

kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.8°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek High/Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.588 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.21 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 0.557 W/kg

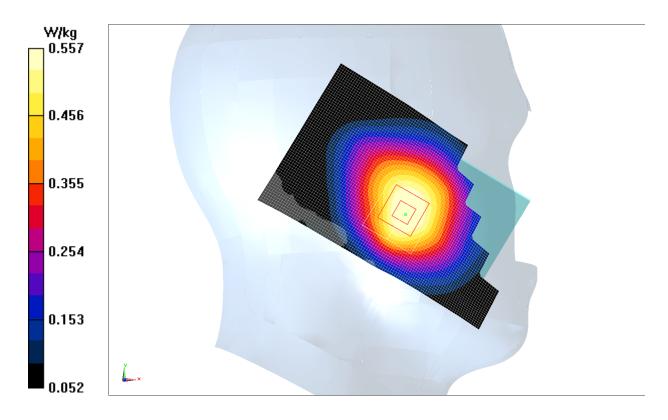


Fig.1 850MHz 251



GSM850 Body Rear High with GPRS

Date: 2014-12-22

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used(interpolated): f = 848.8 MHz; $\sigma = 9.994$ S/m; $\varepsilon_r = 53.263$; $\rho = 1000$

kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.8°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN3846 ConvF(9.09, 9.09, 9.09)

Rear High/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.728 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.43 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.480 W/kgMaximum value of SAR (measured) = 0.677 W/kg

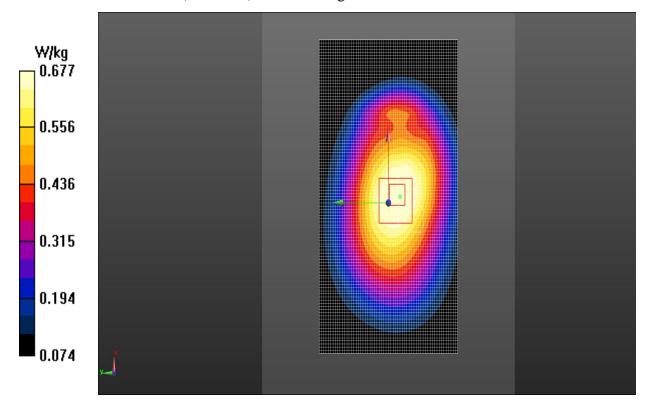


Fig.2 850 MHz CH251



GSM1900 Left Cheek Low

Date: 2014-12-11

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters used(interpolated): f = 1850.2 MHz; $\sigma = 1.355$ S/m; $\varepsilon_r = 40.591$; $\rho = 1000$

 kg/m^3

Ambient Temperature: 22.0°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(7.26, 7.26, 7.26)

Cheek Low/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.506 W/kg

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.705 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.271 W/kgMaximum value of SAR (measured) = 0.506 W/kg

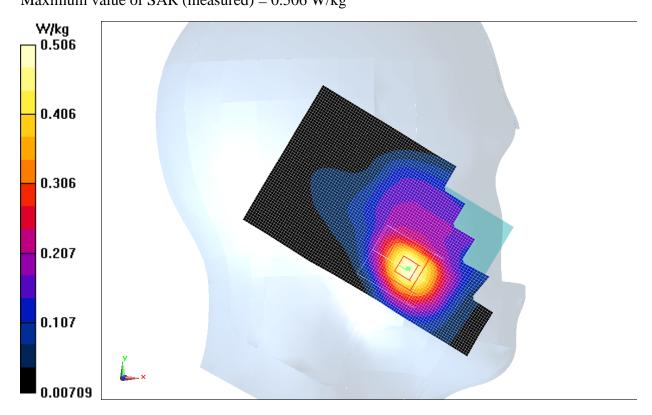


Fig.3 1900 MHz CH512



GSM1900 Body Rear Low with GPRS

Date: 2014-12-11

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used (interpolated): f = 1850.2 MHz; $\sigma = 1.505$ S/m; $\varepsilon_r = 53.038$; $\rho = 1000$

 kg/m^3

Ambient Temperature: 22.0°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:2

Probe: EX3DV4 - SN3846 ConvF(7.15, 7.15, 7.15)

Rear Low/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.470 W/kg

Rear Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.629 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.533 W/kg

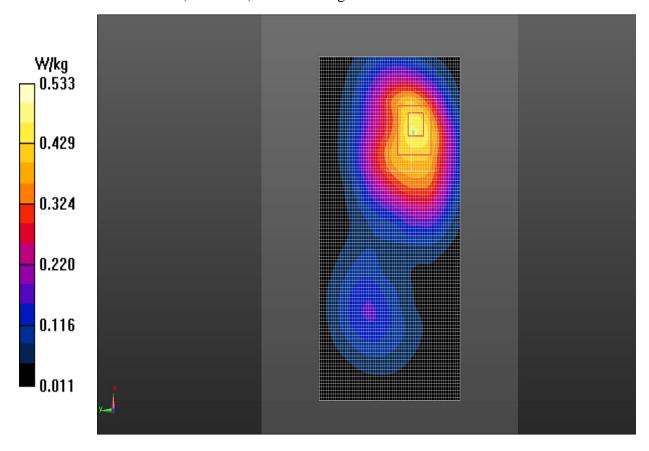


Fig.4 1900 MHz CH512



WCDMA 850 Left Cheek Middle

Date: 2014-12-22

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 836.4 MHz; $\sigma = 0.898$ S/m; $\varepsilon_r = 41.39$; $\rho = 1000$

kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.8°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm Maximum value of SAR (interpolated) = 0.596 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.412 W/kgMaximum value of SAR (measured) = 0.575 W/kg

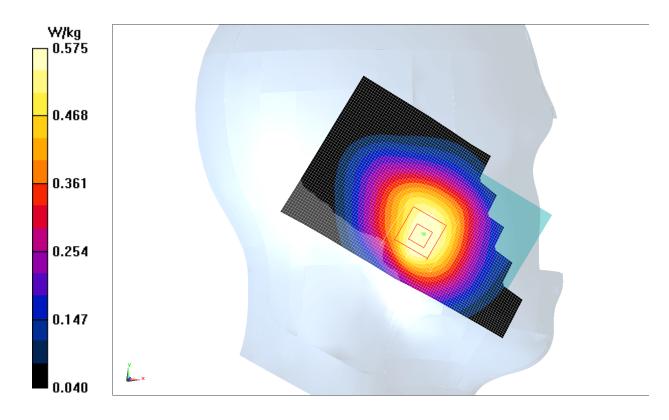


Fig.5 WCDMA 850 CH4182