

# SAR TEST REPORT

# No. I15Z43241-SEM01

For

**TCL Communication Ltd.** 

# HSUPA/HSDPA/UMTS quad band /GSM quad band mobile phone

Model Name: 4034A

With

**Hardware Version: PIO** 

Software Version: SW3D51

FCC ID: 2ACCJH045

Issued Date: 2016-2-3



#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

#### **Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: <a href="mailto:cttl">cttl</a> terminals@catr.cn, website: <a href="mailto:www.chinattl.com">www.chinattl.com</a>



# **REPORT HISTORY**

Report Number	Revision	Issue Date	Description
I15Z43241-SEM01	Rev.0	2016-2-3	Initial creation of test report



# **TABLE OF CONTENT**

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT	5
1.3 Project Data	
1.4 Signature	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 Manufacturer Information	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 About EUT	9
4.2 Internal Identification of EUT used during the test	9
4.3 Internal Identification of AE used during the test	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS	10
6 SPECIFIC ABSORPTION RATE (SAR)	11
6.1 Introduction	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	16
8.1 System Setup	16
8.2 System Verification	17
9 MEASUREMENT PROCEDURES	18
9.1 Tests to be performed	18
9.2 GENERAL MEASUREMENT PROCEDURE	19
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	
9.4 BLUETOOTH &WI-FI MEASUREMENT PROCEDURES FOR SAR	
9.5 Power Drift	21
10 AREA SCAN BASED 1-G SAR	22
10.1 REQUIREMENT OF KDB.	22
10.2 FAST SAR ALGORITHMS	22
11 CONDUCTED OUTPUT POWER	23



11.1 MANU	JFACTURING TOLERANCE	23	
11.2 GSM	MEASUREMENT RESULT	26	
11.3 WCD	MA MEASUREMENT RESULT	27	
11.4 WI-FI	AND BT MEASUREMENT RESULT	27	
12 SIMULT	TANEOUS TX SAR CONSIDERATIONS	29	
12.1 INTRO	DUCTION	29	
	SMIT ANTENNA SEPARATION DISTANCES		
	MEASUREMENT POSITIONS		
12.4 STANI	DALONE SAR TEST EXCLUSION CONSIDERATIONS	30	
13 EVALU	ATION OF SIMULTANEOUS	31	
14 SAR TE	EST RESULT	32	
14.1 Тне е	VALUATION OF MULTI-BATTERIES	32	
14.2 SAR RESULTS FOR FAST SAR			
14.3 SAR RESULTS FOR STANDARD PROCEDURE			
14.4 WLA	N EVALUATION	38	
15 SAR MI	EASUREMENT VARIABILITY	40	
16 MEASU	REMENT UNCERTAINTY	41	
16.1 MEAS	UREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	41	
16.2 MEAS	UREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	42	
16.3 MEAS	UREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHZ~3GHZ)	43	
16.4 MEAS	UREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	44	
17 MAIN T	EST INSTRUMENTS	45	
ANNEX A	GRAPH RESULTS	46	
ANNEX B	SYSTEMVERIFICATION RESULTS	66	
ANNEX C	SAR MEASUREMENT SETUP	73	
ANNEX D	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .	79	
ANNEX E	EQUIVALENT MEDIA RECIPES	82	
ANNEX F	SYSTEM VALIDATION	83	
ANNEX G	PROBE CALIBRATION CERTIFICATE	84	
ANNEX H	DIPOLE CALIBRATION CERTIFICATE	95	
ANNEX I	SPOT CHECK TEST	119	
ANNEY I	ACCREDITATION CERTIFICATE	134	



# 1 Test Laboratory

## 1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District,
	Beijing, P. R. China100191

## **1.2 Testing Environment**

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

## 1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	January 1, 2016
Testing End Date:	January 3, 2016

# 1.4 Signature

Lin Xiaojun

(Prepared this test report)

Qi Dianyuan

(Reviewed this test report)

Xiao Li

Deputy Director of the laboratory (Approved this test report)



### 2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.I15Z43213-SEM01. According to the client request, we quote the test results of original sample. The results of spot check are presented in the annex I.

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd. HSUPA/HSDPA/UMTS quad band /GSM quad band mobile phone 4034A are as follows:

Table 2.1: Highest Reported SAR (1g)

		, 0,	
Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
	GSM 850	0.97	
Llood	PCS 1900	0.47	PCE
Head (Separation Distance 0mm)	UMTS FDD 5	0.94	PCE
(Separation Distance 0mm)	UMTS FDD 2	0.55	
	WLAN 2.4 GHz	0.20	DTS
Body-worn (Separation Distance 10mm)	GSM 850	0.83	
	PCS 1900	0.81	PCE
	UMTS FDD 5	1.01	PCE
(Separation distance formin)	UMTS FDD 2	0.87	
	WLAN 2.4 GHz	0.10	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (Table 2.1), and the values are: 1.01 W/kg(1g).



Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.97	0.20	1.17
Highest reported SAR value for Body	Rear	1.01	0.10	1.11

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.97	0.29	1.26
Highest reported SAR value for Body	Rear	1.01	0.15	1.16

BT\* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.26 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



# **3 Client Information**

# **3.1 Applicant Information**

Company Name:	TCL Communication Ltd
Address /Dest	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Address /Post:	Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-51798260
Fax:	0086-21-61460602

## 3.2 Manufacturer Information

Company Name:	TCL Communication Ltd
Address /Deats	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Address /Post:	Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-51798260
Fax:	0086-21-61460602



# 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 4.1 About EUT

Description:	HSUPA/HSDPA/UMTS quad band /GSM quad band mobile phone
Model Name:	4034A
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/900/1900/2100, BT, Wi-Fi
	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
Tested Tx Frequency:	826.4-846.6 MHz (WCDMA850 Band V)
	1852.4-1907.6 MHz (WCDMA1900 Band II)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	В
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)

# 4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014528000100523	PIO	SW3D51
EUT2	014528000100531	PIO	SW3D51
EUT3	014528000100515	PIO	SW3D51
EUT4	014528000100903	PIO	SW3D51
EUT5	014527000100525	PIO	SW3D51
EUT6	014527000100533	PIO	SW3D51
EUT7	014527000100517	PIO	SW3D51

<sup>\*</sup>EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT 1&2 and conducted power with the EUT 3&4. It is performed to test Spot check with the EUT 5&6 and conducted power with the EUT 7.

### 4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB1500040C1	/	BYD
AE2	Battery	CAB1500041C1	/	BYD
AE3	Battery	CAB1500042C7	/	WEKEN
AE4	Battery	CAB1500043C7	/	WEKEN
AE5	Headset	CCB3160A15C1	/	Juwei
AE6	Headset	CCB3160A11C1	/	Juwei
AE7	Headset	CCB3160A15C4	/	Meihao
AE8	Headset	CCB3160A11C4	/	Meihao
AE9	Headset	CCB0002A10C1	/	Juwei
AE10	Headset	CCB0002A10C4	/	Meihao

©Copyright. All rights reserved by CTTL.



\*AE ID: is used to identify the test sample in the lab internally.

**Note:** AE1 and AE2 are the same, so they can use the same results. AE3 and AE4 are the same, so they can use the same results. AE5 and AE6 are the same, so they can use the same results. AE7 and AE8 are the same, so they can use the same results.

### **5 TEST METHODOLOGY**

#### 5.1 Applicable Limit Regulations

**ANSI C95.1–1992:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2013:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

**KDB447498 D01: General RF Exposure Guidance v06:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

**KDB941225 D06 Hotspot Mode SAR v02r01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

**KDB865664 D01SAR measurement 100 MHz to 6 GHz v01r04:** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB865664 D02 RF Exposure Reporting v01r02:** RF Exposure Compliance Reporting and Documentation Considerations



### 6 Specific Absorption Rate (SAR)

#### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's over his awareness and ability to exercise control or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density  $(\rho)$ . The equation description is as below:

$$SAR = \frac{d}{dt}(\frac{dW}{dm}) = \frac{d}{dt}(\frac{dW}{\rho dv})$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c(\frac{\delta T}{\delta t})$$

Where: C is the specific head capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



# 7 Tissue Simulating Liquids

# 7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

				<u> </u>	
Frequency (MHz)	Liquid Type	Conductivity (σ)	± 5% Range	Permittivity (ε)	± 5% Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3


### 7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date	Type	Frequency	Permittivity	Drift	Conductivity	Drift
(yyyy-mm-dd)	Type	rrequency	3	(%)	σ (S/m)	(%)
2016-01-01	Head	835 MHz	41.13	-0.89	0.922	2.44
	Body	835 MHz	56.24	1.88	0.973	0.31
2016-01-02	Head	1900 MHz	39.77	-0.57	1.426	1.86
2010-01-02	Body	1900 MHz	54.04	1.39	1.549	1.91
2040 04 02	Head	2450 MHz	38.02	-3.01	1.823	1.28
2016-01-03	Body	2450 MHz	51.64	-2.01	1.975	1.28

Note: The liquid temperature is 22.0  $^{\circ}\mathrm{C}$ 



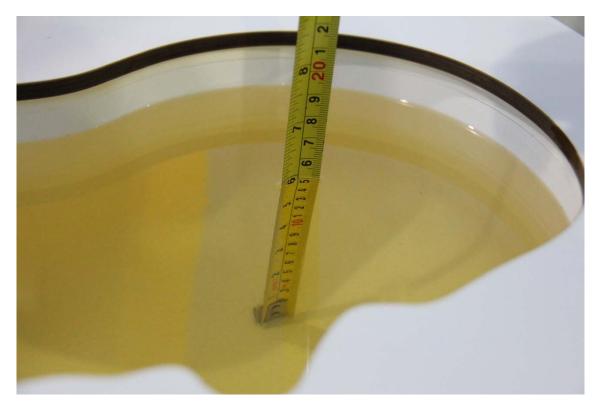

Picture 7-1: Liquid depth in the Head Phantom (835MHz)




Picture 7-2: Liquid depth in the Flat Phantom (835MHz)





Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

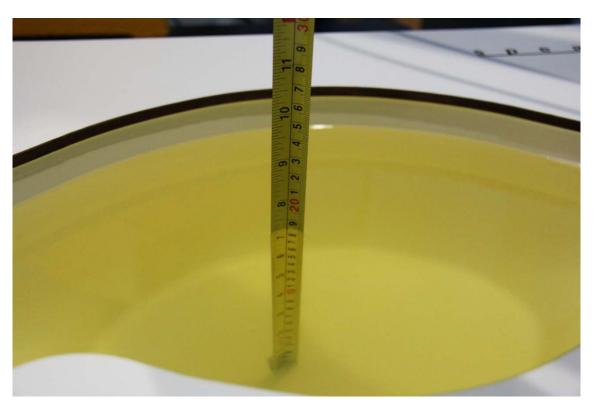


Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)





Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

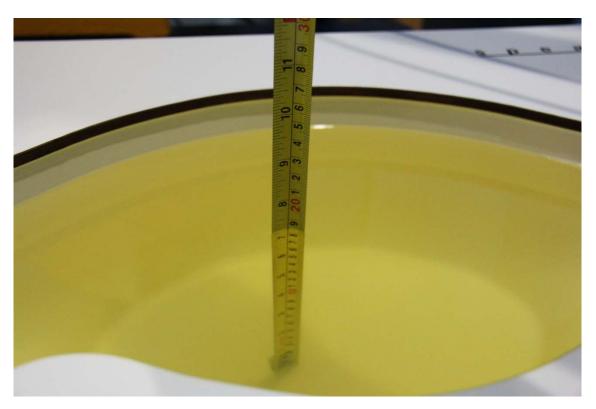


Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)



## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

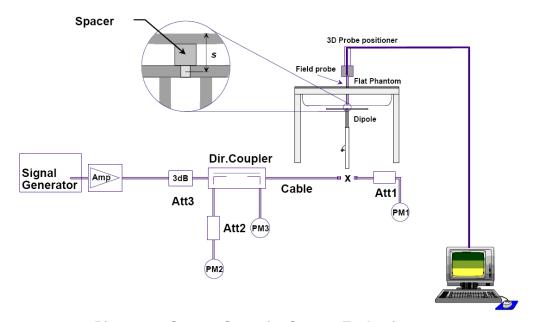

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup



### 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head** 

Measurement		Target val	ue (W/kg)	Measured	value(W/kg)	Devi	viation	
Date	Frequency	10 g	1 g	10 g	1 g	10 g	1 g	
(yyyy-mm-dd)		Average	Average	Average	Average	Average	Average	
2016-01-01	835 MHz	5.86	9.01	5.92	9.16	1.02%	1.66%	
2016-01-02	1900 MHz	21.5	40.7	21.88	41.56	1.77%	2.11%	
2016-01-03	2450 MHz	24.5	52.5	24.56	52.52	0.24%	0.04%	

**Table 8.2: System Verification of Body** 

Measurement		Target val	ue (W/kg)	Measured v	value (W/kg)	Deviation		
Date	Frequency	10 g	1 g	10 g	1 g	10 g	1 g	
(yyyy-mm-dd)		Average	Average	Average	Average	Average	Average	
2016-01-01	835 MHz	6.12	9.29	6.20	9.36	1.31%	0.75%	
2016-01-02	1900 MHz	21.7	40.4	21.96	41.36	1.20%	2.38%	
2016-01-03	2450 MHz	24.4	52.1	24.00	50.84	-1.64%	-2.42%	



### 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.

**Step 1**: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:


- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2**: For the condition providing highest peak spatial-average SAR determined in Step 1,perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3**: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.



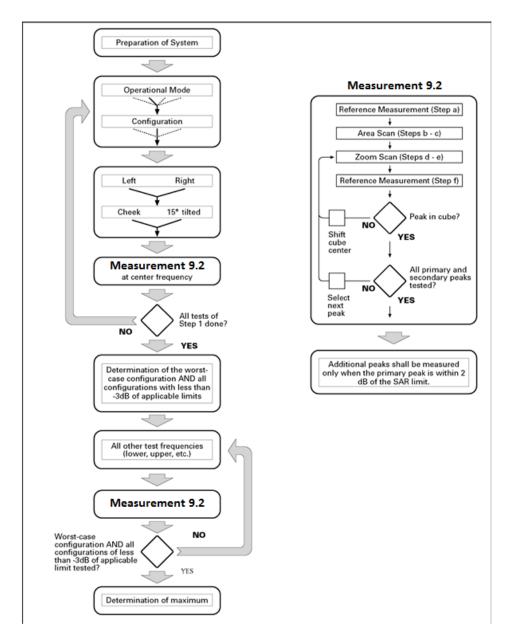

Picture 9.1Block diagram of the tests to be performed

#### 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results



when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from (geometric center of pro			5 ± 1 mm	½-5-ln(2) ± 0.5 mm
Maximum probe angle f normal at the measurem	•	-	30°±1°	20° ± 1°
			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			When the x or y dimension of t measurement plane orientation, measurement resolution must b dimension of the test device wi point on the test device.	is smaller than the above, the e < the corresponding x or y
Maximum zoom scan sp	atial resolu	tion: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$	≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
	uniform (	grid: Δz <sub>Zoom</sub> (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid	Δz <sub>Zoom</sub> (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	1	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: > 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

#### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

<sup>\*</sup> When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



#### For Release 5 HSDPA Data Devices:

Sub-test	$oldsymbol{eta}_c$	$oldsymbol{eta}_d$	$\beta_d$ (SF)	$oldsymbol{eta}_c$ / $oldsymbol{eta}_d$	$oldsymbol{eta}_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1. 0
3	15/15	8/15	64	15/8	30/15	1. 5
4	15/15	4/15	64	15/4	30/15	1. 5

#### For Release 6 HSPA Data Devices

Sub-	$oldsymbol{eta_c}$	$oldsymbol{eta_d}$	$\beta_d$ (SF)	$oldsymbol{eta_c}$ / $oldsymbol{eta_d}$	$oldsymbol{eta_{hs}}$	$oldsymbol{eta_{ec}}$	$oldsymbol{eta}_{ed}$	$eta_{ed}$	$eta_{ed}$	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	4. 5	4. 5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	4. 5	4. 5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$eta_{ed1}$ :47/15 $eta_{ed2}$ :47/15	4	2	4. 5	4. 5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	4. 5	4. 5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	2. 0	2. 0	21	81

#### 9.4 Bluetooth &Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

#### 9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.



### 10 Area Scan Based 1-g SAR

### 10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is  $\leq$  1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz)and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm mare 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.



# **11 Conducted Output Power**

# 11.1 Manufacturing tolerance

Table 11.1: GSM Speech

	GSM 850					
Channel	Channel 251	Channel 190	Channel 128			
Target (dBm)	32.3	32.3	32.3			
Tune-up(dBm)	33.3	33.3	33.3			
	GSN	1 1900				
Channel	Channel 810	Channel 661	Channel 512			
Target (dBm)	29.3	29.3	29.3			
Tune-up(dBm)	30.3	30.3	30.3			

### Table 11.2: GPRS and EGPRS

	16	GSM 850 GPRS (GM		
	Channel	251	190	128
4 T .1.1	Target (dBm)	32.3	32.3	32.3
1 Txslot	Tune-up(dBm)	33.3	33.3	33.3
O Tuelete	Target (dBm)	29.5	29.5	29.5
2 Txslots	Tune-up(dBm)	30.5	30.5	30.5
3Txslots	Target (dBm)	27.5	27.5	27.5
31 XSIOIS	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
4 1 X SIOLS	Tune-up(dBm)	27.5	27.5	27.5
		GSM 850 EGPRS (GN	MSK)	
	Channel	251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tune-up(dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	29.5	29.5	29.5
2 1 X SIULS	Tune-up(dBm)	30.5	30.5	30.5
3Txslots	Target (dBm)	27.5	27.5	27.5
31 851015	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
4 1 731013	Tune-up(dBm)	27.5	27.5	27.5
		GSM 1900 GPRS (GN	MSK)	
	Channel	810	661	512
1 Txslot	Target (dBm)	29.3	29.3	29.3
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tune-up(dBm)	30.3	30.3	30.3
2 Txslots	Target (dBm)	27	27	27
Z 1 731013	Tune-up(dBm)	28	28	28
3Txslots	Target (dBm)	25	25	25
31 721012	Tune-up(dBm)	26	26	26
4 Txslots	Target (dBm)	24	24	24
+ 1721012	Tune-up(dBm)	25	25	25



	GSM 1900 EGPRS (GMSK)						
	Channel <b>810 661 512</b>						
1 Txslot	Target (dBm)	29.3	29.3	29.3			
1 1 XSIOL	Tune-up(dBm)	30.3	30.3	30.3			
2 Txslots	Target (dBm)	27	27	27			
2 1 XSIOIS	Tune-up(dBm)	28	28	28			
3Txslots	Target (dBm)	25	25	25			
31 X51015	Tune-up(dBm)	26	26	26			
4 Txslots	Target (dBm)	24	24	24			
4 1 X SIOLS	Tune-up(dBm)	25	25	25			

### Table 11.3: WCDMA

		3: WCDIVIA							
	WCDM	A 850 CS	<del>,</del>						
Channel	Channel 4233	Channel 4182	Channel 4132						
Target (dBm)	23	23	23						
Tune-up(dBm)	24	24	24						
	HSUPA (sub-test 1~2)								
Channel	Channel 4233	Channel 4182	Channel 4132						
Target (dBm)	20	20	20						
Tune-up(dBm)	21	21	21						
	HSUPA (	(sub-test 3)							
Channel	Channel 4233	Channel 4182	Channel 4132						
Target (dBm)	21	21	21						
Tune-up(dBm)	22	22	22						
	HSUPA (	(sub-test 4)							
Channel	Channel 4233	Channel 4182	Channel 4132						
Target (dBm)	19.5	19.5	19.5						
Tune-up(dBm)	20.5	20.5	20.5						
	HSUPA (	(sub-test 5)							
Channel	Channel 4233	Channel 4182	Channel 4132						
Target (dBm)	22	22	22						
Tune-up(dBm)	23	23	23						
	WCDMA	A 1900 CS							
Channel	Channel 9538	Channel 9400	Channel 9262						
Target (dBm)	22	22	22						
Tune-up(dBm)	23	23	23						
	HSUPA (s	ub-test 1~2)							
Channel	Channel 9538	Channel 9400	Channel 9262						
Target (dBm)	19	19	19						
Tune-up(dBm)	20	20	20						
	HSUPA (	(sub-test 3)							
Channel	Channel 9538	Channel 9400	Channel 9262						
Target (dBm)	20	20	20						

©Copyright. All rights reserved by CTTL.



Tune-up(dBm)	21	21	21							
	HSUPA (sub-test 4)									
Channel	Channel Channel 9538 Channel 9400 Channel 9262									
Target (dBm)	18.5	18.5	18.5							
Tune-up(dBm)	Tune-up(dBm) 19.5		19.5							
	HSUPA (	sub-test 5)								
Channel	Channel Channel 9538		Channel 9262							
Target (dBm)	Target (dBm) 21		21							
Tune-up(dBm)	Tune-up(dBm) 22		22							

### Table 11.4: Bluetooth

Mode	Target (dBm)	Tune-up(dBm)
GFSK	6	7
EDR2M-4_DQPSK ch0	5	6
EDR2M-4_DQPSK ch39	7	8
EDR2M-4_DQPSK ch78	5	6
EDR3M-8DPSK	5	6

### Table 11.5: WiFi

Mode	Target (dBm)	Tune-up(dBm)
802.11 b (2.4GHz)	15.5	16.5
802.11g CH1 6-24Mbps	12.5	13.5
802.11g CH1 36-54Mbps	12.5	13.5
802.11g CH6 6-24Mbps	13.5	14.5
802.11g CH6 36-54Mbps	13	14
802.11g CH11 6-24Mbps	12.5	13.5
802.11g CH11 36-54Mbps	12	13
802.11n HT20 CH1 MCS0-4	12	13
802.11n HT20 CH1 MCS5-7	11.5	12.5
802.11n HT20 CH6 MCS0-4	11.5	12.5
802.11n HT20 CH6 MCS5-7	11	12
802.11n HT20 CH11 MCS0-3	10.5	11.5
802.11n HT20 CH1 1MCS4-7	10	11
802.11n HT40 CH1 MCS0-3	9	10
802.11n HT40 CH1 MCS4-7	8	9
802.11n HT40 CH6 MCS0-2	8.5	9.5
802.11n HT40 CH6 MCS3-7	8	9
802.11n HT40 CH11 MCS0-3	8.5	9.5
802.11n HT40 CH1 1MCS4-7	7.5	8.5



#### 11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.6: The conducted power measurement results for GSM850/1900

GSM		Conducted Power (dBm)				
850MHz	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)			
OOUIVINZ	32.83	32.84	32.80			
CCM		Conducted Power(dBm)				
GSM	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)			
1900MHz	29.58	29.55	29.49			

Table 11.7: The conducted power measurement results for GPRS and EGPRS

GSM 850	Meası	red Power	(dBm)	calculation	Averaç	Averaged Power (dBm)		
GPRS (GMSK)	251	190	128		251	190	128	
1 Txslot	32.82	32.82	32.77	-9.03	23.79	23.79	23.74	
2 Txslots	29.73	29.70	29.66	-6.02	23.71	23.68	23.64	
3Txslots	27.91	27.94	27.91	-4.26	23.65	23.68	23.65	
4 Txslots	26.61	26.61	26.57	-3.01	23.60	23.60	23.56	
GSM 850	Meası	red Power	(dBm)	calculation	Averaç	ged Power	(dBm)	
EGPRS (GMSK)	251	190	128		251	190	128	
1 Txslot	32.82	32.82	32.78	-9.03	23.79	23.79	23.75	
2 Txslots	29.73	29.71	29.68	-6.02	23.71	23.69	23.66	
3Txslots	27.90	27.95	27.91	-4.26	23.64	23.69	23.65	
4 Txslots	26.61	26.61	26.57	-3.01	23.60	23.60	23.56	
PCS1900	Meası	red Power	(dBm)	calculation	Averaç	ged Power	(dBm)	
GPRS (GMSK)	810	661	512		810	661	512	
1 Txslot	29.56	29.53	29.47	-9.03	20.53	20.50	20.44	
2 Txslots	27.35	27.28	27.19	-6.02	21.33	21.26	21.17	
3Txslots	25.34	25.27	25.16	-4.26	21.08	21.01	20.90	
4 Txslots	24.18	24.12	24.02	-3.01	21.17	21.11	21.01	
PCS1900	Meası	red Power	(dBm)	calculation	Averaç	ged Power	(dBm)	
EGPRS (GMSK)	810	661	512		810	661	512	
1 Txslot	29.56	29.53	29.48	-9.03	20.53	20.50	20.45	
2 Txslots	27.35	27.27	27.19	-6.02	21.33	21.25	21.17	
3Txslots	25.32	25.25	25.15	-4.26	21.06	20.99	20.89	
4 Txslots	24.19	24.13	24.03	-3.01	21.18	21.12	21.02	

NOTES:

To average the power, the division factor is as follows:

<sup>1)</sup> Division Factors



1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 1Txslots for GSM850 and 2Txslots for PCS1900.

#### 11.3 WCDMA Measurement result

Table 11.8: The conducted Power for WCDMA850/1900

lt o me	band		FDDV result			
item	Item ARFCN 4233(846.6MHz)		4182(836.4MHz)	4132(826.4MHz)		
WCDMA	\	23.63	23.62	23.64		
	1	20.42	20.41	20.56		
	2	20.4	20.39	20.57		
HSUPA	3	21.37	21.37	21.54		
	4	19.86	19.86	20.01		
	5	22.37	22.36	22.52		
Item	band		FDDII result	DDII result		
item	ARFCN	9538(1907.6MHz)	9400(1880MHz)	9262(1852.4MHz)		
WCDMA	\	22.65	22.53	22.56		
	1	19.47	19.39	19.42		
	2	19.44	19.41	19.41		
HSUPA	3	20.43	20.39	20.39		
	4	18.92	18.84	18.86		
	5	21.5	21.46	21.46		

### 11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)					
iviode	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78(2480MHz)			
GFSK	5.14	6.03	6.13			
EDR2M-4_DQPSK	4.23	7.80	5.22			
EDR3M-8DPSK	4.28	5.08	5.25			

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	16.11	16.09	16.18	16.04
6	15.78	/	15.13	/
11	15.13	/	15.01	/



## 802.11g (dBm)

Channel\dat	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
a rate								
1	13.12	/	/	/	/	/	/	/
6	13.57	13.55	13.51	13.43	13.32	13.16	13.04	12.96
11	12.82	/	/	/	/	1	/	/

### 802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	12.05	11.94	11.88	11.82	11.62	11.61	11.55	11.28
6	11.66	/	/	/	/	/	/	/
11	10.86	/	/	/	/	/	/	/

### 802.11n (dBm) - HT40 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	9.56	9.16	9.01	8.87	8.55	8.52	8.11	7.85
6	8.75	/	/	/	/	/	/	/
9	8.54	/	/	/	/	/	/	/




### 12 Simultaneous TX SAR Considerations

#### 12.1 Introduction

The following procedures adopted from "FCC SAR Considerations for Cell Phones with Multiple Transmitters" are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances

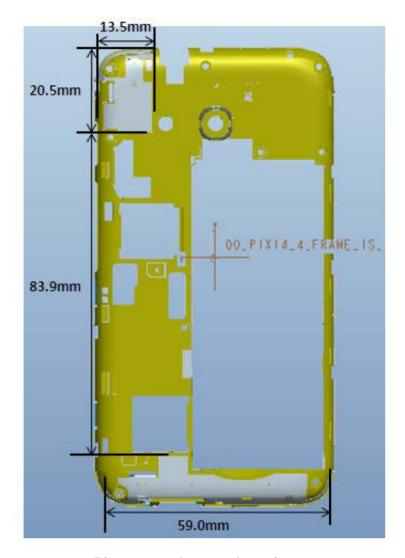

**Picture 12.1 Antenna Locations** 



#### 12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions											
Mode Front Rear Left edge Right edge Top edge Bottom edge											
Main antenna	Yes	Yes	Yes	Yes	No	Yes					
WLAN	WLAN Yes Yes No Yes Yes No										

#### 12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot$  [ $\sqrt{f(GHz)}$ ]  $\leq$  3.0 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion		utput wer	SAR test exclusion
			threshold(mW)	dBm	mW	
Bluetooth	2.441	Head	9.60	7	5.01	Yes
Didelootii	2. <del>44</del> 1	Body	19.20	7	5.01	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	16.5	44.67	No
2.4GHZ WLAN 602.11 D	2.40	Body	19.17	16.5	44.67	No



### 13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.97	0.20	1.17
Highest reported	Door	1.01	0.40	4 44
SAR value for Body	Rear	1.01	0.10	1.11

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.97	0.29	1.26
Highest reported SAR value for Body	Rear	1.01	0.15	1.16

BT\* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Desition	F (GHz)	Diotonos (mm)	Upper limi	Estimated <sub>1g</sub>	
Position	r (GHZ)	Distance (mm)	dBm	mW	(W/kg)
Head	2.441	5	7	5.01	0.29
Body	Body 2.441		7	5.01	0.15

<sup>\* -</sup> Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]-[ $\sqrt{f(GHz)/x}$ ] W/kg for test separation distances  $\leq$  50 mm; where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

### Conclusion:

According to the above tables, the sum of reported SAR values is<1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.



### 14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-gSAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or >1.2W/kg. The calculated SAR is obtained by the following formula:

Reported SAR = Measured SAR  $\times 10^{(P_{Target} - P_{Measured})/10}$ 

Where P<sub>Target</sub> is the power of manufacturing upper limit;

P<sub>Measured</sub> is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850	1:8.3
GPRS&EGPRS for PCS1900	1:4
WCDMA850/1900	1:1

#### 14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.1-1: The evaluation of multi-batteries for Head Test

Freque	ency	Mode/Band	Side	Test	Potton, Type	SAR(1g)	Power
MHz	Ch.	ivioue/bariu	Side	Position	Battery Type	(W/kg)	Drift(dB)
848.8	251	GSM850	Right	Touch	CAB1500040C1	0.652	0.03
848.8	251	GSM850	Right	Touch	CAB1500042C7	0.693	-0.15

Note: According to the values in the above table, the battery, CAB1500042C7, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.1-2: The evaluation of multi-batteries for Body Test

Frequency		Mode/Band	Test	Spacing	Pottory Typo	SAR(1g)	Power
MHz	Ch.	Mode/Barid	Position	(mm)	Battery Type	(W/kg)	Drift(dB)
836.6	190	GSM850	Rear	10	CAB1500040C1	0.674	0.09
836.6	190	GSM850	Rear	10	CAB1500042C7	0.681	0.04

Note: According to the values in the above table, the battery, CAB1500042C7, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.



### 14.2 SAR results for Fast SAR

### Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C													
Frequ	ency	y Test		Figure	Conducted	May tung up	Measured	Reported	Measured	Reported	Power			
	1	Side	Position	No.	Power		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift			
MHz	Ch.		Position	NO.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)			
848.8	251	Left	Touch	/	32.83	33.3	0.543	0.60	0.801	0.89	-0.05			
836.6	190	Left	Touch	Fig.1	32.84	33.3	0.657	0.73	0.876	0.97	-0.17			
824.2	128	Left	Touch	/	32.80	33.3	0.519	0.58	0.761	0.85	-0.14			
836.6	190	Left	Tilt	/	32.84	33.3	0.28	0.31	0.404	0.45	-0.18			
836.6	190	Right	Touch	/	32.84	33.3	0.477	0.53	0.702	0.78	0.06			
836.6	190	Right	Tilt	/	32.84	33.3	0.245	0.27	0.357	0.40	-0.05			

### Table 14.2-2: SAR Values (GSM 850 MHz Band-Body)

	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C													
Frequ	ency	Mode Test		Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift			
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)			
848.8	251	GPRS (1)	Front	/	32.82	33.3	0.455	0.51	0.655	0.73	-0.14			
836.6	190	GPRS (1)	Front	Fig.2	32.82	33.3	0.511	0.57	0.739	0.83	-0.04			
824.2	128	GPRS (1)	Front	/	32.77	33.3	0.503	0.57	0.723	0.82	-0.01			
836.6	190	GPRS (1)	Rear	/	32.82	33.3	0.5	0.56	0.712	0.79	-0.05			
836.6	190	GPRS (1)	Left	/	32.82	33.3	0.286	0.32	0.42	0.47	-0.12			
836.6	190	GPRS (1)	Right	/	32.82	33.3	0.287	0.32	0.423	0.47	-0.02			
836.6	190	GPRS (1)	Bottom	/	32.82	33.3	0.0864	0.10	0.143	0.16	-0.01			
836.6	190	EGPRS (1)	Front	/	32.82	33.3	0.497	0.55	0.711	0.79	-0.04			

Note1: The distance between the EUT and the phantom bottom is 10mm.

### Table 14.2-3: SAR Values (GSM1900 MHz Band - Head)

	Table 1 Hz 61 67 ft Tallage (Collinator IIII z Zalia 11644)														
	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C														
Frequency		Test		Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power				
		Side	Danisia		Power	•	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift				
MHz	Ch.		Position	No.	(dBm)	(dBm) Power (dBm)		(W/kg)	(W/kg)	W/kg)	(dB)				
1909.8	810	Left	Touch	Fig.3	29.58	30.3	0.232	0.27	0.398	0.47	-0.12				
1880	661	Left	Touch	/	29.55	30.3	0.188	0.22	0.318	0.38	-0.11				
1850.2	512	Left	Touch	/	29.49	30.3	0.198	0.24	0.334	0.40	0.05				
1880	661	Left	Tilt	/	29.55	30.3	0.0927	0.11	0.154	0.18	-0.08				
1880	661	Right	Touch	/	29.55	30.3	0.163	0.19	0.273	0.32	0.07				
1880	661	Right	Tilt	/	29.55	30.3	0.107	0.13	0.189	0.22	0.15				



### Table 14.2-4: SAR Values (GSM 1900 MHz Band-Body)

			Ambi	ent Temp	erature: 22.5 $^{\circ}$	C Liquid T	emperature:	22.0°C			
Frequ	ency	Mode	Test	Figure	Conducted Max. tune-up	Measured	Reported	Measured	Reported	Power	
		(number of	Position	No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	timeslots)	rosition	INO.	(dBm)	1 ower (dBill)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1880	661	GPRS (2)	Front	/	27.28	28	0.238	0.28	0.392	0.46	-0.07
1909.8	810	GPRS (2)	Rear	/	27.35	28	0.363	0.42	0.646	0.75	0.01
1880	661	GPRS (2)	Rear	/	27.28	28	0.316	0.37	0.556	0.66	-0.10
1850.2	512	GPRS (2)	Rear	Fig.4	27.19	28	0.395	0.48	0.674	0.81	-0.02
1909.8	810	GPRS (2)	Left	/	27.28	28	0.0556	0.07	0.0969	0.11	-0.10
1880	661	GPRS (2)	Right	/	27.28	28	0.0979	0.12	0.174	0.21	-0.13
1880	661	GPRS (2)	Bottom	/	27.28	28	0.229	0.27	0.421	0.50	-0.01
1850.2	512	EGPRS (2)	Rear	/	27.28	28	0.378	0.45	0.635	0.75	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

### Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)

	Table 1 112 of 67 at Tables (1702 in 172 data 176 day)													
	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C													
Frequ	iency	0.1	Test	Figure	Conducted	Max. tune-up	Measured SAR(10g)	Reported	Measured	Reported	Power			
MHz	Ch.	Side	Position	No.	(dBm)	Power (dBm)		SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	Drift (dB)			
846.6	4233	Left	Touch	/	23.63	24	0.507	0.55	0.746	0.81	-0.07			
836.4	4182	Left	Touch	Fig.5	23.62	24	0.659	0.72	0.865	0.94	-0.12			
826.4	4132	Left	Touch	/	23.64	24	0.471	0.51	0.692	0.75	-0.03			
836.4	4182	Left	Tilt	/	23.62	24	0.273	0.30	0.396	0.43	-0.18			
846.6	4233	Right	Touch	/	23.63	24	0.436	0.47	0.634	0.69	0.03			
836.4	4182	Right	Touch	/	23.62	24	0.532	0.58	0.772	0.84	-0.07			
826.4	4132	Right	Touch	/	23.64	24	0.425	0.46	0.617	0.67	0.16			
836.4	4182	Right	Tilt	/	23.62	24	0.297	0.32	0.43	0.47	0.03			

### Table 14.2-6: SAR Values (WCDMA 850 MHz Band-Body)

	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C												
			Ambi	ient Temperatu	ire: 22.5 °C	Liquid Tempe	rature: 22.0°	C		•			
Frequ	iency	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)(	Power Drift			
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)			
846.6	4233	Front	/	23.63	24	0.588	0.64	0.843	0.92	-0.01			
836.4	4182	Front	/	23.62	24	0.618	0.67	0.894	0.98	0.02			
826.4	4132	Front	/	23.64	24	0.484	0.53	0.697	0.76	-0.12			
846.6	4233	Rear	/	23.63	24	0.592	0.64	0.853	0.93	0.04			
836.4	4182	Rear	Fig.6	23.62	24	0.689	0.75	0.927	1.01	-0.04			
826.4	4132	Rear	/	23.64	24	0.534	0.58	0.77	0.84	-0.02			
836.4	4182	Left	/	23.62	24	0.354	0.39	0.518	0.57	-0.08			
836.4	4182	Right	/	23.62	24	0.352	0.38	0.52	0.57	-0.05			
836.4	4182	Bottom	/	23.62	24	0.0986	0.11	0.163	0.18	-0.07			

Note1: The distance between the EUT and the phantom bottom is 10mm.



### Table 14.2-7: SAR Values (WCDMA1900 MHz Band - Head)

				Ambient	Temperature:	22.5 °C Li	quid Tempera	ture: 22.0 °C			
Frequ	ency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
	Ch. Side F		Position	No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
MHz	Ch.		1 03111011	140.	(dBm)	1 Ower (dBill)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
1907.6	9538	Left	Touch	/	22.65	23	0.242	0.26	0.408	0.44	-0.08
1880	9400	Left	Touch	Fig.7	22.53	23	0.296	0.33	0.491	0.55	-0.11
1852.4	9262	Left	Touch	/	22.56	23	0.237	0.26	0.398	0.44	0.04
1880	9400	Left	Tilt	/	22.53	23	0.115	0.13	0.191	0.21	0.06
1880	9400	Right	Touch	/	22.53	23	0.205	0.23	0.348	0.39	0.10
1880	9400	Right	Tilt	/	22.53	23	0.133	0.15	0.236	0.26	-0.07

### Table 14.2-8: SAR Values (WCDMA1900 MHz Band-Body)

			Ambie	nt Temperature	e: 22.5 °C	Liquid Tempe	rature: 22.0°	С		
Frequ	ency	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)(	Power Drift
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
1880	9400	Front	/	22.53	23	0.25	0.28	0.428	0.48	-0.16
1907.6	9538	Rear	/	22.65	23	0.409	0.44	0.721	0.78	-0.01
1880	9400	Rear	Fig.8	22.53	23	0.456	0.51	0.779	0.87	-0.01
1852.4	9262	Rear	/	22.56	23	0.422	0.47	0.735	0.81	0.02
1880	9400	Left	/	22.53	23	0.0899	0.10	0.158	0.18	0.19
1880	9400	Right	/	22.53	23	0.143	0.16	0.253	0.28	0.05
1880	1880 9400 Bottom / 22.53		23	0.253	0.28	0.466	0.52	0.02		

Note1: The distance between the EUT and the phantom bottom is 10mm.

#### Table 14.2-9: SAR Values (GSM850 MHz Band - Head) - other batteries

		Table 1 made ( Comment and ) the day of the latter of														
Ī		Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C														
Frequency Test Conducted Max. tune-up Measured Reported Reported Reported										Reported	Power					
ŀ	·	,	Side		Battery	Power	•	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift				
	MHz	Ch.		Position		(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)				
ĺ	836.6	190	Left	Touch	1	32.84	33.3	0.645	0.72	0.846	0.94	0.05				

Note1: The battery 1 is CAB1500040C1

#### Table 14.2-10: SAR Values (WCDMA850 MHz Band-Body)- other batteries

					•		- ,			
			Ambier	nt Temperature	e: 22.5°C l	_iquid Tempe	rature: 22.0°	С		
Freque	encv	Toot		Conducted	Measured	Reported	Measured	Reported	Power	
Frequency Test			Battery	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz Ch. Position			(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)	
836.4	4182	Rear	1	23.62	24	0.593	0.65	0.875	0.96	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The battery 1 is CAB1500040C1



### 14.3 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

### Table 14.3-1: SAR Values (GSM 850 MHz Band - Head)

				Ambient	Temperature	: 22.5°C L	iquid Tempera	ature: 22.0°C			
Frequ	ency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
<u> </u>		Side		· ·	Power	•	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
836.6	190	Left	Touch	Fig.1	32.84	33.3	0.657	0.73	0.876	0.97	-0.17

### Table 14.3-2: SAR Values (GSM 850 MHz Band-Body)

			An	nbient Ter	mperature: 22	.5°C Liqui	d Temperature	e: 22.0 °C			
Frequency Mode (number of number of											
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.6	836.6 190 GPRS (1) Front Fig.2 32.82 33.3 0.511 <b>0.57</b> 0.739 <b>0.83</b> -0.04										

Note1: The distance between the EUT and the phantom bottom is 10mm.

#### Table 14.3-3: SAR Values (GSM1900 MHz Band - Head)

				Ambient	Temperature:	22.5 °C L	iquid Tempera	ture: 22.0 °C			
Freque	ency	Cido	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	Drift (dB)
1909.8	810	Left	Touch	Fig.3	29.58	30.3	0.232	0.27	0.398	0.47	-0.12

### Table 14.3-4: SAR Values (GSM 1900 MHz Band-Body)

			Ambi	ent Temp	erature: 22.5 °	°C Liquid T	emperature:	22.0°C				
Frequency Mode Test Figure Conducted Max. tune-up Measured Reported Reported Po												
	·····	(number of			Power		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift	
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)	
1850.2	1850.2 512 GPRS (2) Rear Fig.4 27.19 28 0.395 <b>0.48</b> 0.674 <b>0.81</b> -0.0										-0.02	

Note1: The distance between the EUT and the phantom bottom is 10mm.

#### Table 14.3-5: SAR Values (WCDMA 850 MHz Band - Head)

				Ambient	Temperature:	22.5 °C Li	quid Tempera	ture: 22.0 °C			
Frequency Test Figure Conducted Max. tune-up Measured Reported								Reported	Measured	Reported	Power
		Side			Power	·	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
836.4 4182 Left Touch Fig.5 23.62 24						24	0.659	0.72	0.865	0.94	-0.12



## Table 14.3-6: SAR Values (WCDMA 850 MHz Band-Body)

			Ambi	ent Temperatu	ıre: 22.5°C	Liquid Tempe	rature: 22.0°	C		
Frequ	uency	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)(	Power Drift
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
836.4	4182	Rear	Fig.6	23.62	24	0.689	0.75	0.927	1.01	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

## Table 14.3-7: SAR Values (WCDMA1900 MHz Band - Head)

				Ambient	Temperature:	22.5 °C Li	quid Tempera	ture: 22.0 °C			
Frequ	iency	0:4-	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	Drift (dB)
1880 9400 Left Touch Fig.7 22.53 23						23	0.296	0.33	0.491	0.55	-0.11

#### Table 14.3-8: SAR Values (WCDMA1900 MHz Band-Body)

						•			<i>J</i> ,		
				Ambie	nt Temperature	e: 22.5 °C	Liquid Tempe	rature: 22.0°	С		
	Frequency Test Figure Condu					May tung up	Measured	Reported	Measured	Reported	Power
				Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
	MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
I	1880	9400	Rear	Fig.8	22.53	23	0.456	0.51	0.779	0.87	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.



#### 14.4 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the <u>initial test</u> <u>position</u> procedure.

#### **Head Evaluation**

Table 14.4-1: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Fast SAR)

	Ambient Temperature: 22.0 °C Liquid Temperature: 21.6 °C													
Freque	Frequency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power			
		Side			Power	-	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift			
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)			
2412	1	Left	Touch	/	16.18	16.5	0.0862	0.09	0.164	0.18	0.12			
2412	1	Left	Tilt	/	16.18	16.5	0.0529	0.06	0.111	0.12	-0.12			
2412	1	Right	Touch	/	16.18	16.5	0.0459	0.05	0.0874	0.09	0.11			
2412	1	Right	Tilt	/	16.18	16.5	0.0336	0.04	0.0668	0.07	0.10			

As shown above table, the <u>initial test position</u> for head is "Left Touch". So the head SAR of WLAN is presented as below:

Table 14.4-2: SAR Values (WLAN - Head) - 802.11b 5.5Mbps (Full SAR)

			Amb	ient Tem	nperature: 2	2.5 °C L	iquid Tempe	erature: 22.0	O°C		
Freque	ency	Side	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift
MHz	Ch.	Side	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2412 1 Left Touch Fig.9 16.18 16.5 0.0904 <b>0.10</b> 0.189 <b>0.20</b> 0									0.12		

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below:

Table 14.4-3: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambier	nt Temperat	ure: 22.5°C	Liquid Te	mperature: 22.0	°C
Freque	ency	Side	Test	Actual duty	maximum	Reported SAR	Scaled reported SAR
MHz	Ch.	0.00	Position	factor	duty factor	(1g) (W/kg)	(1g) (W/kg)
2412	1	Left	Touch	98%	100%	0.20	0.20

SAR is not required for OFDM because the 802.11b adjusted SAR  $\leq$  1.2 W/kg.



## **Body Evaluation**

Table 14.4-4: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Fast SAR)

			Aml	oient Tempera	ture: 22.0 °C	Liquid Temp	erature: 21.6	5°C		
Frequ	iency	Test Figure		Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)(	Power Drift
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
2412	1	Front	/	16.18	16.5	0.0239	0.03	0.0468	0.05	0.12
2412	1	Rear	/	16.18	16.5	0.0422	0.05	0.0891	0.10	0.11
2412	1	Right	/	16.18	16.5	0.00613	0.01	0.0104	0.01	-0.14
2412	1	Тор	/	16.18	16.5	0.0127	0.01	0.0233	0.03	-0.05

As shown above table, the <u>initial test position</u> for body is "Rear". So the body SAR of WLAN is presented as below:

Table 14.4-5: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Full SAR)


1											
			Aı	mbient T	emperature:	22.5 °C	Liquid Tem	perature: 2	22.0 °C		
	Freque	Frequency Test			Conducted	May tung up	Measured	Reported	Measured	Reported	Power
				Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
	MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
	2412	1	Rear	Fig.10	16.18	16.5	0.0408	0.04	0.091	0.10	0.11

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-6: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambient Ter	nperature: 22.5	5°C Liquio	d Temperature: 22	.0 °C				
Freque	Frequency Test Actual duty maximum duty Reported SAR Scaled reported SAR									
MHz	Ch.	Position	factor	factor	(1g) (W/kg)	(1g) (W/kg)				
2412 1 Rear 98% 100% <b>0.10 0.10</b>										

SAR is not required for OFDM because the 802.11b adjusted SAR  $\, \leq \,$  1.2 W/kg.



Picture 14.1 The plot of duty factor for WLAN-2.4G



# 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Table 15.1: SAR Measurement Variability for Head GSM 850 (1g)

Freque	ency		Toct	Original	First	The	Second
MHz	Ch.	Side	Test Position	SAR (W/kg)	Repeated SAR (W/kg)	Ratio	Repeated SAR (W/kg)
836.6	190	Left	Touch	0.876	0.869	1.01	1

Table 15.2: SAR Measurement Variability for Head WCDMA 850 (1g)

Frequ	iency		_ ,	Original	First		Second
MHz	Ch.	Side	Test Position	SAR (W/kg)	Repeated SAR (W/kg)	The Ratio	Repeated SAR (W/kg)
836.4	4182	Left	Touch	0.865	0.869	1.00	1

Table 15.3: SAR Measurement Variability for Body WCDMA 850 (1g)

Frequ	iency	Test	Spacing	Original	First	The	Second
MHz	Ch.	Position	Spacing (mm)	SAR (W/kg)	Repeated SAR (W/kg)	The Ratio	Repeated SAR (W/kg)
836.4	4182	Rear	10	0.927	0.924	1.00	1



# **16 Measurement Uncertainty**

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

10.	16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)										
No.	Error Description	Type	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree	
			value	Distribution		1g	10g	Unc.	Unc.	of	
								(1g)	(10g)	freedo	
										m	
Mea	Measurement system										
1	Probe calibration	В	5.5	N	1	1	1	5.5	5.5	$\infty$	
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞	
3	Boundary effect	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞	
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞	
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞	
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞	
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞	
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞	
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	8	
10	RFambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	8	
11	Probe positioned mech. restrictions	В	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	8	
12	Probe positioning with respect to phantom shell	В	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	8	
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$	
			Test	sample related	1	U.	U.	I.			
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71	
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5	
16	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	8	
			Phan	tom and set-uj	р						
17	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$	
18	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	8	
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43	
20	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞	
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521	



Expanded u (confidence 95 %)  16.2 Mea  No. Error  Measureme 1 Probe 2 Isotro 3 Boun 4 Linea	asurement Un Description  ent system e calibration	Type	Uncertainty value	Probably Distribution	Tests Div.	(3~60 (Ci) 1g	GHz) (Ci) 10g	9.25 18.5 Std. Unc.	9.12 18.2 Std. Unc.	257  Degree of
(confidence 95 %)  16.2 Mea  No. Error  Measureme  1 Probe 2 Isotro 3 Boun 4 Linea	ent system e calibration	Type B	inty for No Uncertainty value	Probably		(Ci)	(Ci)	Std. Unc.	Std.	_
Measureme 1 Probe 2 Isotro 3 Boun 4 Linea	ent system e calibration	Туре	Uncertainty value	Probably		(Ci)	(Ci)	Unc.		_
Measureme 1 Probe 2 Isotro 3 Boun 4 Linea	ent system e calibration	В	value	_	Div.			Unc.		_
1 Probe 2 Isotro 3 Boun 4 Linea	e calibration opy			Distribution		1g	10g		Unc.	of
1 Probe 2 Isotro 3 Boun 4 Linea	e calibration opy									
1 Probe 2 Isotro 3 Boun 4 Linea	e calibration opy							(1g)	(10g)	freedo
1 Probe 2 Isotro 3 Boun 4 Linea	e calibration opy				i .					m
2 Isotro 3 Boun 4 Linea	рру		- <del>-</del>							
3 Boun 4 Linea		_	6.5	N	1	1	1	6.5	6.5	∞
4 Linea	dary effect	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
1	<i>J</i>	В	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
5 Detec	rity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
	ction limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
6 Read	out electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7 Respo	onse time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8 Integr	ration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9 RF condi	ambient tions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	∞
10	nbient tions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	∞
11 Probe mech	e positioned . restrictions	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
Probe 12 with phant	e positioning respect to com shell	В	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13 Post-1	processing	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
			Test	sample related	l					
1 14 1	sample oning	A	3.3	N	1	1	1	3.3	3.3	71
15	ce holder tainty	A	3.4	N	1	1	1	3.4	3.4	5
16 Drift powe	•	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
	Phantom and set-up									
17 Phant	tom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18 Liqui (targe	-	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19 Liqui (meas	•	A	2.06	N	1	0.64	0.43	1.32	0.89	43



20	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(	Combined standard uncertainty	$u_c^{'} =$	$\sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					10.8	10.7	257
_	anded uncertainty fidence interval of	ı	$u_e = 2u_c$					21.6	21.4	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Туре	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree
	•	<b>J1</b>	value	Distribution		1g	10g	Unc.	Unc.	of
								(1g)	(10g)	freedo
										m
Mea	surement system									
1	Probe calibration	В	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	&
10	RFambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	В	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	В	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	œ
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	В	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	$\infty$
			Test	sample related	l					
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	8



			Phant	tom and set-uj	p					
18	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	8
19	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	8
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(	Combined standard uncertainty		$\sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		ı	$u_e = 2u_c$					20.2	19.9	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree	
			value	Distribution		1g	10g	Unc.	Unc.	of	
								(1g)	(10g)	freedo	
										m	
Meas	Measurement system										
1	Probe calibration	В	6.5	N	1	1	1	6.5	6.5	∞	
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞	
3	Boundary effect	В	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞	
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞	
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞	
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞	
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞	
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞	
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	8	
10	RFambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	8	
11	Probe positioned mech. Restrictions	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	8	
12	Probe positioning with respect to phantom shell	В	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	8	
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	8	
14	Fast SAR z-Approximation	В	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	8	
			Test s	sample related	l						



15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	8
Phantom and set-up										
18	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	8
19	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	8
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	8
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(	Combined standard uncertainty	$u_c^{'} =$	$\sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					13.3	13.2	257
_	inded uncertainty fidence interval of	ı	$u_e = 2u_c$					26.6	26.4	

# **17 MAIN TEST INSTRUMENTS**

**Table 17.1: List of Main Instruments** 

No.	Name	Туре	Serial Number	Calibration Date	Valid Period	
01	Network analyzer	E5071C	MY46110673	February 03, 2015	One year	
02	Power meter	NRVD	102196	March 03, 2015	One year	
03	Power sensor	NRV-Z5	100596	Watch 05, 2015	One year	
04	Signal Generator	E4438C	MY49071430	February 02, 2015	One Year	
05	Amplifier	60S1G4	0331848	No Calibration Requested		
06	BTS	E5515C	MY50263375	January 30, 2015	One year	
07	E-field Probe	SPEAG EX3DV4	3617	August 26, 2015	One year	
08	DAE	SPEAG DAE4	777	August 26, 2015	One year	
09	Dipole Validation Kit	SPEAG D835V2	4d069	July 23, 2015	One year	
10	Dipole Validation Kit	SPEAG D1900V2	5d101	July 23, 2015	One year	
11	Dipole Validation Kit	SPEAG D2450V2	853	July 24, 2015	One year	

\*\*\*END OF REPORT BODY\*\*\*



# **ANNEX A Graph Results**

#### 850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.903$  mho/m;  $\epsilon r = 39.476$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.975 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.00 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.657 W/kg

Maximum value of SAR (measured) = 0.971 W/kg

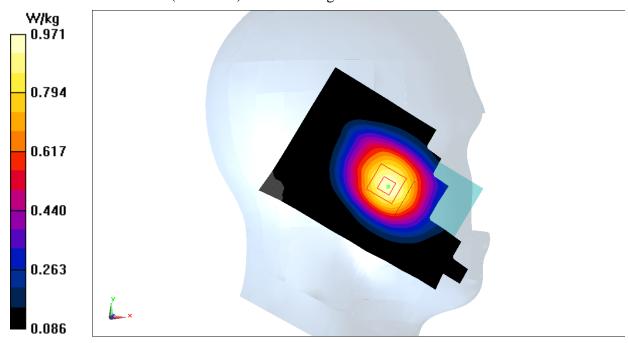


Fig.1 850MHz



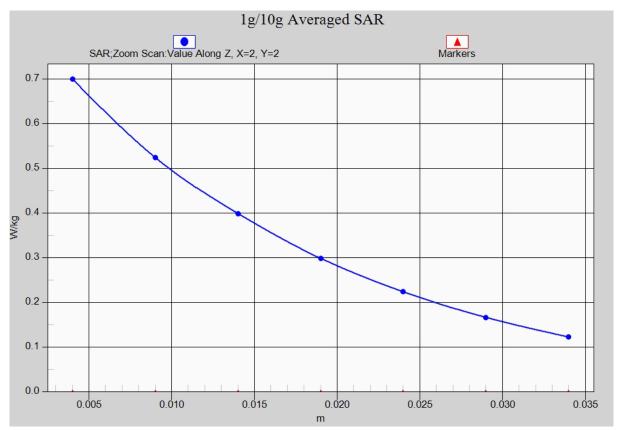


Fig. 1-1 Z-Scan at power reference point (850 MHz)



## 850 Body Front Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 1.215$  mho/m;  $\epsilon r = 58.504$ ;  $\rho = 1.215$  mho/m;  $\epsilon r = 58.504$ ;  $\epsilon r = 58.504$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.837 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.88 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.932 W/kg

SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 0.816 W/kg

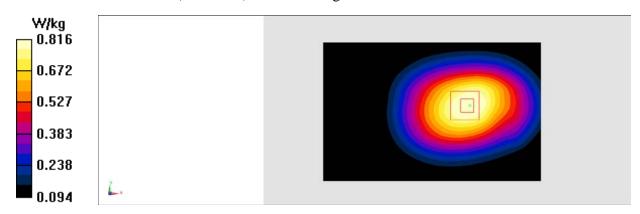


Fig.2 850 MHz



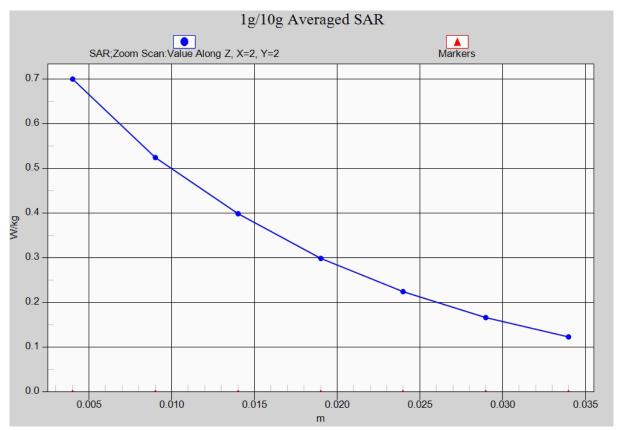


Fig. 2-1 Z-Scan at power reference point (850 MHz)



## 1900 Left Cheek High

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters use (interpolated): f = 1909.8 MHz;  $\sigma = 1.241$  mho/m;  $\epsilon r = 38.122$ ;  $\rho = 1.241$  mho/m;  $\epsilon r = 38.122$ ;  $\epsilon r = 1.241$  mho/m;  $\epsilon r = 1$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

**Area Scan (71x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.481 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.979 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

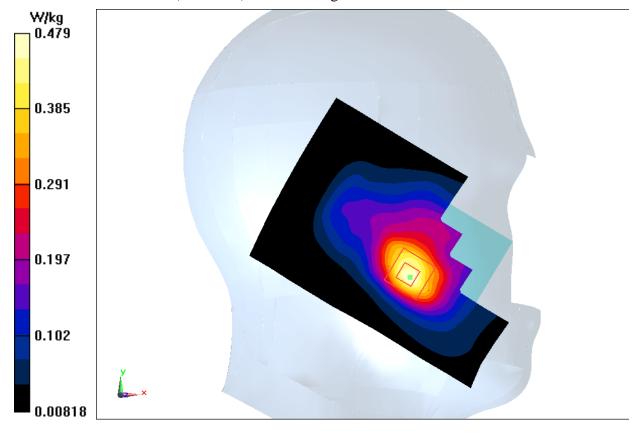


Fig.3 1900 MHz



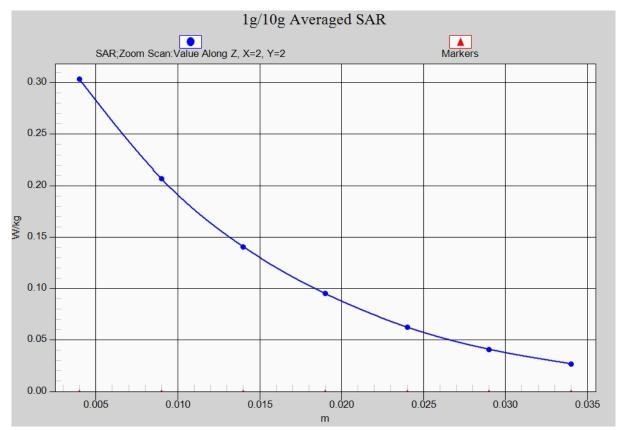


Fig. 3-1 Z-Scan at power reference point (1900 MHz)



## 1900 Body Rear High

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used (interpolated): f = 1850.2 MHz;  $\sigma = 1.649$  mho/m;  $\epsilon r = 55.04$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.850 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.362 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

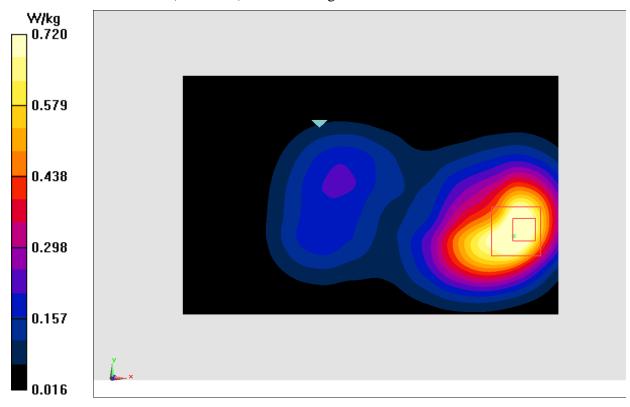


Fig.4 1900 MHz



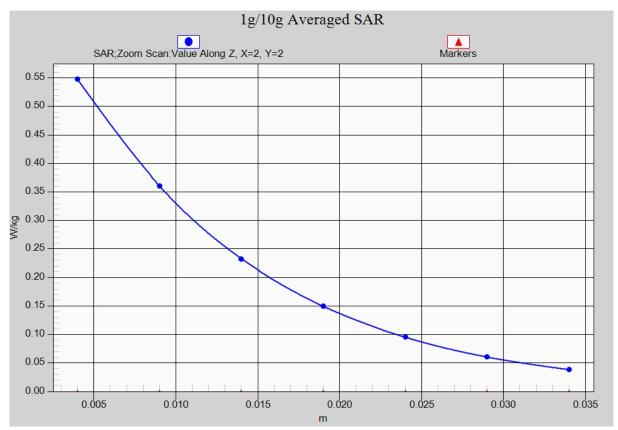


Fig.4-1 Z-Scan at power reference point (1900 MHz)



## WCDMA 850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.912$  mho/m;  $\epsilon r = 40.01$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.947 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.942 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.659 W/kg

Maximum value of SAR (measured) = 0.945 W/kg

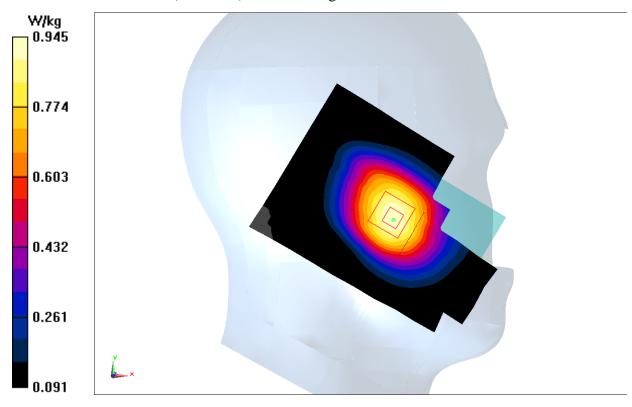


Fig.5 WCDMA 850



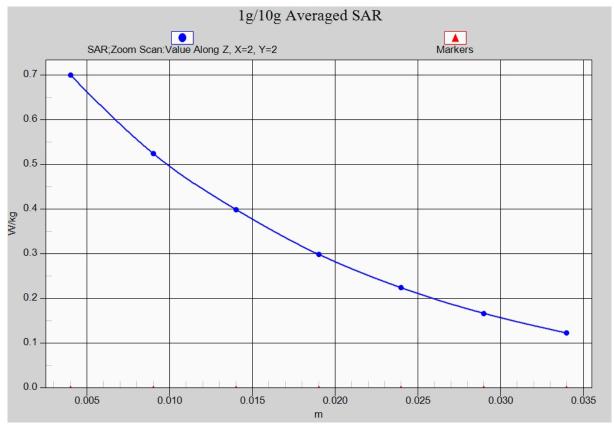


Fig. 5-1 Z-Scan at power reference point (WCDMA 850)



## WCDMA 850 Body Rear Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.831$  mho/m;  $\epsilon r = 54.461$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

**Area Scan (121x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.59 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.689 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

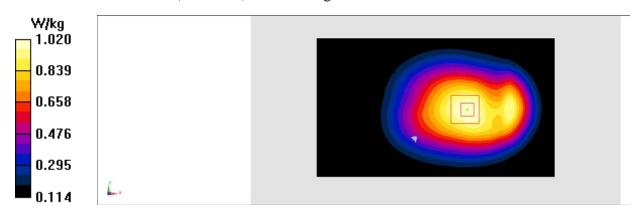


Fig.6 WCDMA 850



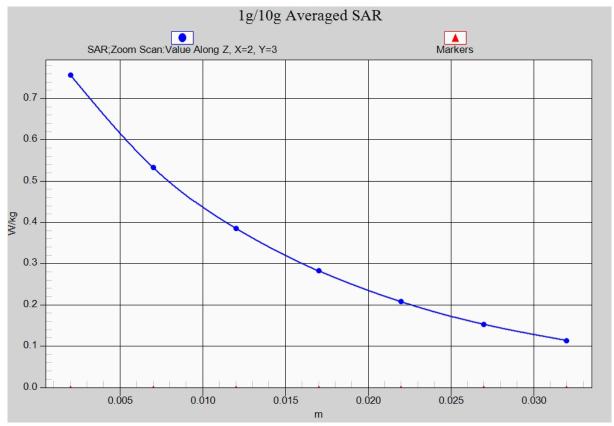


Fig. 6-1 Z-Scan at power reference point (WCDMA850)



## WCDMA 1900 Left Cheek Middle

Date: 2016-01-06

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.168$  mho/m;  $\epsilon r = 38.147$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617ConvF(8.07, 8.07, 8.07)

**Area Scan (71x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.582 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.895 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.589 W/kg

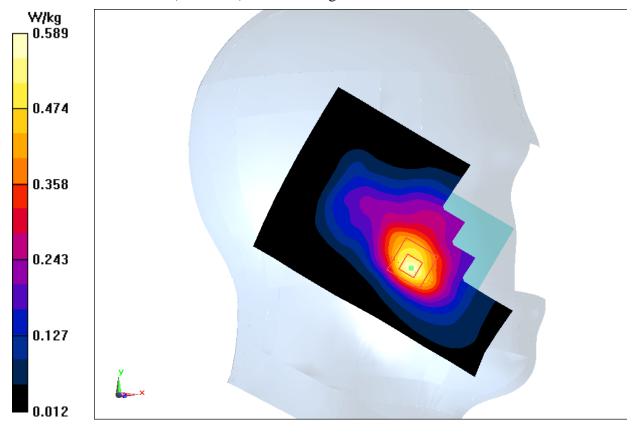


Fig.7 WCDMA1900



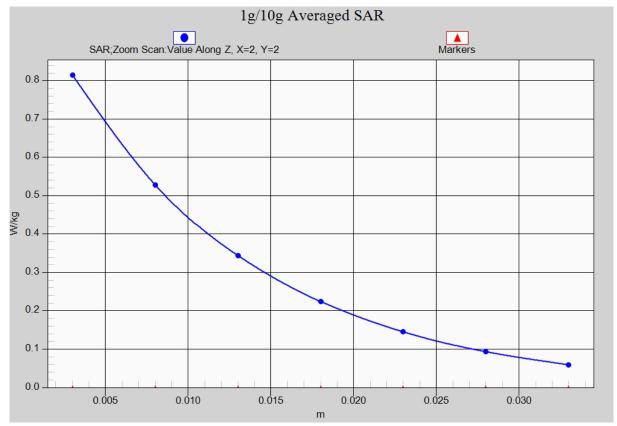


Fig. 7-1 Z-Scan at power reference point (WCDMA1900)



## WCDMA 1900 Body Rear Low

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used: f = 1880 MHz;  $\sigma = 1.257 \text{ mho/m}$ ;  $\epsilon r = 52.172$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.963 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.261 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.456 W/kgMaximum value of SAR (massured) = 0.851 W/kg

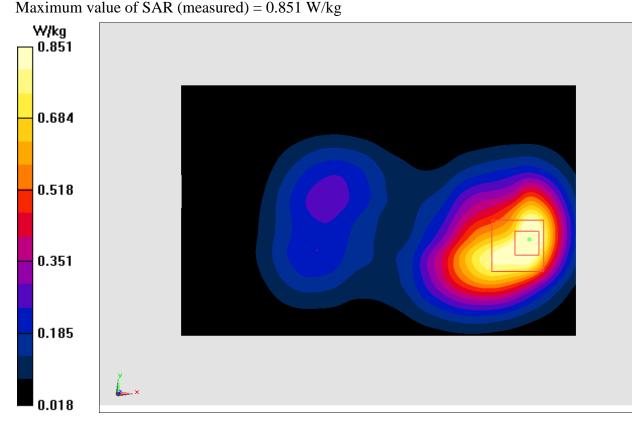


Fig.8 WCDMA1900



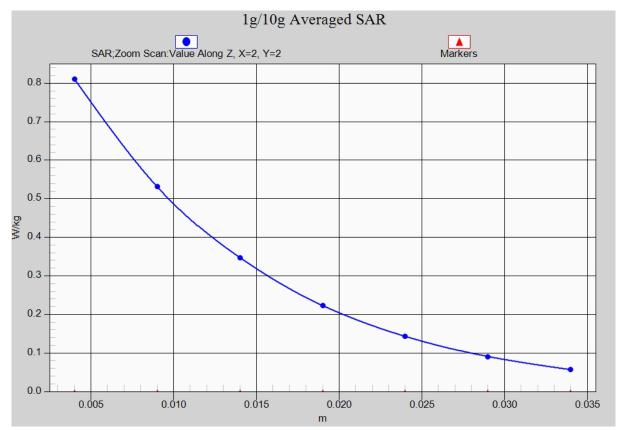


Fig. 8-1 Z-Scan at power reference point (WCDMA1900)



## Wifi 802.11b Left Cheek Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777 Medium: Head 2450 MHz

Medium parameters used (interpolated): f = 2412 MHz;  $\sigma = 1.585$  mho/m;  $\varepsilon_r = 37.843$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF (7.24, 7.24, 7.24)

**Area Scan (71x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.248 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.068 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

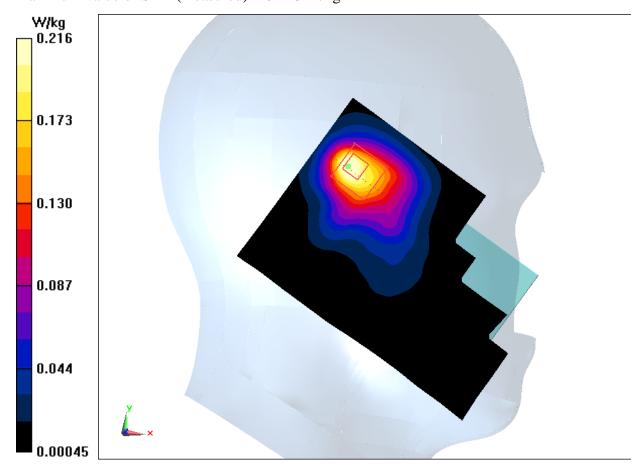


Fig.9 2450 MHz



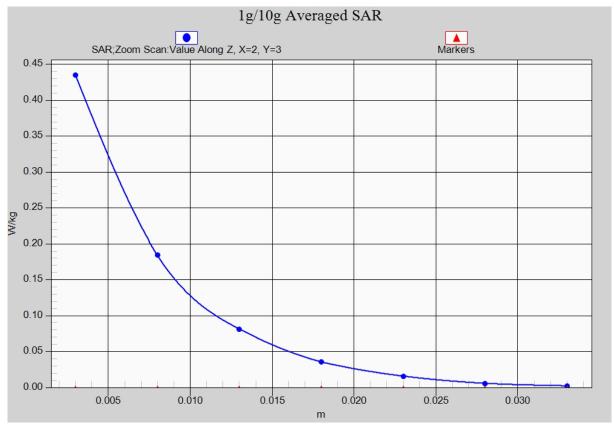


Fig. 9-1 Z-Scan at power reference point (2450 MHz)



## Wifi 802.11b Body Rear Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777 Medium: Body 2450 MHz

Medium parameters used (interpolated): f=2412 MHz;  $\sigma=1.852$  mho/m;  $\epsilon_r=50.597$ ;  $\rho=$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.35, 7.35, 7.35)

**Area Scan (101x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.126 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.539 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

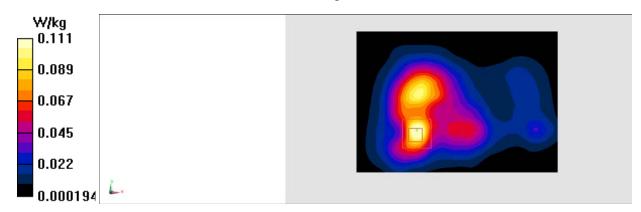


Fig.10 2450 MHz



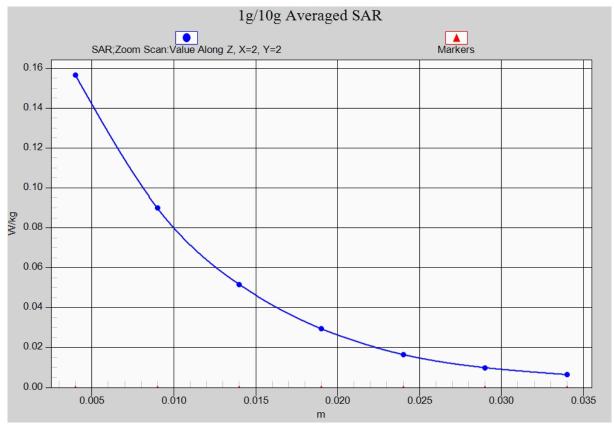


Fig. 10-1 Z-Scan at power reference point (2450 MHz)



# **ANNEX B** SystemVerification Results

## 835MHz

Date: 2015-01-01

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 0.922$  S/m;  $\varepsilon_r = 41.13$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(9.58, 9.58, 9.58)

**System Validation /Area Scan (81x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 50.281 V/m; Power Drift = 0.07 dB

Fast SAR: SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (interpolated) = 2.48 W/kg


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.281 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.51 W/kg

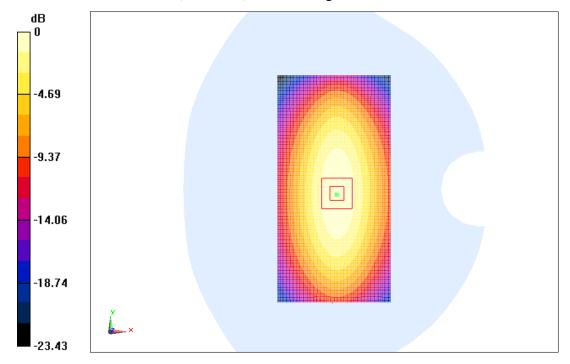

0 dB = 2.51 W/kg = 4.00 dBW/kg

Fig.B.1 validation 835MHz 250mW



#### 835MHz

Date: 2015-01-01

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 0.972$  S/m;  $\varepsilon_r = 56.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(9.71, 9.71, 9.71)

**System Validation /Area Scan (81x171x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 50.697 V/m; Power Drift = 0.05 dB

Fast SAR: SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (interpolated) = 2.49 W/kg


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.697 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.51 W/kg

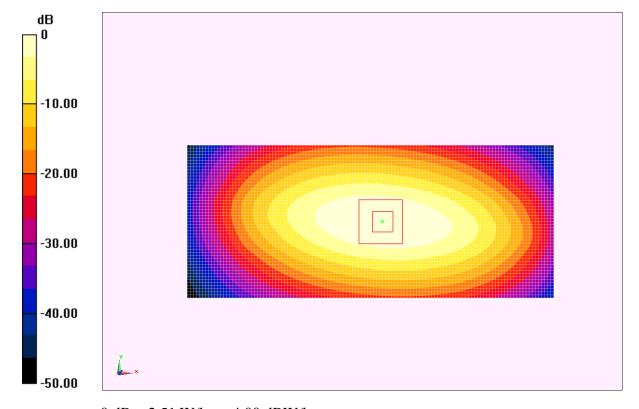

0 dB = 2.51 W/kg = 4.00 dBW/kg

Fig.B.2 validation 835MHz 250mW



#### 1900MHz

Date: 2015-01-02

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.427 \text{ S/m}$ ;  $\varepsilon_r = 39.78$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

System Validation /Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 91.339 V/m; Power Drift = 0.05 dB

Fast SAR: SAR(1 g) = 10.59 W/kg; SAR(10 g) = 5.65 W/kg

Maximum value of SAR (interpolated) = 11.99 W/kg


**System Validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.339 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 19.02 W/kg

SAR(1 g) = 10.39 W/kg; SAR(10 g) = 5.47 W/kg

Maximum value of SAR (measured) = 11.79 W/kg

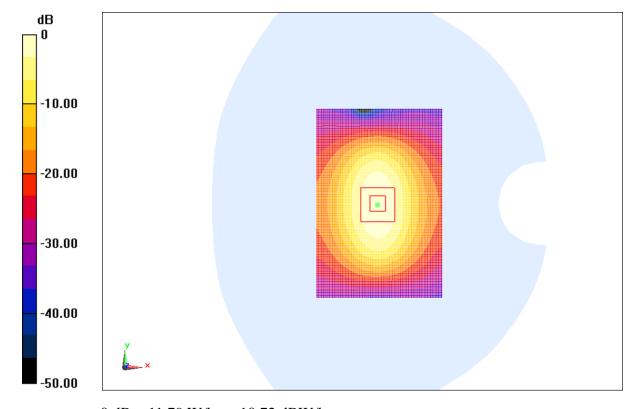

0 dB = 11.79 W/kg = 10.72 dBW/kg

Fig.B.3 validation 1900MHz 250mW



#### 1900MHz

Date: 2015-01-02

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.550 \text{ S/m}$ ;  $\varepsilon_r = 54.05$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

System validation /Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 65.021 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 10.54 W/kg; SAR(10 g) = 5.63 W/kg

Maximum value of SAR (interpolated) = 12.54 W/kg


**System validation /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.021 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 19.38 W/kg

SAR(1 g) = 10.34 W/kg; SAR(10 g) = 5.49 W/kg

Maximum value of SAR (measured) = 12.34 W/kg

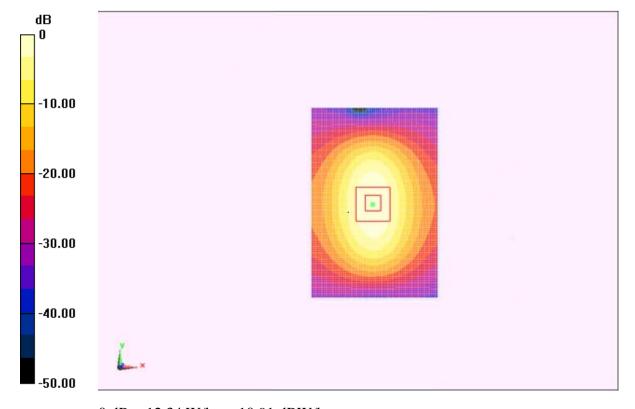

0 dB = 12.34 W/kg = 10.91 dBW/kg

Fig.B.4 validation 1900MHz 250mW