

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

e) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-853\_Jul15 Page 2 of 8



#### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

## **Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.9 ± 6 %	1.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.5 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 16.5 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

The following parameters and calculations were applied.			
	Temperature Permittivity Conductivity		
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.4 ± 6 %	2.03 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	52.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.4 W/kg ± 16.5 % (k=2)



# Appendix (Additional assessments outside the scope of SCS 0108)

#### **Antenna Parameters with Head TSL**

Impedance, transformed to feed point	$49.8~\Omega + 4.4~\mathrm{j}\Omega$
Return Loss	- 27.2 dB

# Antenna Parameters with Body TSL

Impedance, transformed to feed point	$52.3 \Omega + 1.5 j\Omega$
Return Loss	- 31.4 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	November 10, 2009



#### **DASY5 Validation Report for Head TSL**

Date: 24.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:853

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.88$  S/m;  $\varepsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;

· Sensor-Surface: 3mm (Mechanical Surface Detection)


Electronics: DAE4 Sn601; Calibrated: 18.08.2014

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

#### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.4 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 27.9 W/kg SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.24 W/kg Maximum value of SAR (measured) = 17.7 W/kg

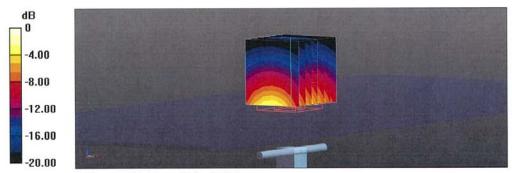

0 dB = 17.7 W/kg = 12.48 dBW/kg



## Impedance Measurement Plot for Head TSL

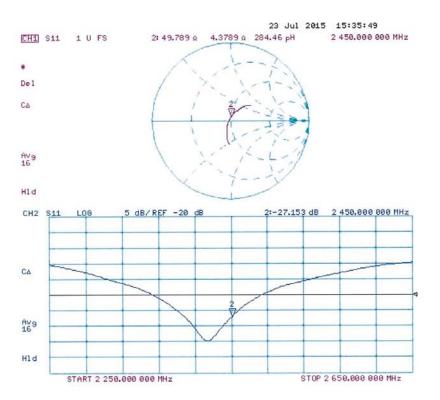



#### **DASY5 Validation Report for Body TSL**

Date: 24.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:853

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.03$  S/m;  $\varepsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)


• Electronics: DAE4 Sn601; Calibrated: 18.08.2014

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.79 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 27.5 W/kg SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.16 W/kg Maximum value of SAR (measured) = 17.6 W/kg

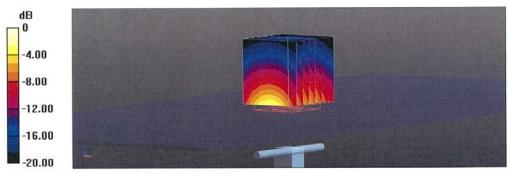

0 dB = 17.6 W/kg = 12.46 dBW/kg



#### Impedance Measurement Plot for Body TSL

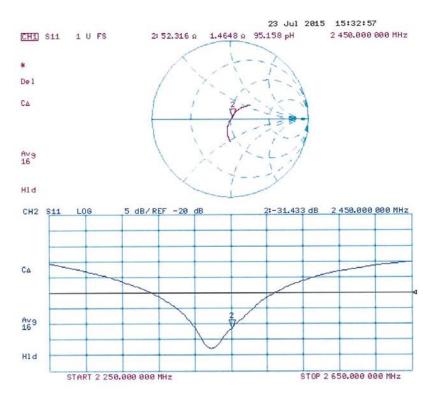



# ANNEX I SPOT CHECK TEST

As the test lab for 4034A from TCL Communication Ltd, we, CTTL (Shouxiang), declare on our sole responsibility that, according to "Declaration of changes" provided by applicant, only the Spot check test should be performed. The test results are as below.

## I.1 Conducted power of selected case

Table I.1-1: The conducted power results for GSM850/1900

CCM		Conducted Power (dBm)	
GSM	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
850MHz	\	32.83	\
0014		Conducted Power (dBm)	
GSM	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
1900MHz	29.70	\	\

Table I.1-2: The conducted power results for GPRS

Table III E. THE	conducted pon	ci icoaito ioi o	1110
GSM 850	Mea	sured Power (d	Bm)
GPRS (GMSK)	251	190	128
1 Txslots	\	32.81	\
PCS1900	Mea	sured Power (d	Bm)
GPRS (GMSK)	810	661	512
2 Txslots	\	\	27.41

Table I.1-3: The conducted Power for WCDMA

Item	band		FDDV result	
item	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	1	1	22.67	1
Item	band		FDDII result	
item	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	1	23.68	1

Table I.1-4: The conducted Power for WLAN

	802.1	1b(dBm)								
Channel\data	1Mbps	2Mbps	5.5Mbps	11Mbps						
rate										
1(2412MHz)										



## I.2 Measurement results

## Table I.2-1: SAR Values (GSM 850 MHz Band - Head)

				Ambient	Temperature	: 22.5 °C L	iquid Tempera	ature: 22.0 °C			
Frequ	ency	0:1	Test	Figure		Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	Drift (dB)
836.6	190	Left	Touch	Fig.1	32.83	33.3	0.514	0.57	0.689	0.77	-0.07

#### Table I.2-2: SAR Values (GSM 850 MHz Band-Body)

			An	nbient Ter	mperature: 22	.5°C Liqui	d Temperature	e: 22.0 °C			
Frequ	iency	Mode (number of	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.6	836.6 190 GPRS (1) Front Fig.2 32.81 33.3 0.459 <b>0.51</b> 0.614 <b>0.69</b> 0.01										

Note1: The distance between the EUT and the phantom bottom is 10mm.

## Table I.2-3: SAR Values (GSM1900 MHz Band - Head)

				Ambient	Temperature:	22.5 °C L	iquid Tempera	ture: 22.0 °C			
Freque	ency	Cido	Test	Figure		Max. tune-up	Measured	Reported	Measured	Reported	Power Drift
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	(dB)
1909.8	810	Left	Touch	Fig.3	29.70	30.3	0.201	0.23	0.348	0.40	0.12

#### Table I.2-4: SAR Values (GSM 1900 MHz Band-Body)

			Ambi	ent Temp	erature: 22.5°	°C Liquid T	emperature:	22.0°C			
Frequ		Mode (number of	Test Position	Figure No.	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift
MHz	Ch.	timeslots)	Position	NO.	(dBm)	Power (dbill)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1850.2	512	GPRS (2)	Rear	Fig.4	27.41	28	0.303	0.35	0.51	0.58	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

## Table I.2-5: SAR Values (WCDMA 850 MHz Band - Head)

	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequ	uency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power	
		Side	Position	No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift	
MHz	Ch.		i osition	INO.	(dBm)	i owei (dbiii)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)	
836.4	4182	Left	Touch	Fig.5	23.68	24	0.566	0.61	0.74	0.80	-0.10	



#### Table I.2-6: SAR Values (WCDMA 850 MHz Band-Body)

			Ambi	ent Temperatu	ıre: 22.5°C	Liquid Tempe	erature: 22.0 $^\circ$	C		
Frequ	uency	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g)( W/kg)	Drift (dB)
836.4	4182	Rear	Fig.6	23.68	24	0.576	0.62	0.774	0.83	-0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

## Table I.2-7: SAR Values (WCDMA1900 MHz Band - Head)

				Ambient	Temperature:	22.5°C Li	quid Tempera	ture: 22.0°C			
Freque	ency		Test	Figure	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
•	,	Side			Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
1880	9400	Left	Touch	Fig.7	22.67	23	0.27	0.29	0.452	0.49	0.12

#### Table I.2-8: SAR Values (WCDMA1900 MHz Band-Body)

			Ambie	nt Temperature	e: 22.5 °C	Liquid Tempe	rature: 22.0°	С		
Frequ	ency Ch.	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)( W/kg)	Power Drift (dB)
		_		(- /		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	· 0/	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	- 0,	
1880	9400	Rear	Fig.8	22.67	23	0.382	0.41	0.654	0.71	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

## **I.3 WLAN Evaluation**

#### **Head Evaluation**

#### Table I.3-1: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Full SAR)

	Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C													
Frequ	ency	0:40	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power			
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)			
2412	1	Left	Touch	Fig.9	15.57	16.5	0.0436	0.05	0.0932	0.12	-0.14			

# Table I.3-2: SAR Values (WLAN - Head) - 802.11b 5.5Mbps (Scaled Reported SAR)

Ambient Temperature: 22.5 °C					Liquid Temperature: 22.0 °C			
Frequ	Frequency		Test Ac	Actual duty	maximum	Reported SAR	Scaled reported SAR	
MHz	Ch.		Position	factor	duty factor	(1g) (W/kg)	(1g) (W/kg)	
2412	1	Left	Touch	98.25%	100%	0.12	0.12	




#### **Body Evaluation**

Table I.3-3: SAR Values (WLAN - Body) - 802.11b 5.5Mbps (Fast SAR)

Ambient Temperature: 22.0 °C				Liquid Temperature: 21.6 °C						
Frequency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
	· · · ·		No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)(	Drift
MHz	Ch.	Position		(dBm)		(W/kg)	(W/kg)	(W/kg)	W/kg)	(dB)
2412	1	Rear	Fig.10	15.57	16.5	0.00805	0.01	0.0325	0.04	0.09

Table I.3-4: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Scaled Reported SAR)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C						
Freque	ency	Test	Actual duty	maximum duty	Reported SAR	Scaled reported SAR
MHz	Ch.	Position	factor	factor	(1g) (W/kg)	(1g) (W/kg)
2412	1	Rear	98.25%	100%	0.04	0.04

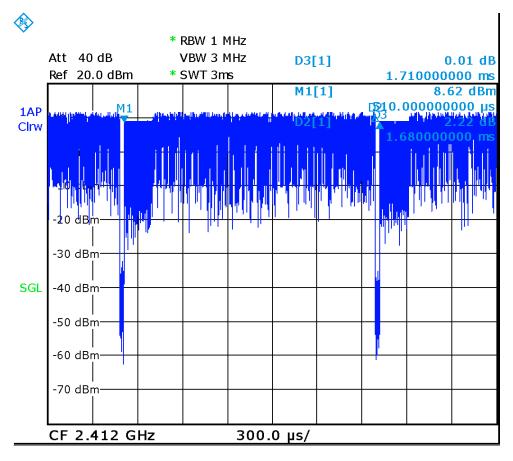

Date: 22.JAN.2016 09:51:55

Picture I.1 The plot of duty factor for WLAN-2.4G



# I.4 Reported SAR Comparison

Function Configuration	To shool and Donal	Reported SAR	Reported SAR	
Exposure Configuration	Technology Band	1g (W/Kg): spot check	1g (W/Kg): original	
	GSM 850	0.77	0.97	
Head	PCS 1900	0.40	0.47	
(Separation Distance 0mm)	UMTS FDD 5	0.80	0.94	
(Separation distance offin)	UMTS FDD 2	0.49	0.55	
	WLAN 2.4 GHz	0.12	0.20	
	GSM 850	0.69	0.83	
Rady warn (Data)	PCS 1900	0.58	0.81	
Body-worn (Data)	UMTS FDD 5	0.83	1.01	
(Separation Distance 10mm)	UMTS FDD 2	0.71	0.87	
	WLAN 2.4 GHz	0.04	0.10	



#### 850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.903$  mho/m;  $\epsilon r = 39.476$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.745 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.092 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.514 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

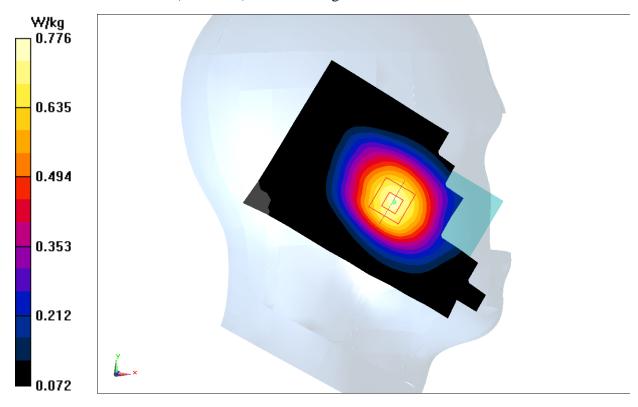


Fig.1 850MHz



# 850 Body Front Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 1.215$  mho/m;  $\epsilon r = 58.504$ ;  $\rho = 1.215$  mho/m;  $\epsilon r = 58.504$ ;  $\epsilon r = 58.504$ ;

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.682 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.81 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 0.674 W/kg

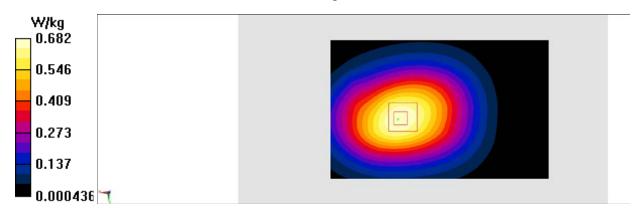


Fig.2 850 MHz



# 1900 Left Cheek High

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters use (interpolated): f = 1909.8 MHz;  $\sigma = 1.241$  mho/m;  $\epsilon r = 38.122$ ;  $\rho = 1.241$  mho/m;  $\epsilon r = 38.122$ ;  $\epsilon = 1.241$  mho/m;  $\epsilon r = 38.122$ ;  $\epsilon = 1.241$  mho/m;  $\epsilon r = 1.241$  mho

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

**Area Scan (71x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.444 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.735 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

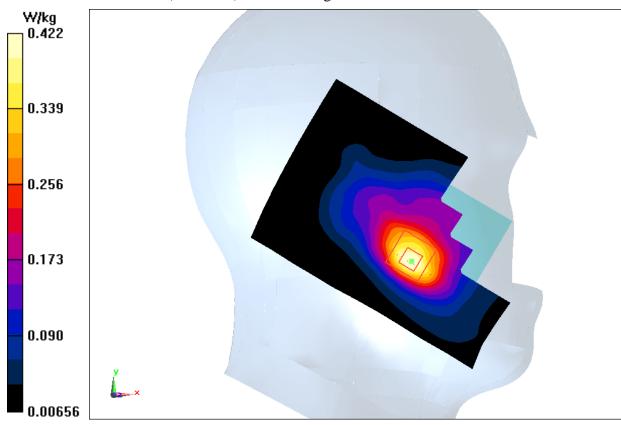


Fig.3 1900 MHz



# 1900 Body Rear High

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used (interpolated): f = 1850.2 MHz;  $\sigma = 1.649$  mho/m;  $\epsilon r = 55.04$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.630 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.563 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.303 W/kg

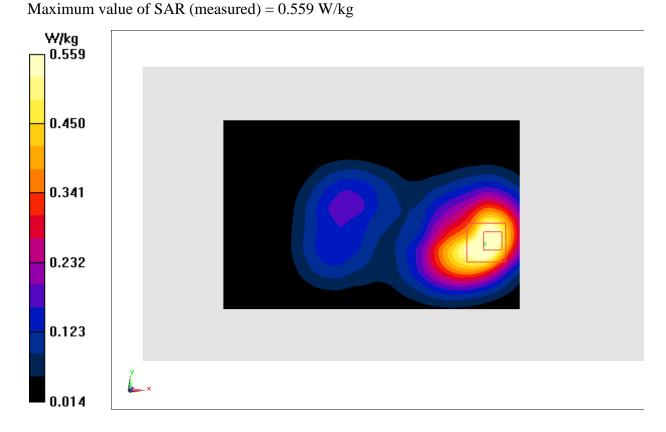


Fig.4 1900 MHz



#### WCDMA 850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.912$  mho/m;  $\epsilon r = 40.01$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.848 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.69 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 0.806 W/kg

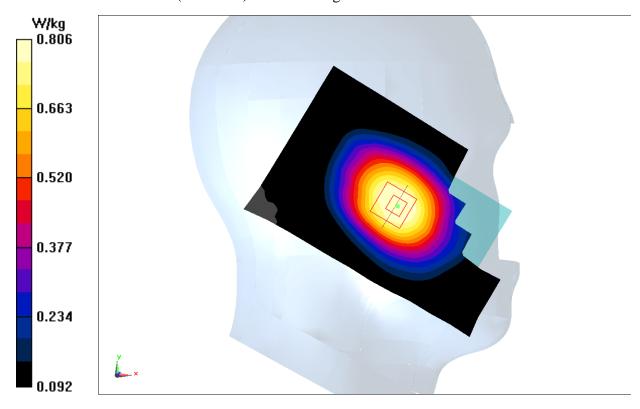


Fig.5 WCDMA 850



# WCDMA 850 Body Rear Middle

Date: 2016-01-01

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.831$  mho/m;  $\epsilon r = 54.461$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

**Area Scan (121x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.850 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.44 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.980 W/kg

SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.576 W/kg

Maximum value of SAR (measured) = 0.851 W/kg

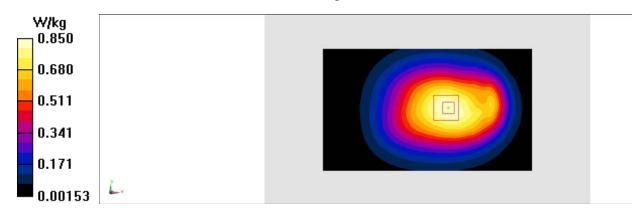


Fig.6 WCDMA 850



# WCDMA 1900 Left Cheek Middle

Date: 2016-01-06

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.168$  mho/m;  $\epsilon r = 38.147$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617ConvF(8.07, 8.07, 8.07)

**Area Scan (71x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.545 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.805 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.541 W/kg

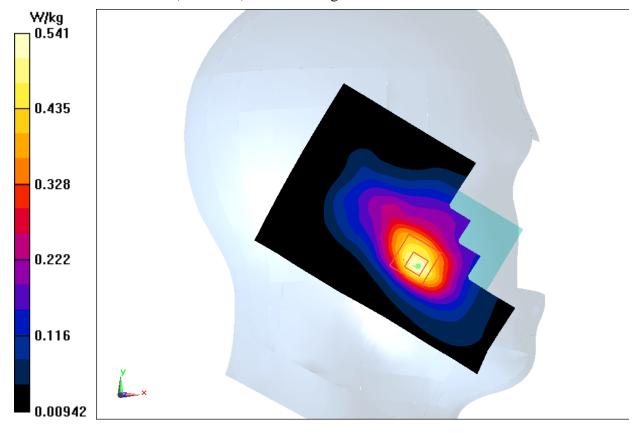


Fig.7 WCDMA1900



# WCDMA 1900 Body Rear Low

Date: 2016-01-02

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used: f = 1880 MHz;  $\sigma = 1.257 \text{ mho/m}$ ;  $\epsilon r = 52.172$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

**Area Scan (111x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.857 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.939 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.382 W/kgMaximum value of SAR (measured) = 0.697 W/kg

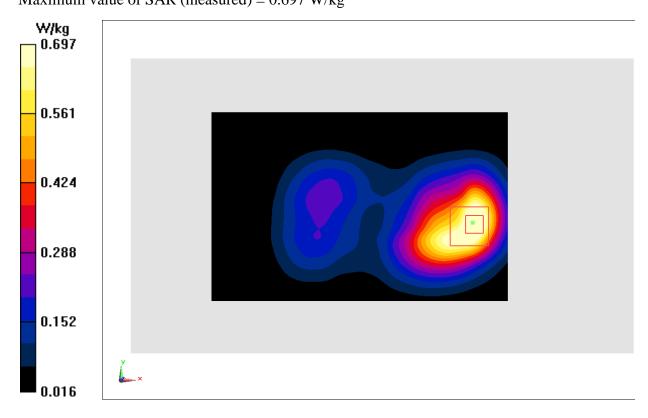


Fig.8 WCDMA1900



#### Wifi 802.11b Left Cheek Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777 Medium: Head 2450 MHz

Medium parameters used (interpolated): f = 2412 MHz;  $\sigma = 1.585$  mho/m;  $\varepsilon_r = 37.843$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF (7.24, 7.24, 7.24)

**Area Scan (81x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.120 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.932 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.044 W/kgMaximum value of SAR (measured) = 0.120 W/kg

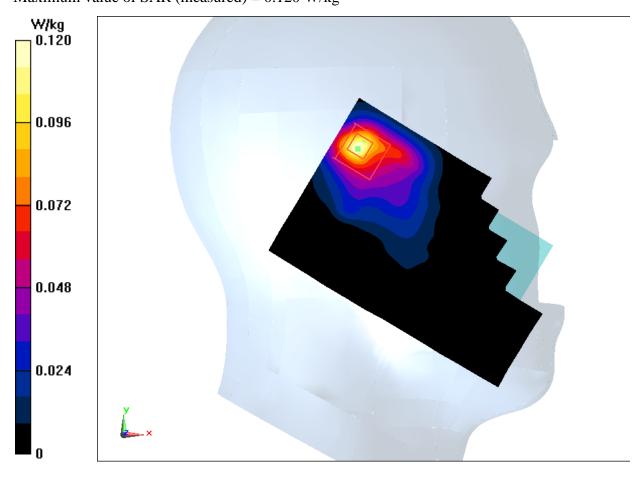


Fig.9 2450 MHz



# Wifi 802.11b Body Rear Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777 Medium: Body 2450 MHz

Medium parameters used (interpolated): f = 2412 MHz;  $\sigma = 1.852$  mho/m;  $\varepsilon_r = 50.597$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.35, 7.35, 7.35)

**Area Scan (101x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0461 W/kg

**Zoom Scan** (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.905 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.00805 W/kg

Maximum value of SAR (measured) = 0.0328 W/kg

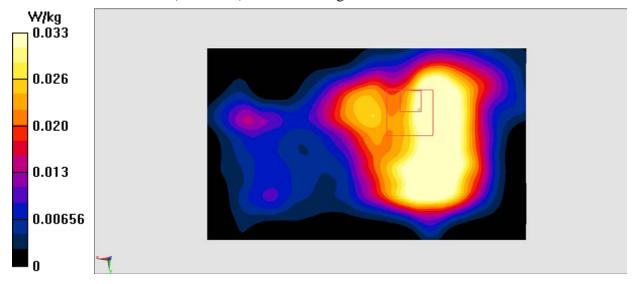


Fig.10 2450 MHz



# **ANNEX J** Accreditation Certificate

