

SAR TEST REPORT

No. I16Z41073-SEM01

For

TCL Communication Ltd.

UMTS/GSM mobile phone

Model name: 5012G/SMART PLUS

With

Hardware Version: PIO

Software Version: v7GA4

FCC ID: 2ACCJH057

Issued Date: 2016-7-8



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I16Z41073-SEM01	Rev.0	2016-7-5	Initial creation of test report
I16Z41073-SEM01 Rev.1 2	2016-7-8	Update the data of Bluetooth in:	
	IXEV. I	2010-7-0	Table 2.3;Table 12.1;Table 13.2



TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT	5
1.3 Project Data	5
1.4 Signature	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 Manufacturer Information	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 About EUT	9
4.2 Internal Identification of EUT used during the test	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS	10
6 SPECIFIC ABSORPTION RATE (SAR)	11
6.1 Introduction	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	17
8.1 System Setup	17
8.2 System Verification	18
9 MEASUREMENT PROCEDURES	19
9.1 Tests to be performed	19
9.2 GENERAL MEASUREMENT PROCEDURE	21
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	
9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	
9.5 Power Drift	23
10 AREA SCAN BASED 1-G SAR	24
10.1 REQUIREMENT OF KDB.	
10.2 FAST SAR ALGORITHMS	24
11 CONDUCTED OUTPUT POWER	25



II.I MIANU	FACTURING TOLERANCE	23
11.2 GSM	MEASUREMENT RESULT	29
11.3 WCD	MA MEASUREMENT RESULT	31
11.4 WI-FI	AND BT MEASUREMENT RESULT	31
12 SIMULT	ANEOUS TX SAR CONSIDERATIONS	33
12.1 Intro	DUCTION	33
12.2 TRANS	SMIT ANTENNA SEPARATION DISTANCES	33
12.3 SAR N	MEASUREMENT POSITIONS	33
12.4 STANI	DALONE SAR TEST EXCLUSION CONSIDERATIONS	34
13 EVALU	ATION OF SIMULTANEOUS	35
14 SAR TE	ST RESULT	35
14.1 THE E	VALUATION OF MULTI-BATTERIES	36
	ESULTS FOR FAST SAR	
	ESULTS FOR STANDARD PROCEDURE	
14.4 WLA	N EVALUATION	45
15 SAR MI	EASUREMENT VARIABILITY	48
16 MEASU	REMENT UNCERTAINTY	49
16.1 MEAS	UREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	49
16.2 MEAS	UREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	50
	UREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	
16.4 MEAS	UREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	52
17 MAIN T	EST INSTRUMENTS	53
ANNEX A	GRAPH RESULTS	54
ANNEX B	SYSTEM VERIFICATION RESULTS	78
ANNEX C	SAR MEASUREMENT SETUP	87
ANNEX D	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	93
ANNEX E	EQUIVALENT MEDIA RECIPES	96
ANNEX F	SYSTEM VALIDATION	97
ANNEX G	PROBE CALIBRATION CERTIFICATE	98
ANNEX H	DIPOLE CALIBRATION CERTIFICATE	109
ANNEY I	ACCREDITATION CERTIFICATE	141



1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District,
	Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	June 13, 2016
Testing End Date:	June 29, 2016

1.4 Signature

Lin Xiaojun

(Prepared this test report)

Qi Dianyuan

(Reviewed this test report)

Xiao Li

Deputy Director of the laboratory (Approved this test report)



2 Statement of Compliance

The maximum results of SAR found during testing for TCL Communication Ltd. UMTS/GSM mobile phone 5012G/SMART PLUS are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class	
	GSM 850	0.42		
	PCS 1900	0.20		
Head	UMTS FDD 5	0.27	PCE	
(Separation Distance 0mm)	UMTS FDD 4	0.48		
	UMTS FDD 2	0.29		
	WLAN 2.4 GHz	0.72	DTS	
	GSM 850	0.92		
	PCS 1900	1.34		
Body-worn	UMTS FDD 5	0.31	PCE	
(Separation Distance 10mm)	UMTS FDD 4	0.84		
	UMTS FDD 2	1.24		
	WLAN 2.4 GHz	0.37	DTS	
Oracio De de	PCS 1900	4.54	PCE	
0mm Body	UMTS FDD 2	3.52	FUE	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (Table 2.1), and the values are: 1.34W/kg (1g).



Table 2.2: The sum of reported SAR values for main antenna and WLAN

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.48	0.72	1.20
Maximum reported	Rear	0.92	0.37	1.29
SAR value for Body	Bottom	1.34	/	1.34

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported	Left hand, Touch cheek	0.48	0.15	0.63
SAR value for Head	Left flaffu, fouch cheek	0.40	0.13	0.03
Highest reported	Bottom	1.34	/	1.34
SAR value for Body	Rear	0.92	0.07	0.99

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.34 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address /Dest	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Address /Post:	Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-51798260
Fax:	0086-21-61460602

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
A dalua a a /D a a ta	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Address /Post:	Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-51798260
Fax:	0086-21-61460602



4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	UMTS/GSM mobile phone
Model name:	5012G/SMART PLUS
Operating mode(s):	GSM 850/900/1800/1900,
	WCDMA 850/900/1700/1800/1900/2100, BT, Wi-Fi
	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
Tested Tx Frequency:	826.4-846.6 MHz (WCDMA850 Band V)
lested 1x i requericy.	1712.4 – 1752.6 MHz (WCDMA 1700 Band IV)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	В
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support
Product dimension	Long 151.2mm ;Wide 78.3mm ; Overall Diagonal 170.27mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	014674000014395	PIO	v7GA4
EUT2	014674000014171	PIO	v7GA4
EUT3	014674000013033	PIO	v7GA4
EUT4	014674000012936	PIO	v7GA4

^{*}EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2 and conducted power with the EUT3&4.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAC2500064C1 (TLp025H1)	/	BYD
AE2	Battery	CAB2500001C1 (TLi025A1)	/	BYD
AE3	Battery	CAB2500002C1 (TLi025A1)	/	BYD
AE4	Battery	CAC2500068C1 (TLp025H1)	/	BYD
AE5	Headset	CCB0049A10C1	/	Reach DALIN
AE6	Headset	CCB0049A10C4	/	Reach 'Meihao
AE7	Headset	53250821TMC	/	Chuangshuo

^{*}AE ID: is used to identify the test sample in the lab internally.

Note: AE3 and AE4 don't need test.



5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations



6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ) . The equation description is as below:

$$SAR = \frac{d}{dt}(\frac{dW}{dm}) = \frac{d}{dt}(\frac{dW}{\rho dv})$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c(\frac{\delta T}{\delta t})$$

Where: C is the specific head capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	± 5% Range	Permittivity(ε)	± 5% Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3


7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Туре	Frequency	Permittivity ε	Drift (%)	Conductivity σ (S/m)	Drift (%)
	Head	835 MHz	42.16	1.59	0.928	3.11
2016-6-13	Body	835 MHz	55.99	1.43	0.965	-0.52
2040 0 44	Head	1750 MHz	41.04	2.40	1.376	0.44
2016-6-14	Body	1750 MHz	52.51	-1.67	1.496	0.40
2016 6 20	Head	1900 MHz	39.76	-0.60	1.419	1.36
2016-6-28	Body	1900 MHz	53.03	-0.51	1.542	1.45
2016 6 20	Head	2450 MHz	38.32	-2.24	1.849	2.72
2016-6-29	Body	2450 MHz	51.19	-2.87	1.998	2.46

Note: The liquid temperature is 22.0 $^{\circ}\mathrm{C}$



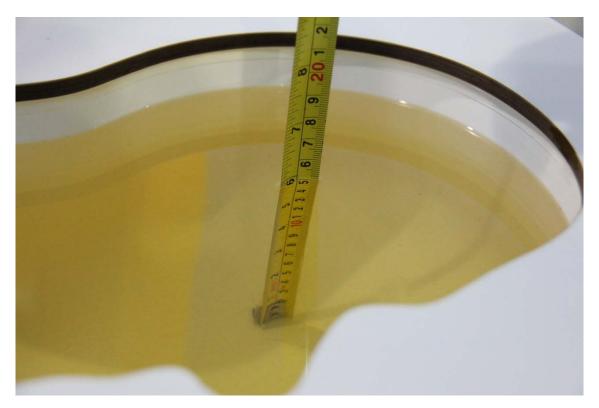

Picture 7-1: Liquid depth in the Head Phantom (835 MHz)




Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)





Picture 7-3: Liquid depth in the Head Phantom (1750 MHz)

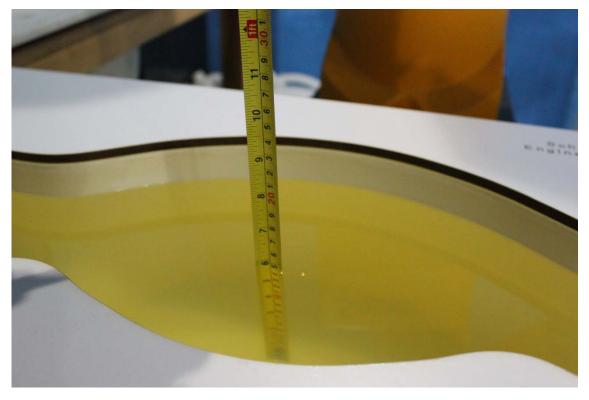

Picture 7-4 Liquid depth in the Flat Phantom (1750MHz)





Picture 7-5: Liquid depth in the Head Phantom (1900 MHz)




Picture 7-6 Liquid depth in the Flat Phantom (1900MHz)





Picture 7-7 Liquid depth in the Head Phantom (2450MHz)

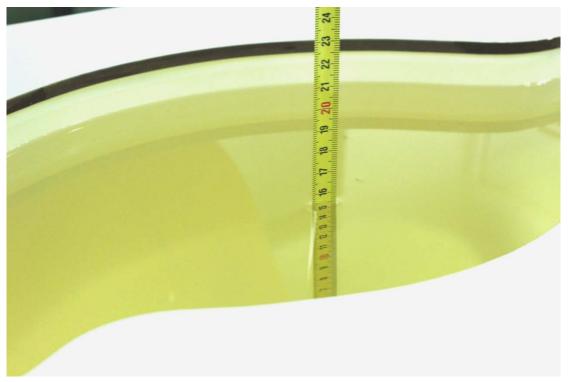


Picture 7-8 Liquid depth in the Flat Phantom (2450MHz)



8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

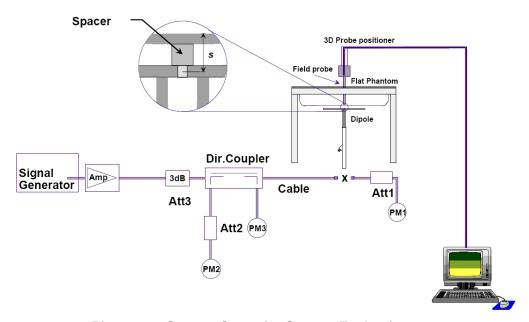

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup



8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement		Target val	ue (W/kg)	Measured	value (W/kg)	Deviation	
Date	Frequency	10 g	1 g	10 g	1 g	10 g	1 g
(yyyy-mm-dd)		Average	Average	Average	Average	Average	Average
2016-6-13	835 MHz	5.86	9.01	5.96	9.24	1.71%	2.55%
2016-6-14	1750 MHz	19.90	36.90	20.4	37.44	2.51%	1.46%
2016-6-28	1900 MHz	21.50	40.70	22.16	41.92	3.07%	3.00%
2016-6-29	2450 MHz	24.50	52.50	23.96	51.68	-2.20%	-1.56%

Table 8.2: System Verification of Body

Measurement		Target val	ue (W/kg)	V/kg) Measured value (W/kg)		Deviation	
Date	Frequency	10 g	1 g	10 g	1 g	10 g	1 g
(yyyy-mm-dd)		Average	Average	Average	Average	Average	Average
2016-6-13	835 MHz	6.12	9.29	6.04	9.24	-1.31%	-0.54%
2016-6-14	1750 MHz	20.30	37.40	19.72	36.4	-2.86%	-2.67%
2016-6-28	1900 MHz	21.70	40.40	21.96	41.52	1.20%	2.77%
2016-6-29	2450 MHz	24.40	52.10	24.36	51.28	-0.16%	-1.57%



9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.

Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:


- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c >$ 3), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.



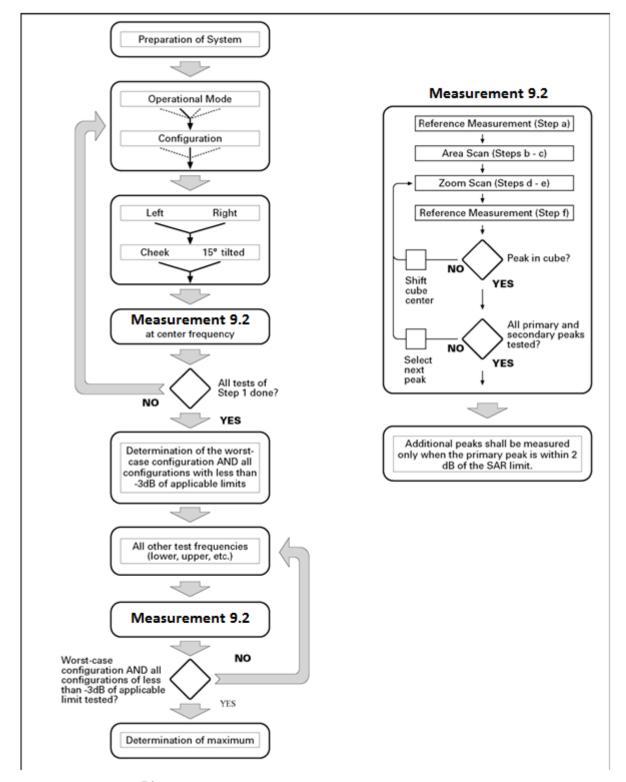

Picture 9.1 Block diagram of the tests to be performed



9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz	
Maximum distance from (geometric center of pro			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$	
Maximum probe angle f normal at the measurem			30° ± 1° 20° ± 1°		
			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			When the x or y dimension of the measurement plane orientation, measurement resolution must be dimension of the test device with point on the test device.	is smaller than the above, the <pre> </pre> <pre> <pre> </pre> <pre> </pre> <pre> </pre> <pre> </pre> <pre> </pre></pre>	
Maximum zoom scan sp	atial resolu	tion: Δx _{Zoom} , Δy _{Zoom}	\leq 2 GHz: \leq 8 mm 3 - 4 GHz: \leq 5 mm [*] 2 - 3 GHz: \leq 5 mm [*] 4 - 6 GHz: \leq 4 mm [*]		
	uniform g	grid: Δz _{Zoom} (n)	≤ 5 mm	3 - 4 GHz: ≤ 4 mm 4 - 5 GHz: ≤ 3 mm 5 - 6 GHz: ≤ 2 mm	
Maximum zoom scan spatial resolution, normal to phantom surface	1-1	graded	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid $\Delta z_{Zoom}(n>1)$: between subsequent points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$		
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

When zoom scan is required and the <u>reported</u> SAR from the area scan based *I-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	$oldsymbol{eta}_c$	$oldsymbol{eta}_d$	β_d (SF)	$oldsymbol{eta}_c$ / $oldsymbol{eta}_d$	$oldsymbol{eta}_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1. 0
3	15/15	8/15	64	15/8	30/15	1. 5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-	$oldsymbol{eta_c}$	$oldsymbol{eta_d}$	eta_d	$oldsymbol{eta_c}$ / $oldsymbol{eta_d}$	$oldsymbol{eta_{hs}}$	$oldsymbol{eta}_{ec}$	$oldsymbol{eta}_{ed}$	eta_{ed}	$oldsymbol{eta_{ed}}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3. 0	2. 0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	eta_{ed1} :47/15 eta_{ed2} :47/15	4	2	2. 0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3. 0	2. 0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

For Release 8

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the <u>3G SAR test reduction procedure</u> is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.



9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.



10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is \leq 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.



11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11-1.1: GSM Speech

GSM 850 GPRS						
Channel	251	190	128			
Target (dBm)	32.3	32.3	32.3			
Tune-up (dBm)	33.3	33.5	33.5			
	GSM 1900 GPRS	3				
Channel	251	190	128			
Target (dBm)	29.3	29.3	29.3			
Tune-up (dBm)	30.3	30.3	30.3			

Table 11-1.2: GPRS and EGPRS

		GSM 850 GPRS (GM		
	Channel	251	190	128
4 Tyrolot	Target (dBm)	32.3	32.3	32.3
1 Txslot	Tune-up (dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	31.3	31.3	31.3
2 1 XSIOIS	Tune-up (dBm)	32.3	32.3	32.3
3 Txslots	Target (dBm)	30	30	30
3 1 X SIOLS	Tune-up (dBm)	31	31	31
4 Txslots	Target (dBm)	29	29	29
4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tune-up (dBm)	30	30	30
		GSM 850 EGPRS(GN	/ISK)	
	Channel	251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
1 1 7 5101	Tune-up (dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	31.3	31.3	31.3
2 1 / 31013	Tune-up (dBm)	32.3	32.3	32.3
3 Txslots	Target (dBm)	30	30	30
3 1 / 31013	Tune-up (dBm)	31	31	31
4 Txslots	Target (dBm)	29	29	29
4 1 / 51015	Tune-up (dBm)	30	30	30
		GSM 850 EGPRS (8F	PSK)	
	Channel	251	190	128
1 Txslot	Target (dBm)	26	26	26
1 173101	Tune-up (dBm)	27	27	27
2 Txslots	Target (dBm)	24.5	24.5	24.5
2 1 / 31013	Tune-up (dBm)	25.5	25.5	25.5
3 Txslots	Target (dBm)	23	23	23
0 1 / 21013	Tune-up (dBm)	24	24	24
4 Txslots	Target (dBm)	21.5	21.5	21.5
7 1 731013	Tune-up (dBm)	22.5	22.5	22.5



		GSM 1900 GPRS (G	MSK)	
	Channel	810	661	512
1 Txslot	Target (dBm)	29	29	29
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tune-up (dBm)	30	30	30
2 Txslots	Target (dBm)	28	28	28
2 1 351015	Tune-up (dBm)	29	29	29
3 Txslots	Target (dBm)	26	26	26
3 1 XSIUIS	Tune-up (dBm)	27	27	27
4 Txslots	Target (dBm)	25.5	25.5	25.5
4 1 XSIOIS	Tune-up (dBm)	26.5	26.5	26.5
	(GSM 1900 EGPRS(G	MSK)	
	Channel	810	661	512
1 Txslot	Target (dBm)	29	29	29
1 1 X SIOL	Tune-up (dBm)	30	30	30
2 Txslots	Target (dBm)	28	28	28
2 1 XSIOIS	Tune-up (dBm)	29	29	29
3 Txslots	Target (dBm)	26	26	26
3 1 XSIUIS	Tune-up (dBm)	27	27	27
4 Txslots	Target (dBm)	25.5	25.5	25.5
4 1 X SIOLS	Tune-up (dBm)	26.5	26.5	26.5
	(GSM 1900 EGPRS (8	BPSK)	
	Channel	810	661	512
1 Txslot	Target (dBm)	25	25	25
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tune-up (dBm)	26	26	26
2 Txslots	Target (dBm)	23.5	23.5	23.5
Z 1 X31013	Tune-up (dBm)	24.5	24.5	24.5
3 Txslots	Target (dBm)	22	22	22
3 1 2 2 1 1 2 1 1 2 1	Tune-up (dBm)	23	23	23
4 Txslots	Target (dBm)	20.7	20.7	20.7
4 1 351015	Tune-up (dBm)	21.7	21.7	21.7

Table 11-1.3: WCDMA

WCDMA 850 CS						
Channel	Channel 4233	Channel 4182	Channel 4132			
Target (dBm)	22	22	22			
Tune-up (dBm)	23.5	23.5	23.5			
	HSUPA (s	sub-test 1/2)				
Channel	Channel 4233	Channel 4182	Channel 4132			
Target (dBm)	20	20	20			
Tune-up (dBm)	21	21	21			
	HSUPA (sub-test 3)					



Channel	Channel 4233	Channel 4182	Channel 4132				
Target (dBm)	20.5	20.5	20.5				
Tune-up (dBm)	21.5	21.5	21.5				
Tune up (ubin)		sub-test 4)	21.0				
Channel	Channel 4233	Channel 4182	Channel 4132				
Target (dBm)	19	19	19				
Tune-up (dBm)	20	20	20				
rune-up (ubin)		(sub-test 5)	20				
Channel	Channel 4233	Channel 4182	Channel 4132				
Target (dBm)	21	21	21				
Tune-up (dBm)	22	22	22				
rune-up (ubin)		1700 CS	22				
Channel	Channel 1513	Channel 1412	Channel 1312				
	22	22	22				
Target (dBm)	23.5	23.5	23.5				
Tune-up (dBm)			23.5				
Channel	Channel 1513	b-test 1/2/3) Channel 1412	Channel 1312				
Target (dBm)	20	20	20				
Tune-up (dBm) 21 21 21							
	,	sub-test 4)	1				
Channel	Channel 1513	Channel 1412	Channel 1312				
Target (dBm)	19.5	19.5	19.5				
Tune-up (dBm)	20.5	20.5	20.5				
	· ·	sub-test 5)	1				
Channel	Channel 1513	Channel 1412	Channel 1312				
Target (dBm)	21.5	21.5	21.5				
Tune-up (dBm)	22.5	22.5	22.5				
	WCDMA	1900 CS					
Channel	Channel 9538	Channel 9400	Channel 9262				
Target (dBm)	22	22	22				
Tune-up (dBm)	23.5	23.5	23.5				
	HSUPA (su	b-test 1/2/3)					
Channel	Channel 1513	Channel 1412	Channel 1312				
Target (dBm)	20	20	20				
Tune-up (dBm)	21	21	21				
	HSUPA (sub-test 4)					
Channel	Channel 1513	Channel 1412	Channel 1312				
Target (dBm)	19.5	19.5	19.5				
Tune-up (dBm)	20.5	20.5	20.5				
·	HSUPA (sub-test 5)	•				
Channel	Channel 1513	Channel 1412	Channel 1312				
Torget (dDm)	22	22	22				
Target (dBm)							

©Copyright. All rights reserved by CTTL.



Table 11-1.4: Bluetooth

GFSK					
Channel	Channel 0	Channel 39	Channel 78		
Target (dBm)	4.5	4	4		
Tune-up (dBm)	5.5	5	5		

Table 11-1.5: WiFi

Channel Channel 1 Channel 6 Channel 11	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\						
Target (dBm) 20 20 20 20 Tune-up(dB) 21 21 21 21 21 21 21 2	Ohamad	1	<u> </u>	Ob ann al 44			
Tune-up(dB) 21 21 21 21 21 21 21 2							
WiFi 802.11g (2.4GHz) 6Mbps-12 Mbps							
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 18Mbps-24 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2-3 Channel 1	Tune-up(dB)	21	21	21			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 18Mbps-24 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2-3 Channel 1							
Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 18Mbps-24 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS2-3 Data Rate Channel 1 Channel 6 Channel 11			<u> </u>				
Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 18Mbps-24 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Channel 11 Channel 6 Channel 11 Target (dBm) 16 15<	Data Rate	Channel 1	Channel 6	Channel 11			
WiFi 802.11g (2.4GHz)	Target (dBm)	17	17	17			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS2-3 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS4-7<	Tune-up(dB)	18	18	18			
Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 16		WiFi 802.11g (2.4GF	lz) 18Mbps-24 Mbps				
Tune-up(dB) 18 18 18 WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 15 15 Tune-up(dB) 16 15 15 15 Tune-up(dB) 16 15	Data Rate	Channel 1	Channel 6	Channel 11			
WiFi 802.11g (2.4GHz) 36Mbps-54 Mbps Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16	Target (dBm)	17	17	17			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Channel 11 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Target (dBm) 16 15 15	Tune-up(dB)	18	18	18			
Target (dBm) 17 17 17 Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 0 0 0 Data Rate Channel 1 0 0 0 Data Rate Channel 1 0 0 0 0 Data Rate Channel 1 0 0 0 0 0		WiFi 802.11g (2.4GF	lz) 36Mbps-54 Mbps				
Tune-up(dB) 18 18 18 WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Data Rate	Channel 1	Channel 6	Channel 11			
WiFi 802.11n-20 (2.4GHz) MCS0 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Target (dBm)	17	17	17			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 MCS4~7 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 Channel 11 Target (dBm) 16 15 15	Tune-up(dB)	18	18 18				
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 MCS4~7 Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 Channel 11 Target (dBm) 16 15 15		•					
Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 Channel 6 Channel 11 Target (dBm) 16 15 15		WiFi 802.11n-20	(2.4GHz) MCS0				
Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 15	Data Rate	Channel 1	Channel 6	Channel 11			
WiFi 802.11n-20 (2.4GHz) MCS1 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Target (dBm)	16	15	15			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Tune-up(dB)	17	16	16			
Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15		WiFi 802.11n-20	(2.4GHz) MCS1				
Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Data Rate	Channel 1	Channel 6	Channel 11			
WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Target (dBm)	16	15	15			
WiFi 802.11n-20 (2.4GHz) MCS2~3 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Tune-up(dB)	17	16	16			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15		WiFi 802.11n-20 (2.4GHz) MCS2~3				
Target (dBm) 16 15 15 Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15	Data Rate	<u> </u>	· · · · · · · · · · · · · · · · · · ·	Channel 11			
Tune-up(dB) 17 16 16 WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15		16	15				
WiFi 802.11n-20 (2.4GHz) MCS4~7 Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15		17	16	16			
Data Rate Channel 1 Channel 6 Channel 11 Target (dBm) 16 15 15		WiFi 802.11n-20 (2.4GHz) MCS4~7				
Target (dBm) 16 15 15	Data Rate	· ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` `	, , , , , , , , , , , , , , , , , , ,	Channel 11			



WiFi 802.11n-40 (2.4GHz) MCS0							
Data Rate	Channel 3	Channel 6	Channel 9				
Target (dBm)	15	14	14				
Tune-up(dB)	16	15	15				
	WiFi 802.11n-40	(2.4GHz) MCS1					
Data Rate	Channel 3	Channel 6	Channel 9				
Target (dBm)	15	14	14				
Tune-up(dB)	16	15	15				
	WiFi 802.11n-40 (2.4GHz) MCS2~3					
Data Rate	Channel 3	Channel 6	Channel 9				
Target (dBm)	15	14	14				
Tune-up(dB)	16	15	15				
	WiFi 802.11n-40 (2.4GHz) MCS4~5	•				
Data Rate	Channel 3	Channel 6	Channel 9				
Target (dBm)	15	14	14				
Tune-up(dB)	16	15	15				
	WiFi 802.11n-40 (2.4GHz) MCS6~7						
Data Rate	Channel 3	Channel 6	Channel 9				
Target (dBm)	15	14	14				
Tune-up(dB)	16	15	15				

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11-2.1: The conducted power measurement results for GSM850/1900 for head

GSM		Conducted Power (dBm)	
850MHz	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
OOUIVINZ	32.22	32.10	31.91
CCM		Conducted Power (dBm)	
GSM	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
1900MHz	29.37	29.49	29.36

Table 11-2.2: The conducted power measurement results for GPRS and EGPRS for body

GSM 850	Measured Power (dBm)			calculation	Averaged Power (dBm)		
GPRS (GMSK)	251	190	128		251	190	128
1 Txslot	32.23	32.11	31.90	-9.03	23.20	23.08	22.87
2 Txslots	31.46	31.35	31.19	-6.02	25.44	25.33	25.17
3Txslots	29.75	29.64	29.49	-4.26	25.49	25.38	25.23
4 Txslots	28.82	28.76	28.59	-3.01	25.81	25.75	25.58



GSM 850	Meası	ured Power	(dBm)	calculation	Avera	ged Power	(dBm)
EGPRS (GMSK)	251	190	128		251	190	128
1 Txslot	32.24	32.10	31.92	-9.03	23.21	23.07	22.89
2 Txslots	31.48	31.36	31.20	-6.02	25.46	25.34	25.18
3Txslots	29.75	29.64	29.49	-4.26	25.49	25.38	25.23
4 Txslots	28.86	28.76	28.56	-3.01	25.85	25.75	25.55
GSM 850	Meası	ured Power	(dBm)	calculation	Avera	ged Power	(dBm)
EGPRS (8PSK)	251	190	128		251	190	128
1 Txslot	26.29	26.31	26.40	-9.03	17.26	17.28	17.37
2 Txslots	25.32	25.42	25.47	-6.02	19.30	19.40	19.45
3Txslots	23.20	23.34	23.46	-4.26	18.94	19.08	19.20
4 Txslots	22.29	22.45	22.48	-3.01	19.28	19.44	19.47
PCS1900	Meası	red Power	(dBm)	calculation	Avera	ged Power	(dBm)
GPRS (GMSK)	810	661	512		810	661	512
1 Txslot	29.40	29.51	29.39	-9.03	20.37	20.48	20.36
2 Txslots	28.59	28.76	28.63	-6.02	22.57	22.74	22.61
3Txslots	26.84	26.99	26.90	-4.26	22.58	22.73	22.64
4 Txslots	25.73	25.92	25.84	-3.01	22.72	22.91	22.83
PCS1900	Meası	ured Power	(dBm)	calculation	Avera	ged Power	(dBm)
EGPRS (GMSK)	810	661	512		810	661	512
1 Txslot	29.42	29.53	29.41	-9.03	20.39	20.50	20.38
2 Txslots	28.61	28.78	28.64	-6.02	22.59	22.76	22.62
3Txslots	26.86	27.93	26.93	-4.26	22.60	23.67	22.67
4 Txslots	25.79	25.97	25.87	-3.01	22.78	22.96	22.86
GSM 1900	Meası	red Power	(dBm)	calculation	Avera	ged Power	(dBm)
EGPRS (8PSK)	810	661	512		810	661	512
1 Txslot	25.52	25.52	25.31	-9.03	16.49	16.49	16.28
2 Txslots	24.50	24.49	24.40	-6.02	18.48	18.47	18.38
3Txslots	22.67	22.64	22.56	-4.26	18.41	18.38	18.30
4 Txslots	21.58	21.68	21.57	-3.01	18.57	18.67	18.56

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and PCS1900.



11.3 WCDMA Measurement result

Table 11-3.1: The conducted Power for WCDMA

Table 11-5.1. The conducted Fower for WCDMA						
Item	band		FDDV result			
item	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)		
WCDMA	\	22.41	22.28	22.11		
	1	19.30	19.35	19.76		
	2	19.30	19.37	19.28		
HSUPA	3	20.31	20.36	20.26		
	4	18.76	18.82	18.73		
	5	21.29	21.35	21.25		
Item	band		FDDIV result			
item	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)		
WCDMA	\	22.34	22.29	22.11		
	1	19.49	19.53	19.91		
	2	19.49	19.48	19.37		
HSUPA	3	20.49	20.48	20.39		
	4	18.96	18.96	18.81		
	5	21.47	21.47 21.53			
Item	band		FDDII result			
Item	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)		
WCDMA	١	22.46	22.46	22.19		
	1	19.60	19.77	20.03		
	2	19.55	19.72	19.49		
HSUPA	3	20.61	20.76	20.55		
	4	19.02	19.22	19.02		
	5	21.61	21.76	21.54		

11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)			
iviode	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)	
GFSK	4.68	4.42	4.55	

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	20.44	20.41	20.82	20.40
6	19.67	/	19.94	/
11	19.12	/	19.32	/



802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	17.16	17.13	17.08	17.00	16.85	16.72	16.77	16.27
6	16.50	/	/	/	/	/	/	/
11	15.80	/	/	/	/	/	/	/

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	16.33	16.23	16.15	16.05	15.91	15.85	15.78	15.70
6	15.52	/	/	/	/	/	/	/
11	14.86	/	/	/	/	/	/	/




12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from "FCC SAR Considerations for Cell Phones with Multiple Transmitters" are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

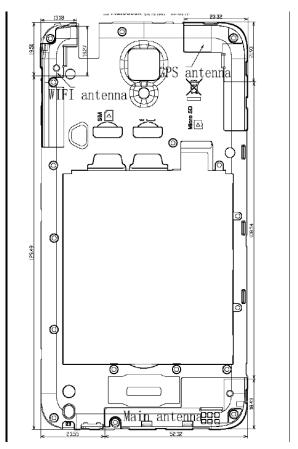

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions								
Mode Front Rear Left edge Right edge Top edge Bottom edge								
Main antenna	Yes	Yes	Yes	Yes	No	Yes		
WLAN	Yes	Yes	No	Yes	Yes	No		



12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] \leq 3.0 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Donal/Mode	E(CH-)	Desition	SAR test exclusion	RF outp	SAR test	
Band/Mode	F(GHz)	Position	threshold (mW)			exclusion
Divistanth	2.441	Head	9.60	5.5	3.55	Yes
Bluetooth		Body	19.20	5.5	3.55	Yes
2.4GHz WLAN	O 45	Head	9.58	21	125.89	No
802.11 b	2.45	Body	19.17	21	125.89	No



13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WLAN

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.48	0.72	1.20
Maximum reported	Rear	0.92	0.37	1.29
SAR value for Body	Bottom	1.34	/	1.34

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum	
Highest reported	Left hand, Touch cheek	0.48	0.15	0.63	
SAR value for Head	Left flaffu, fouch cheek	0.40	0.15	0.03	
Highest reported	Bottom	1.34	/	1.34	
SAR value for Body	Rear	0.92	0.07	0.99	

BT* - Estimated SAR for Bluetooth (see the table 13.2)

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom. The distance is 10mm and just applied to the condition of body worn accessory. It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-gSAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or >1.2W/kg. The calculated SAR is obtained by the following formula:

Reported SAR = Measured SAR
$$\times$$
 10^{(P_{Target} -P_{Measured})/10}

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Duty Cycle						
Speech for GSM850/1900	1:8.3					
GPRS&EGPRS for GSM850/1900	1:2					
WCDMA	1:1					



14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.1-1: The evaluation of multi-batteries for Head Test

Frequ	ency	Modo/Pond	6:40	Test	Pottory Type	SAR(1g)	Power
MHz	Ch.	Mode/Band	Side	Position	Battery Type	(W/kg)	Drift(dB)
836.6	190	GSM 850	Left	Touch	CAC2500064C1	0.252	-0.05
836.6	190	GSM 850	Left	Touch	CAB2500001C1	0.248	0.05

Note: According to the values in the above table, the battery, CAC2500064C1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.1-2: The evaluation of multi-batteries for Body Test

Frequ	requency Mode/Band Test Spaci		Spacing	Pottory Type	SAR(1g)	Power	
MHz	Ch.	Wiode/Barid	Position	(mm)	Battery Type	(W/kg)	Drift(dB)
824.2	128	GSM 850	Rear	10	CAC2500064C1	0.665	0.05
824.2	128	GSM 850	Rear	10	CAB2500001C1	0.661	0.06

Note: According to the values in the above table, the battery, CAC2500064C1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

14.2 SAR results for Fast SAR

Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

	Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C												
Frequ	Frequency		Frequency		Test Figure		Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
		Side	Position	No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift		
MHz	Ch.		Position	NO.	(dBm)	rowei (abiii)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)		
836.6	190	Left	Touch	/	32.10	33.3	0.173	0.23	0.252	0.33	-0.05		
836.6	190	Left	Tilt	/	32.10	33.3	0.106	0.14	0.153	0.20	0.03		
848.8	251	Right	Touch	Fig.1	32.22	33.3	0.252	0.32	0.326	0.42	-0.06		
836.6	190	Right	Touch	/	32.10	33.3	0.174	0.23	0.253	0.33	0.15		
824.2	128	Right	Touch	/	31.91	33.3	0.189	0.26	0.277	0.38	-0.01		
836.6	190	Right	Tilt	/	32.10	33.3	0.095	0.13	0.136	0.18	0.15		



Table 14.2-2: SAR Values (GSM 850 MHz Band - Body)

			Ambie	ent Temp	erature: 23.	0°C Liq	uid Tempera	ture: 22.5°0	C		
Frequ	encv	Mode	Test	Figure	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
	,	(number of	Position	No.	Power	Max. tune-up Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	timeslots)	Position	NO.	(dBm)	Power (dbiii)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.6	190	GPRS (4)	Front	/	28.76	30	0.177	0.24	0.265	0.35	-0.12
848.8	251	GPRS (4)	Rear	/	28.82	30	0.408	0.54	0.582	0.76	0.07
836.6	190	GPRS (4)	Rear	/	28.76	30	0.422	0.56	0.591	0.79	0.14
824.2	128	GPRS (4)	Rear	Fig.2	28.59	30	0.509	0.70	0.665	0.92	0.05
836.6	190	GPRS (4)	Left	/	28.76	30	0.182	0.24	0.287	0.38	0.06
836.6	190	GPRS (4)	Right	/	28.76	30	0.226	0.30	0.353	0.47	-0.08
836.6	190	GPRS (4)	Bottom	/	28.76	30	0.194	0.26	0.349	0.46	0.19
824.2	128	EGPRS (4)	Rear	/	28.86	30	0.443	0.58	0.632	0.82	0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-3: SAR Values (GSM 1900 MHz Band - Head)

			Am	bient Ter	mperature: 2	23.0 °C	_iquid Temp	erature: 22	.5°C		
Freque	ency	C: d c	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1909.8	810	Left	Touch	/	29.37	30.3	0.074	0.09	0.127	0.16	0.06
1880	661	Left	Touch	/	29.49	30.3	0.087	0.10	0.150	0.18	0.12
1850.2	512	Left	Touch	Fig.3	29.36	30.3	0.104	0.13	0.165	0.20	0.09
1880	661	Left	Tilt	/	29.49	30.3	0.043	0.05	0.075	0.09	0.18
1880	661	Right	Touch	/	29.49	30.3	0.059	0.07	0.100	0.12	0.02
1880	661	Right	Tilt	/	29.49	30.3	0.064	0.08	0.116	0.14	0.07



Table 14.2-4: SAR Values (GSM 1900 MHz Band - Body)

			Ambier	nt Tempe	erature: 23.0)°C Liqu	ıid Tempera	ture: 22.5°0	7		
Freque	ency	Mode	Test	Figure No./H	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	(number of timeslots)	Position	eadse t	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1880	661	GPRS (4)	Front	/	25.92	26.5	0.339	0.39	0.637	0.73	-0.15
1909.8	810	GPRS (4)	Rear	/	25.73	26.5	0.360	0.43	0.753	0.90	0.18
1880	661	GPRS (4)	Rear	/	25.92	26.5	0.375	0.43	0.732	0.84	-0.07
1850.2	512	GPRS (4)	Rear	/	25.84	26.5	0.363	0.42	0.726	0.85	-0.12
1880	661	GPRS (4)	Left	/	25.92	26.5	0.102	0.12	0.183	0.21	0.03
1880	661	GPRS (4)	Right	/	25.92	26.5	0.053	0.06	0.087	0.10	0.11
1909.8	810	GPRS (4)	Bottom	/	25.73	26.5	0.452	0.54	0.912	1.09	-0.02
1880	661	GPRS (4)	Bottom	Fig.4	25.92	26.5	0.634	0.72	1.170	1.34	0.13
1850.2	512	GPRS (4)	Bottom	/	25.84	26.5	0.430	0.50	0.874	1.02	-0.01
1880	661	EGPRS (4)	Bottom	/	25.79	26.5	0.486	0.57	1.010	1.19	0.05
1880	661	Speech	Bottom	H1	25.92	26.5	0.487	0.56	0.998	1.14	0.08
1880	661	Speech	Bottom	H2	25.92	26.5	0.492	0.56	1.020	1.17	-0.06
1880	661	Speech	Bottom	H3	25.92	26.5	0.468	0.53	0.936	1.07	0.17
1880	661	GPRS (4)	Bottom	/	25.92	26.5	1.620	1.85	3.970	4.54	0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The test distance of the last data is 0mm

Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)

			Aml	oient Tei	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C		
Frequ	iency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
	<u> </u>	Side	Positio	No.	Power	Power (dBm)	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.		n	INO.	(dBm)	1 ower (dbill)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.4	4182	Left	Touch	/	22.28	23	0.119	0.14	0.174	0.21	-0.04
836.4	4182	Left	Tilt	/	22.28	23	0.080	0.09	0.115	0.14	0.06
846.6	4233	Right	Touch	Fig.5	22.11	23	0.173	0.21	0.224	0.27	-0.02
836.4	4182	Right	Touch	/	22.28	23	0.132	0.16	0.192	0.23	-0.09
826.4	4132	Right	Touch	/	22.41	23	0.111	0.13	0.162	0.19	0.16
836.4	4182	Right	Tilt	/	22.28	23	0.077	0.09	0.110	0.13	0.15



Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body)

			Ambien	t Temperatu	re: 23.0 °C	Liquid Te	mperature:	22.5°C		
Frequ	iencv	Test	Figure	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
	I	Position	No.	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	Position	NO.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.4	4182	Front	/	22.28	23	0.136	0.16	0.193	0.23	0.00
846.6	4233	Rear	Fig.6	22.11	23	0.195	0.24	0.250	0.31	0.01
836.4	4182	Rear	/	22.28	23	0.170	0.20	0.240	0.28	0.02
826.4	4132	Rear	/	22.41	23	0.159	0.18	0.224	0.26	0.04
836.4	4182	Left	/	22.28	23	0.123	0.15	0.182	0.21	0.02
836.4	4182	Right	/	22.28	23	0.089	0.10	0.131	0.15	0.05
836.4	4182	Bottom	/	22.28	23	0.098	0.12	0.151	0.18	0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-7: SAR Values (WCDMA 1700 MHz Band - Head)

	Table 1 12 11 67 th Values (1765 lin) 1 1760 lini 2 5 and 1760 a)													
	Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C													
Freque	ency	0.1	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power			
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)			
1752.6	1738	Left	Touch	/	22.19	23	0.192	0.23	0.326	0.39	0.12			
1732.5	1637	Left	Touch	Fig.7	22.46	23	0.262	0.30	0.421	0.48	0.13			
1712.4	1537	Left	Touch	/	22.46	23	0.163	0.18	0.277	0.31	0.12			
1732.5	1637	Left	Tilt	/	22.46	23	0.115	0.13	0.189	0.21	0.08			
1732.5	1637	Right	Touch	/	22.46	23	0.104	0.12	0.169	0.19	-0.10			
1732.5	1637	Right	Tilt	/	22.46	23	0.129	0.15	0.228	0.26	-0.12			

Table 14.2-8: SAR Values (WCDMA 1700 MHz Band - Body)

	A 11 17 10 10 10 10 10 10 10 10 10 10 10 10 10												
		A	Ambient	Temperature	e: 23.0 °C	Liquid Tem	nperature: 2	2.5°C					
Frequ	ency	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift			
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)			
1732.5	1637	Front	/	22.46	23	0.292	0.33	0.508	0.58	-0.01			
1732.5	1637	Rear	/	22.46	23	0.313	0.35	0.504	0.57	-0.01			
1732.5	1637	Left	/	22.46	23	0.145	0.16	0.245	0.28	0.05			
1732.5	1637	Right	/	22.46	23	0.086	0.10	0.141	0.16	0.08			
1752.6	1738	Bottom	/	22.19	23	0.357	0.43	0.644	0.78	-0.06			
1732.5	1637	Bottom	Fig.8	22.46	23	0.417	0.47	0.738	0.84	0.01			
1712.4	1537	Bottom	/	22.46	23	0.302	0.34	0.544	0.62	-0.01			

Note1: The distance between the EUT and the phantom bottom is 10mm.



Table 14.2-9: SAR Values (WCDMA 1900 MHz Band - Head)

			Aml	oient Ter	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C		
Frequ	ency	0: 1	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	/iHZ Cn.		Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1907.6	9938	Left	Touch	/	22.11	23	0.110	0.14	0.192	0.24	0.13
1880	9800	Left	Touch	Fig.9	22.29	23	0.152	0.18	0.244	0.29	0.15
1852.4	9662	Left	Touch	/	22.34	23	0.129	0.15	0.221	0.26	0.08
1880	9800	Left	Tilt	/	22.29	23	0.079	0.09	0.137	0.16	0.04
1880	9800	Right	Touch	/	22.29	23	0.079	0.09	0.129	0.15	0.04
1880	9800	Right	Tilt	/	22.29	23	0.088	0.10	0.159	0.19	0.05

Table 14.2-10: SAR Values (WCDMA 1900 MHz Band - Body)

	Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C													
			Ambient ³	Temperature	e: 23.0 °C	Liquid Ter	nperature: 2	22.5°C						
Frequ	encv	Test	Figure	Conducted	May tung up	Measured	Reported	Measured	Reported	Power				
	······	Positio	No./Hea	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift				
MHz	Ch.	n	dset	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)				
1907.6	9938	Front	/	22.11	23	0.342	0.42	0.666	0.82	-0.07				
1880	9800	Front	/	22.29	23	0.355	0.42	0.680	0.80	0.00				
1852.4	9662	Front	/	22.34	23	0.354	0.41	0.669	0.78	0.01				
1907.6	9938	Rear	/	22.11	23	0.365	0.45	0.705	0.87	-0.04				
1880	9800	Rear	/	22.29	23	0.353	0.42	0.670	0.79	0.02				
1852.4	9662	Rear	/	22.34	23	0.343	0.40	0.641	0.75	-0.04				
1880	9800	Left	/	22.29	23	0.130	0.15	0.234	0.28	0.02				
1880	9800	Right	/	22.29	23	0.069	0.08	0.119	0.14	-0.15				
1907.6	9938	Bottom	Fig.10	22.11	23	0.540	0.66	1.010	1.24	0.01				
1880	9800	Bottom	/	22.29	23	0.513	0.60	0.951	1.12	0.02				
1852.4	9662	Bottom	/	22.34	23	0.422	0.49	0.844	0.98	0.00				
1907.6	9938	Bottom	H1	22.11	23	0.441	0.54	0.912	1.12	-0.02				
1907.6	9938	Bottom	H2	22.11	23	0.424	0.52	0.831	1.02	0.02				
1907.6	9938	Bottom	НЗ	22.11	23	0.429	0.53	0.865	1.06	0.01				
1907.6	9938	Bottom	/	22.11	23	1.130	1.39	2.870	3.52	0.05				

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The test distance of the last data is 0mm



Table 14.2-11: SAR Values (GSM 850 MHz Band - Head) -battery CAB2500001C1

			Am	bient Tei	mperature: 2	23.0 °C	Liquid Temp	erature: 22	.5°C		
Frequency Test Figure Conducted Max. tune-u						Measured	Reported	Measured	Reported	Power	
		Side			Power		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
848.8	848.8 251 Right Touch / 32.22				33.3	0.248	0.32	0.310	0.40	0.05	

Table 14.2-12: SAR Values (GSM 850 MHz Band - Body) -battery CAB2500001C1

			Ambie	nt Temp	erature: 23.	0°C Liq	uid Tempera	ture: 22.5°C	C		
Frequ	encv	Mode	Test	Eiguro	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
		(number of		Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
824.2	128	GPRS (4)	Rear	/	28.59	30	0.497	0.69	0.658	0.91	0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-13: SAR Values (GSM 1900 MHz Band - Head) -battery CAB2500001C1

			Am	bient Tei	mperature: 2	23.0 °C	Liquid Temp	erature: 22	.5°C		
Freque	ency	Side	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1a)	Power Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1850.2	512	Left	Touch	/	29.36	30.3	0.090	0.11	0.155	0.19	0.04

Table 14.2-14: SAR Values (GSM 1900 MHz Band - Body) -battery CAB2500001C1

			Ambie	ent Temp	erature: 23.	0°C Liq	uid Tempera	ture: 22.5°C			
Frequ	iencv	Mode	Test	Eiguro	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
	I	(number of		Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1880	661	GPRS (4)	Bottom	/	25.92	26.5	0.621	0.71	1.110	1.27	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-15: SAR Values (WCDMA 850 MHz Band - Head) -battery CAB2500001C1

			Aml	oient Ter	mperature: 2	23.0 °C I	_iquid Temp	erature: 22	.5°C		
Freque	ency		Test	Figure	Conducted Max. tune-up		Measured	Reported	Measured	Reported	Power
	Side			Power	•	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift	
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
846.6	4233	Right	Touch	/	22.11	23	0.161	0.20	0.217	0.27	0.09

Table 14.2-16: SAR Values (WCDMA 850 MHz Band - Body) -battery CAB2500001C1

			Ambient '	Temperature	e: 23.0 °C	Liquid Ter	mperature:	22.5°C		
Fregu	encv	Test	Figure	Conducted	May tung up	Measured	Reported	Measured	Reported	Power
Frequency	Positio	Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift	
MHz	Ch.	n	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
846.6	4233	Rear	/	22.11	23	0.186	0.23	0.212	0.26	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.



Table 14.2-17: SAR Values (WCDMA 1700 MHz Band - Head) -battery CAB2500001C1

			Aml	oient Ter	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C		
Frequ	iency	0: 1	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1732.5	1637	Left	Touch	/	22.46	23	0.247	0.28	0.411	0.47	0.07

Table 14.2-18: SAR Values (WCDMA 1700 MHz Band - Body) -battery CAB2500001C1

			Ambient ³	Temperature	e: 23.0 °C	Liquid Ter	mperature:	22.5°C		
Freque	encv	Test	Figure	Conducted	May tung up	Measured	Reported	Measured	Reported	Power
	Positio	Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift	
MHz	Ch.	n	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1732.5	1732.5 1637 Bottom / 22.46 23		0.396	0.45	0.712	0.81	0.04			

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-19: SAR Values (WCDMA 1900 MHz Band - Head) -battery CAB2500001C1

				Aml	oient Ter	mperature: 2	23.0 °C l	iquid Temp	erature: 22	.5°C		
	Freque	ency		Test	Eiguro	Conducted	May tung up	Measured	Reported	Measured	Reported	Power
-		, 	Side		Figure	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
	MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
	1880	9800	Left	Touch	/	22.29	23	0.141	0.17	0.231	0.27	0.06

Table 14.2-20: SAR Values (WCDMA 1900 MHz Band - Body) -battery CAB2500001C1

				•			,			
			Ambient '	Temperature	e: 23.0 °C	Liquid Ter	mperature:	22.5°C		
Frequ	encv	Test	Ciaura	Conducted	May tune up	Measured	Reported	Measured	Reported	Power
	T	Positio Figure Power Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift		
MHz	Ch.	n	INO.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1907.6	9938	Bottom	/	22.11	23	0.051	0.06	0.910	1.12	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

14.3 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.3-1: SAR Values (GSM 850 MHz Band - Head)

			Am	bient Te	mperature: 2	23.0 °C	Liquid Temp	erature: 22	.5°C		
Frequ	ency	0.1	Test	Figure		Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
848.8	251	Right	Touch	Fig.1	32.22	33.3	0.252	0.32	0.326	0.42	-0.06



Table 14.3-2: SAR Values (GSM 850 MHz Band - Body)

			Ambie	ent Temp	erature: 23.	0°C Liq	uid Tempera	ture: 22.5°0	2		
Frequ	iencv	Mode	Test	Figure	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
	· · · ·	(number of		0	Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
824.2	128	GPRS (4)	Rear	Fig.2	28.59	30	0.509	0.70	0.665	0.92	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3-3: SAR Values (GSM 1900 MHz Band - Head)

			Am	bient Ter	mperature: 2	23.0 °C	Liquid Temp	erature: 22	.5°C		
Freque	ency	C:de	Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
MHz	Ch.	Side	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1850.2	512	Left	Touch	Fig.3	29.36	30.3	0.104	0.13	0.165	0.20	0.09

Table 14.3-4: SAR Values (GSM 1900 MHz Band - Body)

			Ambier	nt Tempe	erature: 23.0)°C Liqu	ıid Tempera	ture: 22.5°0	7		
Frequ	ency	Mode (number of	Test	Figure	Conducted Power	Max. tune-up	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift
MHz	Ch.	timeslots)	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1880 661 GPRS (4) Bottom Fig.4 25.92						26.5	0.634	0.72	1.170	1.34	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3-5: SAR Values (WCDMA 850 MHz Band - Head)

			Aml	oient Ter	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C				
Freq	Frequency Test Figure			Conducted	May tupo up	Measured	Reported	Measured	Reported	Power			
	Side	Positio		Power	Max. tune-up	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift			
MHz	Ch.		n	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)		
846.6 4233 Right Touch Fig.5 22.11 23 0.173 0.21 0.224 0.27									0.27	-0.02			



Table 14.3-6: SAR Values (WCDMA 850 MHz Band - Body)

			Ambien	t Temperatu	re: 23.0 °C	Liquid Temperature: 22.5°C				
Frequ	uency	Toot	Figure	Conducted	May tupo up	Measured	Reported	Measured	Reported	Power
	i est Figure		Power Max. tune-up		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift	
MHz	Ch. Position No. (dBm)		Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)		
846.6	846.6 4233 Rear Fig.6 22.11 23						0.24	0.250	0.31	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3-7: SAR Values (WCDMA 1700 MHz Band - Head)

			Aml	oient Ter	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C		
Frequ	ency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
•	Side			· ·	Power	•	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1732.5	1732.5 1637 Left Touch Fig.7 22.46 23							0.30	0.421	0.48	0.13

Table 14.3-8: SAR Values (WCDMA 1700 MHz Band - Body)

		Α	Ambient	Temperature	e: 23.0 °C	Liquid Temperature: 22.5°C				
Frequ MHz	ency Ch.	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
1732.5 1637 Bottom Fig.8 22.46 23						0.417	0.47	0.738	0.84	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3-9: SAR Values (WCDMA 1900 MHz Band - Head)

			Aml	oient Ter	mperature: 2	23.0 °C L	iquid Temp	erature: 22	.5°C		
Frequ	Frequency Test Figure Conducted						Measured	Reported	Measured	Reported	Power
MHz	Side Position No Power					Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
1880	1880 9800 Left Touch Fig.9 22.29 23 0.152 0.18 0.244 0.29 0.15										

Table 14.3-10: SAR Values (WCDMA 1900 MHz Band - Body)

					•			- ,		
		A	mbient [*]	Temperature	e: 23.0 °C	Liquid Temperature: 22.5°C				
Frequ	encv	Toot	Figure	Conducted	May tung up	Measured	Reported	Measured	Reported	Power
	Power Power				-	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	MHz Ch. Position No. (dBm) Power (dBm)				(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)	
1907.6	1907.6 9938 Bottom Fig.10 22.11 23						0.66	1.010	1.24	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.



14.4 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the <u>initial test</u> <u>position</u> procedure.

Head Evaluation

Table 14.4-1: SAR Values (WLAN - Head) - 802.11b 5.5Mbps (Fast SAR)

	Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C													
Freque	ency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power			
	Side			No.	Power	-	SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift			
MHz	Ch.		Position	NO.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)			
2412	1	Left	Touch	/	20.82	21	0.317	0.33	0.627	0.65	0.12			
2412	1	Left	Tilt	/	20.82	21	0.251	0.26	0.483	0.50	0.06			
2412	1	Right	Touch	/	20.82	21	0.212	0.22	0.391	0.41	0.01			
2412	1	Right	Tilt	/	20.82	21	0.214	0.22	0.419	0.44	0.10			

As shown above table, the <u>initial test position</u> for head is "Left Touch". So the head SAR of WLAN is presented as below:

Table 14.4-2: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Full SAR)

			Amb	ient Tem	nperature: 2	3.0 °C L	iquid Tempe	erature: 22.	5°C		
Frequ	ency		Test	Figure	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
	1	Side			Power		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.		Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2412	1	Left	Touch	Fig.11	20.82	21	0.339	0.35	0.680	0.71	0.12
2412	1	Left	Tilt	/	20.82	21	0.288	0.30	0.602	0.63	0.06

Note1: When the <u>reported</u> SAR of the <u>initial test position</u> is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the <u>initial test position</u> using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the <u>reported</u> SAR is \leq 0.8 W/kg. Note2: For all positions/configurations tested using the <u>initial test position</u> and subsequent test positions, when the

reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the <u>reported</u> SAR is \leq 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-3: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambier	nt Temperat	ure: 23.0 °C	Liquid Te	mperature: 22.5	°C
Freque	ency	Side	Test	Actual duty	maximum	Reported SAR	Scaled reported SAR
MHz	Ch.	0.00	Position	factor	duty factor	(1g) (W/kg)	(1g) (W/kg)
2412	1	Left	Touch	98.25%	100%	0.71	0.72

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.



Body Evaluation

Table 14.4-4: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Fast SAR)

		А	mbient T	emperature:	23.0 °C	Liquid Tem	perature: 2	22.5 °C		
Freque	encv	Test	Eiguro	Conducted	Max. tune-up	Measured	Reported	Measured	Reported	Power
		Position No.		Power Power (dBm)		SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	Position	NO.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2412	1	Front	/	20.82	21	0.108	0.11	0.194	0.20	-0.09
2412	1	Rear	/	20.82	21	0.177	0.18	0.355	0.37	0.05
2412	1	Right	/	20.82	21	0.060	0.06	0.124	0.13	0.12
2412	1	Тор	/	20.82	21	0.079	0.08	0.146	0.15	0.04

As shown above table, the <u>initial test position</u> for body is "Rear". So the body SAR of WLAN is presented as below:

Table 14.4-5: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Full SAR)

		Aı	mbient T	emperature:	23.0 °C	Liquid Tem	perature: 2	22.5 °C		
Freque	encv	Toot	Ciauro	Conducted	May tung up	Measured	Reported	Measured	Reported	Power
	,	Test	Figure Power Max. tune-up			SAR(10g)	SAR(10g)	SAR(1g)	SAR(1g)	Drift
MHz	Ch.	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2412	2412 1 Rear Fig.12 20.82 21						0.19	0.348	0.36	0.05

Note1: When the <u>reported</u> SAR of the <u>initial test position</u> is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the <u>initial test position</u> using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the <u>reported</u> SAR is $\leq 0.8 \text{ W/kg}$.

Note2: For all positions/configurations tested using the <u>initial test position</u> and subsequent test positions, when the <u>reported</u> SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the <u>reported</u> SAR is ≤ 1.2 W/kg or all required channels are tested.


According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-6: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambient Ten	nperature: 23.0)°C Liquid	d Temperature: 22	.5 °C							
Freque	Frequency Test Actual duty maximum duty Reported SAR Scaled reported SAR												
MHz	Ch.	Position	factor	factor	(1g) (W/kg)	(1g) (W/kg)							
2412	2412 1 Rear 98.25% 100% 0.36 0.37												

SAR is not required for OFDM because the 802.11b adjusted SAR \leq 1.2 W/kg.



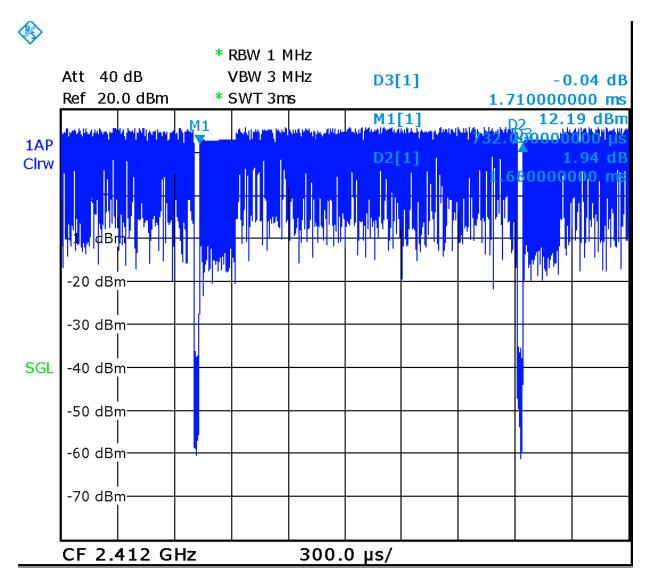

Picture 14.1 The plot of duty factor for head

Table 14.4-7: SAR Values (WLAN - Head) - 802.11b 5.5Mbps (Full SAR) -battery CAB2500001C1

			Amb	ient Tem	nperature: 2	3.0 °C L	iquid Tempe	erature: 22.5	5°C			
Frequency Side Test Figure Conducted Power Max. tune-up SAR(10g) SAR(10g)										Power		
MHz	Ch.	Side	Position	No.	(dBm)	Power (dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)	
2412	2412 1 Left Touch / 20.82 21 0.315 0.33 0.667 0.70 0.09											

Table 14.4-8: SAR Values (WLAN - Body) - 802.11b 5.5Mbps (Full SAR) -battery CAB2500001C1

		Aı	mbient T	emperature:	23.0 °C	Liquid Tem	perature: 2	22.5 °C		
Freque	ency	Test Figure Conducted Max. tune-u		Max. tune-up	Measured	Reported	Measured	Reported	Power	
MHz	Ch.	Position	No.	Power (dBm)	Power (dBm)	SAR(10g) (W/kg)	SAR(10g) (W/kg)	SAR(1g) (W/kg)	SAR(1g) (W/kg)	Drift (dB)
2412	1	Rear	/	20.82	21	0.157	0.16	0.316	0.33	0.06



15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Table 15.1: SAR Measurement Variability for Body GSM1900 (1g)

Frequ	uency		Specing	Original	First	The	Second
MHz	Ch.	Test Position	Spacing (mm)	SAR (W/kg)	Repeated SAR (W/kg)	Ratio	Repeated SAR (W/kg)
1880	661	Bottom	10	1.17	1.13	1.03	1

Table 15.2: SAR Measurement Variability for Body WCDMA1900 (1g)

Frequ	ency	Toot	Specing	Original	First	The	Second
MHz	Ch.	Test Position	Spacing (mm)	SAR (W/kg)	Repeated SAR (W/kg)	Ratio	Repeated SAR (W/kg)
1907.6	9938	Bottom	10	1.01	0.99	1.02	1



16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

10.	1 Measurement Ui	illiai SAK	16212	(SUUI	VITIZ~	JUNZ	<u>, </u>			
No.	Error Description	Type	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree
			value	Distribution		1g	10g	Unc.	Unc.	of
								(1g)	(10g)	freedo
										m
Mea	surement system									
1	Probe calibration	В	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	В	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	8
10	RFambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	В	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	8
12	Probe positioning with respect to phantom shell	В	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
			Test	sample related	1	I	I	I	I	
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	8
			Phan	tom and set-u	p					
17	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	8
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521



(Combined standard uncertainty	$u_c' =$	$\sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257	
	anded uncertainty fidence interval of	ι	$u_e = 2u_c$					19.1	18.9		
16.	2 Measurement Ui	ncerta	inty for No	rmal SAR	Tests	(3~60	GHz)				
No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedo m	
Mea	surement system	l			<u>I</u>	<u>l</u>	<u>I</u>	<u>I</u>	<u>I</u>		
1	Probe calibration	В	6.55	N	1	1	1	6.55	6.55	∞	
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞	
3	Boundary effect	В	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞	
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞	
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞	
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞	
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞	
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞	
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	∞	
10	RF ambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	∞	
11	Probe positioned mech. restrictions	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞	
12	Probe positioning with respect to phantom shell	В	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞	
13	Post-processing	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞	
	T	r	Test	sample related	l	r	r	1			
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71	
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5	
16	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞	
Phantom and set-up											
17	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞	
18	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	8	
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43	



20	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(Combined standard uncertainty	$u_c^{'} =$	$\sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					10.7	10.6	257
_	anded uncertainty fidence interval of	ı	$u_e = 2u_c$					21.4	21.1	

	3 Measurement U		1		· ·			T -	I	T.
No.	Error Description	Type	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree
			value	Distribution		1g	10g	Unc.	Unc.	of
								(1g)	(10g)	freedo
										m
Mea	surement system	ı	T	T	1	1	1	1	1	ı
1	Probe calibration	В	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	В	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	8
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	~
10	RF ambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	8
11	Probe positioned mech. Restrictions	В	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	8
12	Probe positioning with respect to phantom shell	В	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	8
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	В	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
		•	Test	sample related	i				•	
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞



			Phan	tom and set-uj	p					
18	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	8
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(Combined standard uncertainty		$\sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					10.4	10.3	257
(conf	Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$					20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty	Probably	Div.	(Ci)	(Ci)	Std.	Std.	Degree		
			value	Distribution		1g	10g	Unc.	Unc.	of		
								(1g)	(10g)	freedo		
										m		
Meas	Measurement system											
1	Probe calibration	В	6.55	N	1	1	1	6.55	6.55	8		
2	Isotropy	В	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	8		
3	Boundary effect	В	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	8		
4												
5	Detection limit	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞		
6	Readout electronics	В	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	8		
7	Response time	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	8		
8	Integration time	В	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	8		
9	RF ambient conditions-noise	В	0	R	$\sqrt{3}$	1	1	0	0	8		
10	RF ambient conditions-reflection	В	0	R	$\sqrt{3}$	1	1	0	0	8		
11	Probe positioned mech. Restrictions	В	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	8		
12	Probe positioning with respect to phantom shell	В	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	8		
13	Post-processing	В	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	8		
14	Fast SAR z-Approximation	В	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	8		
			Test s	sample related	i							



15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	В	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	8
			Phan	tom and set-uj	p					
18	Phantom uncertainty	В	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	8
19	Liquid conductivity (target)	В	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	8
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	В	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	8
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
(Combined standard uncertainty	$u_c^{'} =$	$\sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					13.5	13.4	257
_	inded uncertainty fidence interval of	ı	$u_e = 2u_c$					27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Туре	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 26, 2016	One year
02	Power meter	NRVD	102196	March 02, 2016	One year
03	Power sensor	NRV-Z5	100596	March 03, 2016	One year
04	Signal Generator	E4438C	MY49071430	February 01, 2016	One Year
05	Amplifier	60S1G4	0331848	No Calibration Re	equested
06	BTS	E5515C	MY50263375	January 30, 2016	One year
07	E-field Probe	SPEAG EX3DV4	3617	August 26, 2015	One year
08	DAE	SPEAG DAE4	777	August 26, 2015	One year
09	Dipole Validation Kit	SPEAG D835V2	4d069	July 23, 2015	One year
10	Dipole Validation Kit	SPEAG D1750V2	1003	July 16, 2015	One year
11	Dipole Validation Kit	SPEAG D1900V2	5d101	July 23, 2015	One year
12	Dipole Validation Kit	SPEAG D2450V2	853	July 24, 2015	One year

^{***}END OF REPORT BODY***



ANNEX A Graph Results

850 Left Cheek High

Date: 2016-6-13

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 848.8 MHz; $\sigma = 0.922$ mho/m; $\epsilon r = 41.869$; $\rho = 0.922$ mho/m; $\epsilon r = 41.869$; $\epsilon r = 41.869$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(9.56, 9.56, 9.56)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.357 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.551 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

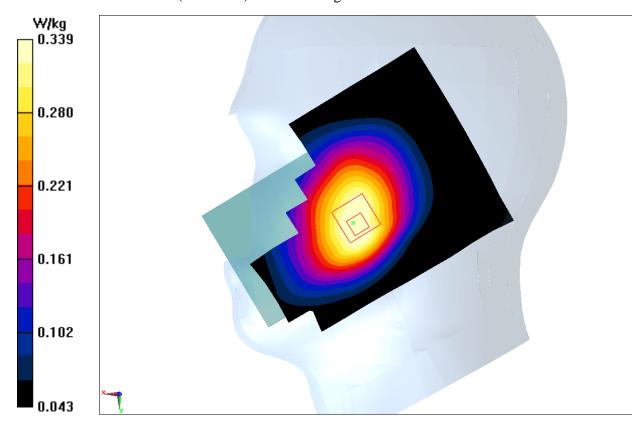


Fig.1 850MHz



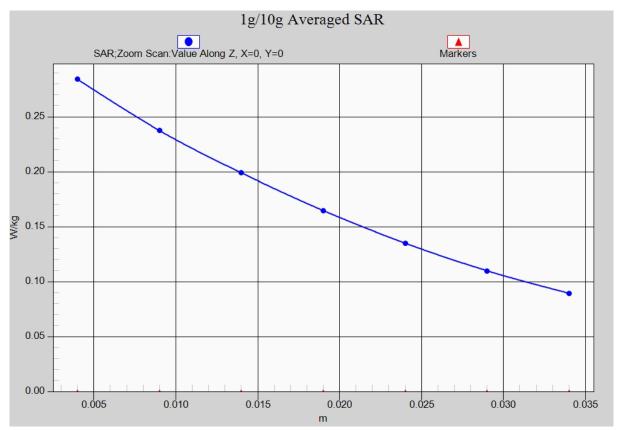


Fig. 1-1 Z-Scan at power reference point (850 MHz)



850 Body Rear Low

Date: 2016-6-13

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 824.2 MHz; $\sigma = 0.951$ mho/m; $\epsilon r = 56.06$; $\rho =$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (131x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.724 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.21 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

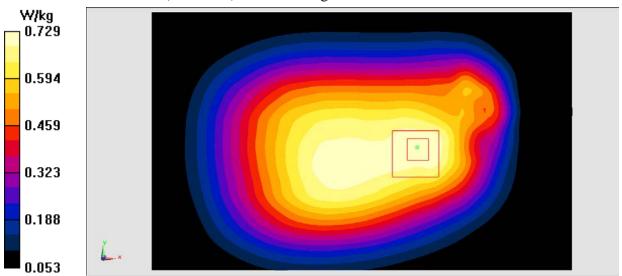


Fig.2 850 MHz



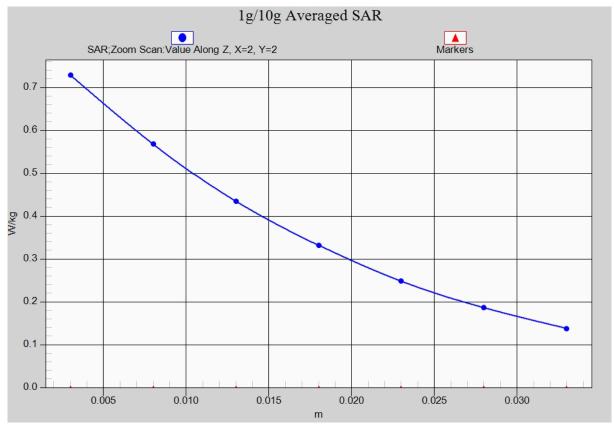


Fig. 2-1 Z-Scan at power reference point (850 MHz)



1900 Left Cheek Low

Date: 2016-6-28

Electronics: DAE4 Sn777 Medium: Head 1900 MHz

Medium parameters use: f = 1850 MHz; $\sigma = 1.409 \text{ mho/m}$; $\epsilon r = 39.81$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.193 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.268 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.104 W/kgMaximum value of SAR (measured) = 0.193 W/kg

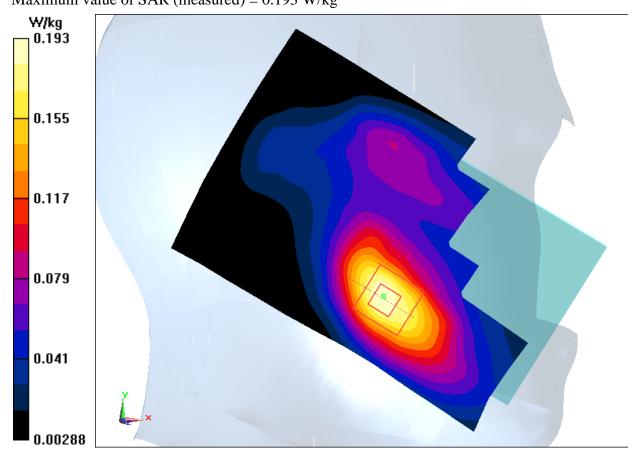


Fig.3 1900 MHz



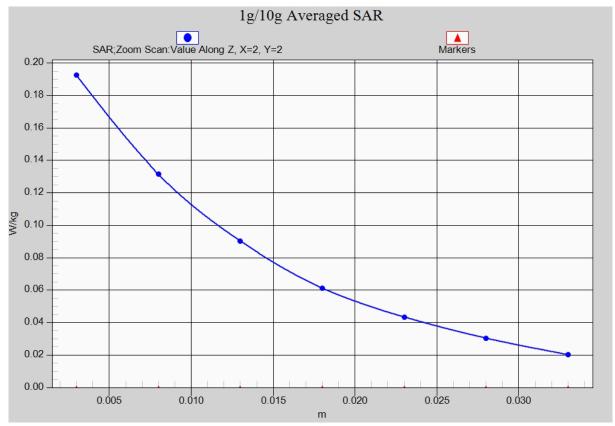


Fig. 3-1 Z-Scan at power reference point (1900 MHz)



1900 Body Bottom Middle

Date: 2016-6-28

Electronics: DAE4 Sn777 Medium: Body 1900 MHz

Medium parameters used: f = 1880 MHz; $\sigma = 1.412 \text{ mho/m}$; $\epsilon r = 39.78$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:2

Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (131x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (7x7x7)/**Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.29 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.634 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

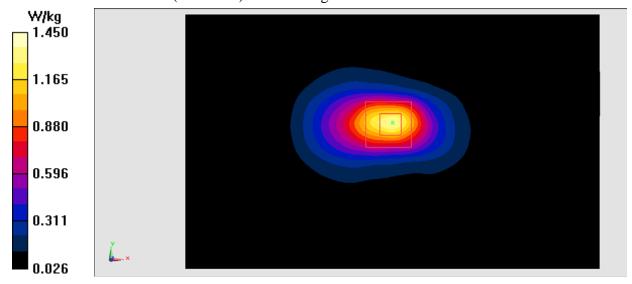


Fig.4 1900 MHz



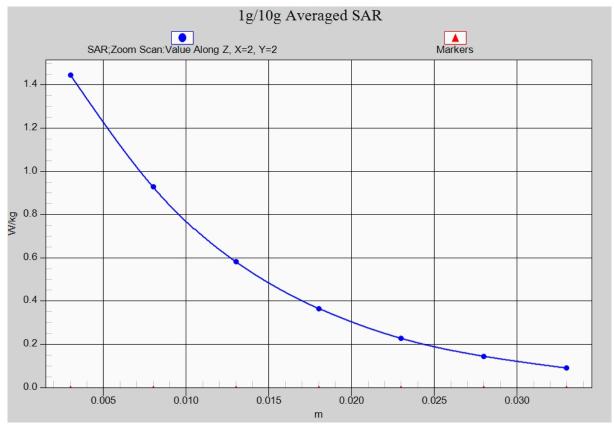


Fig.4-1 Z-Scan at power reference point (1900 MHz)



WCDMA 850 Right Cheek High

Date: 2016-6-13

Electronics: DAE4 Sn777 Medium: Head 850 MHz

Medium parameters used (interpolated): f = 846.6 MHz; $\sigma = 0.927$ mho/m; $\epsilon r = 42.168$; $\rho =$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.56, 9.56, 9.56)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.246 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.767 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

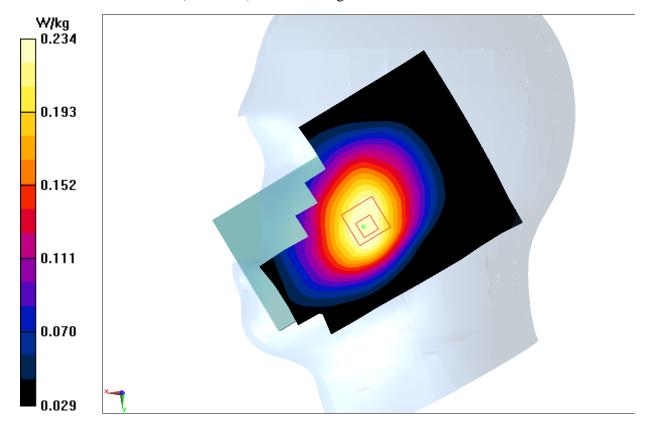


Fig.5 WCDMA 850



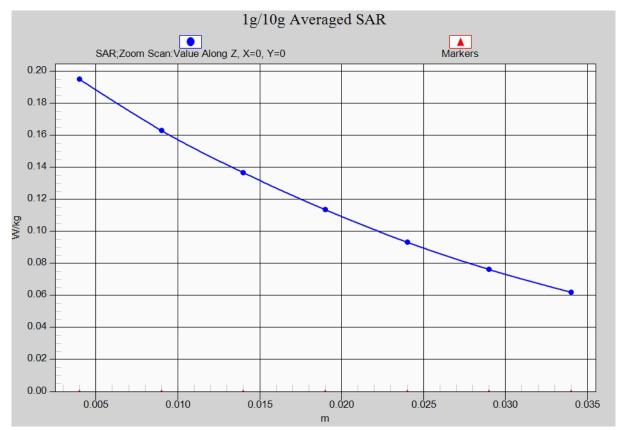


Fig. 5-1 Z-Scan at power reference point (WCDMA 850)



WCDMA 850 Body Rear High

Date: 2016-6-13

Electronics: DAE4 Sn777 Medium: Body 850 MHz

Medium parameters used (interpolated): f = 846.6 MHz; $\sigma = 0.963$ mho/m; $\epsilon r = 56.01$; $\rho =$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (121x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.277 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.88 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

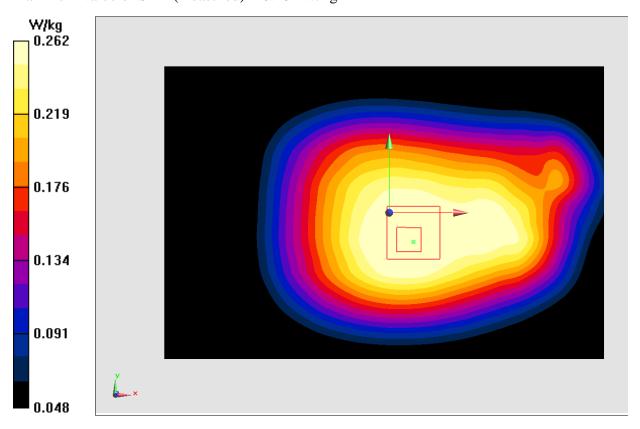


Fig.6 WCDMA 850



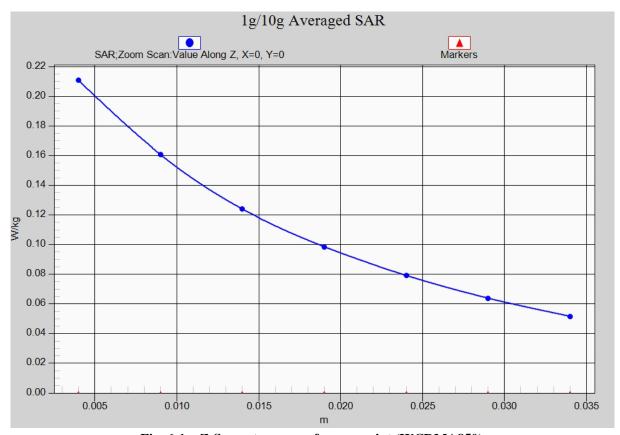


Fig. 6-1 Z-Scan at power reference point (WCDMA850)



WCDMA 1700 Left Cheek Middle

Date: 2016-6-14

Electronics: DAE4 Sn777 Medium: Head 1750 MHz

Medium parameters used (interpolated): f = 1732.5 MHz; $\sigma = 1.369$ mho/m; $\epsilon r = 41.11$; $\rho = 1.369$ mho/m; $\epsilon r = 41.11$; $\epsilon r = 41.11$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1700 Frequency: 1732.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.34, 8.34, 8.34)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.513 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.356 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.488 W/kg

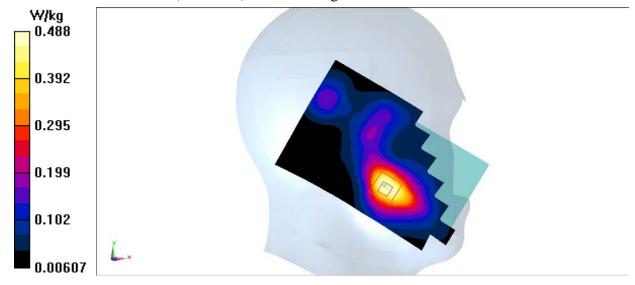


Fig.7 1700MHz



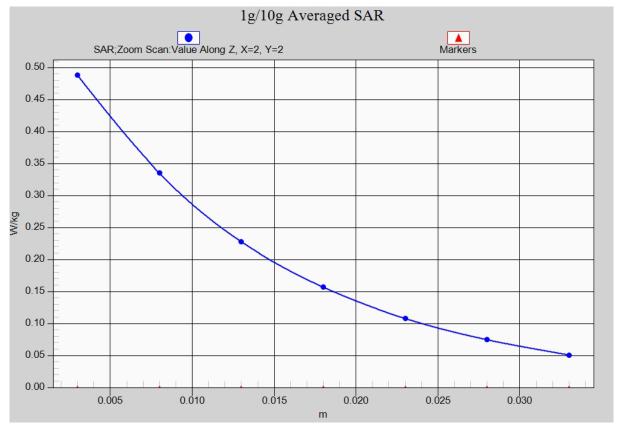


Fig. 7-1 Z-Scan at power reference point (1700 MHz)



WCDMA 1700 Body Bottom Middle

Date: 2016-6-14

Electronics: DAE4 Sn777 Medium: Body 1750 MHz

Medium parameters used (interpolated): f = 1732.5 MHz; $\sigma = 1.489$ mho/m; $\epsilon r = 52.46$; $\rho =$

 1000 kg/m^3

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1700 Frequency: 1732.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.96, 7.96, 7.96)

Area Scan (121x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.846 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.40 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

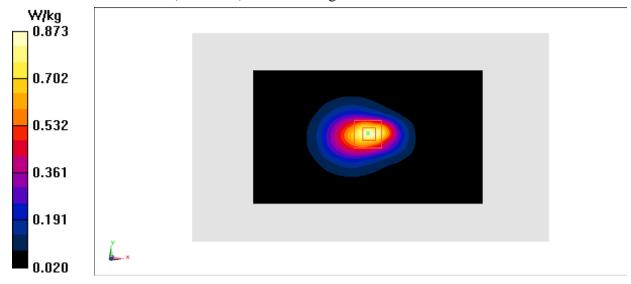


Fig.8 1700 MHz