

Report No.: SZEM180200119802

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 21

FCC TEST REPORT

Application No: SZEM1802001198RG

Applicant: TCL Communication Ltd.

Manufacturer: Vodafone Procurement Company S.à.r.I

Factory: TCL Mobile Communication Co.,Ltd.Huizhou

Product Name: LTE/UMTS/GSM mobile phone

Model No.(EUT): VFD 620

Trade Mark: Vodafone

FCC ID: 2ACCJH083

Standards: 47 CFR Part 2

47 CFR Part 22 subpart H 47 CFR Part 24 subpart E 47 CFR Part 27 subpart C

Test Method: FCC KDB 971168 D01 Power Meas License Digital Systems v03

TIA-603-E 2016

Date of Receipt: 2018-02-18

Date of Test: 2018-02-20 to 2018-04-23

Date of Issue: 2018-04-23

Test Result: PASS *

Authorized Signature:

Derek Yang

Derele yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SZEM180200119802

Page: 2 of 21

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-04-23		Original

Authorized for issue by:		
Tested By	Mike Mu	
		2018-04-23
	(Mike Hu) /Project Engineer	Date
Checked By	Jim Hog	2018-04-23
	(Jim Huang) /Reviewer	Date



Report No.: SZEM180200119802

Page: 3 of 21

3 Test Summary

Test Item	FCC	Doguiromento	Toot Decult	Vordint
rest item	Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913, §24.232 §27.50	ERP≤7W {GSM850,WCDMAband 5,LTE BAND 5,BAND 26(824-849)} EIRP ≤ 2 W. (GSM1900,WCDMA band2,LTE BAND2,7,25,38,41,)	Section 1 of Appendix B	PASS
Peak-Average Ratio	§24.232 §27.50	≤13dB	Section 2 of Appendix B	PASS
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	PASS
Bandwidth	§2.1049(h), §22.917, §24.238 §27.53	OBW:No limit EBW: No limit	Section 4 of Appendix B	PASS
Band Edge Compliance	§2.1051, §22.917, §24.238 §27.53	1, LTE band 7 2% EBW Channel 2% EBW 75 dBm 15 dBm 16 dBm 16 dBm 17 dBm	Section 5 of Appendix B	PASS
Spurious emissions at antenna terminals	§2.1051, §22.917, §24.238 §27.53	1, ≤ -25dBm (LTE band 7,38,41) 2, ≤ -13dBm { other band, (LTEband13, ≤-40dBm in the band1559M-1610M)}.	Section 6 of Appendix B	PASS
Field strength of spurious radiation	§2.1053, §22.917, §24.238 §27.53	1, ≤ -25dBm(LTE band 7,38,41) 2, ≤ -13dBm{other band, (LTEband13, ≤-40dBm in the band1559M-1610M)}.	Section 7 of Appendix B	PASS
Frequency stability	§2.1055, §22.355, §24.235 §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	PASS



Report No.: SZEM180200119802

Page: 4 of 21

Content

			Page
			1
2	VEF	SION	2
3	TES	T SUMMARY	3
4	GEN	ERAL INFORMATION	6
	4.1	CLIENT INFORMATION	6
	4.2	GENERAL DESCRIPTION OF EUT	6
	4.3	TEST MODE	6
	4.4	TEST ENVIRONMENT	6
	4.5	TEST FREQUENCY	7
	4.6	TEST LOCATION	9
	4.7	TEST FACILITY	9
	4.8	DEVIATION FROM STANDARDS	9
	4.9	ABNORMALITIES FROM STANDARD CONDITIONS	9
	4.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
	4.11	TECHNICAL SPECIFICATION	10
5	DES	CRIPTION OF TESTS	11
	5.1	CONDUCTED OUTPUT POWER	11
	5.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	11
	5.3	OCCUPIED BANDWIDTH	12
	5.4	BAND EDGE AT ANTENNA TERMINALS	12
	5.5	Spurious And Harmonic Emissions at Antenna Terminal	12
	5.6	PEAK-AVERAGE RATIO	13
	5.7	FIELD STRENGTH OF SPURIOUS RADIATION	13
	5.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	14
	5.9	TEST SETUPS	15
	5.9.	1 Test Setup 1	15
	5.9.	? Test Setup 2	15
	5.9.	3 Test Setup 3	16
	5.9.	1 Test Setup 4	17
	5.10	TEST CONDITIONS	18
6	MAI	N TEST INSTRUMENTS	20

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the itis initiation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 5 of 21

7	MEASUREMENT UNCERTAINTY	21
•	MEXICONE MENT CHOEKTAINT	

8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS 21



Report No.: SZEM180200119802

Page: 6 of 21

4 General Information

4.1 Client Information

Applicant:	TCL Communication Ltd.	
Address of Applicant:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052	
Manufacturer:	Vodafone Procurement Company S.à.r.l	
Address of Manufacturer:	Vodafone S.à.r.l, 15 rue Edward Steichen, L-2540 Luxembourg, Grand-Duché de Luxembourg	
Factory:	TCL Mobile Communication Co.,Ltd.Huizhou	
Address of Factory:	No.86, Hechang 7th West Road, ZhongKai Hi-tech Development District, Huizhou, Guangdong	

4.2 General Description of EUT

Product Name:	LTE/UMTS/GSM mobile phone	
Model No.:	VFD 620	
Trade Mark:	Vodafone	
Sample Type:	Portable production	
Antenna Type:	PIFA	
	GSM850: -3.5dBi; GSM1900:-1.0dBi	
Antenna Gain:	WCDMA B2:-1dBi;WCDMA B5:-3.5dBi	
	LTE B5:-3.5dBi; LTE B7: -0.1dBi	

4.3 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS/EGPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

4.4 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	52%	
Atmospheric Pressure:	1015MPa	
Temperature	TN	25 °C
	VL	3.4V
Voltage :	VN	3.85V
	VH	4.4V

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the ilimitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 7 of 21

NOTE: VL= lower extreme test voltage ;VN= nominal voltage ;VH= upper extreme test voltage

TN= normal temperature

4.5 Test Frequency

TX / RX		RF Channel		
		RF Channel		
	Low (L)	Middle (M)	High (H)	
TX	Channel 128	Channel 190	Channel 251	
	824.2MHz	836.6 MHz	848.8 MHz	
DV	Channel 128	Channel 190	Channel 251	
KA	869.2 MHz	881.6 MHz	893.8 MHz	
TV / DV		RF Channel		
IA/KA	Low (L)	Middle (M)	High (H)	
TV	Channel 512	Channel 661	Channel 810	
1.7	1850.2MHz	1880.0 MHz	1909.8 MHz	
DV	Channel 512	Channel 661	Channel 810	
KX	1930.2 MHz	1960.0 MHz	1989.8 MHz	
TV / DV		RF Channel		
IA/KA	Low (L)	Middle (M)	High (H)	
TV	Channel 4132	Channel 4182	Channel 4233	
1.7	826.4MHz	836.4 MHz	846.6 MHz	
DV	Channel 4357	Channel 4407	Channel 4458	
KA	871.4 MHz	881.4 MHz	891.6 MHz	
TX / RX	RF Channel			
	Low (L)	Middle (M)	High (H)	
TV	Channel 9262	Channel 9400	Channel 9538	
IX.	1852.4 MHz	1880.0 MHz	1907.6 MHz	
RX	Channel 9662	Channel 9800	Channel 9938	
	1932.4 MHz	1960.0 MHz	1987.6 MHz	
TV / DV		RF Channel		
IA/KA	Low (L)	Middle (M)	High (H)	
TV	Channel 20407	Channel 20525	Channel 20643	
1.7	824.7 MHz	836.5 MHz	848.3 MHz	
DV	Channel 2407	Channel 2525	Channel 2643	
KA	869.7 MHz	881.5 MHz	893.3 MHz	
TV / DV		RF Channel		
IX/KX	Low (L)	Middle (M)	High (H)	
TV	Channel 20415	Channel 20525	Channel 20635	
TX	825.5 MHz	836.5 MHz	847.5 MHz	
RX -	Channel 2415	Channel 2525	Channel 2635	
	870.5 MHz	881.5 MHz	892.5 MHz	
TX / RX		RF Channel		
	Low (L)	Middle (M)	High (H)	
	TX RX TX/RX TX RX TX/RX TX/RX TX/RX	Channel 128 869.2 MHz TX / RX Low (L) TX 1850.2MHz RX Channel 512 1930.2 MHz 1930.2 MHz TX / RX Low (L) TX 826.4MHz Channel 4132 826.4MHz TX / RX Low (L) TX / RX Low (L) Channel 9262 1852.4 MHz TX / RX Low (L) TX / RX Low (L) Channel 9662 1932.4 MHz TX / RX Low (L) Channel 20407 824.7 MHz TX / RX Low (L) Channel 2407 869.7 MHz TX / RX Channel 20415 RX 825.5 MHz Channel 2415 870.5 MHz	RX Channel 128 Channel 190 869.2 MHz 881.6 MHz RF Channel RF Channel Low (L) Middle (M) TX Channel 512 Channel 661 1850.2MHz 1880.0 MHz RX Channel 512 Channel 661 1930.2 MHz 1960.0 MHz TX / RX RF Channel Low (L) Middle (M) Channel 4132 Channel 4182 826.4 MHz 836.4 MHz RX Channel 4357 Channel 4407 RX RF Channel TX / RX Low (L) Middle (M) TX Channel 9262 Channel 9400 1852.4 MHz 1880.0 MHz RX 1932.4 MHz 1960.0 MHz TX / RX Low (L) Middle (M) TX / RX Channel 20407 Channel 20525 824.7 MHz 836.5 MHz TX / RX Channel 2407 Channel 2525 869.7 MHz 881.5 MHz RX Channel 20415 Channel 20525	



Report No.: SZEM180200119802

Page: 8 of 21

LTE BAND 5 5MHz	TX	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	DV	Channel 2425	Channel 2525	Channel 2625
	RX	871.5 MHz	881.5 MHz	891.5 MHz
Test Mode	TX / RX		RF Channel	
i est wode	IA/KA	Low (L)	Middle (M)	High (H)
	TX	Channel 20450	Channel 20525	Channel 20600
LTE BAND 5	1.	829 MHz	836.5 MHz	844 MHz
10MHz	DV	Channel 2450	Channel 2525	Channel 2600
	RX	874 MHz	881.5 MHz	889 MHz
Took Mode	TV / DV		RF Channel	
Test Mode	TX / RX	Low (L)	Middle (M)	High (H)
	TV	Channel 20775	Channel 21100	Channel 21425
LTE BAND 7	TX	2502.5 MHz	2535 MHz	2567.5 MHz
5MHz	DV	Channel 2775	Channel 3100	Channel 5825
	RX	2622.5 MHz	2655 MHz	2687.5 MHz
Took Mode	TV / DV	RF Channel		
Test Mode	TX / RX	Low (L)	Middle (M)	High (H)
	TX	Channel 20800	Channel 21100	Channel 21400
LTE BAND 7		2505 MHz	2535 MHz	2565 MHz
10MHz	RX	Channel 2800	Channel 3100	Channel 3400
		2625 MHz	2655 MHz	2685 MHz
Took Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	TX	Channel 20825	Channel 21100	Channel 21375
LTE BAND 7	1.	2507.5 MHz	2535 MHz	2562.5 MHz
15MHz	RX	Channel 2825	Channel 3100	Channel 3375
	KA	2627.5 MHz	2655 MHz	2682.5 MHz
Test Mode	TV / DV		RF Channel	
rest Mode	TX / RX	Low (L)	Middle (M)	High (H)
	TV	Channel 20850	Channel 21100	Channel 21350
LTE BAND 7	TX	2510 MHz	2535 MHz	2560 MHz
20MHz	RX -	Channel 2850	Channel 3100	Channel 3350
		2630 MHz	2655 MHz	2680 MHz



Report No.: SZEM180200119802

Page: 9 of 21

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.



Report No.: SZEM180200119802

Page: 10 of 21

4.10Other Information Requested by the Customer

None.

4.11 Technical Specification

Characteristics	Description		
	⊠ GSM		
Radio System Type	□ UMTS		
	0014050	Transmission (TX): 824 to 849 MHz	
	GSM850	Receiving (RX): 869 to 894 MHz	
	GSM1900	Transmission (TX): 1850 to 1910 MHz	
	G2M1900	Receiving (RX): 1930 to 1990 MHz	
	UMTS band 2	Transmission (TX): 1850 to 1910 MHz	
Supported Frequency Range	OWITS barid 2	Receiving (RX): 1930 to 1990 MHz	
Supported Frequency Range	UMTS band 5	Transmission (TX): 824 to 849 MHz	
		Receiving (RX): 869 to 894 MHz	
	LTE band 5	Transmission (TX): 824 to 849 MHz	
		Receiving (RX): 869 to 894 MHz	
	LTE band 7	Transmission (TX): 2500 to 2570 MHz	
	LIE Dand 7	Receiving (RX): 2620 to 2690 MHz	
	GSM850:33.3 dBm; GSM1900: 30.3dBm		
Target TX Output Power	UMTS band 2: 24dBm; UMTS band 5: 24dBm		
	LTE band 5: 24.5dBm;	and 5: 24.5dBm; LTE band 7: 24.4.0dBm	
	GSM system:	⊠0.2 MHz	
Supported Channel Bandwidth	UMTS system:	⊠5 MHz	
Supported Chamilei Bandwidth	LTE band5	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz	
	LTE band7	⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz	

Characteristics	Description		
	GSM850	245KGXW; 243KG7W	
	GSM1900	246KGXW; 240KG7W	
	UMTS band 2	4M17F9W; 4M19W7D;	
Designation of Emissions	UMTS band 5	4M17F9W; 4M19W7D;	
(Note: the necessary bandwidth of	LTE band5	1M09G7D;1M09W7D;	
which is the worst value from the		2M67G7D;2M67W7D;	
measured occupied bandwidths for		4M48G7D;4M49W7D;	
each type of channel bandwidth configuration.)		8M95G7D;8M95W7D;	
	LTE band7	4M48G7D;4M48W7D;	
		8M97G7D;8M95W7D;	
		13M6G7D;13M5W7D;	
		18M0G7D;18M0W7D;	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the ilimitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 11 of 21

5 Description of Tests

5.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Note: Reference test setup 1

5.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8). Calculate power in dBm by the following formula:

ERP (dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pg is the generator output power into the substitution antenna.

Above 1GHz test procedure as below:

- 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2). Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

3). Test the EUT in the lowest channel, the middle channel the Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 12 of 21

4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.

5). Repeat above procedures until all frequencies measured was complete.

Note: Reference test setup 2

5.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Note: Reference test setup 1

5.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Note: Reference test setup 1

5.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 13 of 21

bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Note: Reference test setup 1

5.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Note: Reference test setup 1

5.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v03

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

1) Different between above is the test site, change from Semi- Anechoic

Chamber to fully Anechoic Chamber

2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 14 of 21

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete Note: Reference test setup 3

5.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 Power Meas License Digital Systems v03

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Note: Reference test setup 4




Report No.: SZEM180200119802

Page: 15 of 21


5.9 Test Setups

5.9.1 Test Setup 1

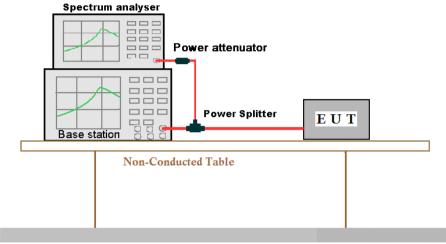

Ground Reference Plane

5.9.2 Test Setup 2



Hom Antenna Tower

AE EUT

Antenna Tower

Ground Reference Plane


Test Receiver

Test Receiver

Controller

Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz






Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the ilimitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 16 of 21

5.9.3 Test Setup 3




Figure 1. Below 30MHz




Figure 2. 30MHz to 1GHz




Figure 3. above 1GHz




Figure 2. 30MHz to 1GHz





Figure 3. above 1GHz



Report No.: SZEM180200119802

Page: 17 of 21

5.9.4 Test Setup 4

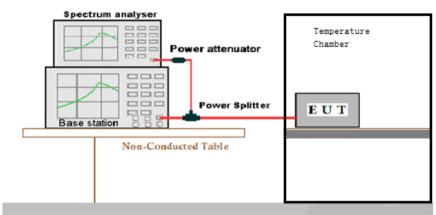

Ground Reference Plane



Report No.: SZEM180200119802

Page: 18 of 21

5.10 Test Conditions

Test Case		Test Conditions				
		Test Environment	Ambient Climate & Rated Voltage			
	Average	Test Setup	Test Setup 1			
	Power, Total	RF Channels	L, M, H			
Transmit	. • • • •	(TX)	(L= low channel, M= middle channel, H= high channel)			
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
Power Data	Average	Test Environment	Ambient Climate & Rated Voltage			
	Power,	Test Setup	Test Setup 1			
	Spectral Density (if	RF Channels	L, M, H			
	required)	(TX)	(L= low channel, M= middle channel, H= high channel)			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
		Test Environment	Ambient Climate & Rated Voltage			
Peak-to-Ave	erage Ratio	Test Setup	Test Setup 1			
(if required)		RF Channels	L, M, H			
		(TX)	(L= low channel, M= middle channel, H= high channel)			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
		Test Environment	Ambient Climate & Rated Voltage			
Modulation		Test Setup	Test Setup 1			
Characteris	Characteristics		M (M= middle channe)			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
		Test Environment	Ambient Climate & Rated Voltage			
	Occupied	Test Setup	Test Setup 1			
	Bandwidth	RF Channels	L, M, H			
		(TX)	(L= low channel, M= middle channel, H= high channel)			
Bandwidth		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
Dandwidth	Emission Bandwidth (if required)	Test Environment	Ambient Climate & Rated Voltage			
		Test Setup	Test Setup 1			
		RF Channels	L, M, H			
		(TX)	(L= low channel, M= middle channel, H= high channel)			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
Band Edges Compliance		Test Environment	Ambient Climate & Rated Voltage			
		Test Setup	Test Setup 1			
		RF Channels (TX)	L, H (L= low channel, H= high channel)			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2			
		1 COL IVIOUE				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180200119802

Page: 19 of 21

	Test Environment	Ambient Climate & Rated Voltage		
Spurious Emission at	Test Setup	Test Setup 1		
Antenna Terminals	RF Channels (TX)	L,M, H		
		(L= low channel, M= middle channel, H= high channel)		
	Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1		
	Test Environment	Ambient Climate & Rated Voltage		
	Test Setup	Test Setup 2		
Field Strength of Spurious Radiation	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;LTE/TM1;LTE/TM2 NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
	RF Channels (TX)	L, M, H		
		(L= low channel, M= middle channel, H= high channel)		
	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;		
Frequency Stability		(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
	Test Setup	Test Setup 4		
	RF Channels	L, M, H		
	(TX)	(L= low channel, M= middle channel, H= high channel)		
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2		



Report No.: SZEM180200119802

Page: 20 of 21

6 Main Test Instruments

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-05-10	2018-05-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2017-10-09	2018-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-02	201711-15	2020-11-15
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18- 26GHz)	ETS-LINDGREN	3160	SEM003-12	2017-11-24	2020-11-24
6	Pre-amplifier (0.1- 1300MHz)	Agilent Technologies	8447D	SEM005-01	2018/2/14	2019/2/13
7	Pre-Amplifier (0.1- 26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2017-10-17	2018-10-17
8	Band filter	Amindeon	82346	SEM023-01	N/A	N/A
9	Universal radio communication tester	Rohde &Schwarz	CMU200	SEM010-01	2017-10-09	2018-10-09
10	Universal radio communication tester	Rohde &Schwarz	CMW500	SEM010-03	2017-10-23	2018-10-23
11	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-10-09	2018-10-09
12	BiConiLog Antenna (30MHz-3GHz)	Schwarzbeck	VULB9163	SEM003-05	2015-10-17	2018-10-17
13	Horn Antenna (800MHz-18GHz)	Rohde &Schwarz	HF907	SEM003-06	2015-06-14	2018-06-14

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy mm-dd)	Cal. Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2017-05-10	2018-05-10
2	EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/2/14	2019/2/13
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2017-07-06	2018-07-06
5	.Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14



Report No.: SZEM180200119802

Page: 21 of 21

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Humi/ Temp Indicator	MingGao	TH101B	W006-09	2018-03-13	2019-03-12
2	Signal Analyzer	Rohde Schwarz	FSV	W005-02	2018-03-13	2019-03-12
3	Barometer	ChangChun	DYM3	SEL0088	2017-05-24	2018-05-24
4	Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66319D	W009-02	2017-07-23	2018-07-23
5	Digital Multimeter	Fluke	15B+	W055-01	2018-03-13	2019-03-12
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	W005-02	2018-03-13	2019-03-12
7	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	W005-02	2018-03-13	2019-03-12

7 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data	
Transmit Output Power Data	Power [dBm]	U = 0.37 dB	
Bandwidth	Magnitude [%]	U = 0.2%	
Band Edge Compliance	Disturbance Power [dBm]	U = 2.0 dB	
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = 2.0 dB	
		For 3 m Chamber:	
		U = 4.5 dB (30 MHz to 1GHz)	
Field Strength of Spurious	ERP [dBm]	U = 3.3 dB (above 1 GHz)	
Radiation	EKF [dBiii]	For 10 m Chamber:	
		U = 4.5 dB (30 MHz to 1GHz)	
		U = 3.2 dB (above 1 GHz)	
Frequency Stability	Frequency Accuracy [ppm]	U = 0.24 ppm	

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1802001198.

The End