


TEST REPORT

Application No.: ZR/2019/C0035
Applicant: TCL Communication Ltd.
Address of Applicant: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer: TCL Communication Ltd.
Address of Manufacturer: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
EUT Description: LTE/UMTS/GSM mobile phone
Model No.: 5029E
Trade Mark: alcatel
FCC ID: 2ACCJH119
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2019-12-30
Date of Test: 2020-01-07 to 2020-01-13
Date of Issue: 2021-5-24

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Simon Ling

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi'an, Shaanxi, China 710086 t (86-29) 6282 7885 www.sgs.com.cn
 中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 sgs.china@sgs.com



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2020-01-13		Original
02		2021-5-24	Leah Chen	1. Modify data conversion error of antenna height 2.Updated equipment list

Authorized for issue by:		
Prepared By		Leah chen (Leah Chen) /Engineer
Checked By		Daniel Wang (Daniel Wang) /Reviewer



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (30MHz-1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (above 1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower



3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 DESCRIPTION OF SUPPORT UNITS	6
4.2 MEASUREMENT UNCERTAINTY	6
4.3 TEST LOCATION.....	7
4.4 TEST FACILITY.....	7
4.5 DEVIATION FROM STANDARDS.....	7
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST	8
6 EMISSION TEST RESULTS	9
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	9
6.1.1 E.U.T. Operation	9
6.1.2 Test Setup Diagram	10
6.1.3 Measurement Data	10
6.2 RADIATED EMISSIONS (30MHz-1GHz).....	13
6.2.1 E.U.T. Operation	13
6.2.2 Test Setup Diagram	14
6.2.3 Measurement Data	14
6.3 RADIATED EMISSIONS (ABOVE 1GHz).....	17
6.3.1 E.U.T. Operation	17
6.3.2 Test Setup Diagram	18
6.3.3 Measurement Data	18
7 PHOTOGRAPHS.....	21
7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP	21
7.2 RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	21
7.3 RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP	21
7.4 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	21



4 General Information

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	LTE/UMTS/GSM mobile phone		
Model No.(EUT):	5029E		
Trade Mark:	alcatel		
Product Phase:	production unit		
FCC ID:	2ACCJH119		
SN:	AYGYY9L7GEYHMJAA/NRMZ4HX4ONPJOFM7		
Hardware Version:	PIO		
Software Version:	v4F5E		
Antenna Type:	Inner Antenna		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK, 16QAM(HSPA+); LTE: QPSK,16QAM WIFI: DSSS, OFDM BT: GFSK, π/4DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/7/13/17/66)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 13	777~787	746~756
	LTE Band 17	704~716	734~746
	LTE Band 66	1710~1780	2110~2180
	WIFI 2.4G	2412~2462	2412~2462
	BT	2402~2480	2402~2480
	FM	/	88~108
	GNSS(GPS/BDS/GLONASS/Galileo)	/	1559~1610
Adaptor Information 1#:	Model:	UC13US(CBA0059AGAC7)	
	SEC:	5V/2A	
	Manufacturer:	Chenyang	
Adaptor Information 1#:	Model:	UC13US(CBA0059AGAC5)	
	SEC:	5V/2A	
	Manufacturer:	PUAN	
EUT 1 Battery Information 1#:	Model:	CAC3860024C1	
	Normal Voltage:	3.85V	



	Rated capacity:	3860mAh
	Manufacturer:	Shenzhen BYD Lithium Battery Company Limited
EUT 2 Battery Information 2#:	Model:	CAC3860025C7
	Normal Voltage:	3.85V
	Rated capacity:	3860mAh
	Manufacturer:	Ningbo Veken Battery Company Limited
Headset Information1#:	Model:	CCB0046A10C1
	Manufacturer:	JUWEI
Headset Information2#:	Model:	CCB0049A10C1
	Manufacturer:	JUWEI
Headset Information3#:	Model:	CCB0046A10C4
	Manufacturer:	MEIHAO
Headset Information4#:	Model:	CCB0049A10C4
	Manufacturer:	MEIHAO
Headset Information5#:	Model:	CCB0046A15C1 (CCB0046A15C1 Same with CCB0046A10C1, only remove alcatel logo)
	Manufacturer:	JUWEI
Headset Information6#:	Model:	CCB0046A15C4 (CCB0046A15C4 Same with CCB0046A10C4, only remove alcatel logo)
	Manufacturer:	MEIHAO
Headset Information7#:	Model:	CCB0049A12C1 (CCB0049A12C1 Same with CCB0049A10C1 , only remove alcatel logo)
	Manufacturer:	JUWEI
Headset Information8#:	Model:	CCB0049A12C4 (CCB0049A12C4 Same with CCB0049A10C4 , only remove alcatel logo)
	Manufacturer:	MEIHAO
USB cable Information1#:	Model:	CDA0000024C8
	Manufacturer:	PUAN
USB cable Information2#:	Model:	CDA0000024C2
	Manufacturer:	JUWEI

4.1 Description of Support Units

Description	Manufacturer	Model No.	Inventory No.
Router	NETGEAR	R6020	No.XA1401
Computer	Lenovo	L480	No.XA1402
Mouse	A4TECH	OP-520NU USB	No.XA1403

4.2 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8dB (Below 1GHz)
		± 4.8dB (1GHz to 6GHz)
		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)



4.3 Test Location

All tests were performed at:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Ben Huang

No tests were sub-contracted.

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4854.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

- **FCC –Designation Number: CN1271.**

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

RE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2019-06-27	2020-06-26
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR
5G UXM	Keysight	E7515B	XAW01-19-01	2019-08-17	2020-08-16
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2019-06-27	2020-06-26

CE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-01	2019-07-16	2020-07-15
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05
Measurement Software	Tonscend	TS+ CE V2.5	XAW02-05-02	NCR	NCR
5G UXM	Keysight	E7515B	XAW01-19-01	2019-08-17	2020-08-16
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2019-06-27	2020-06-26



6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 18.9 °C Humidity: 55.1 % RH Atmospheric Pressure: 1000 mbar


Pretest these
modes to find
the worst case:

- a: Transfer data between the EUT1 and the PC+USB cable 1
- d: Transfer data between the EUT2 and the PC+USB cable 2
- e: GSM850 Idle+BT+WLAN+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable1+adapter1
- f: GSM1900 Idle+BT+WLAN+BDS Rx+camera (Front) +earphone+EUT2+USB cable1+adapter2
- g: WCDMA II Idle+BT+WLAN+GLONASS Rx+camera (Back) +earphone+EUT(worst)+USB cable1+adapter1
- h: WCDMA V Idle +BT+FM +WLAN+ Galileo Rx+earphone+EUT2+USB cable1+adapter2
- i: WCDMA IV Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- j: LTE band 2 Idle +BT+FM+ WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- k: LTE band 4 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- l: LTE band 5 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- m: LTE band 7 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- n: LTE band 13 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- o: LTE band 17 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- p: LTE band 66 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2

The worst case
for final test:

- l: LTE band 5 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2

6.1.2 Test Setup Diagram

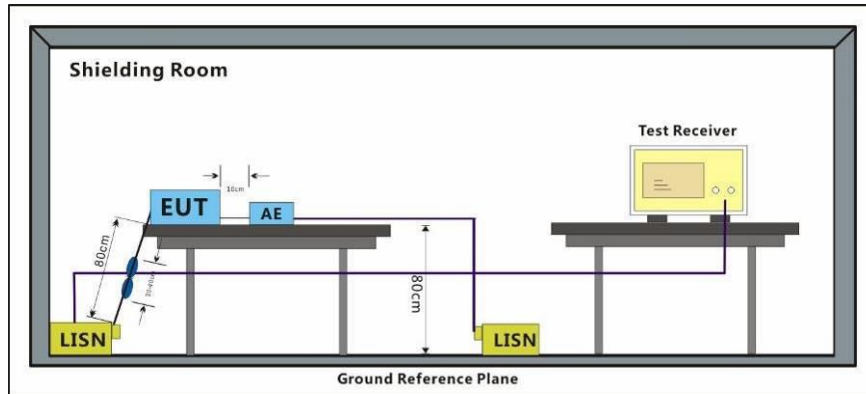


6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.



Mode:I; Line:Live Line

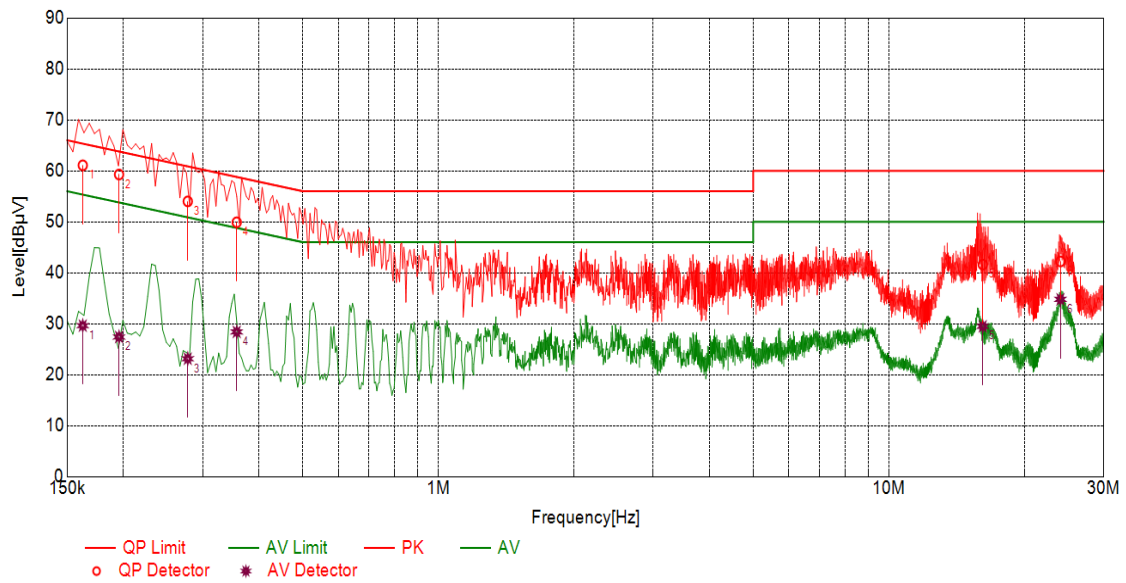


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type
1	0.1625	10.10	61.09	65.33	4.24	29.62	55.33	25.71	L
2	0.1956	10.10	59.29	63.79	4.50	27.40	53.79	26.39	L
3	0.2779	10.10	54.01	60.88	6.87	23.13	50.88	27.75	L
4	0.3569	10.10	49.92	58.80	8.88	28.40	48.80	20.40	L
5	16.1610	10.11	41.61	60.00	18.39	29.49	50.00	20.51	L
6	24.0362	10.11	42.24	60.00	17.76	34.79	50.00	15.21	L



Mode:I; Line:Neutral Line

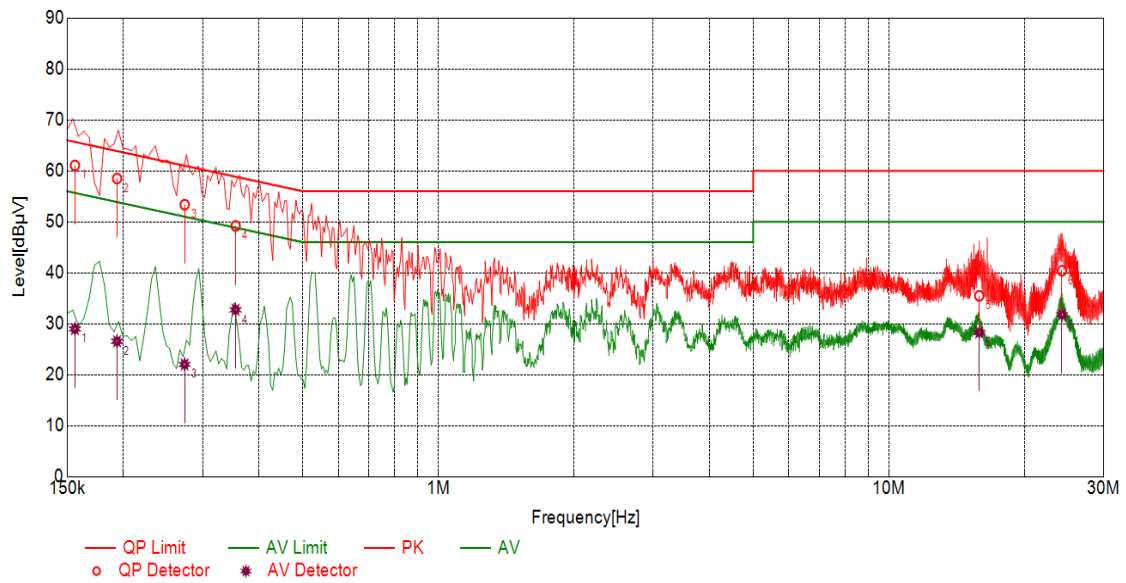

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type
1	0.1561	10.10	61.07	65.67	4.60	28.96	55.67	26.71	N
2	0.1936	10.10	58.50	63.88	5.38	26.56	53.88	27.32	N
3	0.2735	10.10	53.36	61.01	7.65	22.02	51.01	28.99	N
4	0.3548	10.10	49.20	58.85	9.65	32.73	48.85	16.12	N
5	15.8714	10.11	35.48	60.00	24.52	28.29	50.00	21.71	N
6	24.2282	10.11	40.41	60.00	19.59	31.78	50.00	18.22	N



6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz -88MHz	40.0(dBμV/m) quasi-peak
88MHz-216MHz	43.5(dBμV/m) quasi-peak
216MHz-960MHz	46.0(dBμV/m) quasi-peak
960MHz-1000MHz	54.0(dBμV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 66.5 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

- a: Transfer data between the EUT1 and the PC+USB cable 1
- d: Transfer data between the EUT2 and the PC+USB cable 2
- e: GSM850 Idle+BT+WLAN+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable1+adapter1
- f: GSM1900 Idle+BT+WLAN+BDS Rx+camera (Front) +earphone+EUT2+USB cable1+adapter2
- g: WCDMA II Idle+BT+WLAN+GLONASS Rx+camera (Back) +earphone+EUT(worst)+USB cable1+adapter1
- h: WCDMA V Idle +BT+FM +WLAN+ Galileo Rx+earphone+EUT2+USB cable1+adapter2
- i: WCDMA IV Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- j: LTE band 2 Idle +BT+FM+ WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- k: LTE band 4 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- l: LTE band 5 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- m: LTE band 7 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- n: LTE band 13 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- o: LTE band 17 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- p: LTE band 66 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2

The worst case for final test: m: LTE band 7 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2

6.2.2 Test Setup Diagram

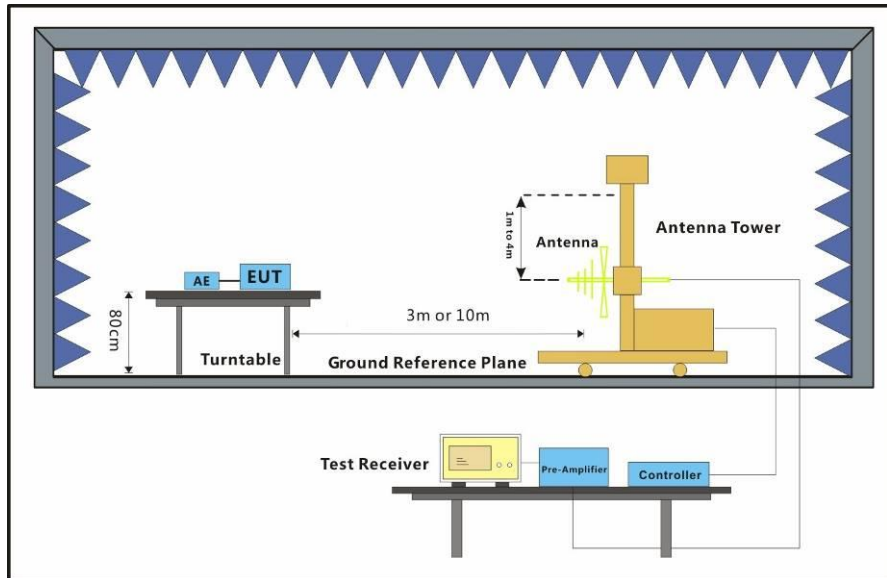


6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



Mode:m; Polarization:Horizontal

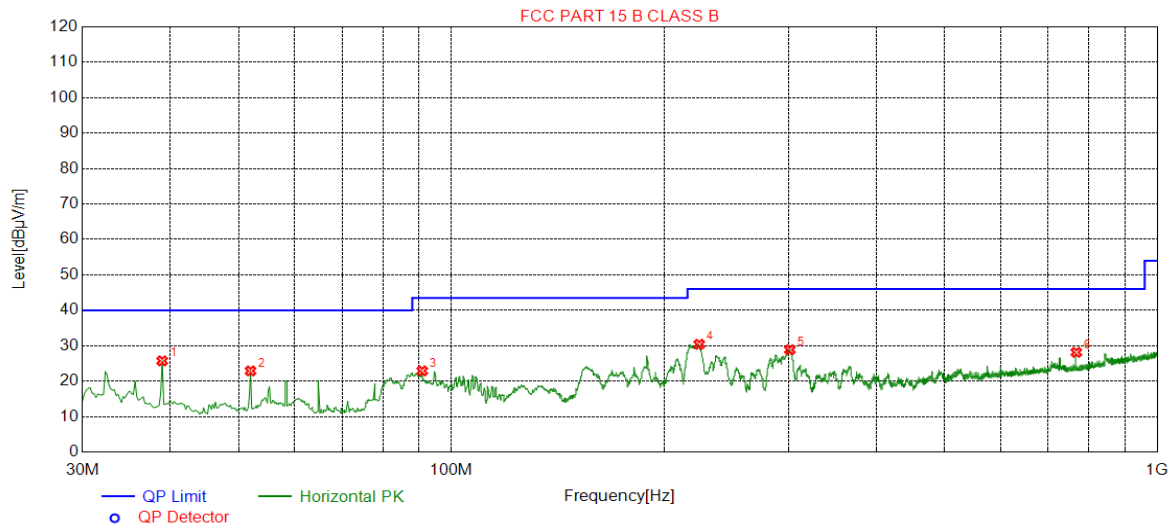


Suspected List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.9258	25.73	-28.69	40.00	14.27	180	18	Horizontal
2	51.9264	22.89	-30.65	40.00	17.11	101	26	Horizontal
3	90.9282	22.89	-33.56	43.50	20.61	199	90	Horizontal
4	224.426	30.41	-30.58	46.00	15.59	174	219	Horizontal
5	301.654	28.86	-28.21	46.00	17.14	144	246	Horizontal
6	768.123	28.13	-18.13	46.00	17.87	135	311	Horizontal



Mode:m; Polarization:Vertical

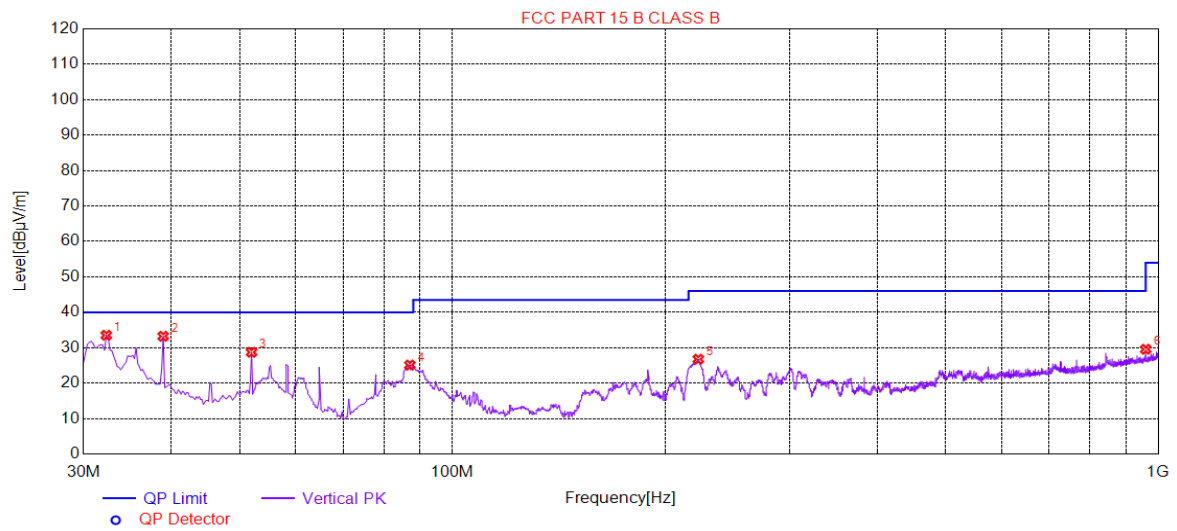

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.3285	33.52	-30.02	40.00	6.48	169	278	Vertical
2	38.9258	33.24	-28.69	40.00	6.76	207	68	Vertical
3	51.9264	28.72	-30.65	40.00	11.28	245	34	Vertical
4	87.0474	25.11	-34.44	40.00	14.89	229	290	Vertical
5	223.068	26.77	-30.62	46.00	19.23	284	25	Vertical
6	960.028	29.57	-15.34	54.00	24.43	226	301	Vertical



6.3 Radiated Emissions (above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4:2014
Frequency Range: Above 1GHz
Measurement Distance: 3m
Limit:
Above 1GHz 74(dB μ V/m) peak, 54(dB μ V/m) average
Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation

Operating Environment:


Temperature: 21.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

- a: Transfer data between the EUT1 and the PC+USB cable 1
- d: Transfer data between the EUT2 and the PC+USB cable 2
- e: GSM850 Idle+BT+WLAN+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable1+adapter1
- f: GSM1900 Idle+BT+WLAN+BDS Rx+camera (Front) +earphone+EUT2+USB cable1+adapter2
- g: WCDMA II Idle+BT+WLAN+GLONASS Rx+camera (Back) +earphone+EUT(worst)+USB cable1+adapter1
- h: WCDMA V Idle +BT+FM +WLAN+ Galileo Rx+earphone+EUT2+USB cable1+adapter2
- i: WCDMA IV Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- j: LTE band 2 Idle +BT+FM+ WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- k: LTE band 4 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter1
- l: LTE band 5 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable2+adapter2
- m: LTE band 7 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- n: LTE band 13 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- o: LTE band 17 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2
- p: LTE band 66 Idle +BT+FM +WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2

The worst case for final test: m: LTE band 7 Idle +BT+FM+WLAN+GPS Rx+earphone+EUT2+USB cable1+adapter2

6.3.2 Test Setup Diagram

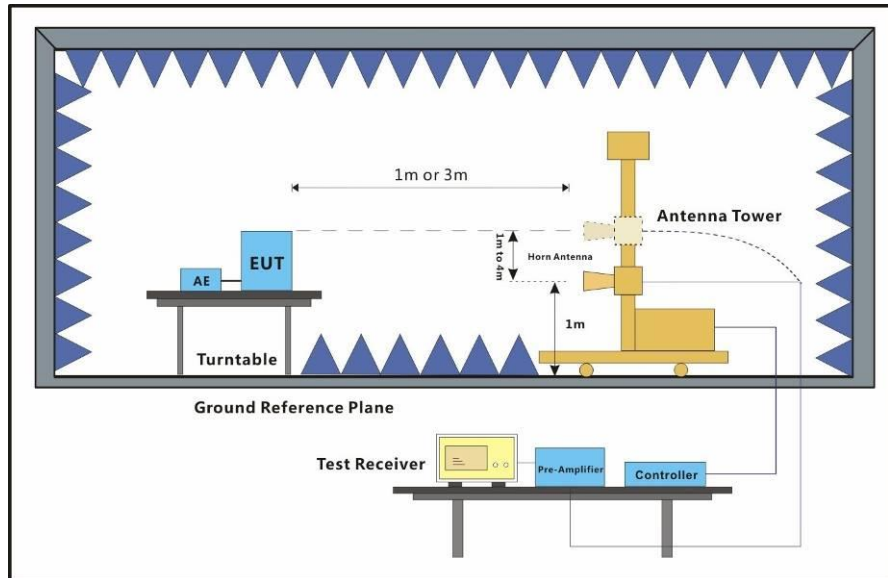


6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.



Mode:m; Polarization:Horizontal

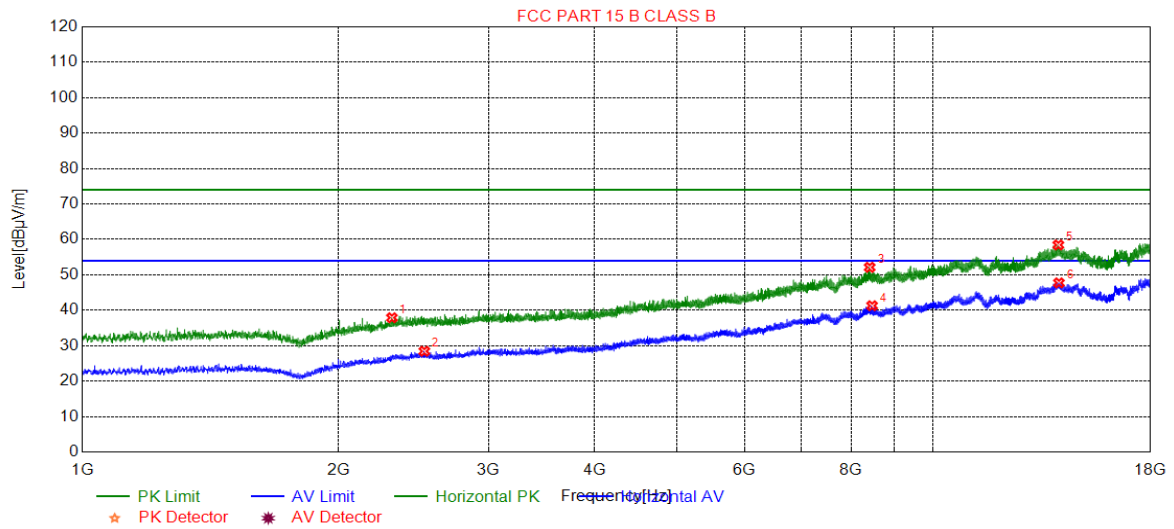


Suspected List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2310.76	37.90	-26.80	74.00	36.10	248	218	Horizontal
2	2522.42	28.44	-25.87	54.00	25.56	131	172	Horizontal
3	8416.62	52.13	-7.76	74.00	21.87	143	232	Horizontal
4	8471.87	41.29	-7.65	54.00	12.71	184	342	Horizontal
5	14022.6	58.44	2.27	74.00	15.56	121	18	Horizontal
6	14044.7	47.73	2.29	54.00	6.27	136	268	Horizontal



Mode:m; Polarization:Vertical

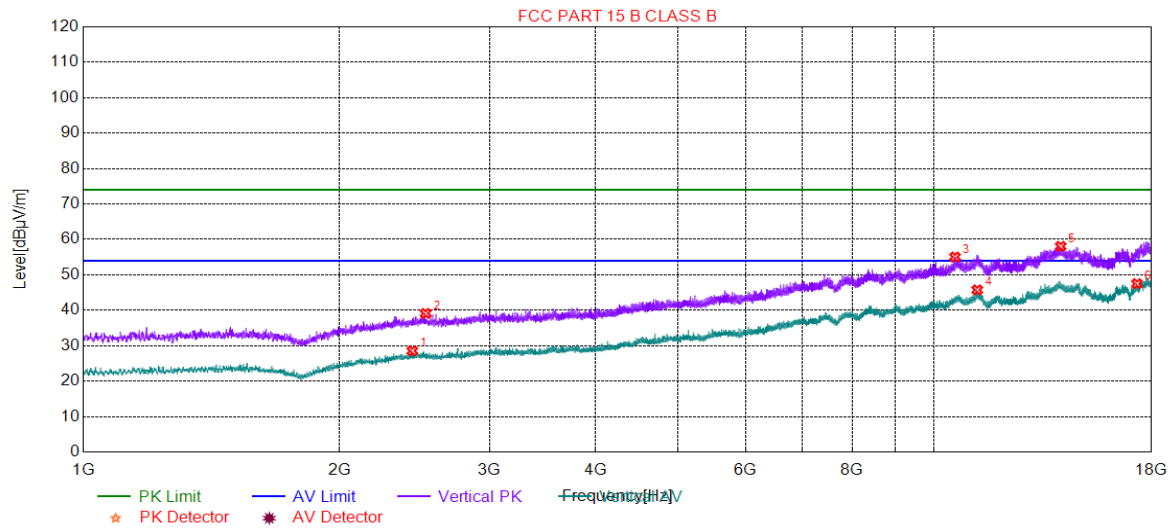

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2434.87	28.55	-26.27	54.00	25.45	198	167	Vertical
2	2524.12	39.11	-25.87	74.00	34.89	200	142	Vertical
3	10574.8	55.04	-3.32	74.00	18.96	298	117	Vertical
4	11230.2	45.76	-2.81	54.00	8.24	259	360	Vertical
5	14074.5	58.04	2.33	74.00	15.96	199	268	Vertical
6	17302.9	47.52	-0.48	54.00	6.48	207	360	Vertical



7 Photographs

7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup

7.2 Radiated Emissions (30MHz-1GHz) Test Setup

7.3 Radiated Emissions (above 1GHz) Test Setup

7.4 EUT Constructional Details (EUT Photos)

Refer to Photographs of EUT Constructional Details

- End of the Report -