



# FCC PART 15B TEST REPORT

No. I21Z61774-EMC01

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE /NR Mobile phone**

**Model name: T767W**

**FCC ID: 2ACCJH155**

with

**Hardware Version: 03**

**Software Version: 3CS9**

**Issued Date: 2021-10-19**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z61774-EMC01	Rev.0	1 <sup>st</sup> edition	2021-10-19

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

**CTTL (huayuan North Road)**

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35° C

Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2021-09-24

Testing End Date: 2021-10-16

### **1.4. Signature**




---

Wang Xue  
(Prepared this test report)



---

Zhang Ying  
(Reviewed this test report)



---

Zhang Xia  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE/NR Mobile phone
Model Name	T767W
FCC ID:	2ACCJH155

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	016062000204679	03	3CS9

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	
AE2	Battery	/	
AE3	USB Cable	/	
AE4	Charger	/	
AE5	Headset		

##### AE1

Model	TLp043E7
Manufacturer	VEKEN
Capacity	4500mAh
Nominal Voltage	

##### AE2

Model	TLp043E1
Manufacturer	BYD
Capacity	4500mAh
Nominal Voltage	

##### AE3

Model	CDA0000128C1
Manufacturer	JUWEI
Length of cable	/

##### AE4

Model	CBA0064BGTC5
Manufacturer	PUAN
Length of cable	/

##### AE5

Model	/
Manufacturer	/

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1 + AE1/2 + AE3 + AE4	Charger1+REAR Camera+ GSM 850 idle
Set.2	EUT1 + AE1/2 + AE3 + AE4	Charger1+MP4+WCDMA 850 idle
Set.3	EUT1 + AE1/2 + AE3 + AE5	USB+ Front Camera + LTE Band 5 idle + FM

**Note:**

The device supports GSM/GPRS/EGPRS 850/900/1800/1900, UMTS FDD Band 1/2/4/5/8; LTE FDD Band 1/2/3/4/5/7/8/12/13/20/25/26/28/66/71, TDD Band 38/39/40/41 and NR n25/n41/n66/n71/n77. It has WLAN (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz,40MHz and 80MHz bandwidth), Bluetooth (EDR, BLE) and GNSS (GPS&GLONASS&BDS& GALILEO) functions.

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM850, WCDMA850, LTE Band 5, LTE Band 12, LTE Band 26, LTE Band 71 and NR n71. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	R&S	2022-02-23	1 Year
2	LISN	ENV216	101200	R&S	2022-05-30	1 year
3	Universal Radio Communication Tester	CMW500	116588	R&S	2021-12-07	1 year
4	Test Receiver	ESCI 7	100344	R&S	2022-02-23	1 Year
5	EMI Antenna	VULB 9163	01223	Schwarzbeck	2022-03-22	1 year
6	EMI Antenna	3115	6914	ETS-Lindgren	2022-02-03	1 year
7	Signal Generator	SMBV100A	260613	R&S	2022-01-06	1 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 4.74 \text{ dB}$ ,  $k=2$ .

#### Measurement results for Set.1:

##### Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17998.300	44.4	-29.06	46.66	26.80	54.0	9.6	V
17907.067	43.7	-29.33	45.95	27.07	54.0	10.3	H
17967.133	43.4	-29.06	46.66	25.80	54.0	10.6	H
17911.033	43.2	-29.33	45.95	26.57	54.0	10.8	H
17893.467	43.2	-29.53	45.95	26.78	54.0	10.8	V
17941.067	43.2	-28.94	46.66	25.48	54.0	10.8	H

##### Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17980.733	52.2	-29.06	46.66	34.60	74.0	21.8	H
17888.367	52.2	-29.53	45.95	35.78	74.0	21.8	H
17977.333	52.0	-29.06	46.66	34.40	74.0	22.0	V
17886.100	51.9	-29.53	45.95	35.48	74.0	22.1	V
17969.400	51.8	-29.06	46.66	34.20	74.0	22.2	H
17777.867	51.7	-29.63	45.95	35.37	74.0	22.3	H

**Measurement results for Set.2:**
**Charing Mode/Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17966.000	43.9	-29.06	46.66	26.30	54.0	10.1	V
17995.467	43.2	-29.06	46.66	25.60	54.0	10.8	H
17912.167	43.2	-29.33	45.95	26.57	54.0	10.8	V
17950.133	43.1	-28.94	46.66	25.38	54.0	10.9	V
17980.733	43.1	-29.06	46.66	25.50	54.0	10.9	V
17955.800	43.1	-28.94	46.66	25.38	54.0	10.9	H

**Charging Mode/Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17922.367	52.5	-29.40	46.66	35.24	74.0	21.5	H
17976.767	52.1	-29.06	46.66	34.50	74.0	21.9	H
17895.167	51.9	-29.53	45.95	35.48	74.0	22.1	H
17945.600	51.6	-28.94	46.66	33.88	74.0	22.4	V
17928.600	51.5	-29.40	46.66	34.24	74.0	22.5	V
17941.633	51.5	-28.94	46.66	33.78	74.0	22.5	H

**Measurement results for Set.3:**
**USB Mode/Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17911.600	43.4	-29.33	45.95	26.77	54.0	10.6	V
18000.000	43.0	-29.24	47.00	25.24	54.0	11.0	V
17992.633	42.8	-29.06	46.66	25.20	54.0	11.2	V
17971.667	42.8	-29.06	46.66	25.20	54.0	11.2	V
17984.133	42.8	-29.06	46.66	25.20	54.0	11.2	V
17988.100	42.8	-29.06	46.66	25.20	54.0	11.2	V

**USB Mode/Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17894.033	52.2	-29.53	45.95	35.78	74.0	21.8	H
17911.600	52.2	-29.33	45.95	35.57	74.0	21.8	H
17766.533	51.8	-29.63	45.95	35.47	74.0	22.2	H
17999.433	51.8	-29.06	46.66	34.20	74.0	22.2	H
17990.933	51.7	-29.06	46.66	34.10	74.0	22.3	H
17928.033	51.7	-29.40	46.66	34.44	74.0	22.3	H

### Measurement results for Set.1:

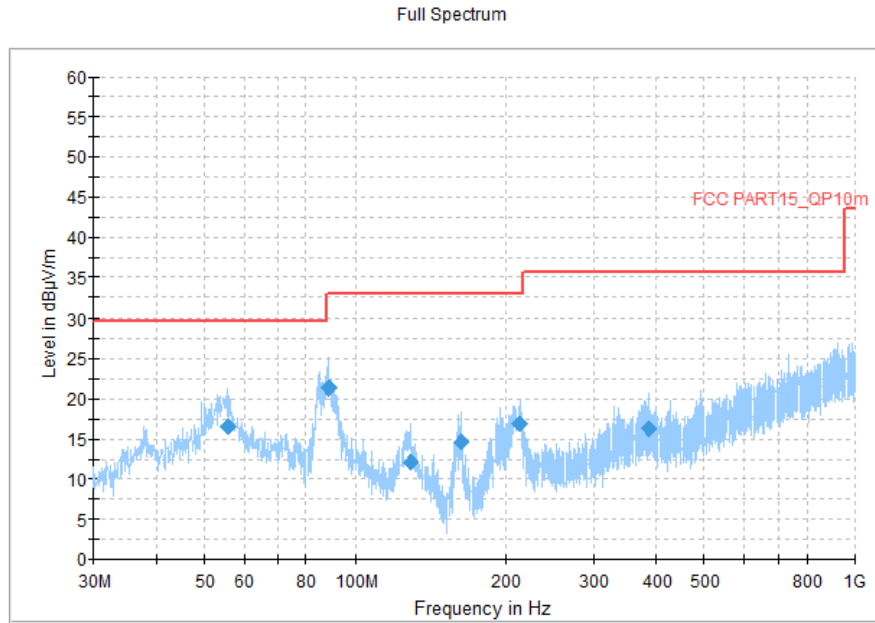



Fig A.1 Radiated Emission from 30MHz to 1GHz

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
55.511000	16.41	29.54	13.13	1000.0	120.000	117.0	V	300.0
88.588000	21.31	33.06	11.75	1000.0	120.000	320.0	V	270.0
128.843000	12.05	33.06	21.01	1000.0	120.000	114.0	V	169.0
163.084000	14.52	33.06	18.54	1000.0	120.000	120.0	V	-20.0
212.845000	16.78	33.06	16.28	1000.0	120.000	101.0	V	183.0
386.184000	16.33	35.56	19.23	1000.0	120.000	101.0	V	90.0




Full Spectrum

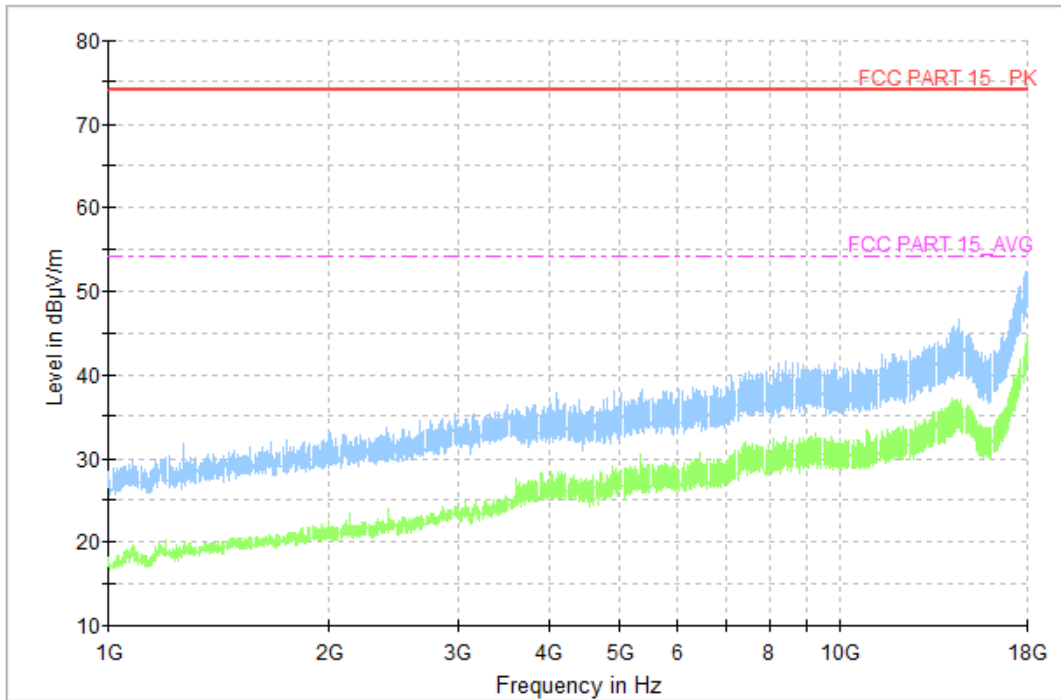

**Fig A.2 Radiated Emission from 1GHz to 18GHz**


**Measurement results for Set.2:**

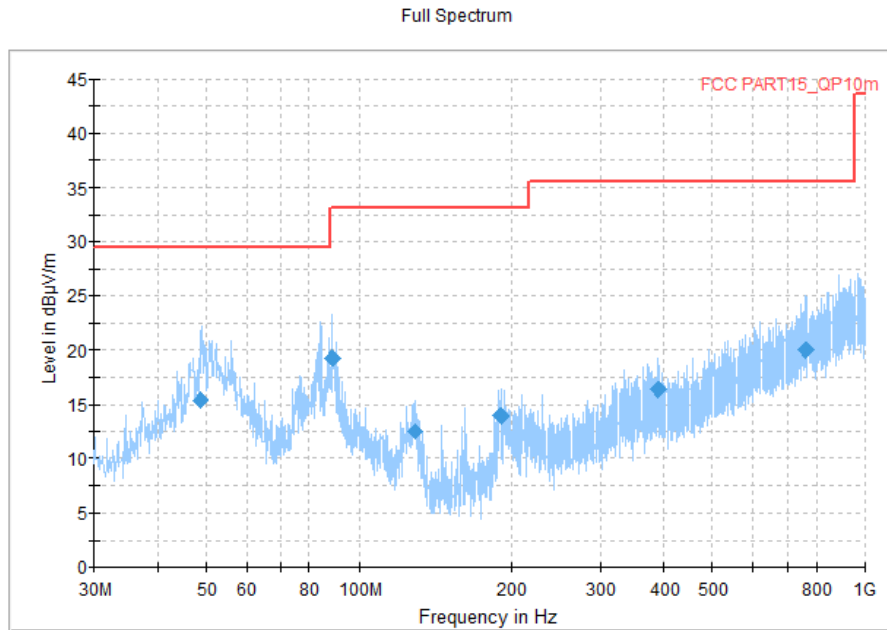

**Fig A.3 Radiated Emission from 30MHz to 1GHz**


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
48.721000	15.35	29.54	14.19	1000.0	120.000	125.0	V	210.0
88.782000	19.31	33.06	13.75	1000.0	120.000	101.0	V	300.0
128.746000	12.55	33.06	20.51	1000.0	120.000	105.0	V	-18.0
190.050000	13.93	33.06	19.13	1000.0	120.000	235.0	V	111.0
388.512000	16.40	35.56	19.16	1000.0	120.000	103.0	V	289.0
763.320000	19.96	35.56	15.60	1000.0	120.000	125.0	V	62.0

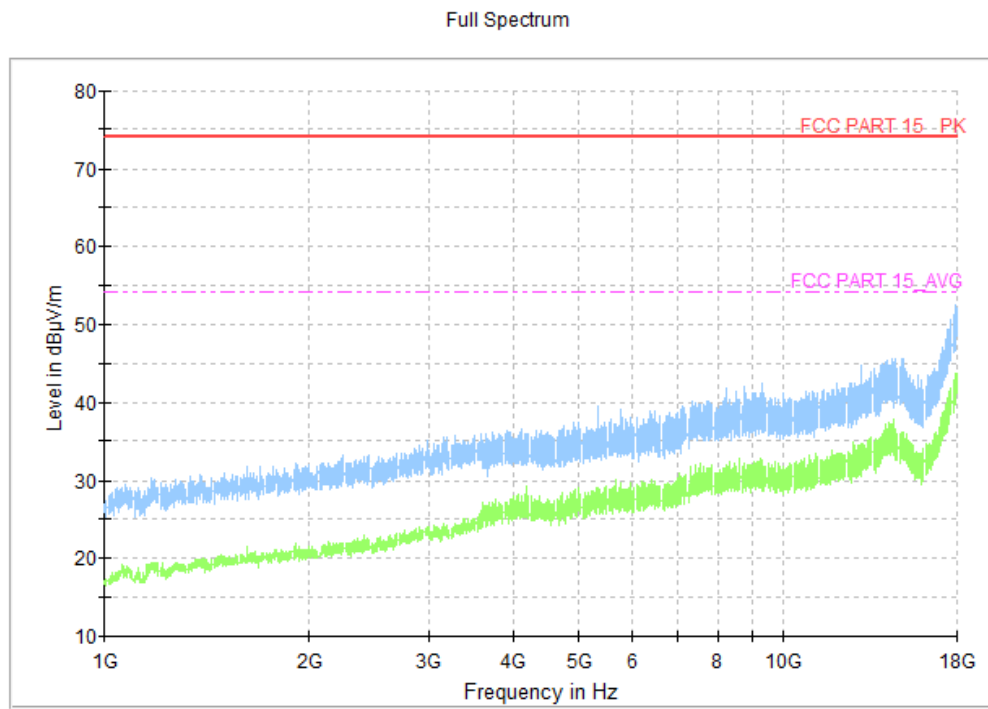

**Fig A.4 Radiated Emission from 1GHz to 18GHz**


**Measurement results for Set.3:**

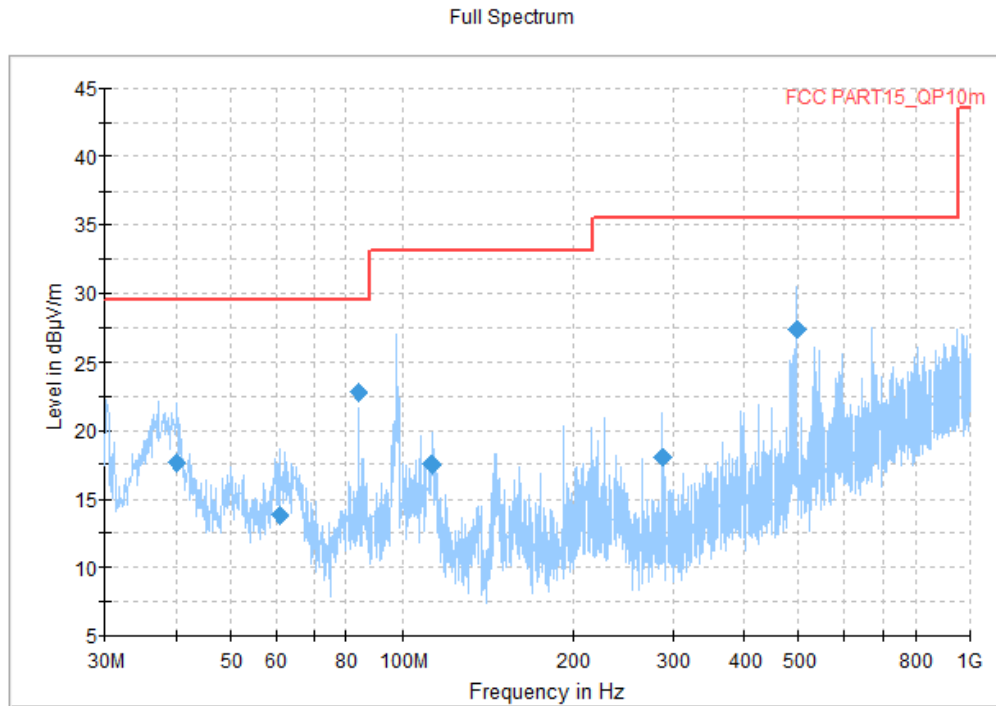

**Fig A.5 Radiated Emission from 30MHz to 1GHz**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
40.185000	17.62	29.54	11.92	1000.0	120.000	98.0	V	34.0
61.040000	13.78	29.54	15.76	1000.0	120.000	112.0	V	198.0
83.835000	22.74	29.54	6.80	1000.0	120.000	125.0	V	74.0
113.226000	17.55	33.06	15.51	1000.0	120.000	219.0	V	60.0
287.438000	17.99	35.56	17.57	1000.0	120.000	201.0	V	170.0
496.085000	27.40	35.56	8.16	1000.0	120.000	218.0	V	-3.0

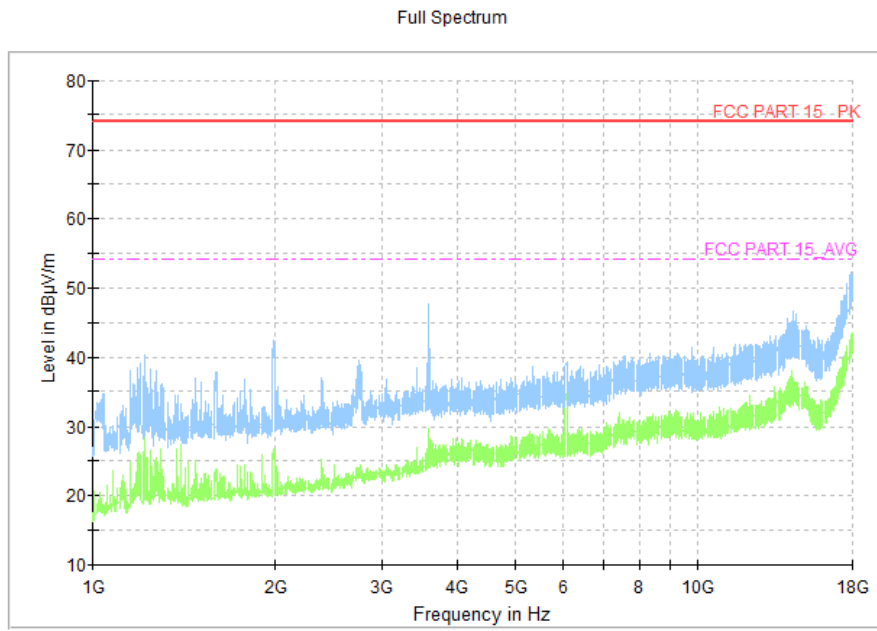

**Fig A.6 Radiated Emission from 1GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.1$  dB,  $k=2$ .

Charging Mode, Set.1:

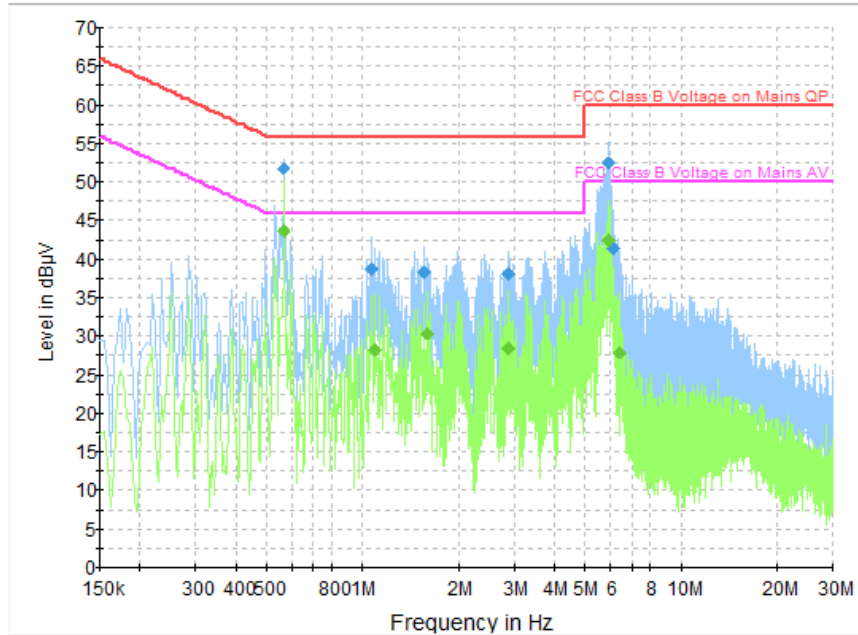


Fig A.7 Radiated Emission from 30MHz to 1GHz

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.566000	51.9	2000.0	9.000	On	L1	19.8	4.1	56.0	
1.062000	38.9	2000.0	9.000	On	L1	19.6	17.1	56.0	
1.562000	38.2	2000.0	9.000	On	L1	19.5	17.8	56.0	
2.874000	38.2	2000.0	9.000	On	L1	19.5	17.8	56.0	
5.874000	52.5	2000.0	9.000	On	L1	19.5	7.5	60.0	
6.122000	41.5	2000.0	9.000	On	L1	19.6	18.5	60.0	

#### Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.566000	43.8	2000.0	9.000	On	L1	19.8	2.2	46.0	
1.094000	28.2	2000.0	9.000	On	L1	19.5	17.8	46.0	
1.594000	30.4	2000.0	9.000	On	L1	19.5	15.6	46.0	
2.874000	28.5	2000.0	9.000	On	L1	19.5	17.5	46.0	
5.874000	42.4	2000.0	9.000	On	L1	19.5	7.6	50.0	
6.370000	27.9	2000.0	9.000	On	L1	19.6	22.1	50.0	

### Charging Mode, Set.2:

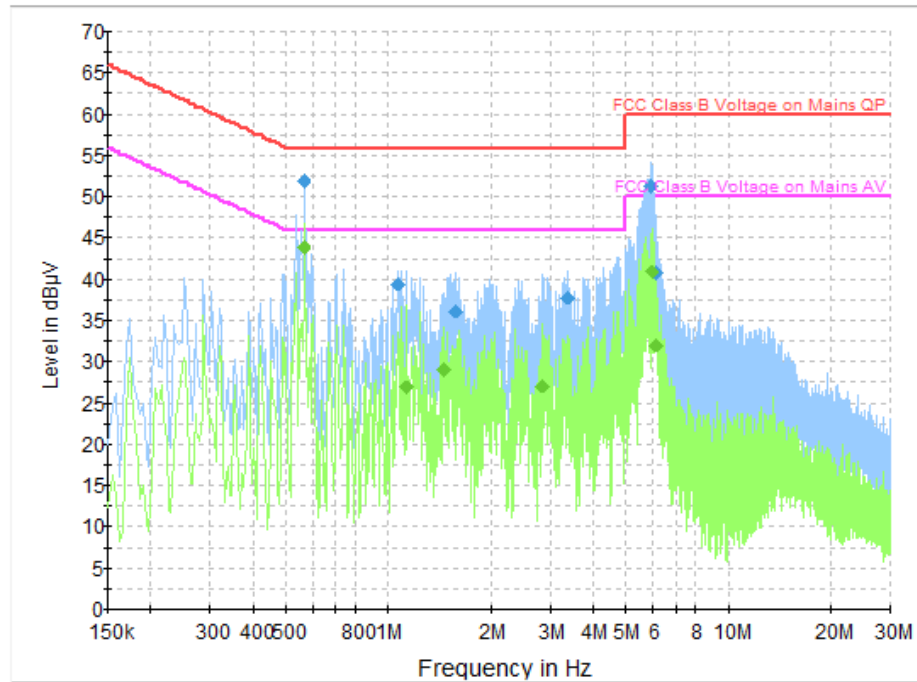


Fig A.8 Radiated Emission from 30MHz to 1GHz

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	52.0	2000.0	9.000	On	L1	19.8	4.0	56.0	
1.066000	39.4	2000.0	9.000	On	L1	19.6	16.6	56.0	
1.574000	36.2	2000.0	9.000	On	L1	19.5	19.8	56.0	
3.366000	37.8	2000.0	9.000	On	L1	19.5	18.2	56.0	
5.898000	51.4	2000.0	9.000	On	L1	19.5	8.6	60.0	
6.130000	40.8	2000.0	9.000	On	L1	19.6	19.2	60.0	

### Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.566000	43.9	2000.0	9.000	On	L1	19.8	2.1	46.0	
1.130000	27.0	2000.0	9.000	On	L1	19.5	19.0	46.0	
1.450000	29.1	2000.0	9.000	On	N	19.8	17.0	46.0	
2.842000	27.2	2000.0	9.000	On	L1	19.5	18.8	46.0	
5.958000	41.0	2000.0	9.000	On	L1	19.5	9.0	50.0	
6.134000	32.1	2000.0	9.000	On	L1	19.6	17.9	50.0	



USB Mode, Set.3:

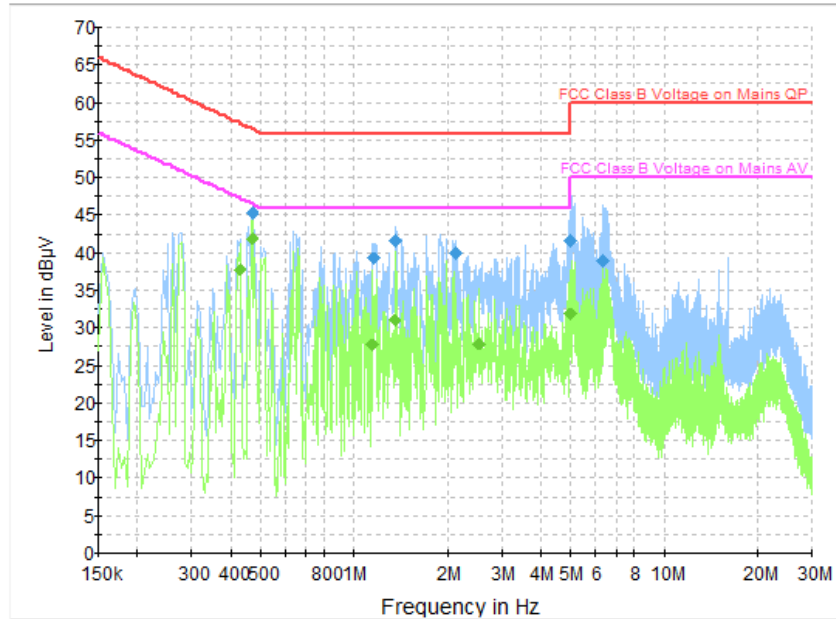


Fig A.9 Radiated Emission from 30MHz to 1GHz

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.470000	45.4	2000.0	9.000	On	N	20.0	11.2	56.5	
1.158000	39.3	2000.0	9.000	On	N	19.8	16.7	56.0	
1.370000	41.6	2000.0	9.000	On	L1	19.5	14.4	56.0	
2.130000	40.0	2000.0	9.000	On	N	19.8	16.0	56.0	
4.994000	41.5	2000.0	9.000	On	L1	19.6	14.5	56.0	
6.366000	38.9	2000.0	9.000	On	L1	19.6	21.1	60.0	

### Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	37.9	2000.0	9.000	On	L1	19.9	9.4	47.3	
0.470000	41.9	2000.0	9.000	On	N	20.0	4.6	46.5	
1.150000	27.7	2000.0	9.000	On	N	19.8	18.3	46.0	
1.350000	31.1	2000.0	9.000	On	L1	19.5	14.9	46.0	
2.526000	27.9	2000.0	9.000	On	N	19.7	18.1	46.0	
4.978000	31.9	2000.0	9.000	On	N	19.7	14.1	46.0	

\*\*\*END OF REPORT\*\*\*