



# FCC PART 15C TEST REPORT No.I22Z61759-IOT05

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE /NR Mobile phone**

**T609SPP**

With

**FCC ID: 2ACCJH168**

**Hardware Version: 04**

**Software Version: KT5F**

**Issued Date: 2022-12-21**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z61759-IOT05	Rev.0	1st edition	2022-12-21

## **CONTENTS**

<b>CONTENTS</b> .....	<b>3</b>
<b>1. TEST LATORATORY</b> .....	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION</b> .....	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)</b> .....	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. GENERAL DESCRIPTION .....	7
<b>4. REFERENCE DOCUMENTS</b> .....	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING .....	8
<b>5. LABORATORY ENVIRONMENT</b> .....	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS</b> .....	<b>9</b>
6.1. SUMMARY OF TEST RESULTS .....	9
6.2. STATEMENTS .....	9
6.3. TEST CONDITIONS .....	9
<b>7. TEST EQUIPMENTS UTILIZED</b> .....	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY</b> .....	<b>10</b>
8.1. TRANSMITTER OUTPUT POWER .....	10
8.2. PEAK POWER SPECTRAL DENSITY .....	10
8.3. OCCUPIED 6dB BANDWIDTH .....	10
8.4. BAND EDGES COMPLIANCE .....	10
8.5. SPURIOUS EMISSIONS .....	10
<b>ANNEX A: MEASUREMENT RESULTS</b> .....	<b>11</b>
A.1. MEASUREMENT METHOD .....	11
A.2. MAXIMUM PEAK OUTPUT POWER .....	11
A.2.1 ANTENNA GAIN .....	11
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	11
A.3. PEAK POWER SPECTRAL DENSITY .....	13
A.4. OCCUPIED 6dB BANDWIDTH .....	13



No. I22Z61759-IOT05

**ANNEX B: EUT PARAMETERS.....19**  
**ANNEX C: ACCREDITATION CERTIFICATE..... 19**

## 1. TEST LABORATORY

### 1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2022-09-21

Testing End Date: 2022-12-21


### 1.5. Signature



---

Xie Xiuzhen

( Prepared this test report )



---

Zheng Wei

(Reviewed this test report)



---

Pang Shuai

(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3661 1621  
Fax: +86 755 3661 2000-81722

### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY**

#### **EQUIPMENT(AE)**

##### **3.1. About EUT**

Description	GSM/UMTS/LTE /NR Mobile phone
Model name	T609SPP
FCC ID	2ACCJH168
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85V

##### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	/	04	KT5F

\*EUT ID: is used to identify the test sample in the lab internally.  
EUT1 is used for Conduction test.

##### **3.3. General Description**

Equipment Under Test (EUT) is a model of GSM/UMTS/LTE /NR Mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## **4. REFERENCE DOCUMENTS**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C and E:	
FCC Part15	15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

## **5. LABORATORY ENVIRONMENT**

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.



## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	<b>P</b>
Peak Power Spectral Density	15.407 (a)	/	<b>P</b>
Occupied 6dB Bandwidth	15.407 (e)	/	<b>P</b>

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

The Equipment Under Test (EUT) model T609SPP (FCC ID: 2ACCJH168) is a variant product of T609DL (FCC ID: 2ACCJH168), according to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01, all results are derived from test report No.I22Z61606-IOT03.

For detail differences between two models please refer the Declaration of Changes document.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	Test Receiver	ESCI	100344	R&S	1 year	2023-03-21
3	LISN	ENV216	101200	R&S	1 year	2023-06-29
4	Shielding Room	S81	/	ETS-Lindgren	/	/

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)


Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

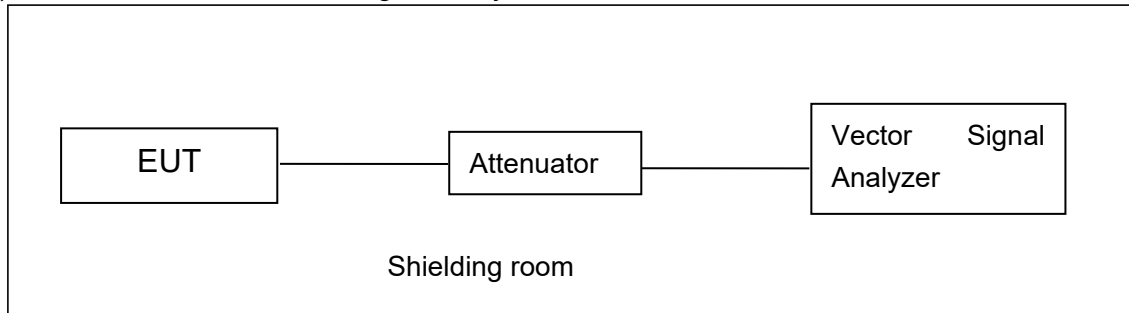

### A.2. Maximum Peak Output Power

#### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

#### A.2.1 Antenna Gain

Antenna gain is -0.68dBi and the value is supplied by the applicant or manufacturer.

#### A.2.2. Maximum Average Output Power-Conducted

##### Measurement Results:

##### 802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	18.92	19.28	18.53

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

##### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	17.98	17.82	17.75

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	17.95	17.86	17.61

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	13.92	14.12

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	12.62	12.83

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

#### 802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	12.27

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

**Conclusion: PASS**

### A.3. Peak Power Spectral Density

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

#### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Results:

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	3.86	P
	157	3.14	P
	165	3.12	P
802.11n HT20	149	3.48	P
	157	3.26	P
	165	2.82	P
802.11n HT40	151	-3.30	P
	159	-3.42	P
802.11ac HT80	155	-8.58	P

**Conclusion: PASS**

### A.4. Occupied 6dB Bandwidth

#### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

#### Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


#### Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11a	149	Fig.1	16.30	P
	157	Fig.2	17.55	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	17.60	P
	157	Fig.5	17.55	P
	165	Fig.6	17.60	P
802.11n HT40	151	Fig.7	36.32	P
	159	Fig.8	36.32	P


802.11ac HT80	155	Fig.9	76.32	P
---------------	-----	-------	-------	---

**Conclusion: PASS**


**Test graphs as below:**

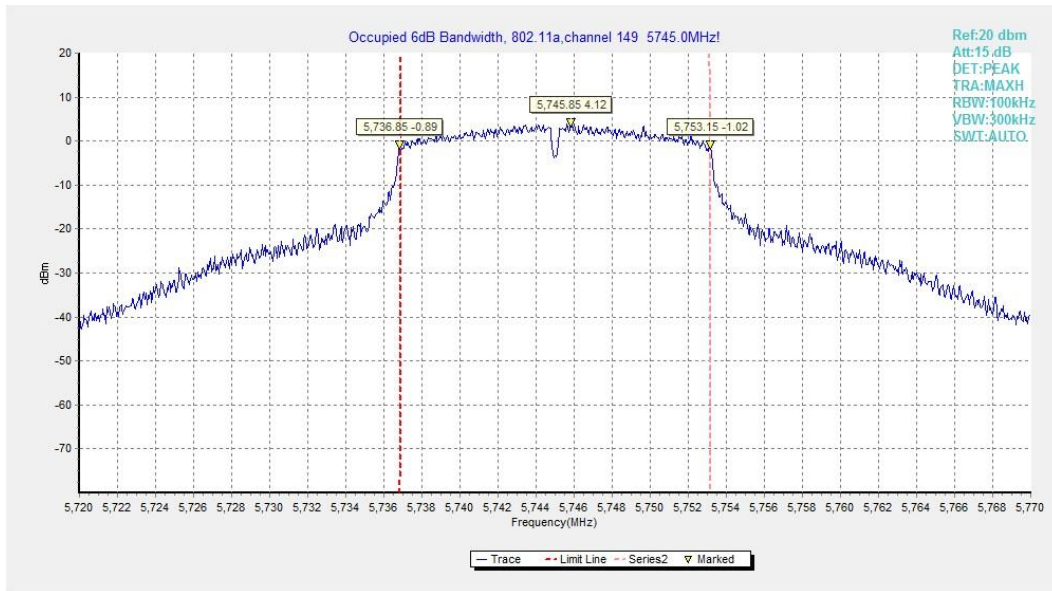


**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

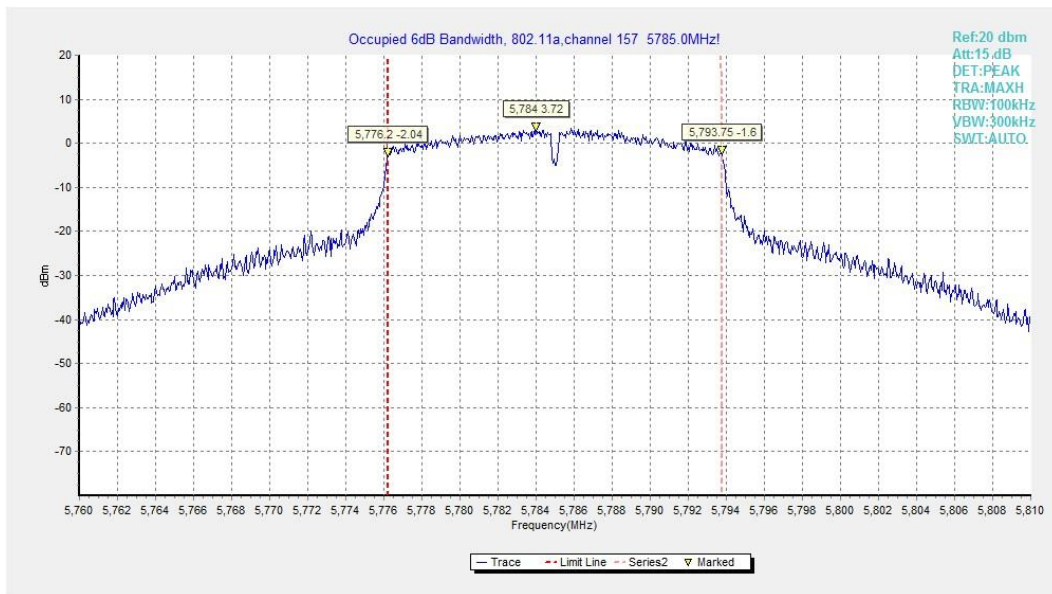


**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

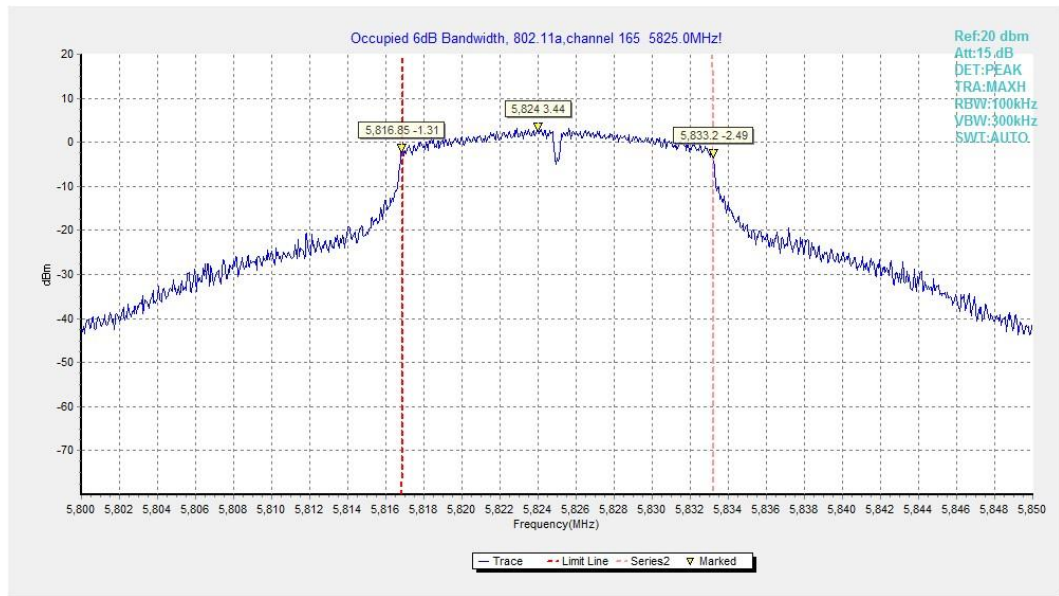


**Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)**

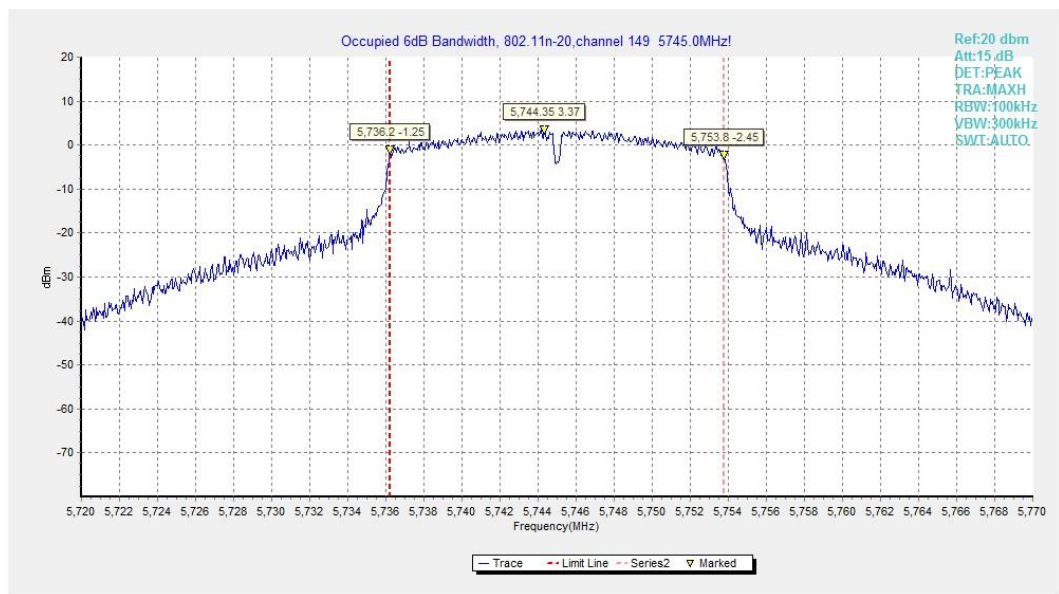

**Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)**

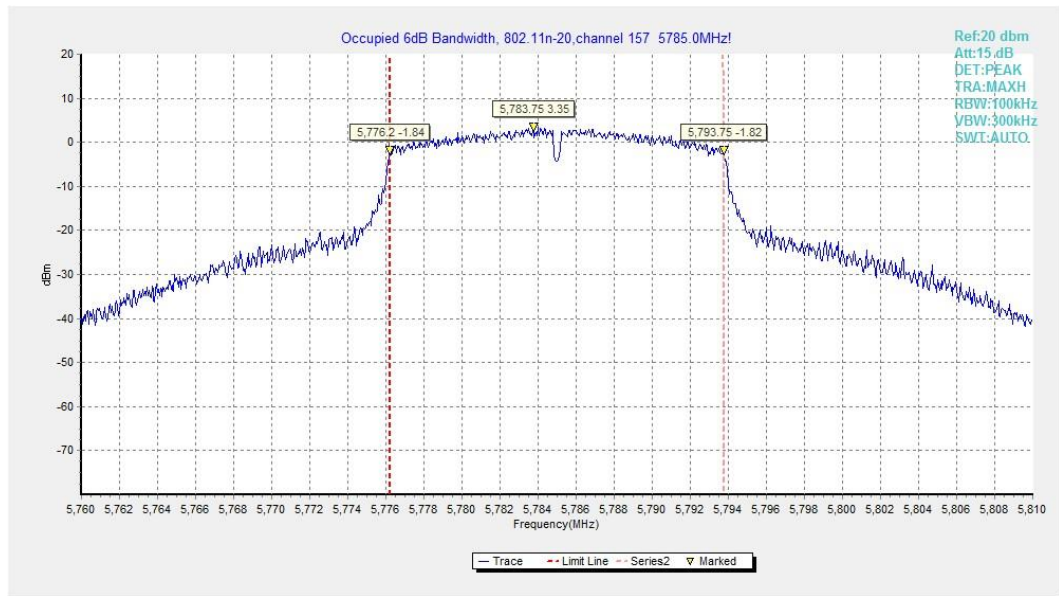


**Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)**

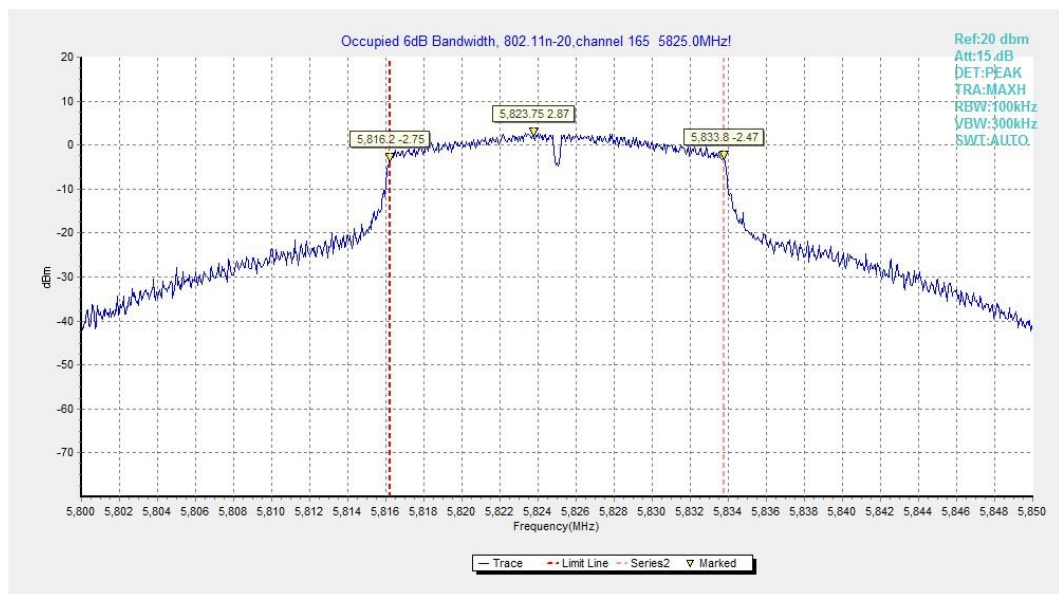


**Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)**




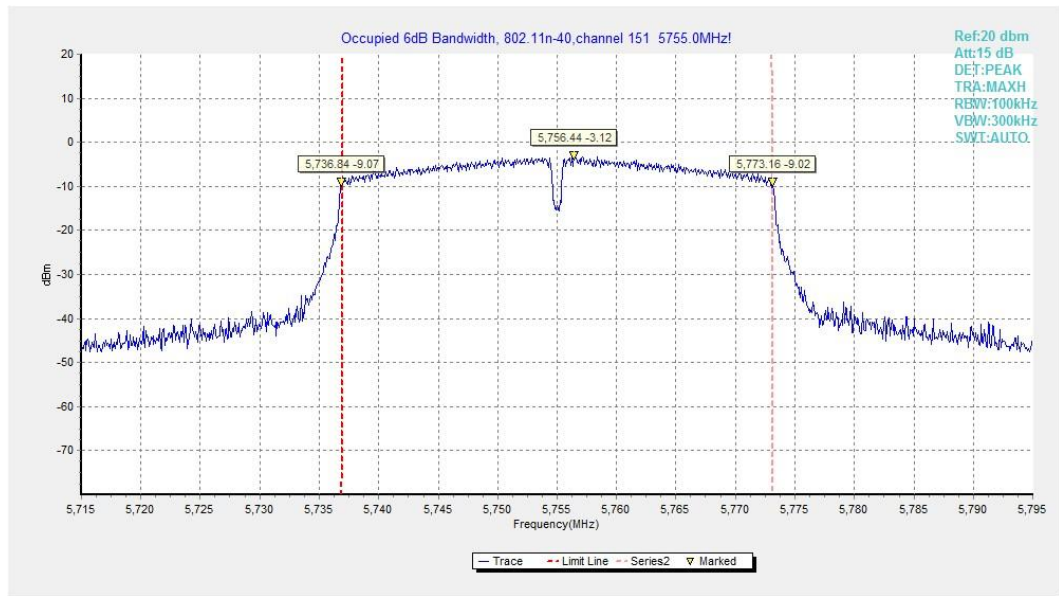

**Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**

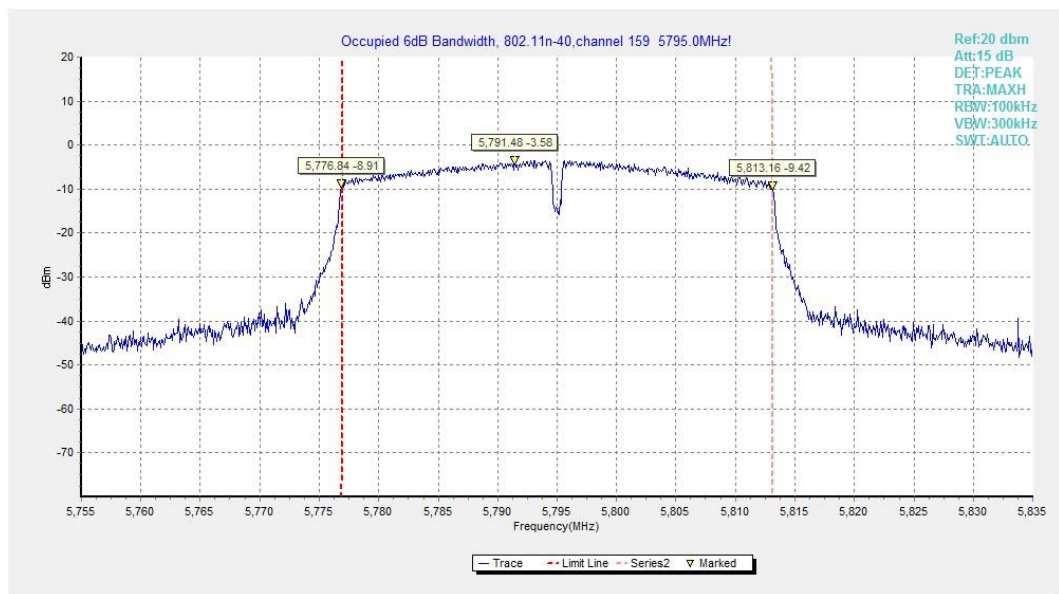

**Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**

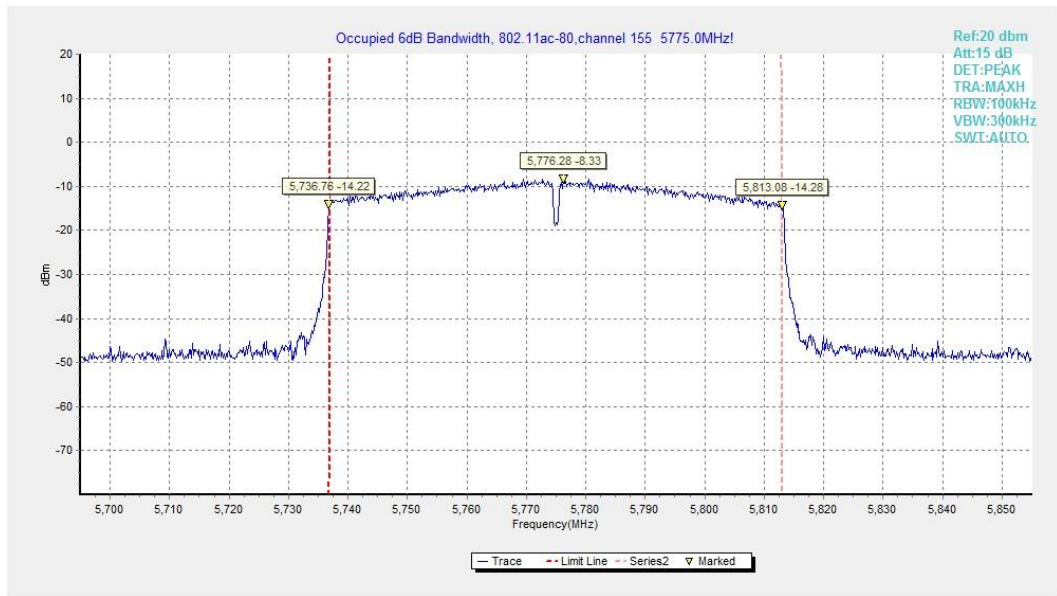

**Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)**

## ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2022-10-01 through 2023-09-30 <i>Effective Dates</i>	  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\* END OF REPORT BODY \*\*\*