



No. 23T04Z80611-01

For

**TCL Communication Ltd.
GSM/UMTS/LTE Mobile phone**

Model Name: T611B

with

Hardware Version: 05

Software Version: 3FS2

FCC ID: 2ACCJH176

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

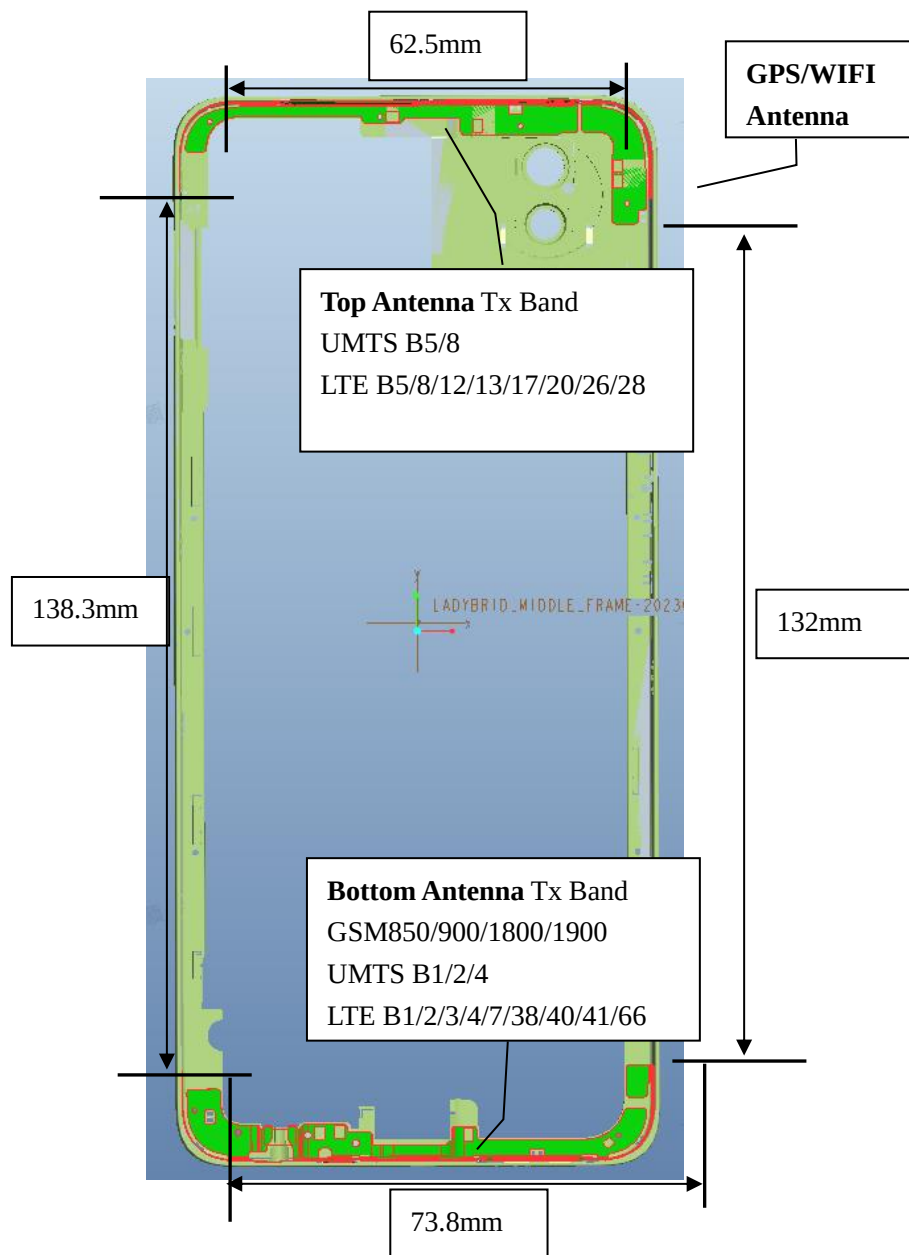


Antenna Locations




Picture 1: Constituents of the sample

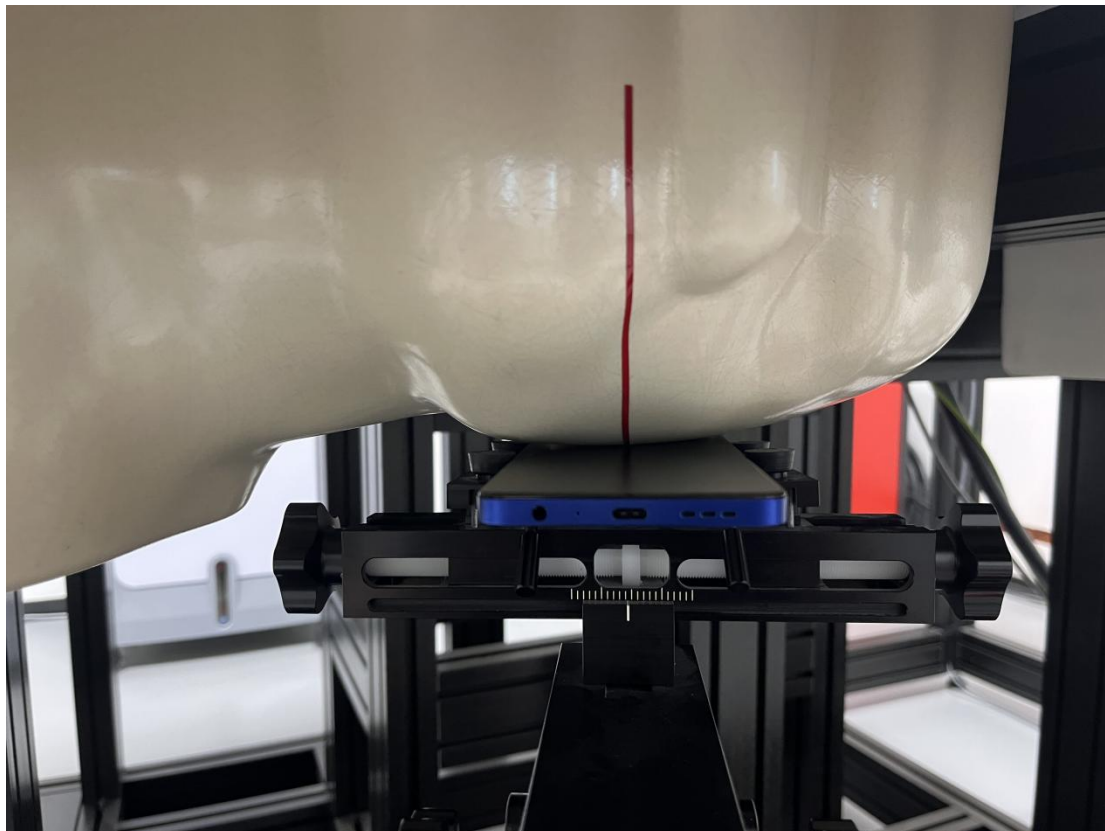


Picture 2: Left Hand Touch Cheek Position

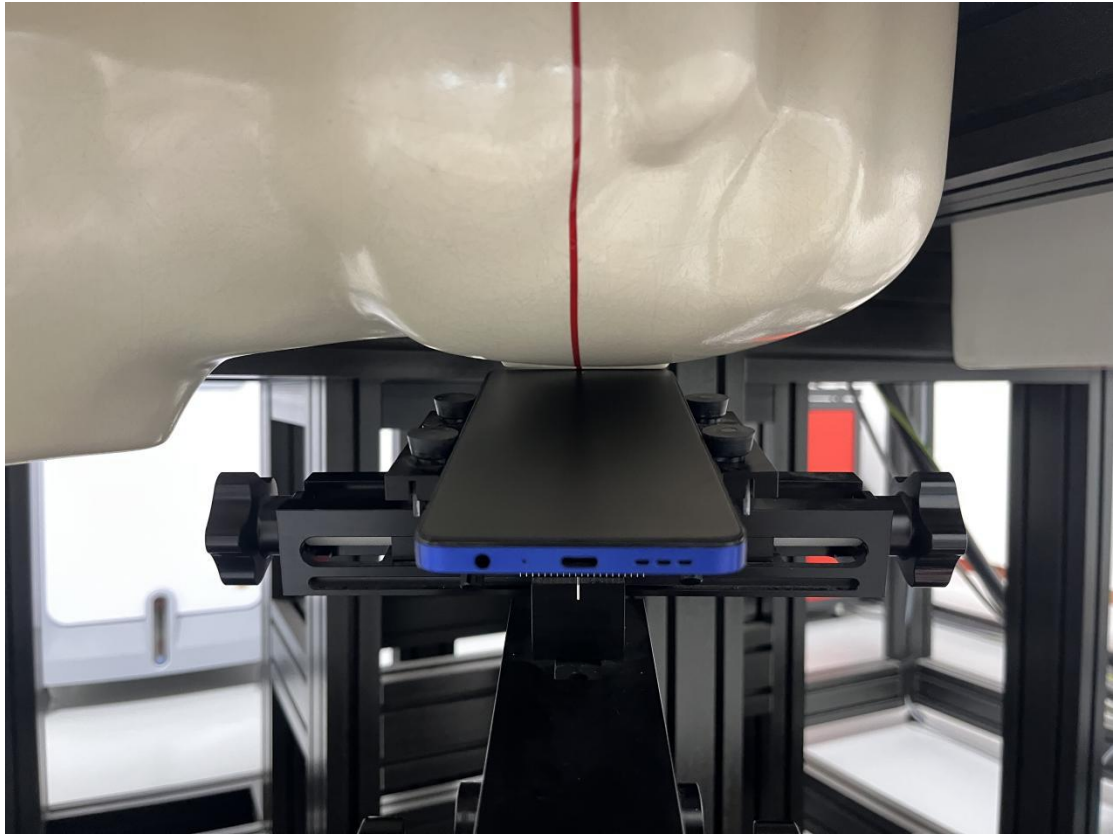

Picture 3: Left Hand Tilt 15° Position

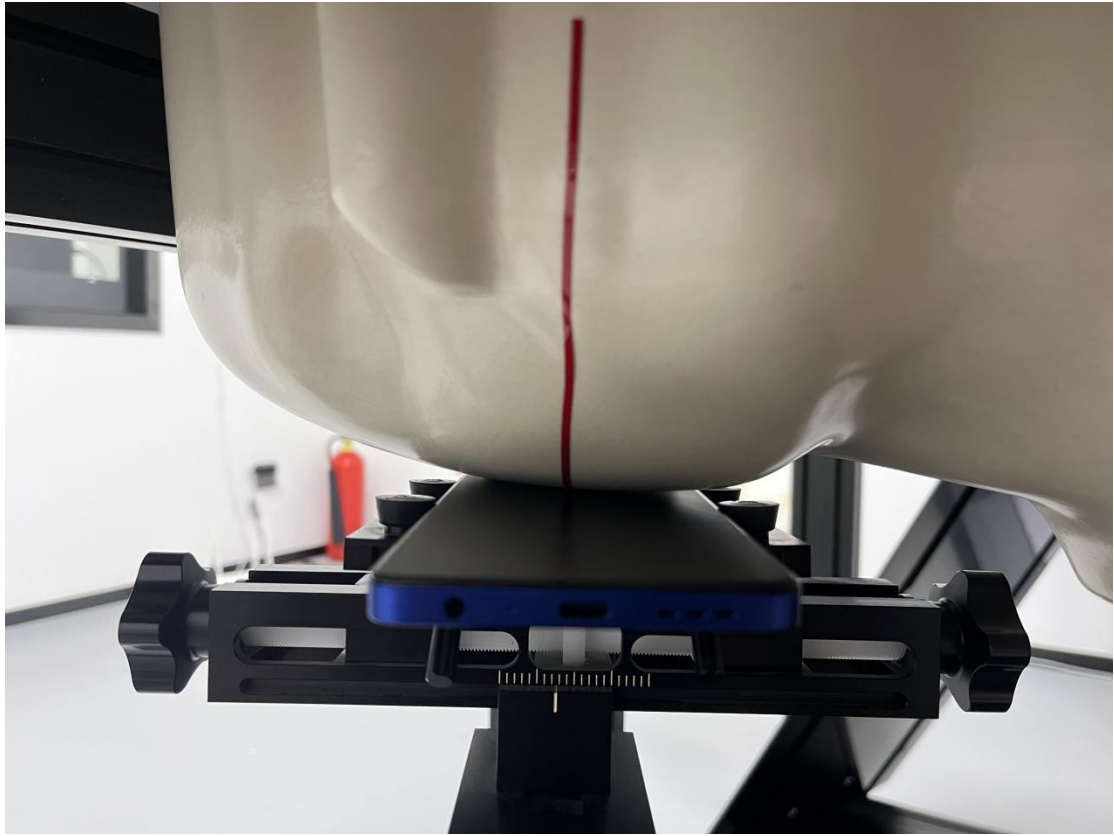


Picture 4: Right Hand Touch Cheek Position

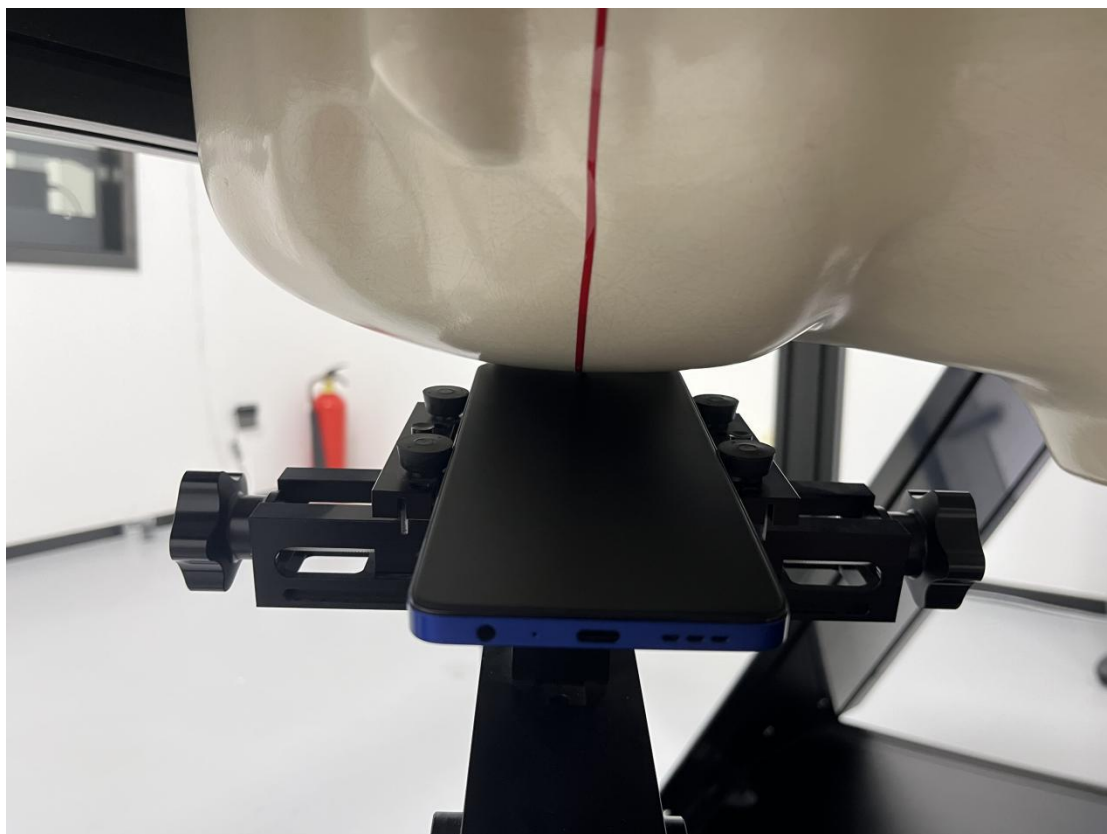


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10mm/15mm/0mm between the EUT and the phantom bottom:

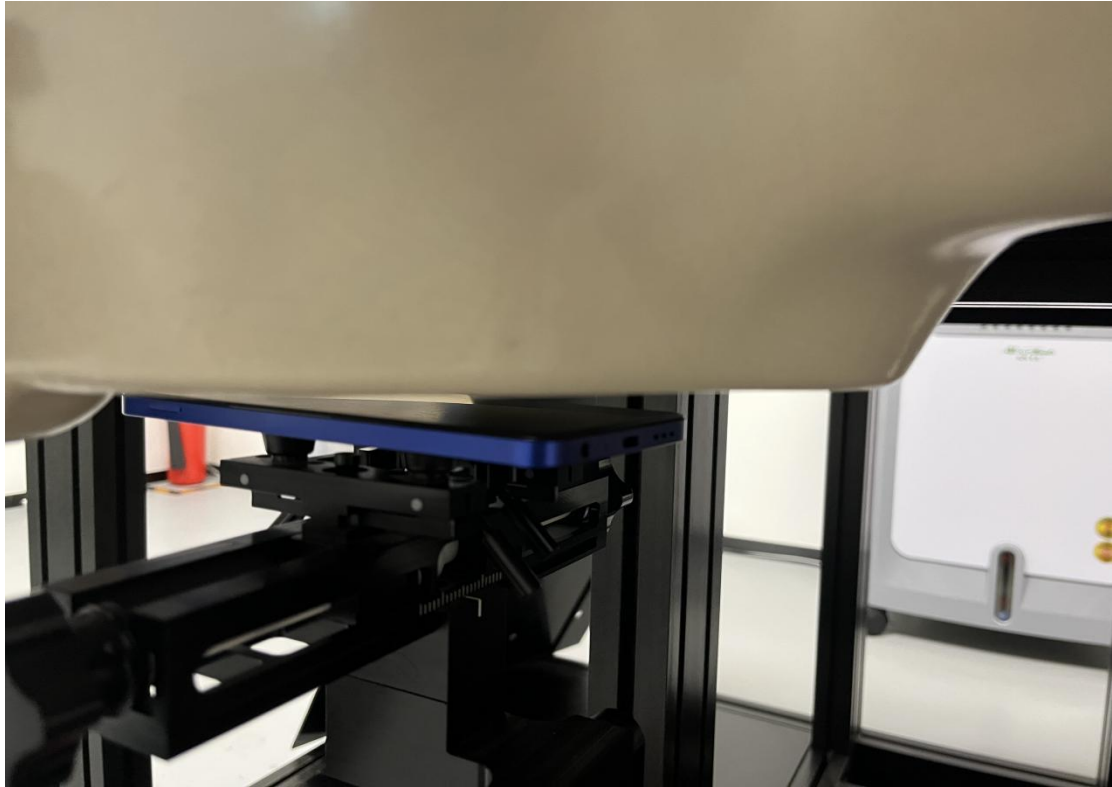

Picture 6: Front 10mm

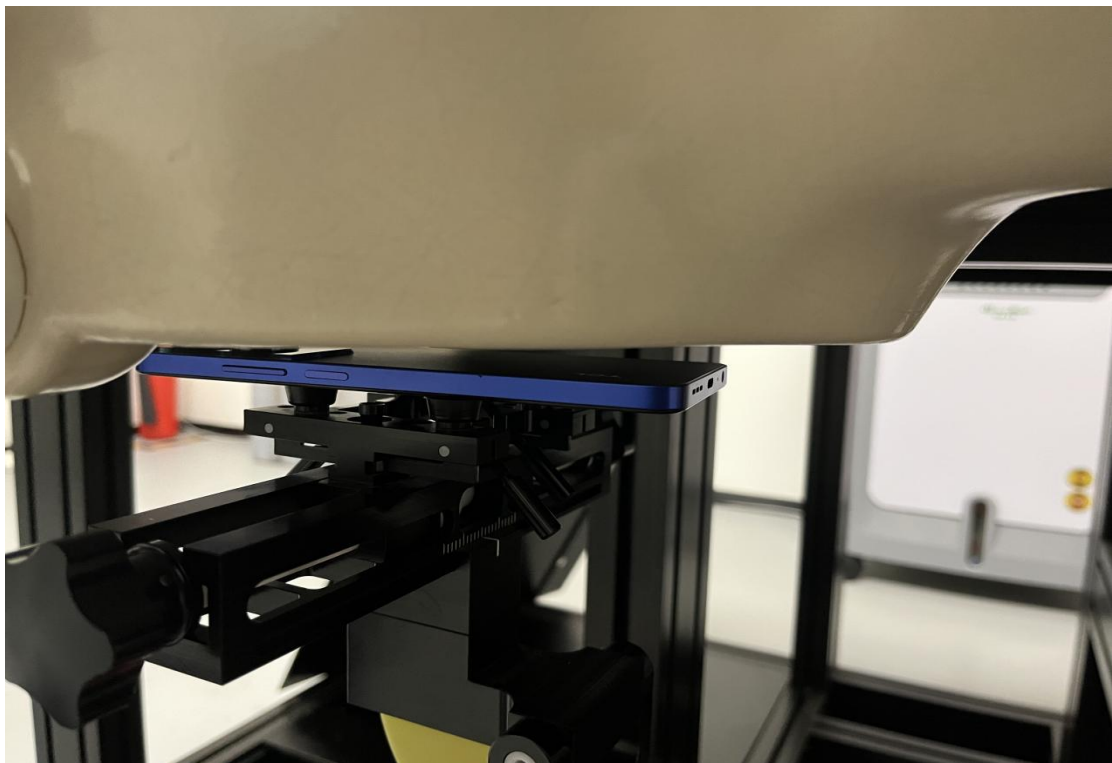


Picture 7: Rear 10mm

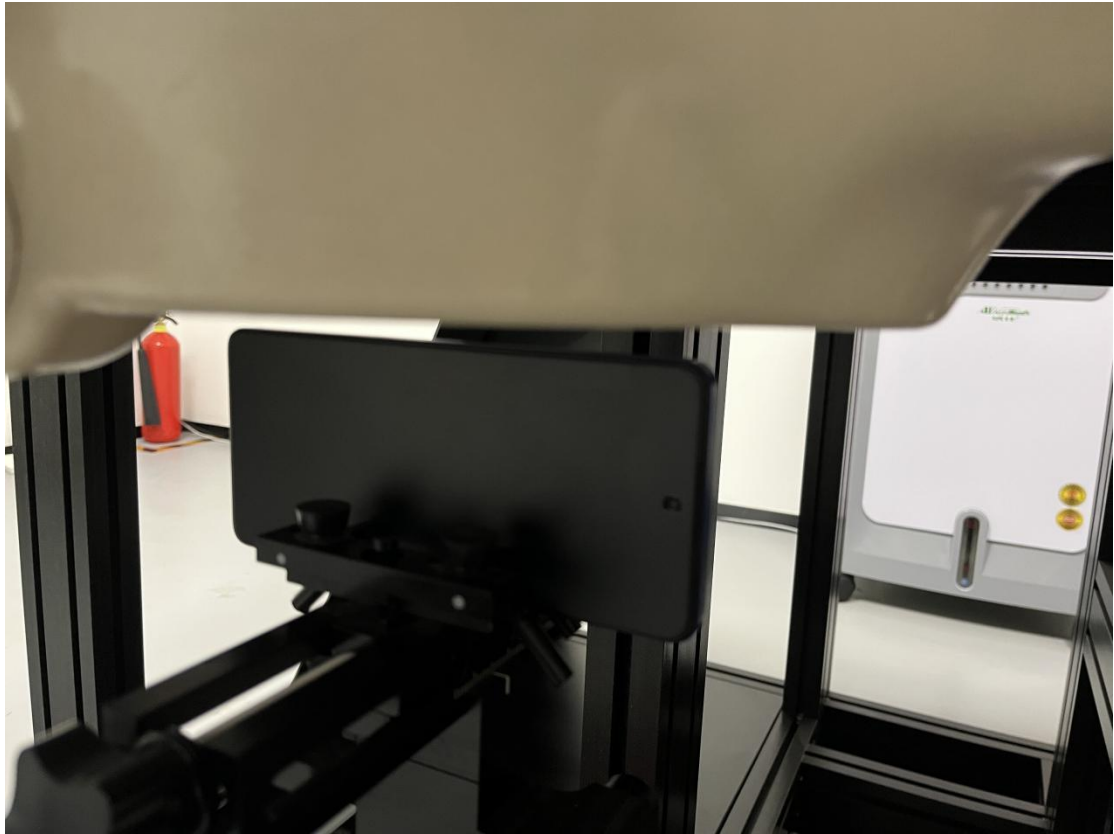

Picture 8: Left 10mm




Picture 9: Right 10mm

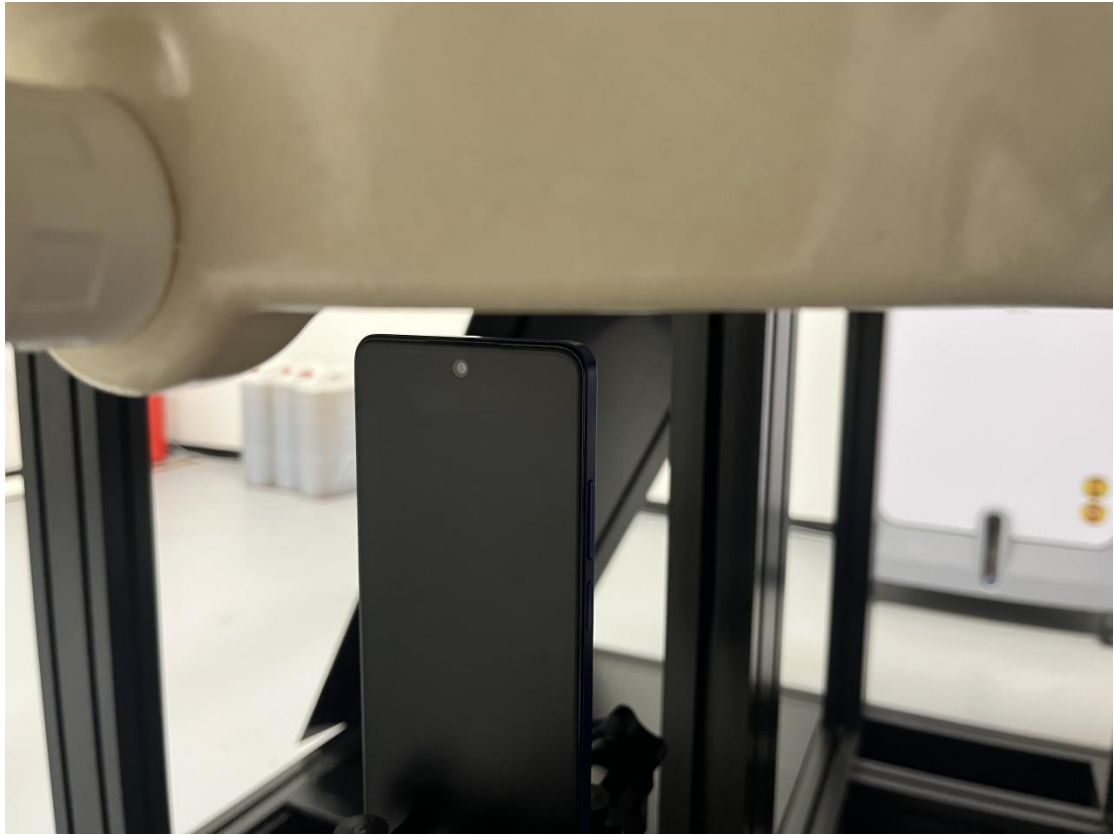


Picture 10: Top 10mm




Picture 11: Bottom 10mm

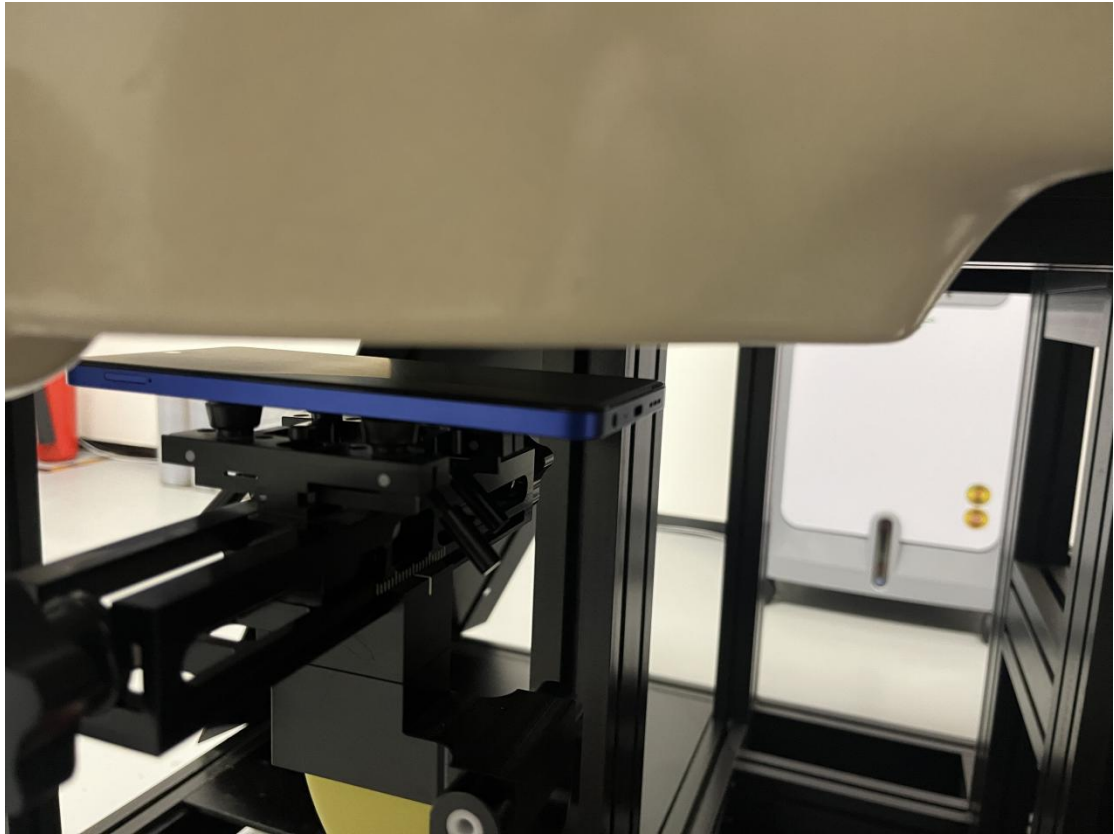

Picture 12: Front 15mm

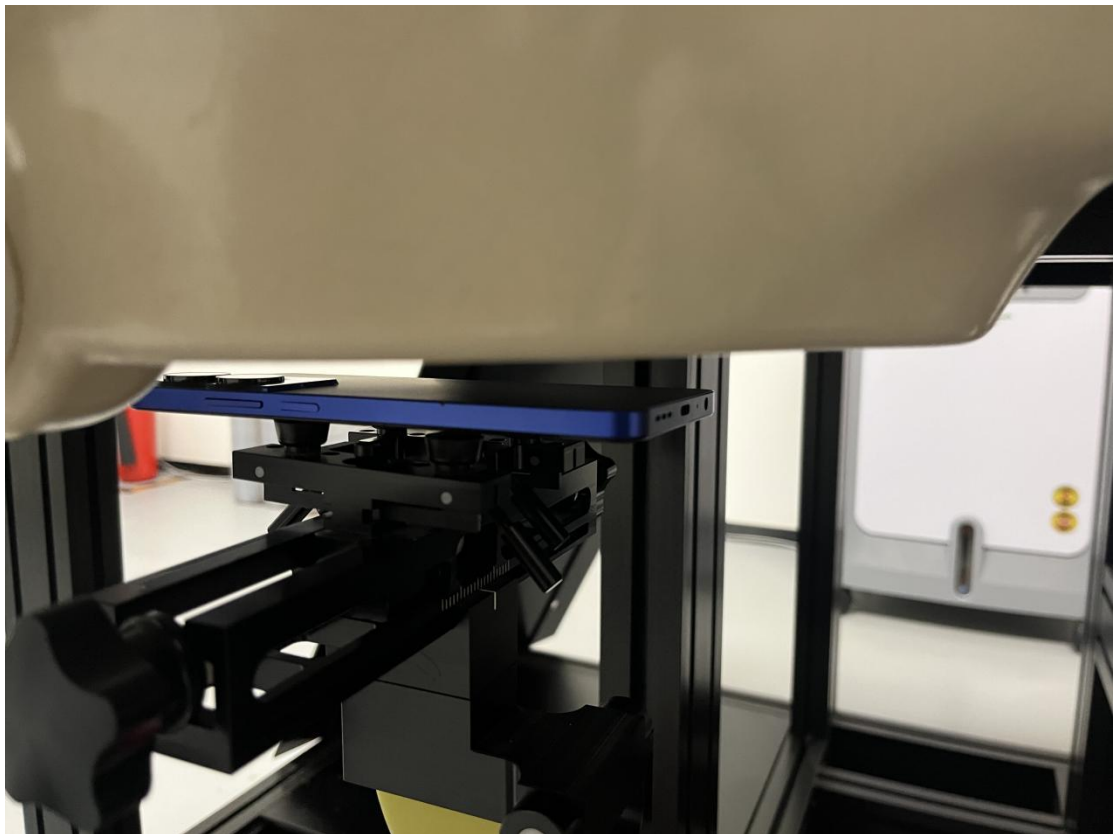


Picture 13: Rear 15mm

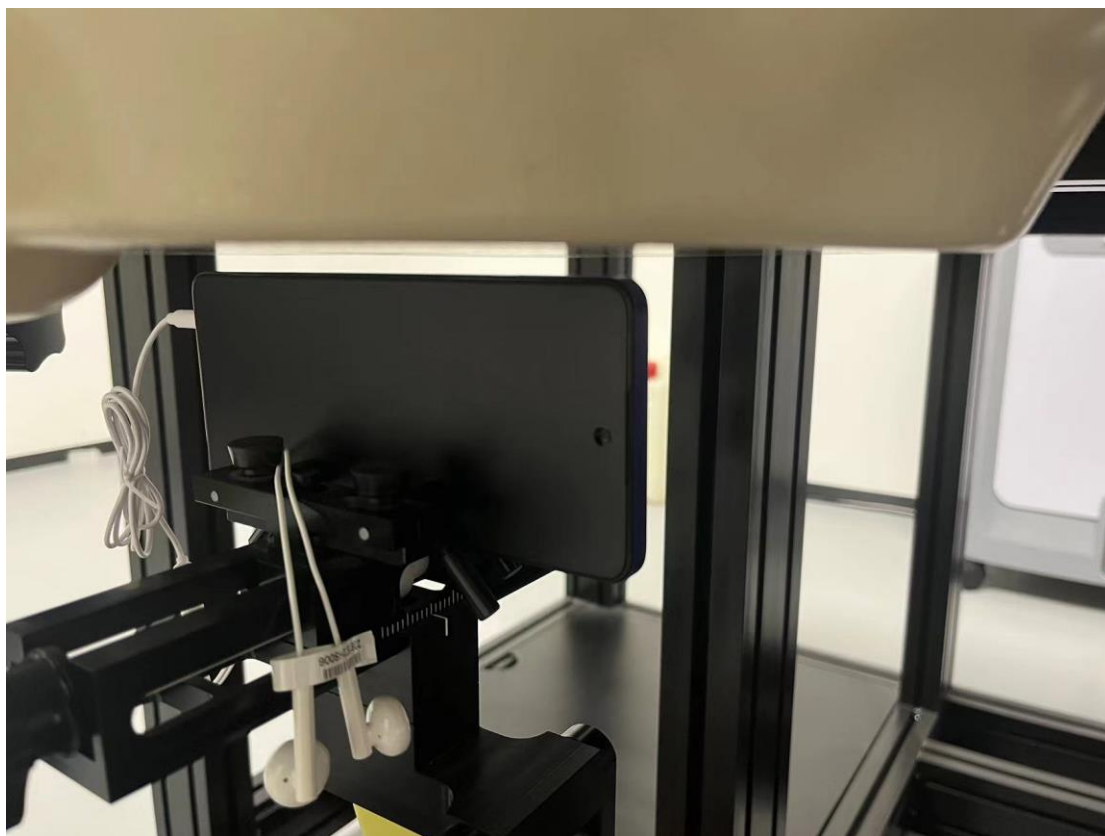


Picture 14: Left 5mm with headset



Picture 15: Rear 5mm with headset

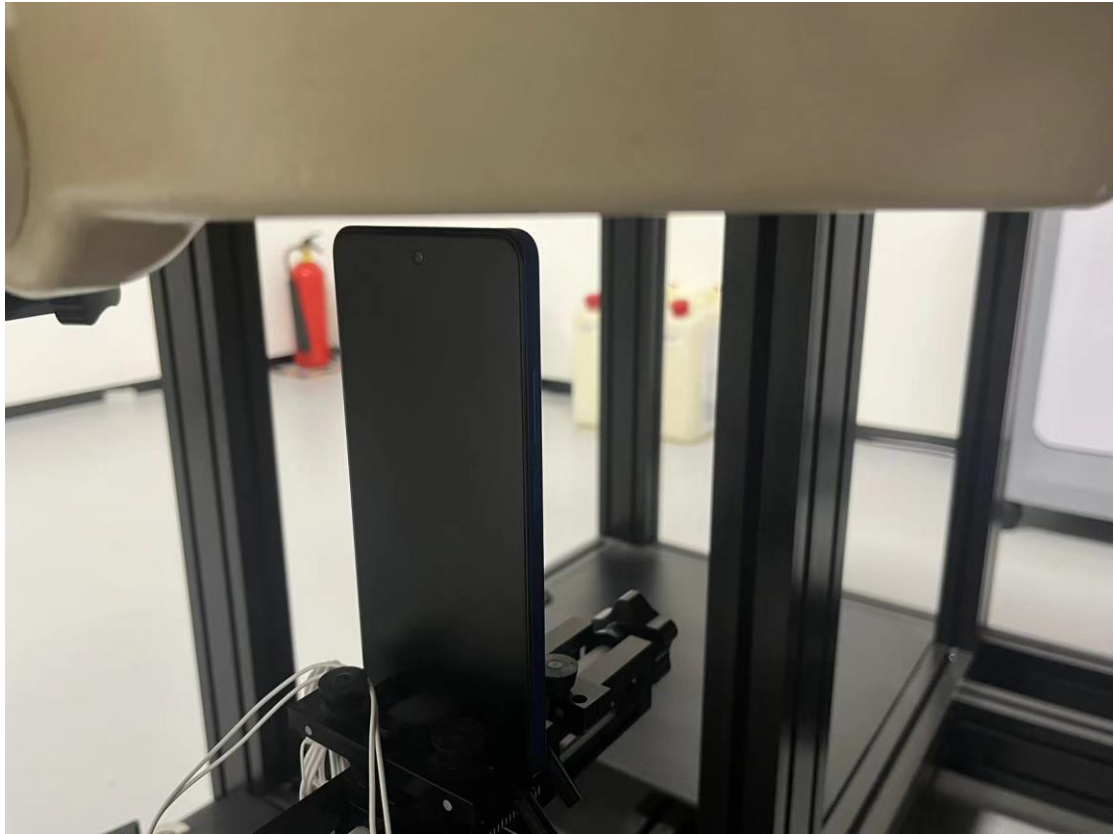

Picture 16: Top 5mm with headset

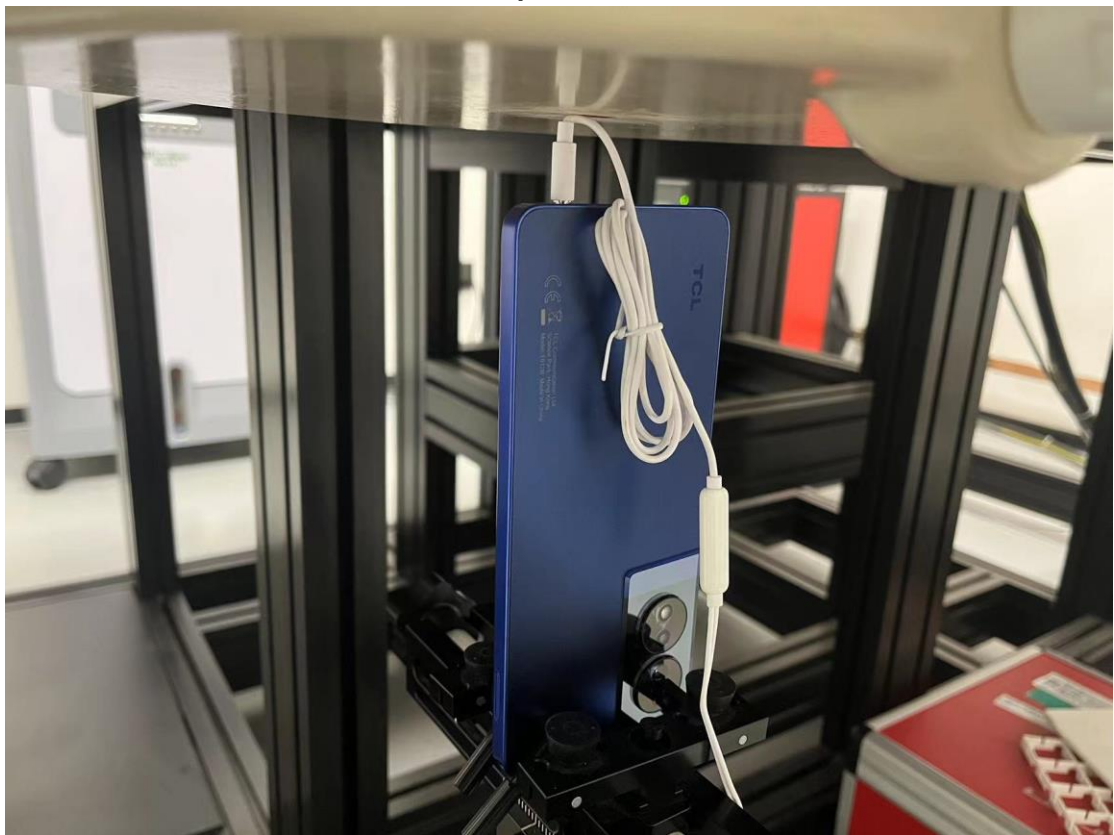

Picture 17: Bottom 21mm with headset