



No. 24T04Z102499-006

For

TCL Communication Ltd.

GSM/UMTS/LTE/NR Mobile phone

Model Name: T704SP

with

Hardware Version: 09

Software Version: 6CS9

FCC ID: 2ACCJH184

Issued Date: 2024-12-2

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

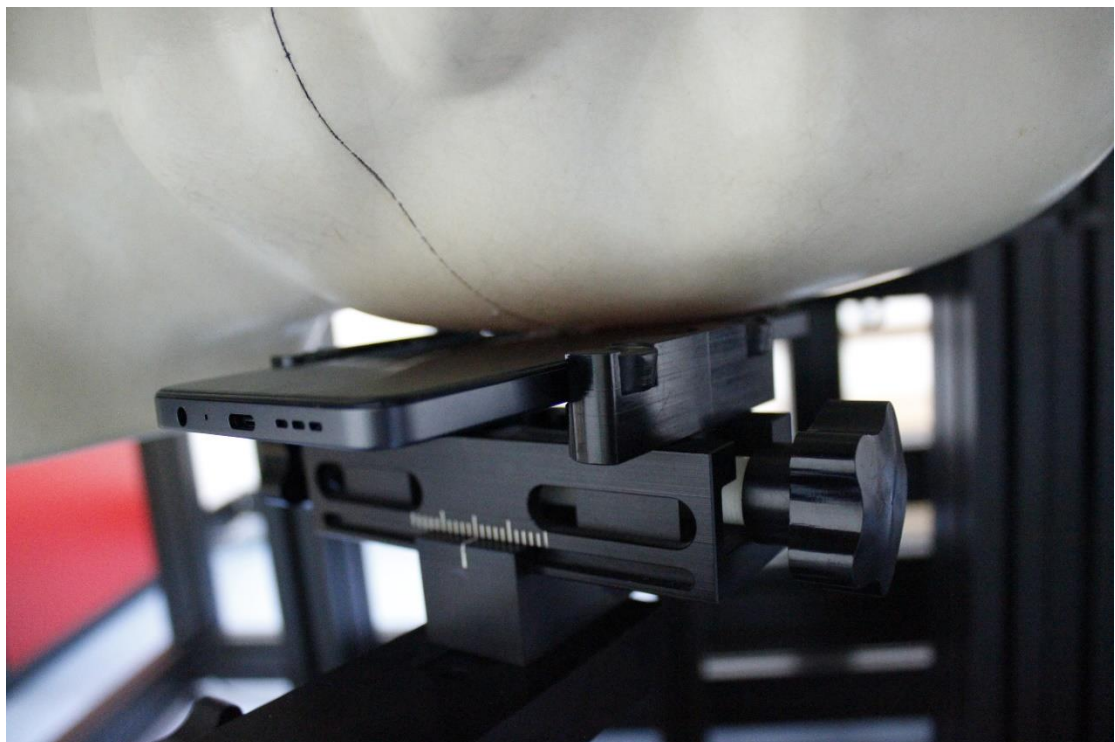


Picture 2: Left Head Touch Cheek Position



Picture 3: Left Head Tilt 15° Position

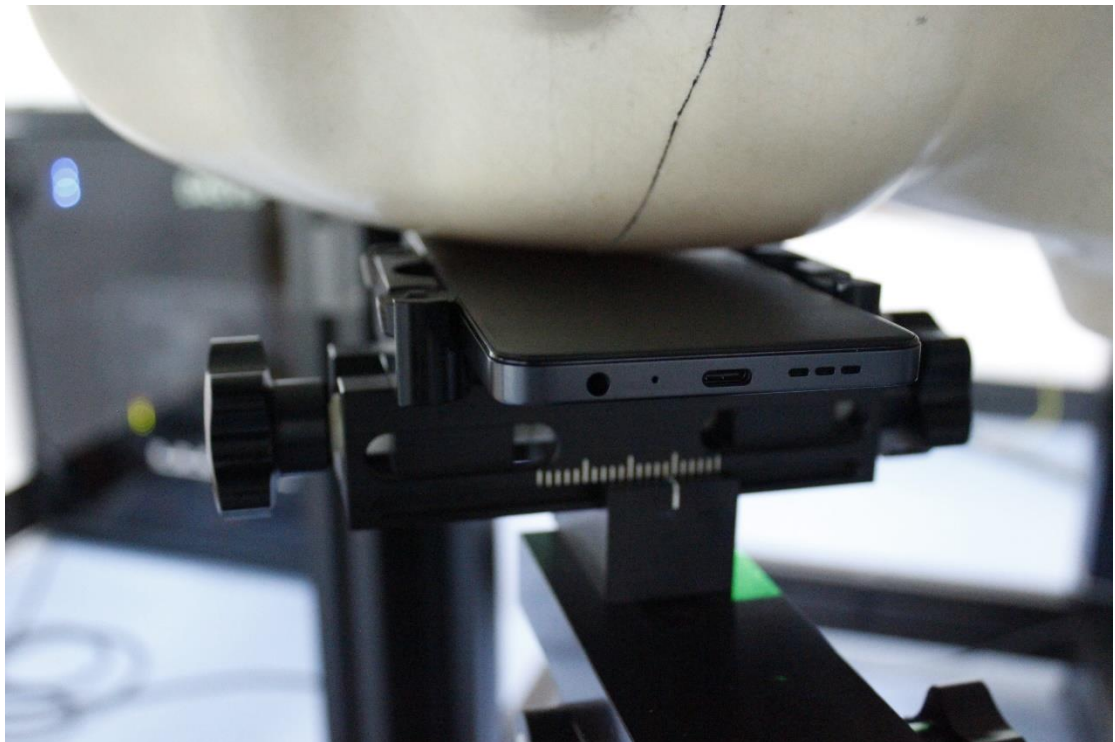


Picture 4: Right Head Touch Cheek Position

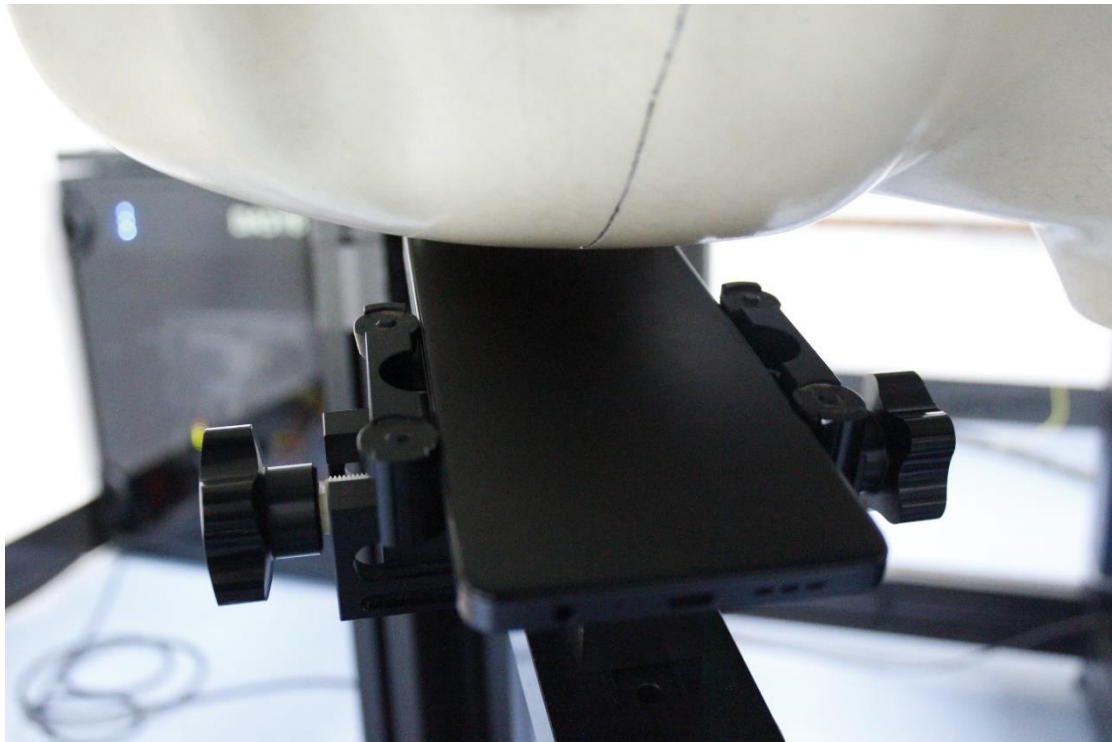


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10/15mm between the EUT and the phantom bottom:

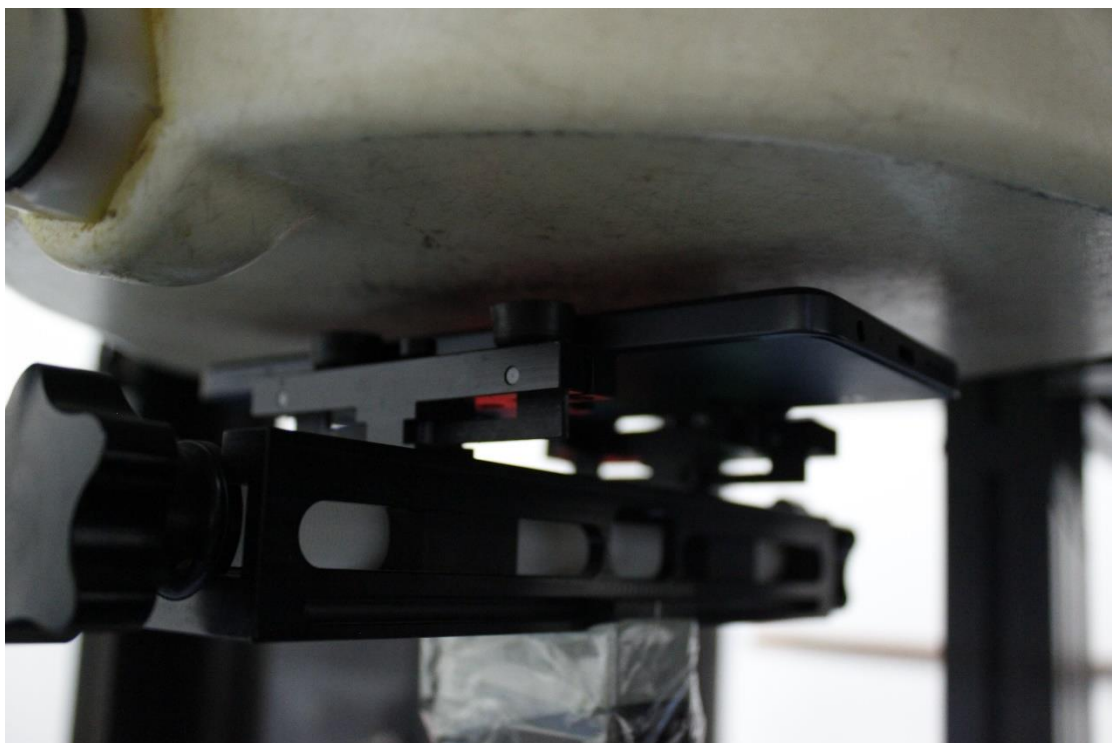


Picture 6: Front 10mm

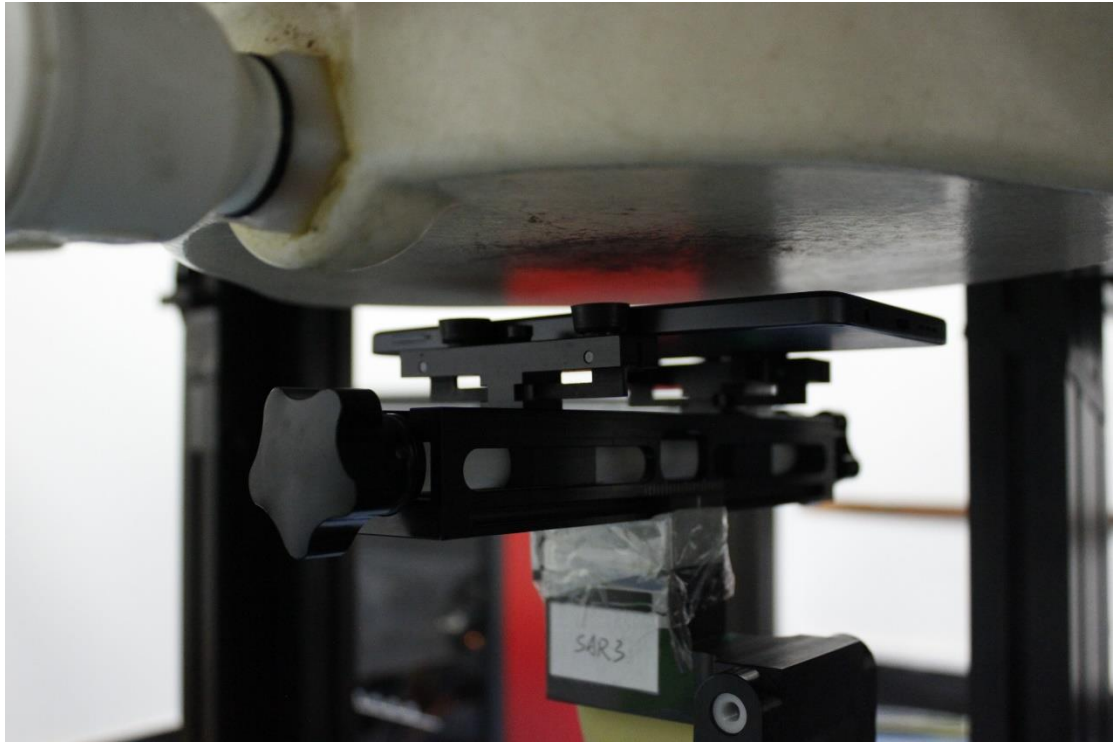


Picture 7: Front 15mm

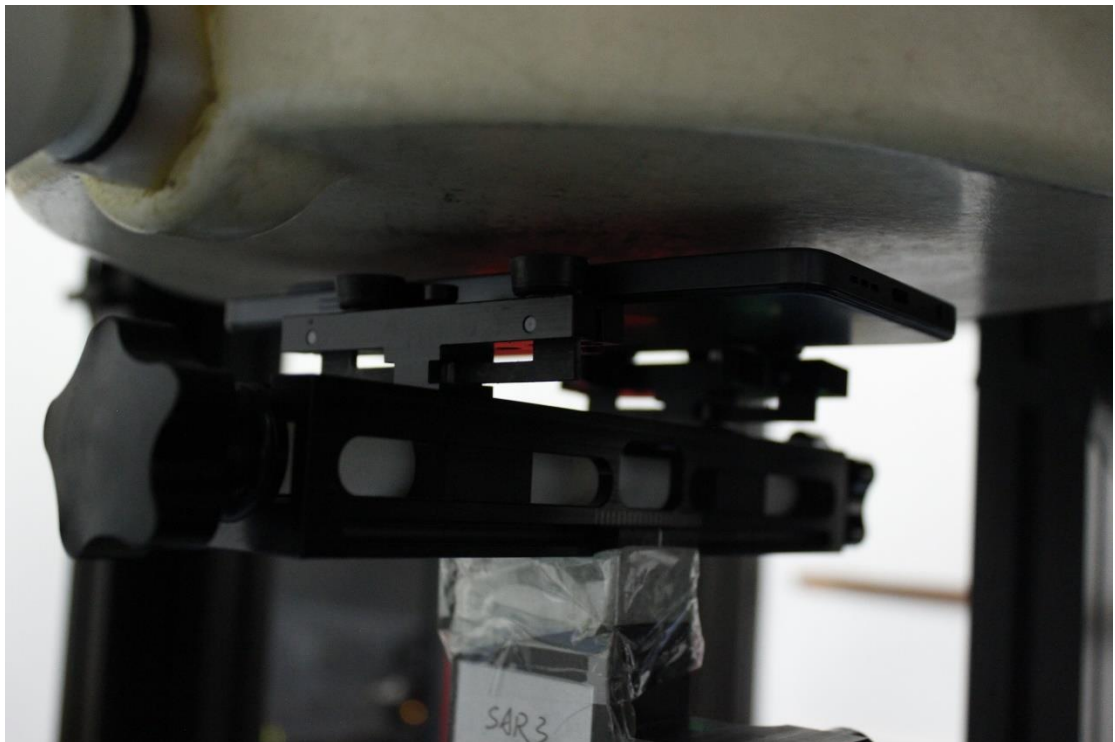

Picture 8: Rear 10mm

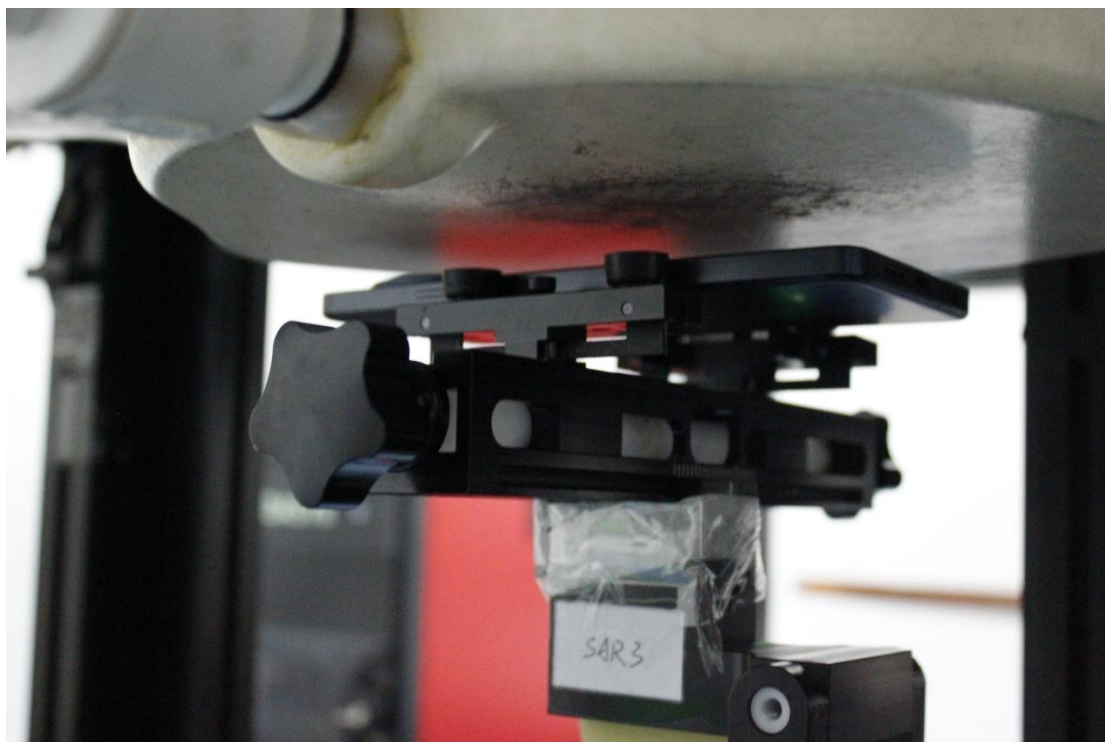


Picture 9: Rear 15mm

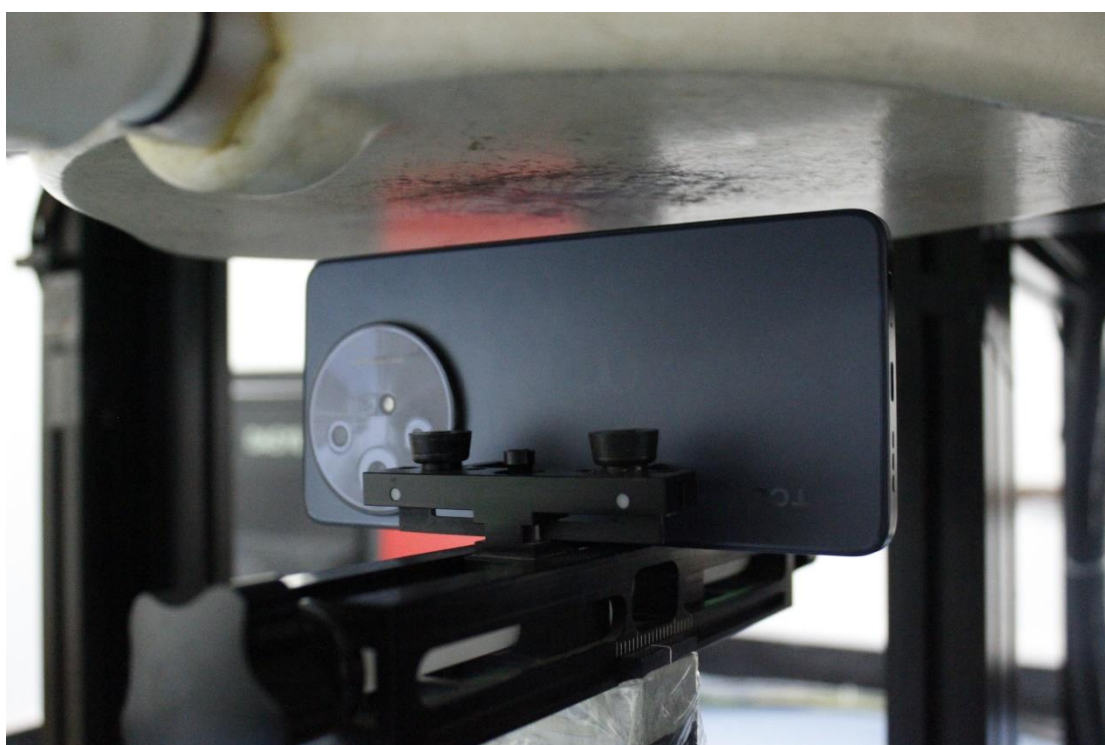


Picture 10: Left 10mm



Picture 11: Right 10mm

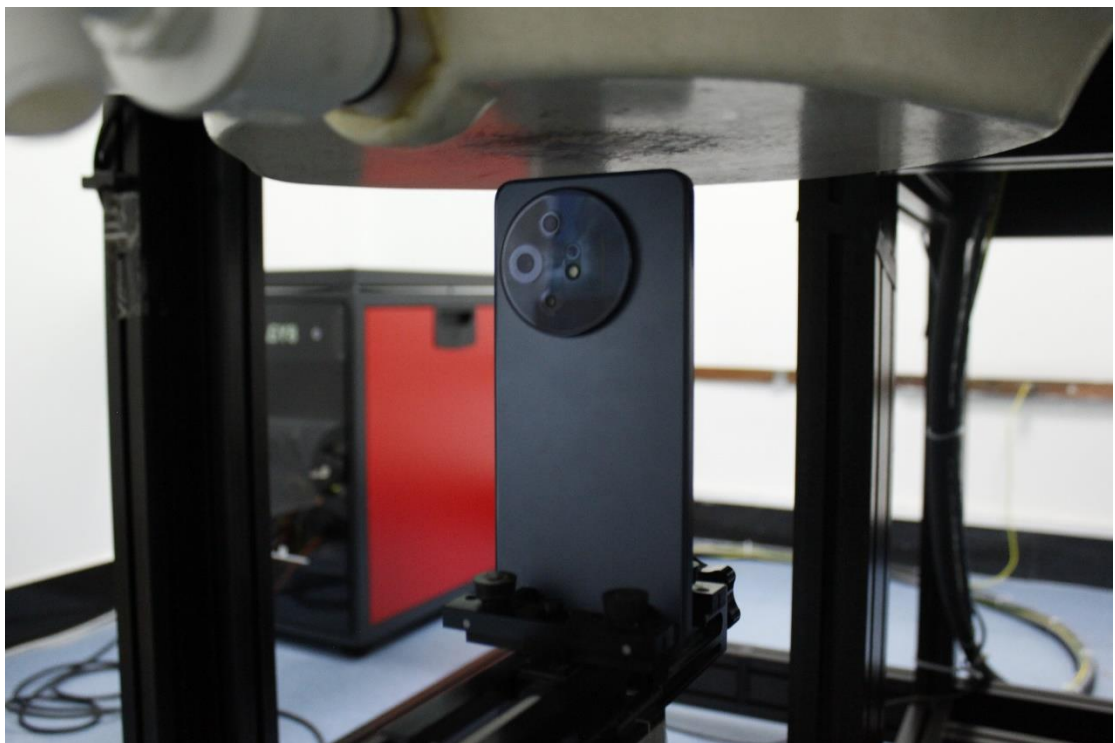


Picture 12: Top 10mm

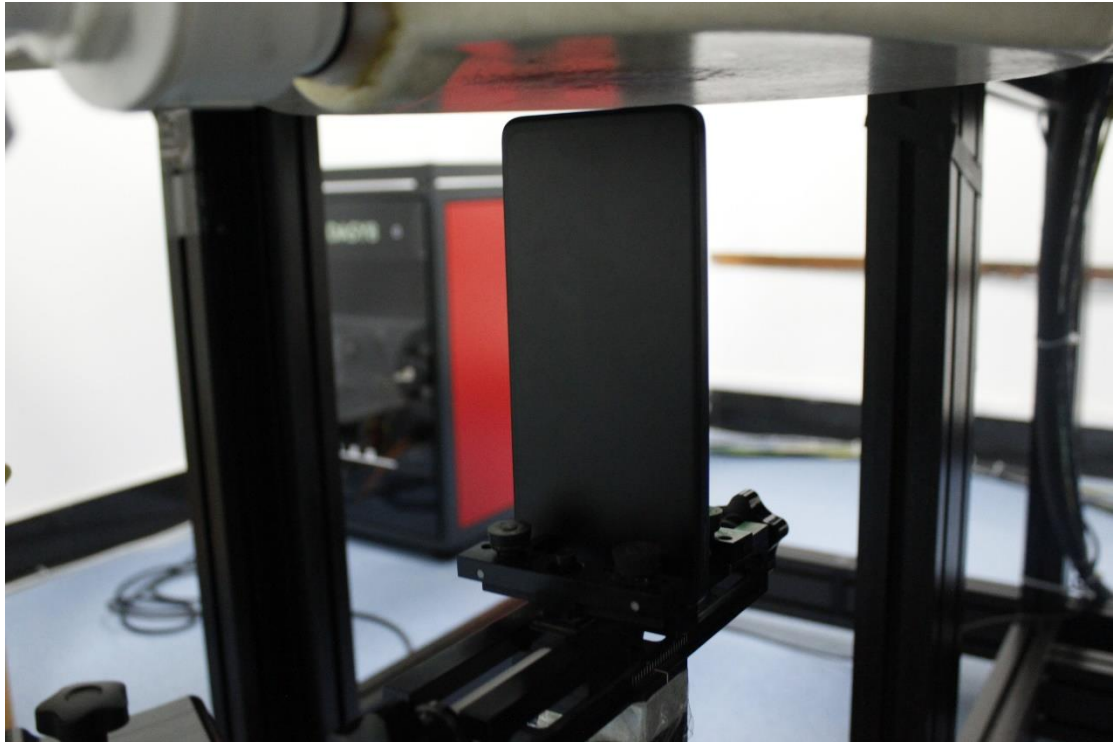

Picture 13: Bottom 10mm

Transmit Antenna Separation Distances

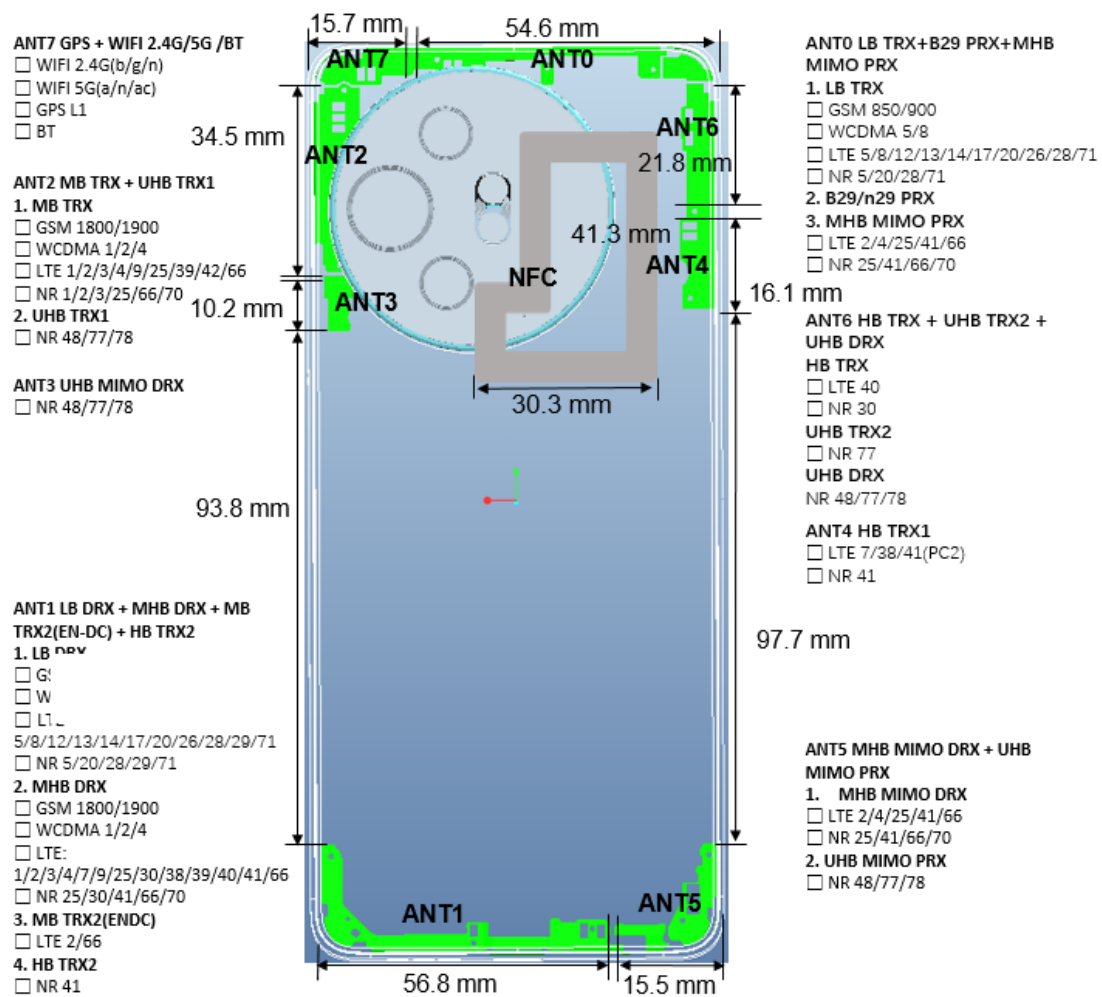

Picture 14 Antenna Locations