

Report No.: AGC01819140501FE03 Page 1 of 69

# **FCC Test Report**

Report No.: AGC01819140501FE03

FCC ID : 2ACDATRACKER

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: bag bluetooth speaker

**BRAND NAME** : N/A

**MODEL NAME** : LX100, BV200, F2

**CLIENT** : US Digital Media

**DATE OF ISSUE** : Jun.05, 2014

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 69

## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jun.05, 2014	Valid	Original Report

## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 20DB BANDWIDTH	19
8.1. MEASUREMENT PROCEDURE	19
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.3. LIMITS AND MEASUREMENT RESULTS	19
9. CONDUCTED SPURIOUS EMISSION	26
9.1. MEASUREMENT PROCEDURE	26
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
9.3. MEASUREMENT EQUIPMENT USED	26
9.4. LIMITS AND MEASUREMENT RESULT	26
10. RADIATED EMISSION	30
10.1. MEASUREMENT PROCEDURE	30
10.2. TEST SETUP	32
10.3. TEST RESULT	33

11. BAND EDGE EMISSION	45
11.1. MEASUREMENT PROCEDURE	45
11.2. TEST SET-UP	45
11.3. TEST RESULT	46
12. NUMBER OF HOPPING FREQUENCY	50
12.1. MEASUREMENT PROCEDURE	50
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	50
12.3. MEASUREMENT EQUIPMENT USED	50
12.4. LIMITS AND MEASUREMENT RESULT	50
13. TIME OF OCCUPANCY (DWELL TIME)	51
13.1. MEASUREMENT PROCEDURE	51
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	51
13.3. MEASUREMENT EQUIPMENT USED	51
13.4. LIMITS AND MEASUREMENT RESULT	51
14. FREQUENCY SEPARATION	54
14.1. MEASUREMENT PROCEDURE	54
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	54
14.3. MEASUREMENT EQUIPMENT USED	54
14.4. LIMITS AND MEASUREMENT RESULT	54
15. FCC LINE CONDUCTED EMISSION TEST	56
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST	56
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	56
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	60
APPENDIX B: PHOTOGRAPHS OF EUT	62

Page 5 of 69

## 1. VERIFICATION OF CONFORMITY

Applicant	US Digital Media		
Address	1929 W. Lone Cactus Dr., Phoenix, AZ 85027, USA		
Manufacturer	Shenzhen Mercury Innovations Science and Technology Ltd		
Address	3rd Floor, Building A1, XixiangTongFuYu Industrial Park, Bao'an District, Shenzhen, CN		
Product Designation	bag bluetooth speaker		
Brand Name	N/A		
Test Model	LX100		
Series Model	BV200, F2		
Different Description	All the same except for the appearance color.		
Date of test	Jun.03, 2014 to Jun.04, 2014		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF (2013-03-01)		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By

Water Zuo Jun.05, 2014

Checked By

Forrest Lei Jun.05, 2014

Authorized By

Solger Zhang Jun.05, 2014

Page 6 of 69

#### 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is "bag bluetooth speaker" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency 2.402 GHz to 2.480GHz				
RF Output Power	-5.45dBm(Max)			
Bluetooth Version	V 2.1+EDR			
Modulation	GFSK, π /4-DQPSK, 8DPSK			
Number of channels	79			
Hardware Version	REV:04 edition			
Software Version	Mifa_F2_EN_1211_05			
Antenna Designation	PCB Antenna			
Antenna Gain	0dBi			
Power Supply DC3.7V by Battery				
Note: The USB port only used for charging and can't be used to transfer data with PC.				

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	÷	:	
	38	2440 MHZ	
2402~2480MHZ	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

Page 7 of 69

#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 69

## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ACDATRACKER** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Test has been referenced to the DA 00-705.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 69

## 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

#### Note:


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 10 of 69

## **5. SYSTEM TEST CONFIGURATION**

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



## 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	bag bluetooth speaker	N/A	LX100	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E

### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Page 11 of 69

## **6. TEST FACILITY**

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.		

## **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/17/2013	07/16/2014
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/17/2013	07/16/2014
Amplifier	EM	EM30180	0607030	02/28/2014	02/27/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/17/2013	07/16/2014
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/17/2013	07/16/2014
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/07/2013	06/06/2014
LISN	R&S	ESH3-Z5	8389791009	07/17/2013	07/16/2014
Loop Antenna	Daze	ZN30900N	SEL0097	07/17/2013	07/16/2014
Isolation Transformer	LETEAC	LTBK		07/17/2013	07/16/2014
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 12 of 69

#### 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 4. Record the maximum power from the Spectrum Analyzer.


#### For average power test:

- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 125mW (21dBm).


**Note**: The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.

### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### **PEAK POWER TEST SETUP**

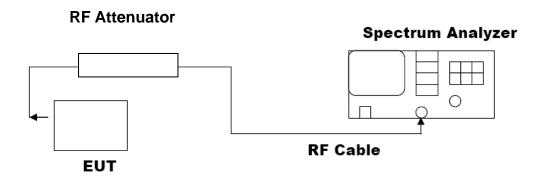


#### **AVERAGE POWER SETUP**




Page 13 of 69

#### 7.3. LIMITS AND MEASUREMENT RESULT


	PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION						
Frequency (GHz) Average Power (dBm) Peak Power Applicable Limits (dBm) Pass or Fail							
2.402	-7.37	-5.45	21	Pass			
2.441	-7.79	-5.84	21	Pass			
2.480	-7.68	-5.72	21	Pass			

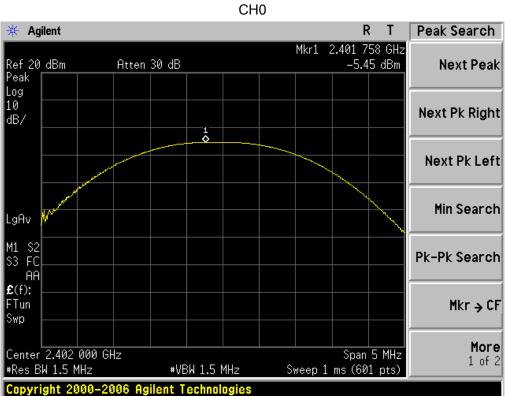

**CH39** 

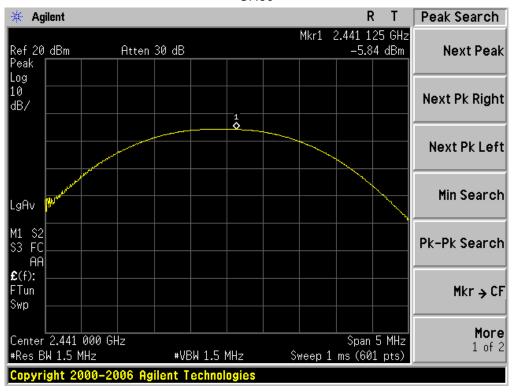


**CH78** 

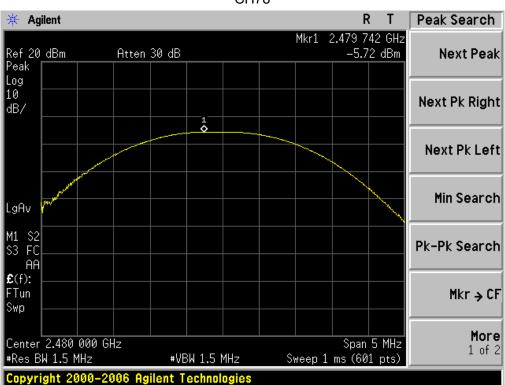


Report No.: AGC01819140501FE03 Page 15 of 69

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Ⅲ /4-DQPSK MODULATION								
Frequency (GHz)  Average Power (dBm)  Peak Power Applicable Limits (dBm)  Pass or Fail								
2.402	-7.74	-5.89	21	Pass				
2.441	-8	-6.06	21	Pass				
2.480	-7.71	-5.75	21	Pass				


CH<sub>0</sub>

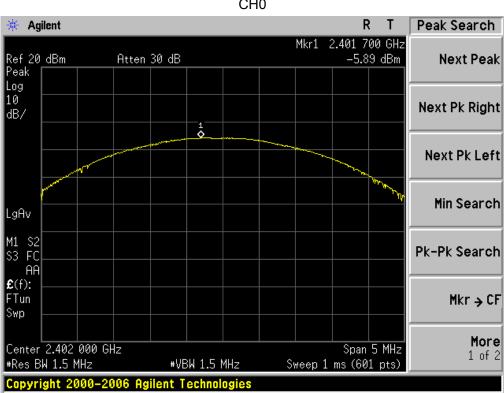

**CH39** 

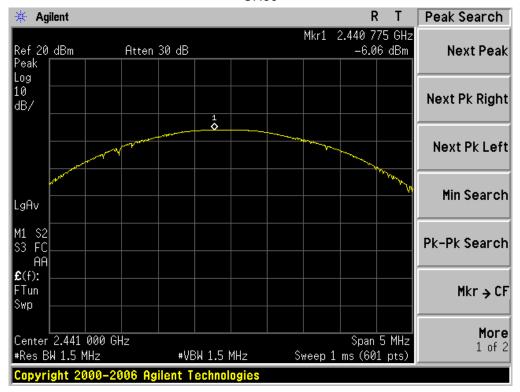


**CH78** 

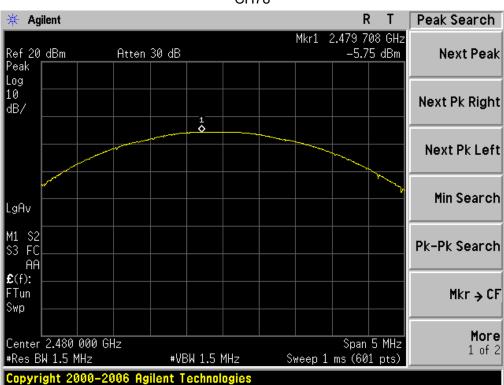


Report No.: AGC01819140501FE03 Page 17 of 69

PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION								
Frequency (GHz)  Average Power (dBm)  Peak Power Applicable Limits (dBm)  Pass or Fail								
2.402	-7.87	-5.92	21	Pass				
2.441	-7.86	-6.02	21	Pass				
2.480	-7.64	-5.73	21	Pass				


CH0

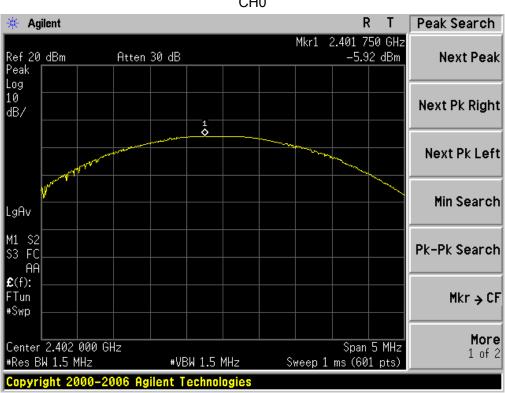

**CH39** 

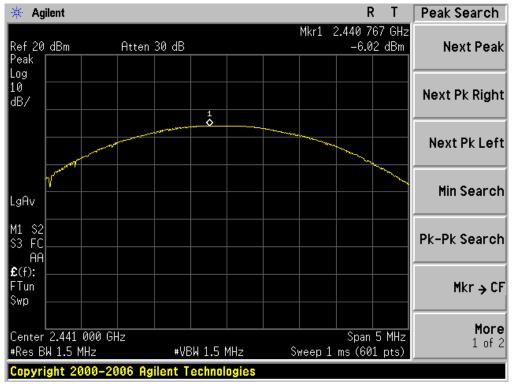

#### **CH78**

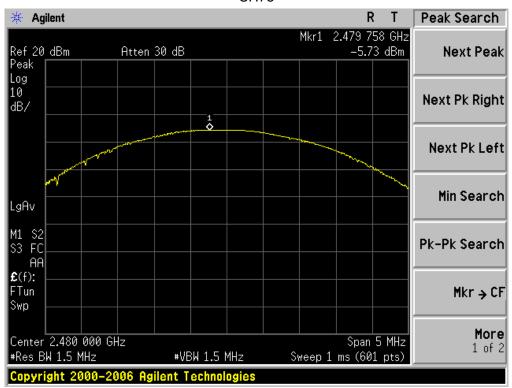


Page 19 of 69

## 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

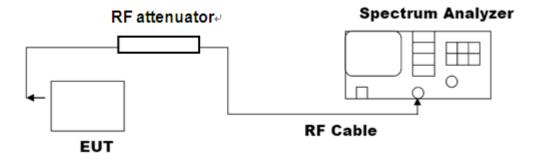

#### 8.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL						
Applicable Limite	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	0.867	PASS			
N/A	Middle Channel	0.837	PASS			
	High Channel	0.828	PASS			

Page 20 of 69

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

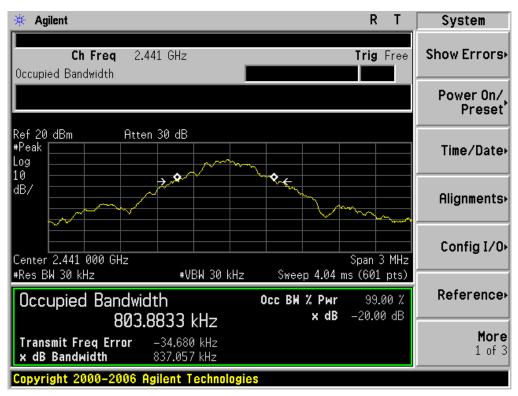

Page 21 of 69

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

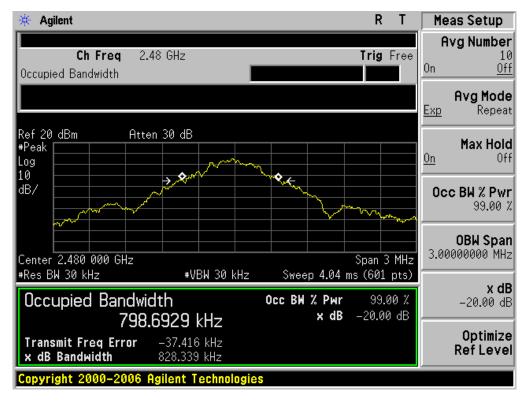

Report No.: AGC01819140501FE03 Page 22 of 69

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL						
Applicable Limite	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	1.160	PASS			
N/A	Middle Channel	1.164	PASS			
	High Channel	1.169	PASS			

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 23 of 69

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

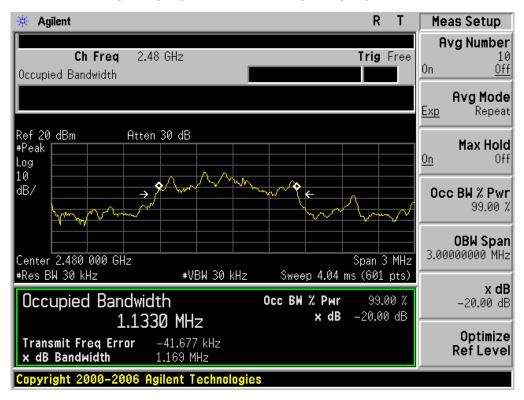

Report No.: AGC01819140501FE03 Page 24 of 69


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL						
Amaliachla Limita	Measurement Result					
Applicable Limits	Test Da	Criteria				
	Low Channel	1.182	PASS			
N/A	Middle Channel	1.182	PASS			
	High Channel	1.156	PASS			

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 25 of 69

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

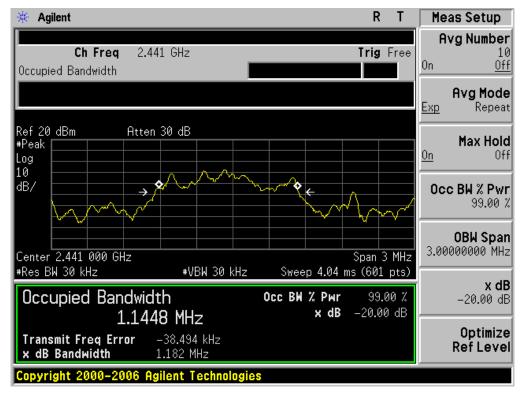

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

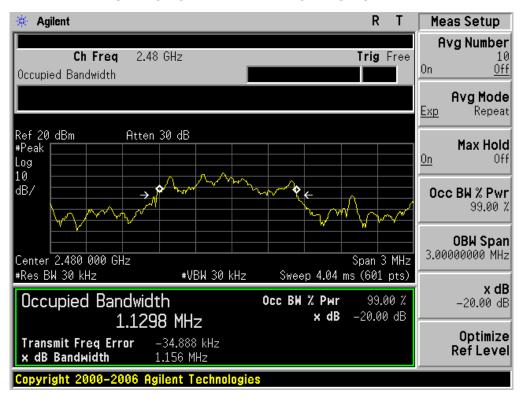

Page 26 of 69

## 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.

  RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

## 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT							
Amulia abla Limita	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit						
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS					
intentional radiator is operating, the radio frequency	Channel						
power that is produce by the intentional radiator							
shall be at least 20 dB below that in 100KHz							
bandwidth within the band that contains the highest							
level of the desired power.	At least -20dBc than the limit	DACC					
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS					
restricted bands, as defined in §15.205(a), must also							
comply with the radiated emission limits specified							
in§15.209(a))							

Page 27 of 69


## TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

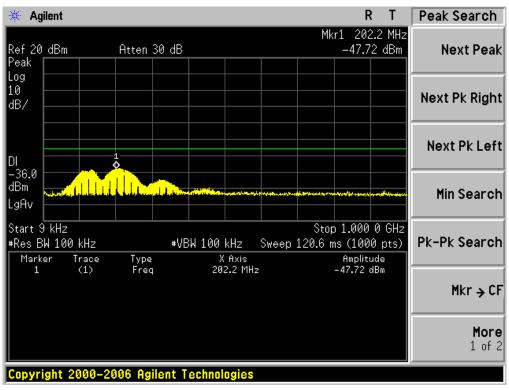


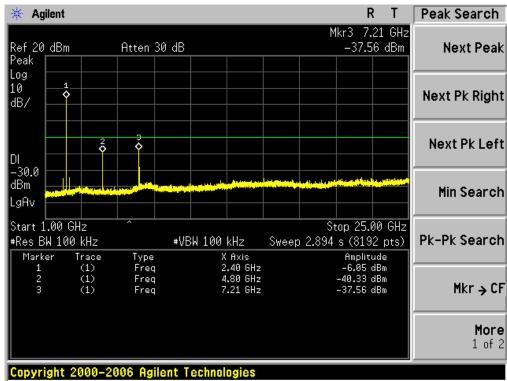

Page 28 of 69


## TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

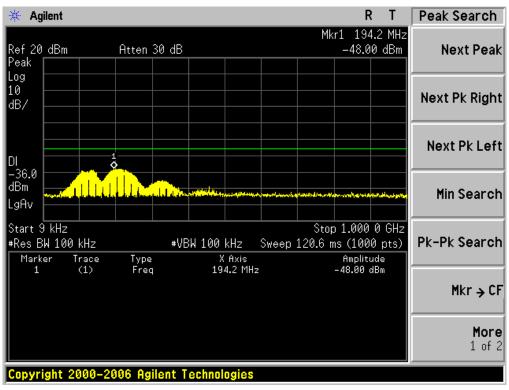


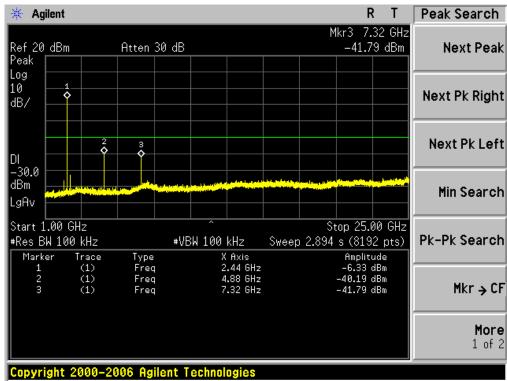

Page 29 of 69

## TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

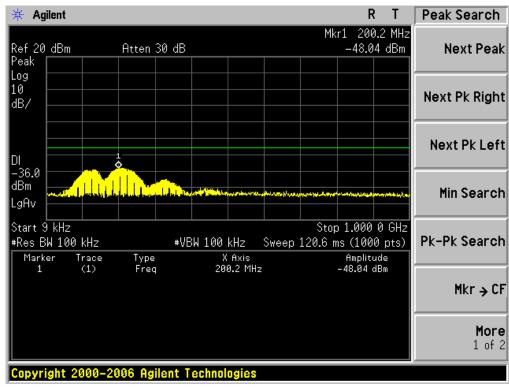

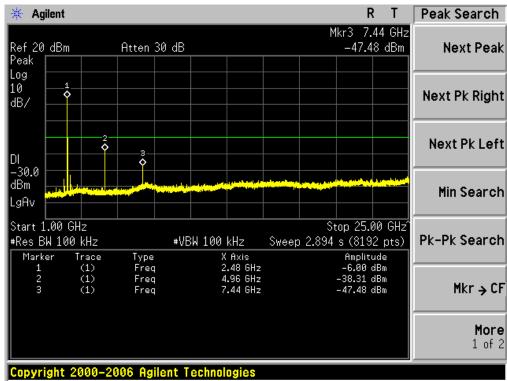

Page 30 of 69

#### 10. RADIATED EMISSION

#### **10.1. MEASUREMENT PROCEDURE**

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC01819140501FE03 Page 31 of 69

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 32 of 69

#### 10.2. TEST SETUP

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

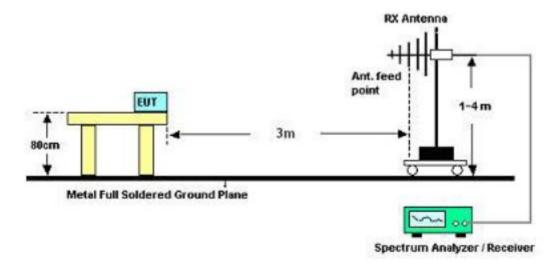

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

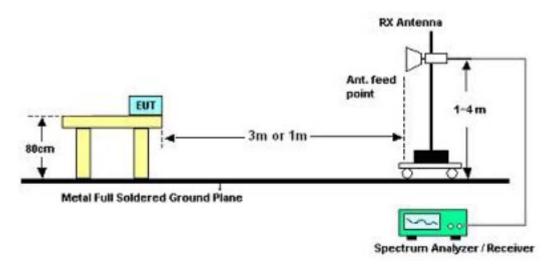

Page 33 of 69


## 10.3. TEST RESULT(Worst case:GFSK)

## **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

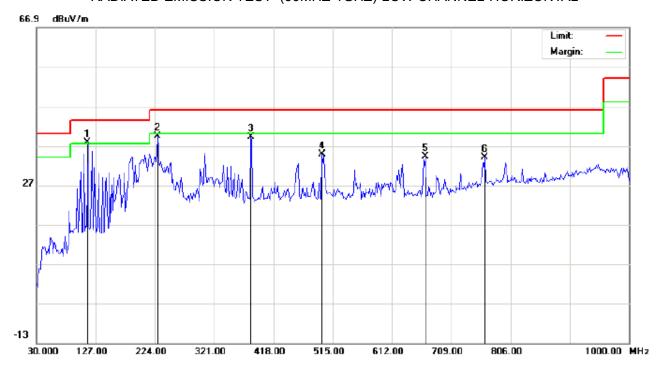

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:Low Channel TX

Note:

Polarization:	Horizontal	Temperature: 26
Power:		Humidity: 60 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	114.0666	26.35	11.45	37.80	43.50	-5.70	peak			
2		228.8499	26.30	13.10	39.40	46.00	-6.60	peak			
3		380.8167	20.32	18.94	39.26	46.00	-6.74	peak			
4		497.2167	13.67	21.10	34.77	46.00	-11.23	peak			
5		666.9666	9.85	24.30	34.15	46.00	-11.85	peak			
6		763.9666	7.17	26.82	33.99	46.00	-12.01	peak		·	

**RESULT: PASS** 

Humidity: 60 %

Page 34 of 69

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

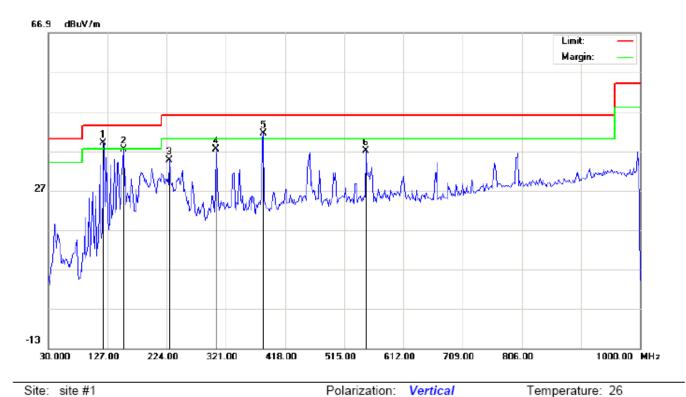

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB	dB	cm	degree	
1	*	120.5332	31.89	7.08	38.97	43.50	-4.53	peak			
2		152.8667	22.13	15.28	37.41	43.50	-6.09	peak			
3		228.8499	22.76	11.83	34.59	46.00	-11.41	peak			
4		304.8333	21.61	15.73	37.34	46.00	-8.66	peak			
5	ļ	382.4332	22.40	18.95	41.35	46.00	-4.65	peak			
6		550 5666	14 50	22.48	37.07	46.00	8 03	noak			

Power:

Distance:


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 35 of 69

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

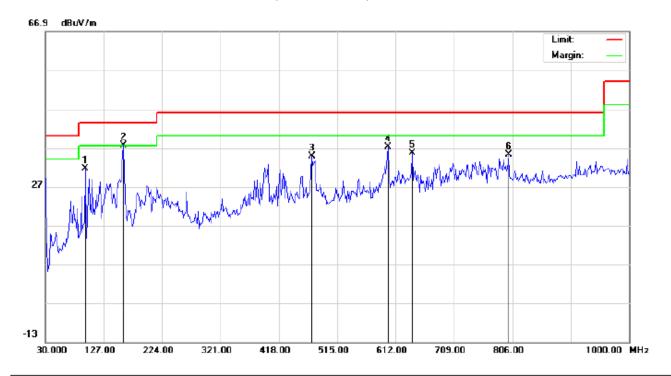

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:Middle Channel TX

Note:

Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %


Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu√/m	dB		cm	degree	
1		96.2833	21.59	10.07	31.66	43.50	-11.84	peak			
2	*	159.3333	22.27	15.33	37.60	43.50	-5.90	peak			
3		472.9667	13.97	20.84	34.81	46.00	-11.19	peak			
4		599.0667	13.58	23.71	37.29	46.00	-8.71	peak			
5		639.4833	11.81	23.82	35.63	46.00	-10.37	peak			
6		799.5333	7.86	27.31	35.17	46.00	-10.83	peak			

**RESULT: PASS** 

Page 36 of 69

## RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

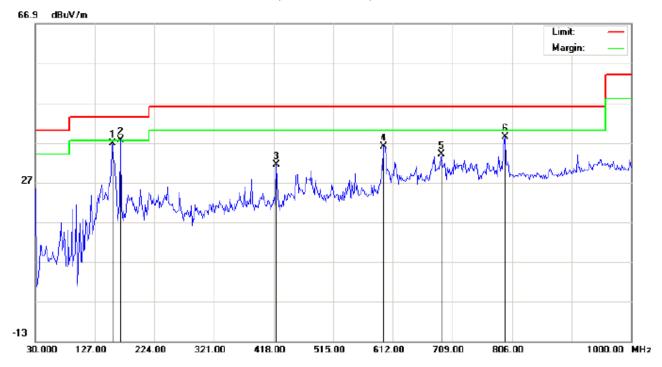

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:Middle Channel TX

Note:

Polarization:	Vertical	Temperature: 26
Power:		Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		156.1000	21.44	15.30	36.74	43.50	-6.76	peak			
2	*	169.0333	22.88	14.76	37.64	43.50	-5.86	peak			
3		422.8500	11.62	19.76	31.38	46.00	-14.62	peak			
4		597.4500	13.32	22.72	36.04	46.00	-9.96	peak			
5		691.2167	9.13	24.95	34.08	46.00	-11.92	peak			
6		794.6833	11.13	27.25	38.38	46.00	-7.62	peak			


#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 37 of 69

### RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

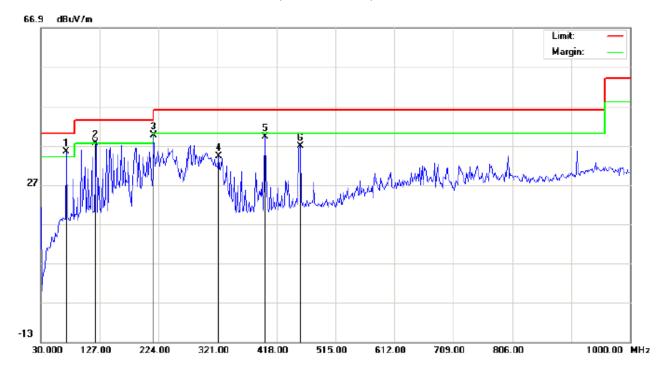

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:High Channel TX

Note:


Polarization:	Horizontal	Temperatu	ire: 26
Power:		Humidity:	60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	İ	72.0332	25.29	10.17	35.46	40.00	-4.54	peak			
2	ļ	120.5332	25.72	11.95	37.67	43.50	-5.83	peak			
3	*	215.9166	26.91	12.60	39.51	43.50	-3.99	peak			
4		322.6166	17.19	16.92	34.11	46.00	-11.89	peak			
5		398.6000	20.14	19.06	39.20	46.00	-6.80	peak			
6		456.8000	16.10	20.66	36.76	46.00	-9.24	peak		·	

Page 38 of 69

### RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

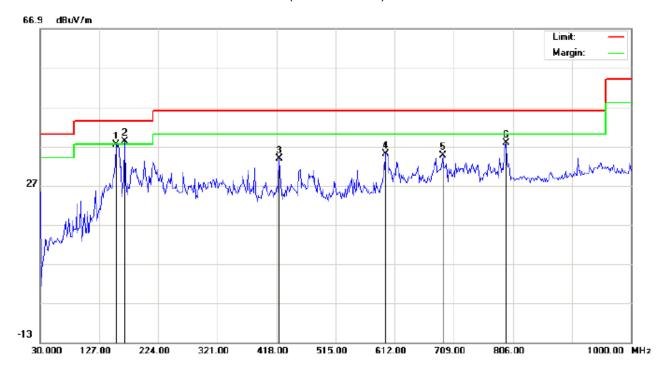

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:bag bluetooth speaker

M/N:LX100

Mode:High Channel TX

Note:

Polarization:	Vertical	Temperatu	ire: 26
Power:		Humidity:	60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		154.4833	22.06	15.29	37.35	43.50	-6.15	peak			
2	*	169.0332	23.38	14.76	38.14	43.50	-5.36	peak			
3		422.8500	14.12	19.76	33.88	46.00	-12.12	peak			
4		597.4500	12.32	22.72	35.04	46.00	-10.96	peak			
5		691.2166	9.63	24.95	34.58	46.00	-11.42	peak			
6		794.6833	10.63	27.25	37.88	46.00	-8.12	peak			

### **RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement systemRADIATED

Page 39 of 69

### **RADIATED EMISSION ABOVE 1GHZ**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL-HORIZONTAL

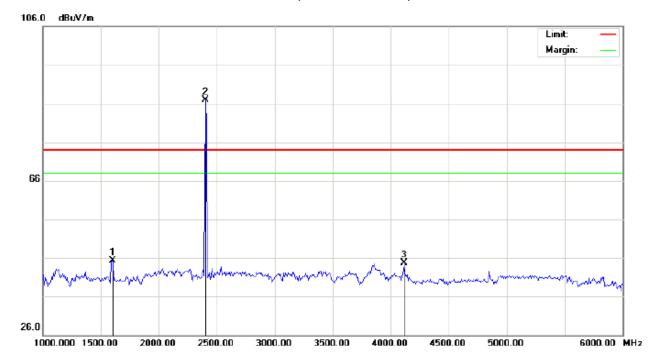

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:bag bluetooth speaker Distance:

M/N:LX100

Mode: Low Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		1600.000	39.66	5.67	45.33	74.00	-28.67	peak			
2	*	2402.000	76.57	10.32	86.89	74.00	12.89	peak			
3		4116.667	31.47	13.25	44.72	74.00	-29.28	peak			

Temperature: 26

Humidity: 60 %

Page 40 of 69

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL -VERTICAL

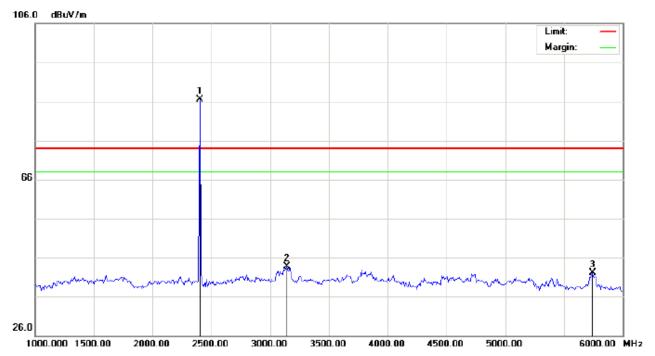

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT:bag bluetooth speaker

M/N:LX100

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2402.000	76.20	10.32	86.52	74.00	12.52	peak			
2		3141.667	31.86	11.77	43.63	74.00	-30.37	peak			
3		5741.667	43.87	-1.70	42.17	74.00	-31.83	peak			


Power:

Distance:

Polarization: Vertical

Page 41 of 69

## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-MIDDLE CHANNEL-HORIZONTAL

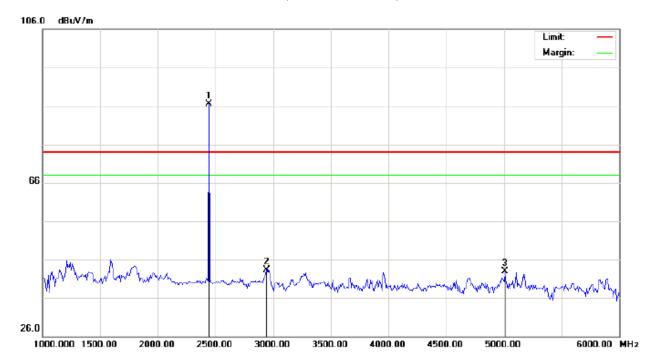

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:bag bluetooth speaker Distance:

M/N:LX100


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2441.667	76.10	10.37	86.47	74.00	12.47	peak			
2		2941.667	31.85	11.50	43.35	74.00	-30.65	peak			
3		5008.333	34.78	8.03	42.81	74.00	-31.19	peak			

Page 42 of 69

## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) - MIDDLE CHANNEL -VERTICAL

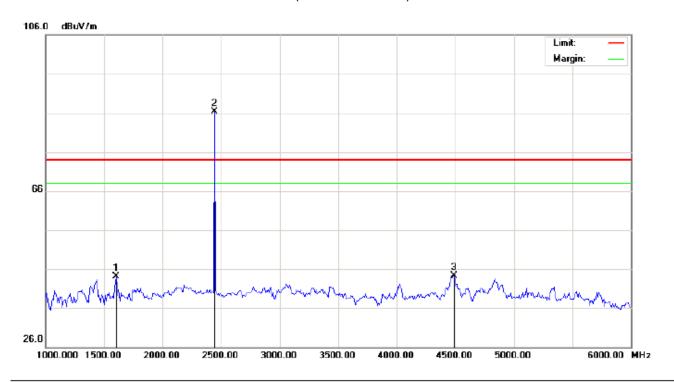

Site: site #1 Temperature: 26 Polarization: Vertical Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:bag bluetooth speaker

Distance:

M/N:LX100


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1600.000	38.36	5.67	44.03	74.00	-29.97	peak			
2	*	2441.667	75.90	10.37	86.27	74.00	12.27	peak			
3		4491.667	37.21	7.03	44.24	74.00	-29.76	peak			

Page 43 of 69

## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL-HORIZONTAL

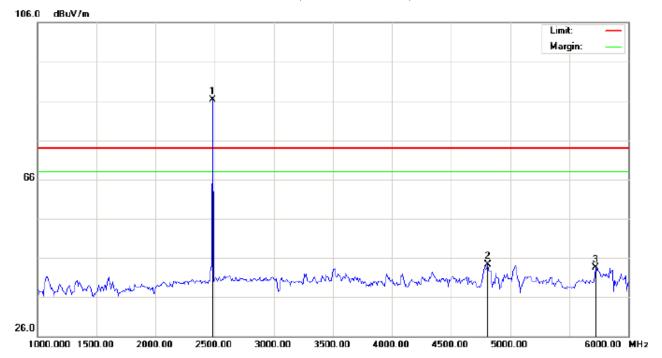

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:bag bluetooth speaker

M/N:LX100

Mode: High Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.89	10.41	86.30	74.00	12.30	peak			
2		4808.333	36.52	7.70	44.22	74.00	-29.78	peak			
3		5725.000	45.12	-1.71	43.41	74.00	-30.59	peak			

Distance:

Page 44 of 69

## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL -VERTICAL

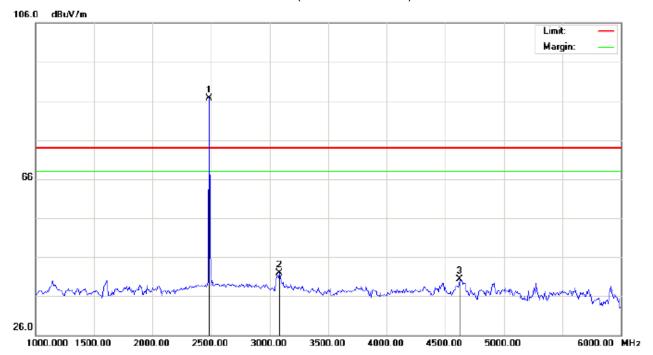

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:bag bluetooth speaker

Distance:

M/N:LX100

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	76.26	10.41	86.67	74.00	12.67	peak			
2		3083.333	30.13	11.72	41.85	74.00	-32.15	peak			
3		4625.000	33.14	7.22	40.36	74.00	-33.64	peak			

#### **RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 45 of 69

### 11. BAND EDGE EMISSION

### 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.


### **11.2. TEST SET-UP**

Radiated same as 10.2

Page 46 of 69

#### 11.3. TEST RESULT

### TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Horizontal

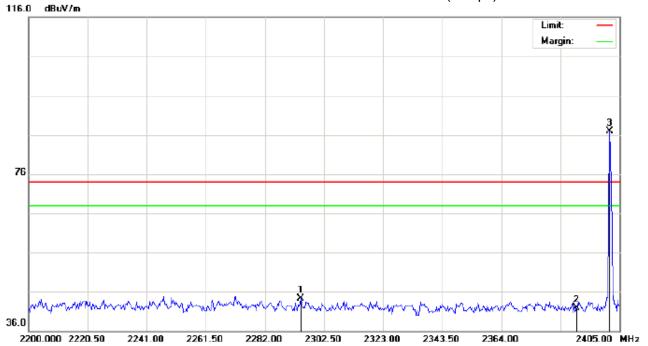

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: bag bluetooth speaker Distance:

M/N: LX100


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2294.300	34.18	10.20	44.38	74.00	-29.62	peak			
2		2390.000	31.62	10.31	41.93	74.00	-32.07	peak			
3	*	2402.000	76.49	10.32	86.81	74.00	12.81	peak			

Page 47 of 69

### TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Vertical

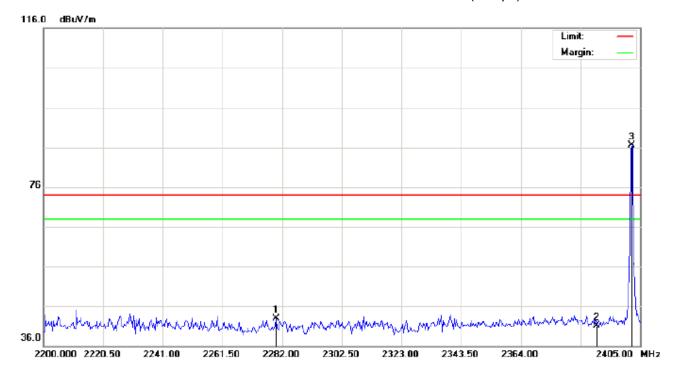

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: bag bluetooth speaker Distance:

M/N: LX100


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2279.950	32.77	10.19	42.96	74.00	-31.04	peak			
2		2390.000	30.85	10.31	41.16	74.00	-32.84	peak			
3	*	2402.000	76.26	10.32	86.58	74.00	12.58	peak			

Page 48 of 69

### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Horizontal

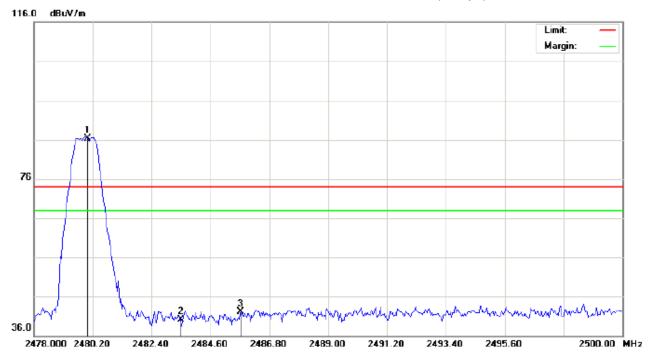

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: bag bluetooth speaker Distance:

M/N: LX100


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.96	10.41	86.37	74.00	12.37	peak			
2		2483.500	29.75	10.41	40.16	74.00	-33.84	peak			
3		2485.737	31.63	10.41	42.04	74.00	-31.96	peak			

Page 49 of 69

### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Vertical

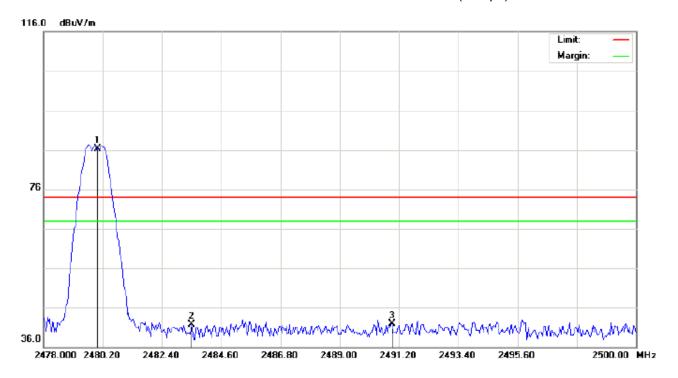

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: bag bluetooth speaker Distance:

M/N: LX100

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.85	10.41	86.26	74.00	12.26	peak			
2		2483.500	31.37	10.41	41.78	74.00	-32.22	peak			
3		2490.943	31.39	10.42	41.81	74.00	-32.19	peak			

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Hopping on and hopping off mode have been tested and only worst case record.

Page 50 of 69

#### 12. NUMBER OF HOPPING FREQUENCY

#### 12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

### 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

#### TEST PLOT FOR NO. OF TOTAL CHANNELS

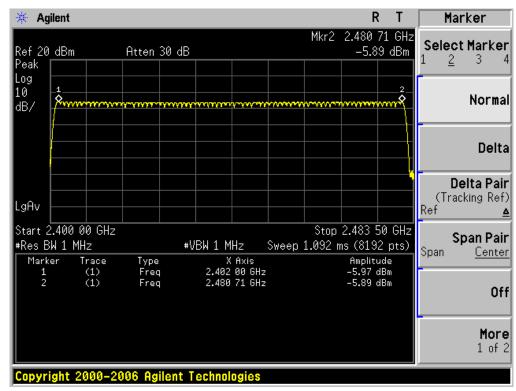

Page 51 of 69

### 13. TIME OF OCCUPANCY (DWELL TIME)

#### 13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 13.4. LIMITS AND MEASUREMENT RESULT


#### The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.931	31.6	312.64	400
Middle	2.931	31.6	312.64	400
High	2.931	31.6	312.64	400


Low Channel Time 2.931\*(1600/6)/79\*31.6=312.64ms Middle Channel Time 2.931\*(1600/6)/79\*31.6=312.64ms High Channel Time 2.931\*(1600/6)/79\*31.6=312.64ms

Page 52 of 69

#### TEST PLOT OF LOW CHANNEL

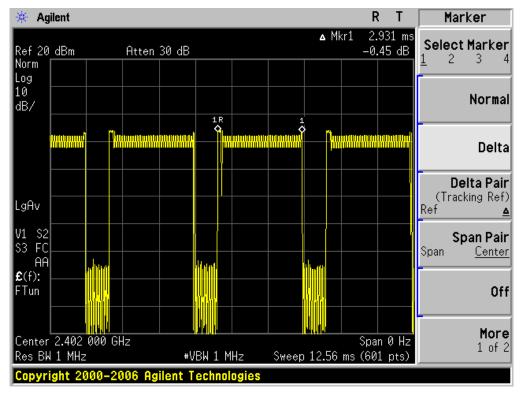


#### TEST PLOT OF MIDDLE CHANNEL

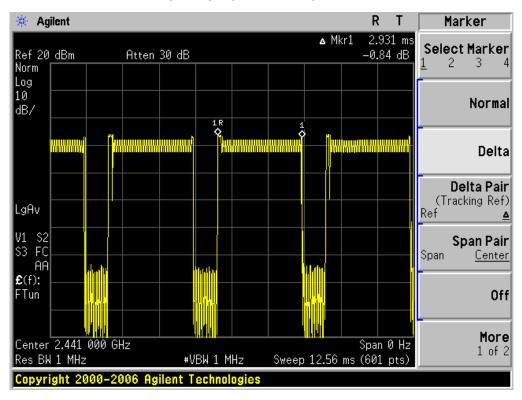

Page 53 of 69

#### TEST PLOT OF HIGH CHANNEL

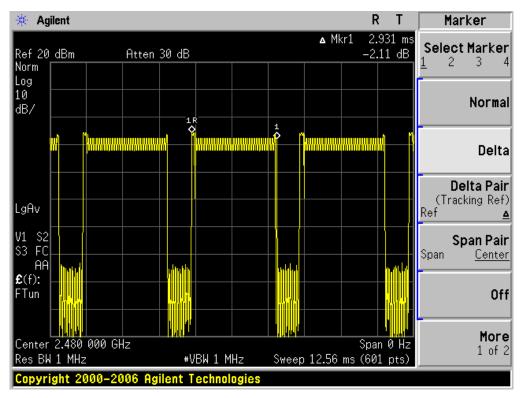

Page 54 of 69

### 14. FREQUENCY SEPARATION

#### 14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

### 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

#### 14.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

#### 14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	Dana
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass

Page 55 of 69

#### TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

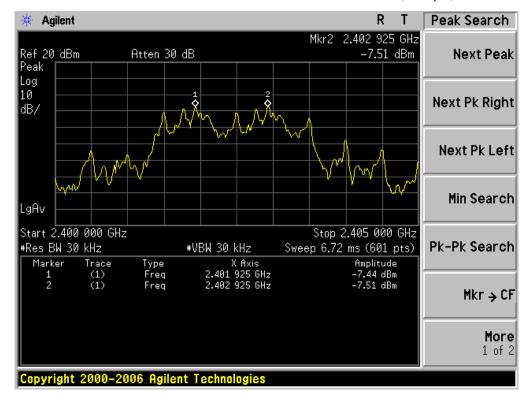

Page 56 of 69

### 15. FCC LINE CONDUCTED EMISSION TEST


#### 15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

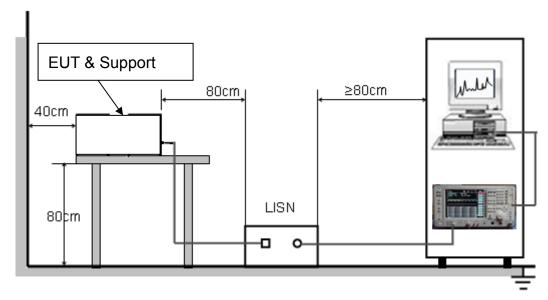

Page 57 of 69

#### 15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 58 of 69

### 15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

### Line Conducted Emission Test Line 1-L

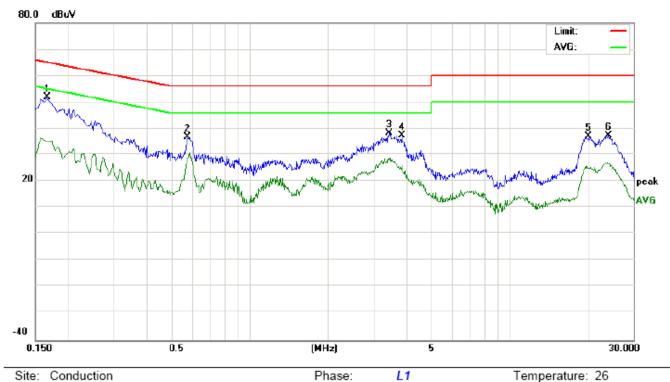

Site: Conduction

Limit: FCC Class B Conduction(QP)

EUT:bag bluetooth speaker

M/N:LX100

Mode:Normal operation

Note:


No.	Freq. (MHz)	Reading_Level (dBuV)		Correct Factor	Measurement (dBuV)					Margin (dB)		P/F	Comment	
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	41.66		24.79	10.18	51.84		34.97	65.15	55.15	-13.31	-20.18	Р	
2	0.5780	26.73		18.39	10.33	37.06		28.72	56.00	46.00	-18.94	-17.28	Р	
3	3.4500	27.92		18.12	10.51	38.43		28.63	56.00	46.00	-17.57	-17.37	Р	
4	3.8420	27.20		15.36	10.46	37.66		25.82	56.00	46.00	-18.34	-20.18	Р	
5	20.0860	27.26		14.77	10.11	37.37		24.88	60.00	50.00	-22.63	-25.12	Р	
6	24.0260	27.36		16.59	10.11	37.47		26.70	60.00	50.00	-22.53	-23.30	Р	

Power:

Humidity: 60 %

Page 59 of 69

### Line Conducted Emission Test Line 2-N

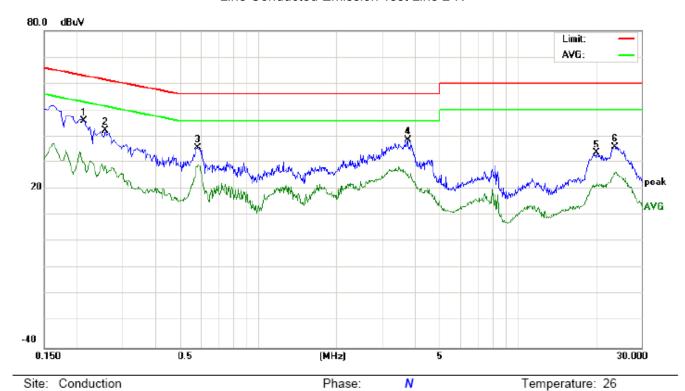

Limit: FCC Class B Conduction(QP)

EUT:bag bluetooth speaker

M/N:LX100

Mode:Normal operation

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)						Margin (dB)		Comment
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	P/F	
1	0.2140	40.27		21.39	10.23	50.50		31.62	63.04	53.04	-12.54	-21.42	Р	
2	0.2580	31.95		18.59	10.27	42.22		28.86	61.49	51.49	-19.27	-22.63	Р	
3	0.5860	25.33		18.35	10.32	35.65		28.67	56.00	46.00	-20.35	-17.33	Р	
4	3.7780	28.22		15.08	10.47	38.69		25.55	56.00	46.00	-17.31	-20.45	Р	
5	20.2060	23.60		12.11	10.11	33.71		22.22	60.00	50.00	-26.29	-27.78	Р	
6	23.7220	26.03		15.57	10.11	36.14		25.68	60.00	50.00	-23.86	-24.32	Р	

Power:


Page 60 of 69

## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

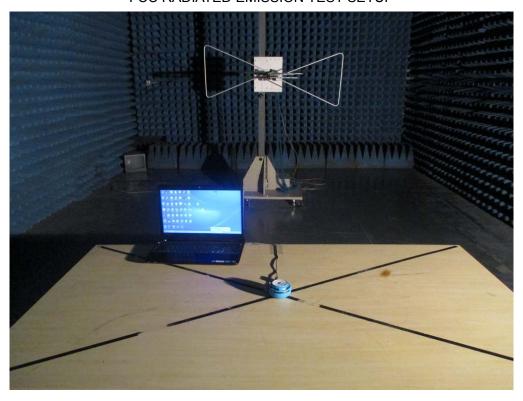




Page 62 of 69

### **APPENDIX B: PHOTOGRAPHS OF EUT**

ALL VIEW OF EUT



TOP VIEW OF EUT

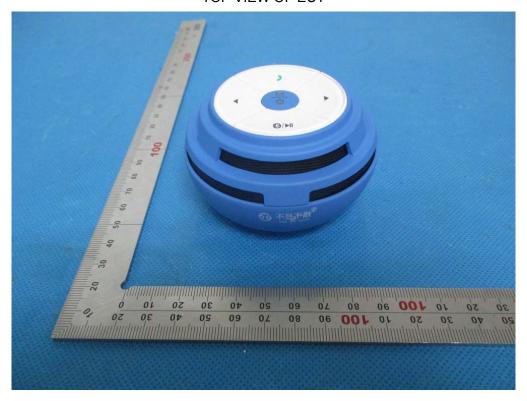

**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



**BACK VIEW OF EUT** 




**LEFT VIEW OF EUT** 



RIGHT VIEW OF EUT



**OPEN VIEW OF EUT-1** 

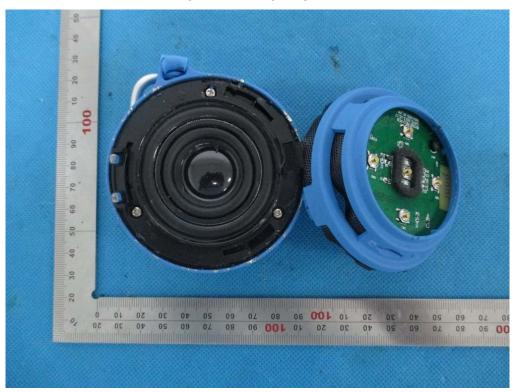


Page 66 of 69


**OPEN VIEW OF EUT-2** 




**OPEN VIEW OF EUT-3** 

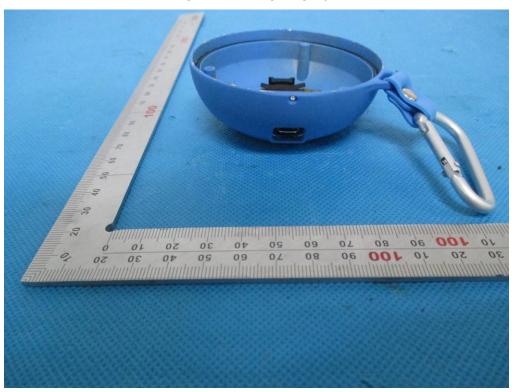


**INTERNAL VIEW OF EUT-1** 

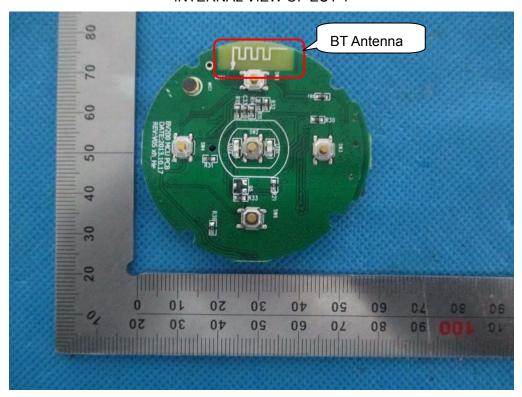


**INTERNAL VIEW OF EUT-2** 

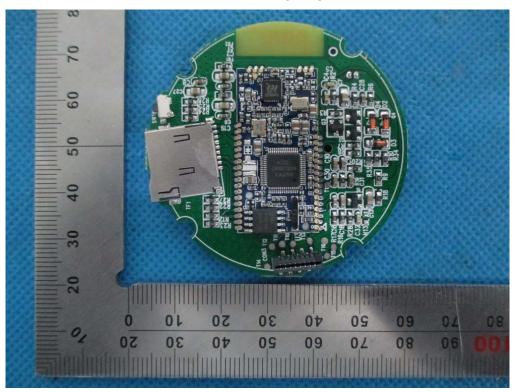


**INTERNAL VIEW OF EUT-3** 

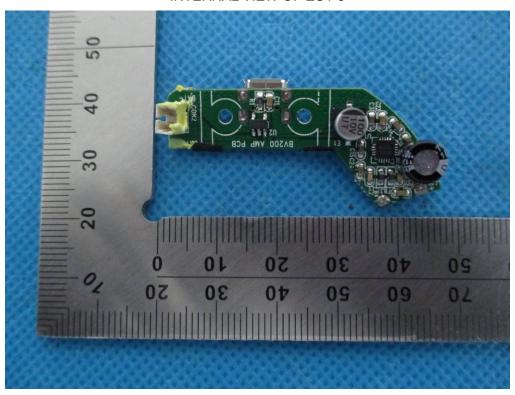


**INTERNAL VIEW OF EUT-4** 

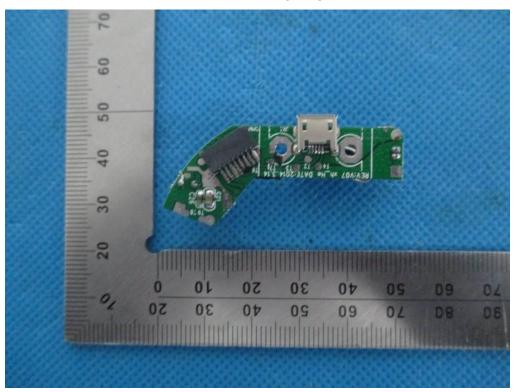

**INTERNAL VIEW OF EUT-5** 

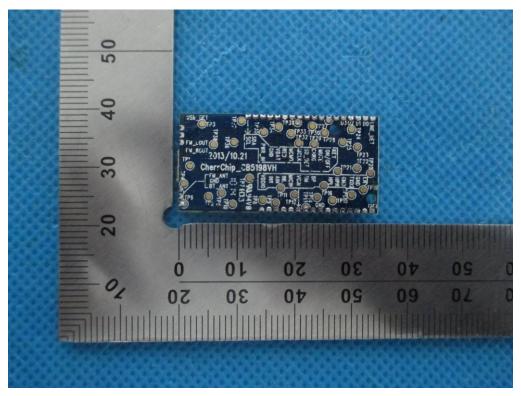

**INTERNAL VIEW OF EUT-6** 

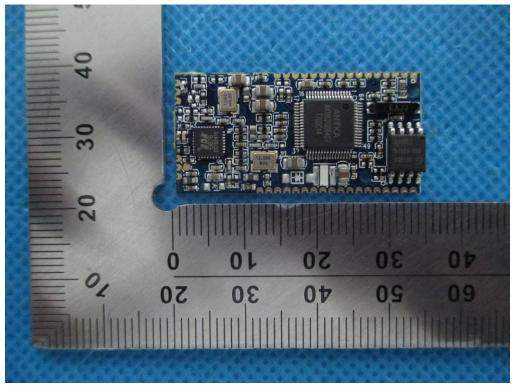

----END OF REPORT----