







ISO/IEC17025Accredited Lab.

Report No: FCC 1406125-03 File reference No: 2014-06-17

Applicant: Welgate Co.,Ltd

Product: U Stick (Mini PC)

Model No: WA-U420D, WA-U220D

Trademark: N/A

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4,FCC Part 15 Subpart C, Paragraph 15.407 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 17, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1406125-03 Page 2 of 73

Date: 2014-06-17



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 73

Report No: 1406125-03

Date: 2014-06-17



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Undesirable Emission and Restrict band.	13
7.0	26dB bandwidth Measurement.	29
8.0	Peak Transmit Power Measurement.	37
9.0	Peak Power Spectral Density Measurement	39
10.0	Peak Power Excursion Measurement.	47
11.0	Frequency Stability	55
12.0	Antenna Requirement.	62
13.0	FCC ID Label.	63
14.0	Photo of Test Setup and EUT View.	64

Date: 2014-06-17



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Welgate Co.,Ltd

Address: 19F, Geopyeong Bldg, 129, Bongeunsa-ro, Gangnam-gu, Seoul, 135-726, Korea

Telephone: +82-2-3471-4181

Fax: --

1.3 Description of EUT

Product: U Stick (Mini PC)

Manufacturer: ShenZhen Netxeon Technology Co.,Ltd

Address: Unit 708,7/F West, Building 202 Tai Ran Industrial Park, Chegongmiao,

Shenzhen, China

Brand Name: N/A
Additional Brand Name: N/A

Model Number: WA-U420D

Additional Model Number: WA-U220D

Type of Modulation IEEE 802.11a : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency 5180MHz, 5200MHz, 5220MHz, 5240MHz;

5745MHz, 5765MHz, 5785MHz, 5805MHz

Air Data Rate IEEE 802.11a: 54, 48,36, 24, 18, 12, 9, 6 Mbps

Antenna: Integral antennas used.

Antenna Gain: Maximum 2.5dBi for 5G band

Test Mode: 5180MHz, 5200MHz, 5240MHz, 5745MHz, 5765MHz, 5805MHz, was tested. And

6Mbps air data rate was the worse case. During testing, EUT was set to 100% duty

cycle.

Frequency Selection By software

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1406125-03 Page 5 of 73

草 TIMEWAY TESTING LABS

Power Supply: Model No.1: K-E70501000U1

Input: 100-240V, 50/60Hz, 0.15A Max; Output: 5V, 1000mA

Model No.2: K-E30502000U1

Input: 100-240V, 50/60Hz, 0.35A Max; Output: 5V, 2000mA

Model No.3: SK21G-0500200U

Input: AC100-240V, 50/60Hz, 0.4A Max; Output: 5V, 2A

Input Voltage: DC5V

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

Date: 2014-06-17

2014-05-29 to 2014-06-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 73

Report No: 1406125-03

Date: 2014-06-17



2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22	
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24	
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22	
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23	
System Controller	CT	SC100	-			
Printer	EPSON	РНОТО ЕХЗ	CFNH234850			
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-	
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22	
3m OATS			N/A	2013-08-22	2014-08-21	
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23	
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23	
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23	
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-24	2014-08-23	
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22	
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22	
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21	
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22	

Report No: 1406125-03 Page 7 of 73

25-03

2.1 Auxiliary Equipment

Date: 2014-06-17

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
TF Card			Kingston		
Passive Earphone					
LCD Monitor	PH2450		SAMSUNG		DOC

Report No: 1406125-03 Page 8 of 73

Date: 2014-06-17



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested ac	ecording to the following speci	ifications:	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.407	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart E Paragraph 15.407 (b1/4/5/6/7), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	PASS	Complies
FCC Part 15, Paragraph 15.407 (a1/2/3)	Peak Transmit Power	PASS	Complies
FCC Part 15, Paragraph 15.407 (a)(6)	Peak Power Excursion	PASS	Complies
FCC Part 15, Paragraph 15.407 (a/1/2/3)	Peak Power Spectral Density	PASS	Complies
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart E, Paragraph 15.407

4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Page 9 of 73

Report No: 1406125-03 Date: 2014-06-17 TIMEWAY

5. Power Line Conducted Emission Test

5.1 Schematics of the test

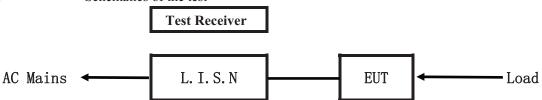


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 50 ohm/50 uH as specified by section 5.1 of ANSI C63.4 -2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

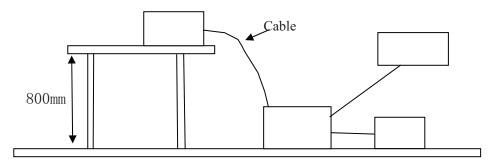

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the

appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC
U Stick (Mini	ShenZhen Netxeon Technology	WA 11420D WA 11220D	FCC ID:
PC)	Co.,Ltd	WA-U420D, WA-U220D	2ACDD-0508

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1406125-03 Page 10 of 73

Date: 2014-06-17



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1406125-03 Page 11 of 73

Date: 2014-06-17



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keeping WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

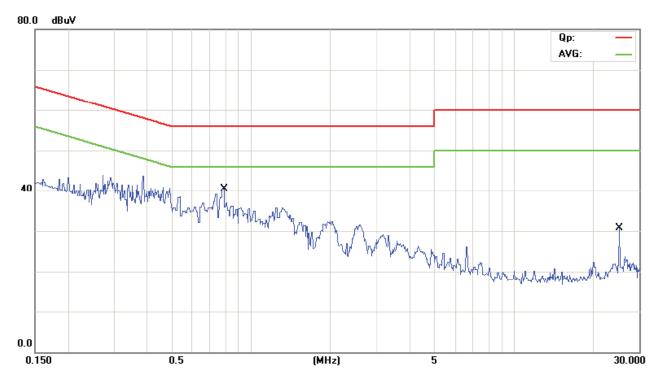

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1 *	0.7813	17.30	11.67	28.97	56.00	-27.03	QP
2	0.7813	-7.40	11.67	4.27	46.00	-41.73	AVG
3	25.1737	19.60	11.40	31.00	60.00	-29.00	QP
4	25.1737	-10.60	11.40	0.80	50.00	-49.20	AVG

Note: Three adaptors was tested, only worst case was recorded

Report No: 1406125-03 Page 12 of 73

Date: 2014-06-17



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keeping WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

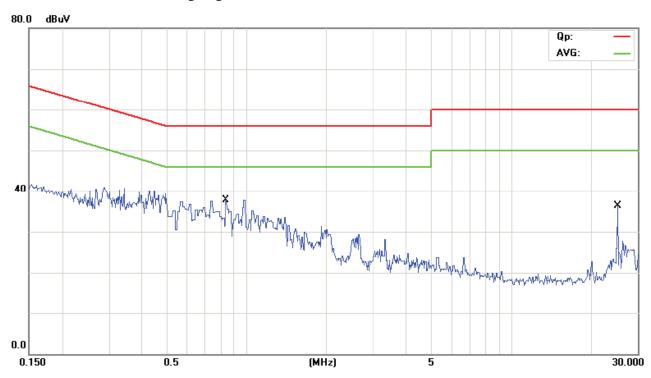

No. Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.8284	11.20	11.72	22.92	56.00	-33.08	QP
2	0.8284	-13.70	11.72	-1.98	46.00	-47.98	AVG
3 *	25.1740	24.90	11.40	36.30	60.00	-23.70	QP
4	25.1740	-12.10	11.40	-0.70	50.00	-50.70	AVG

Note: Three adaptors was tested, only worst case was recorded

Report No: 1406125-03 Page 13 of 73

Date: 2014-06-17




6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector.

 Detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

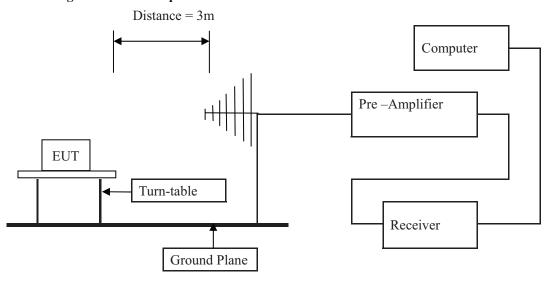

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1406125-03 Page 14 of 73

Date: 2014-06-17



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725- 5.825GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Three adaptors was tested, only worst case was recorded

Report No: 1406125-03 Page 15 of 73

Date: 2014-06-17



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keeping WIFI Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
168.000	34.41	Н	43.50
504.040	37.13	Н	46.00
168.000	30.41	V	43.50
504.000	40.80	V	46.00


Page 16 of 73

Report No: 1406125-03

Date: 2014-06-17



Test Figure:

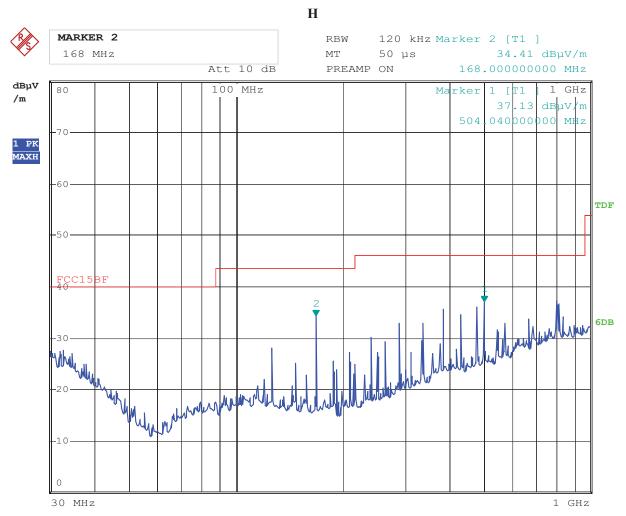


Date: 16.JUN.2014 15:38:41

Report No: 1406125-03 Page 17 of 73

Date: 2014-06-17



Test Figure:

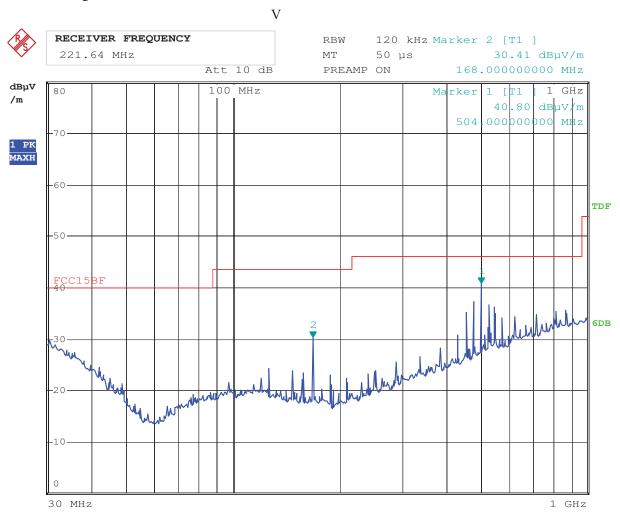

Date: 16.JUN.2014 15:37:52

Report No: 1406125-03 Page 18 of 73

Date: 2014-06-17



Operation Mode: Keep Transmitting mode under CH36 5180MHz 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	1	•	
10360		Н	74(Peak)/ 54(AV)
15540		V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74(Peak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Operation Mode: Keep Transmitting mode under CH40 5200MHz 6Mbps

1			=
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	•	•	
	1	1	•
10400		Н	74(Peak)/ 54(AV)
15600		V	74(Peak)/ 54(AV)
20800		H/V	74(Peak)/ 54(AV)
26000		H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Report No: 1406125-03 Page 19 of 73

Date: 2014-06-17



Operation Mode: Keep Transmitting mode under CH48 5240MHz 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	1		
10480		Н	74(Peak)/ 54(AV)
15720		V	74(Peak)/ 54(AV)
20960		H/V	74(Peak)/ 54(AV)
26200		H/V	74(Peak)/ 54(AV)
31440		H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Operation Mode: Keep Transmitting mode under CH149 5745MHz 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	•	•	1
11490		Н	74(Peak)/ 54(AV)
17235		V	74(Peak)/ 54(AV)
22980		H/V	74(Peak)/ 54(AV)
28725		H/V	74(Peak)/ 54(AV)
34470		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Report No: 1406125-03 Page 20 of 73

Date: 2014-06-17



Operation Mode: Keep Transmitting under CH153 5765MHz 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)	
	1			
11530		Н	74(Peak)/ 54(AV)	
17295		V	74(Peak)/ 54(AV)	
23060		H/V	74(Peak)/ 54(AV)	
28825		H/V	74(Peak)/ 54(AV)	
34590		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11a mode 6Mbps

Operation Mode: Keep Transmitting under CH161 5805MHz 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	1	•	
11610		Н	74(Peak)/ 54(AV)
17415		V	74(Peak)/ 54(AV)
23220		H/V	74(Peak)/ 54(AV)
29025		H/V	74(Peak)/ 54(AV)
34830		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps


Date: 2014-06-17



Please refer to the following test plots for details:


CH36 for 11g at 6Mbps: Horizontal

.__ .

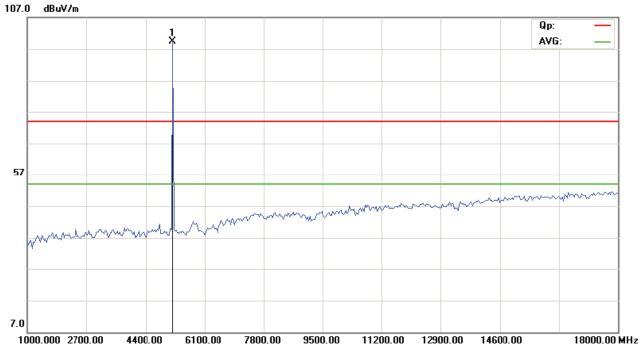

CH36 for 11g at 6Mbps: Vertical

107.0 dBuV/m

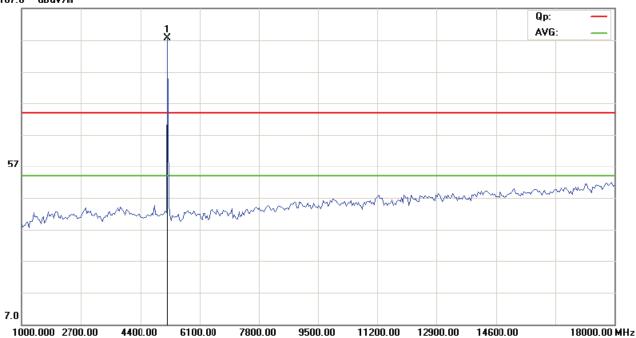

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 22 of 73

Report No: 1406125-03

Date: 2014-06-17



CH40 for 11g at 6Mbps: Vertical

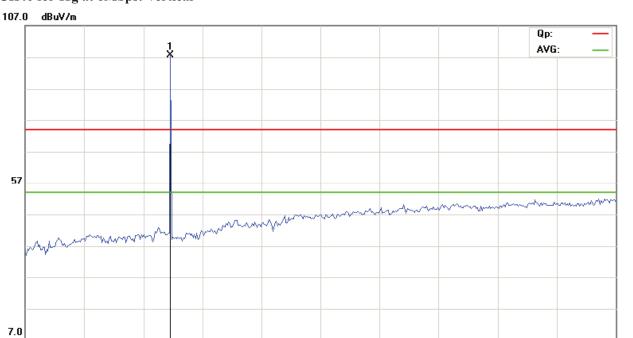

9500.00

12900.00

11200.00

14600.00

18000.00 MHz


CH40 for 11g at 6Mbps: Horizontal

4400.00

6100.00

7800.00

1000.000 2700.00

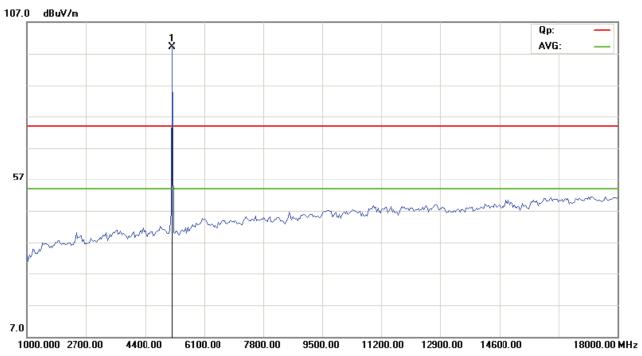

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 23 of 73

Report No: 1406125-03


Date: 2014-06-17



CH48 for 11g at 6Mbps: Vertical

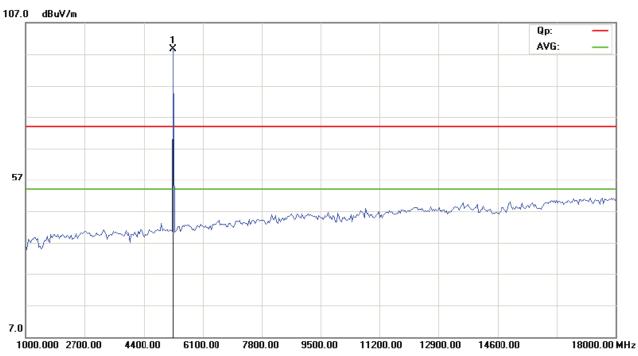

CH48 for 11g at 6Mbps: Horizontal

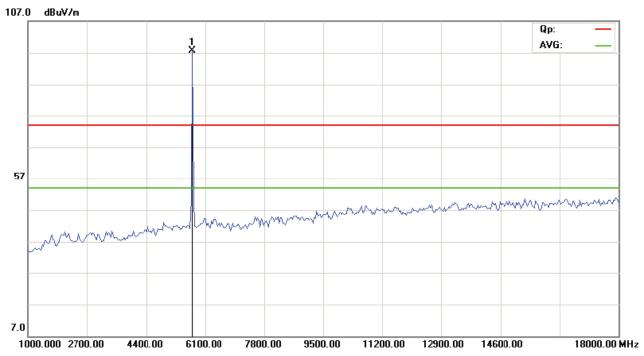

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-06-17



Please refer to the following test plots for details:


CH149 for 11g at 6Mbps: Horizontal

CH149 for 11g at olymps: Horizonta

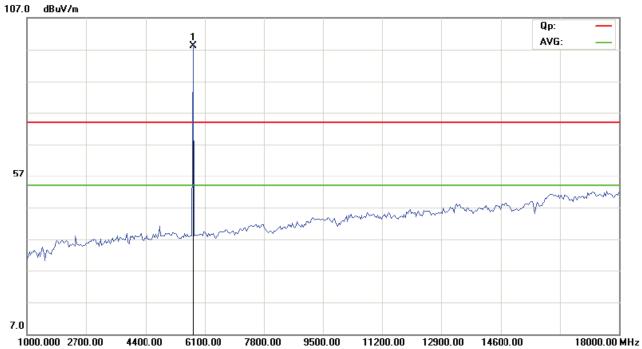

CH149 for 11g at 6Mbps: Vertical

107.0 dBuV/m

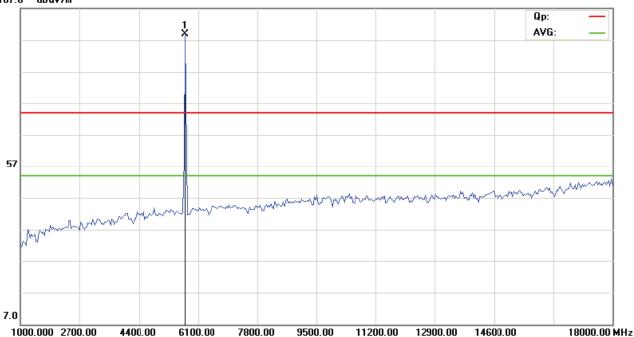

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 25 of 73

Report No: 1406125-03


Date: 2014-06-17



CH153 for 11g at 6Mbps: Vertical

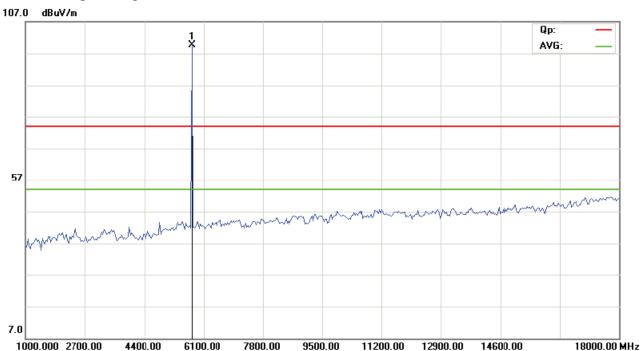

CH153 for 11g at 6Mbps: Horizontal

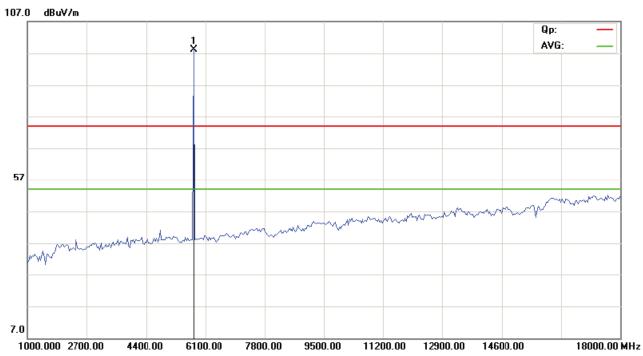


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-06-17



CH161 for 11g at 6Mbps: Vertical

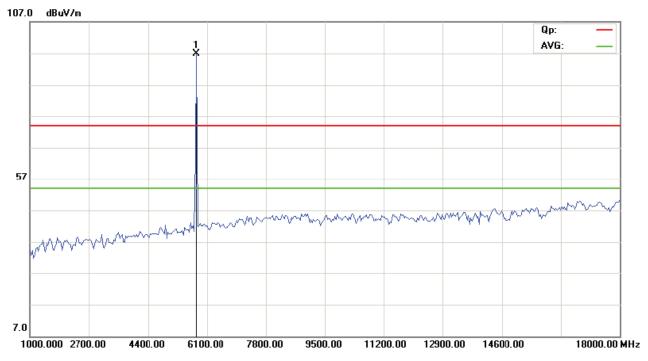

CH161 for 11g at 6Mbps: Horizontal

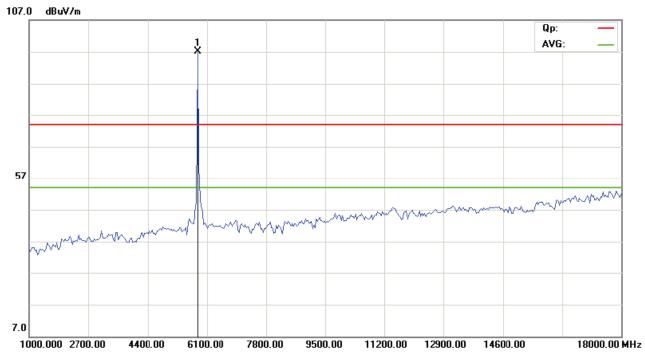

Note: For radiated Emissions from 18-40GHz, it is only the floor noise.

Date: 2014-06-17



Restricted band Measurement						
EUT	U Stic	k (Mini PC)	Test Mode:	Channel 36 (5180MHz)		
Mode	Keeping W	/IFI transmitting	Input Voltage	120V~		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	•	Horizon	ntal			
5150	PK (dBμV/m)	43.66 (PK)	T : '/	27.10 /2411		
	EIRP (dBm)	-51.54	Limit	-27dBm/MHz		
	Vertical					
5150	PK (dBμV/m)	43.92(PK)	T : :/	27.10 / 441		
	EIRP (dBm)	-51.28	Limit	-27dBm/MHz		

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=43.66\ dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=43.66-95.2=-51.54dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	U Stic	k (Mini PC)	Test Mode:	Channel 48 (5240MHz)		
Mode	Keeping W	VIFI transmitting	Input Voltage	120V~		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	Horizontal					
5250	PK (dBµV/m)	60.19 (PK)	T ::4	27.10/МП-		
	EIRP (dBm)	-53.83	Limit	-27dBm/MHz		
Vertical						
5250	PK (dBμV/m)	58.86 (PK)	Limit	-27dBm/MHz		
	EIRP (dBm)	-36.34	Limit	-2/UDIII/IVIHZ		

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=60.19 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=60.19-95.2=-35.01dBm$

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-06-17



Restricted band M	easurement					
EUT	U Stic	k (Mini PC)	Test Mode:	Channel 149 (5745MHz)		
Mode	Keeping V	VIFI transmitting	Input Voltage	120V~		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	Horizontal					
5725MHz	PK (dBμV/m)	50.33 (PK)	T ::4	27.10/\dil_		
	EIRP (dBm)	-44.87	Limit	-27dBm/MHz		
	Vertical					
5725MHz	PK (dBμV/m)	48.29 (PK)	- Limit	-27dBm/MHz		
	EIRP (dBm)	-46.91	Lillill	-2/UDIII/IVITZ		

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=50.33 \ dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50.33-95.2=-44.87dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band M	easurement				
EUT	U Stic	k (Mini PC)	Test Mode:	Channel 161 (5805MHz)	
Mode	Keeping V	VIFI transmitting	Input Voltage	120V~	
Temperature	24	deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
		Horizon	ntal		
5825MHz	PK (dBμV/m)	51.28 (PK)	T :!4	27.10/МП_	
	EIRP (dBm)	-43.92	Limit	-27dBm/MHz	
Vertical					
5825MHz	PK (dBμV/m)	50.07 (PK)	- Limit	-27dBm/MHz	
	EIRP (dBm)	-45.13	Lillit	-2/UDIII/IVITIZ	

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=51.28 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=51.28-95.2=-43.92dBm$

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2014-06-17



Page 29 of 73

7.0 26 dB OCCUPIED BANDWIDTH

7.1 Test Setup



7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 300 kHz
- 2. Set the video bandwidth (VBW) = 1MHz
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: 1406125-03 Page 30 of 73

Date: 2014-06-17



26dB Occupied Bandwidth

EUT		MID Model		lel		TD9300D		
Mode		8	302.11a		Input Volt	tage		120V~
Temperat	ure	24	4 deg. C,		Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		mum Limit MHz)	Pass/ Fail
36		5180	6	21.259		259		Pass
40		5200	6	23.128				Pass
48		5240	6	22.438				Pass
149		5745	6	19.	214			Pass
153		5765	6	19.555				Pass
161		5805	6	19.	085			Pass


Page 31 of 73

Report No: 1406125-03

Date: 2014-06-17




Test Figure:

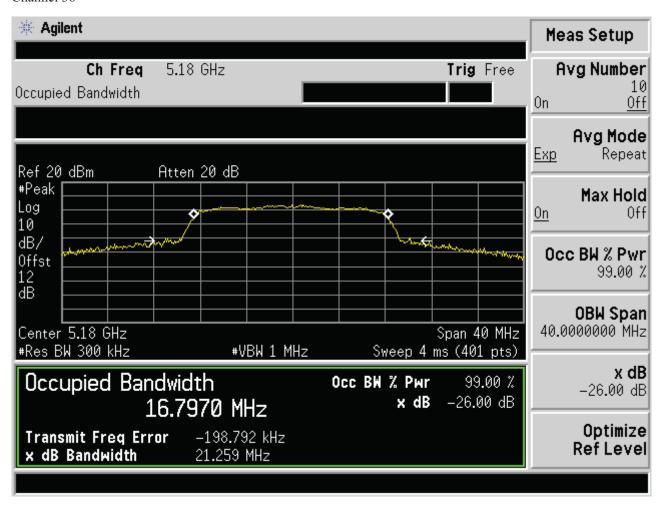

Report No: 1406125-03 Page 32 of 73

Date: 2014-06-17




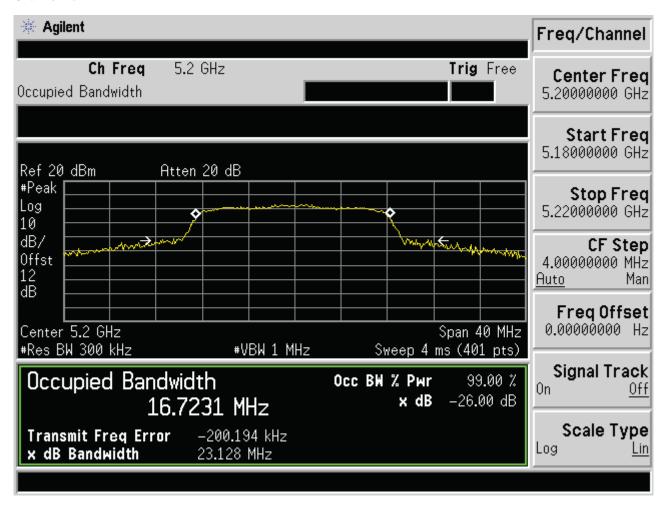

Report No: 1406125-03 Page 33 of 73

Date: 2014-06-17




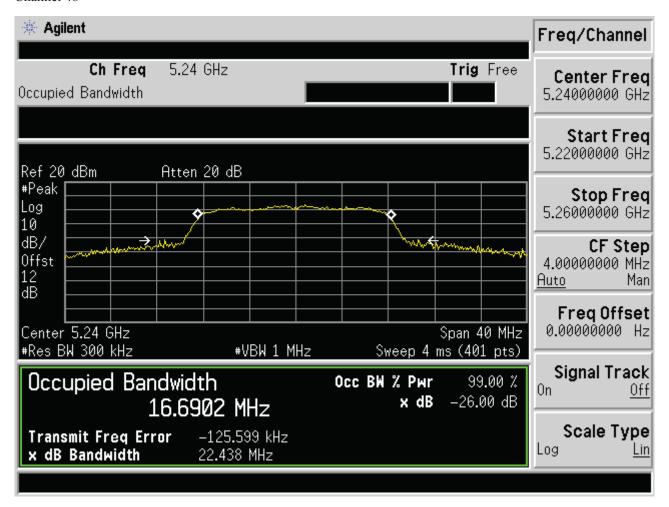

Report No: 1406125-03 Page 34 of 73

Date: 2014-06-17




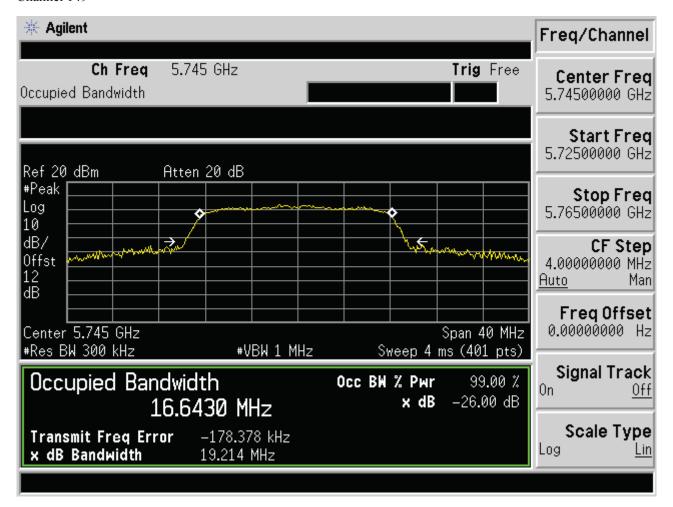

Report No: 1406125-03 Page 35 of 73

Date: 2014-06-17




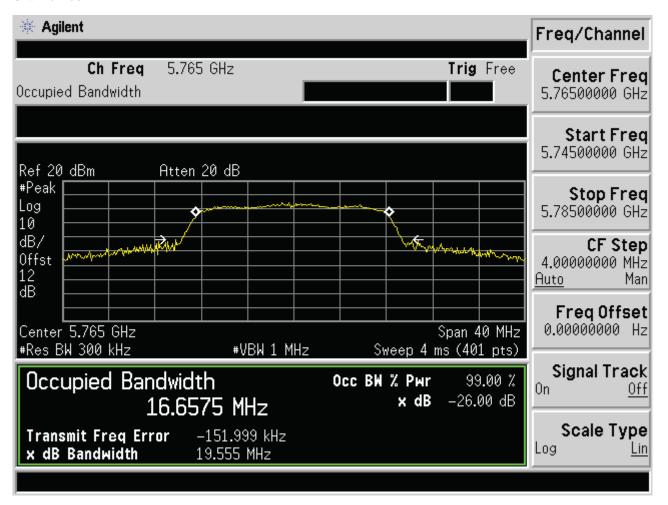

Report No: 1406125-03 Page 36 of 73

Date: 2014-06-17



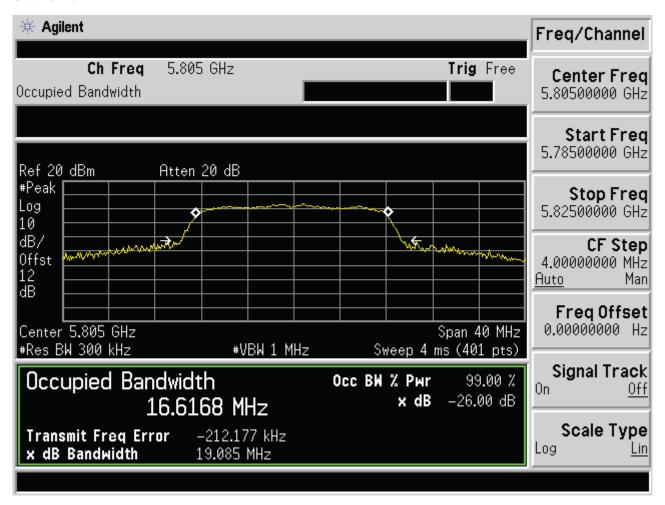


Report No: 1406125-03 Page 37 of 73

Date: 2014-06-17



8.0 MAX Transmit Power Measurement

8.1 Test Setup



8.2 Limits of MAX Transmit Power Measurement

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
and 5.470-5.725GHz	
5.725 - 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

Note: Where B is the 26dB emission bandwidth in MHz.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Report No: 1406125-03 Page 38 of 73

Date: 2014-06-17



8.4Test Results

EUT		U Stick (Mini PC)	Model	W	A-U420D, WA-U	220D
Mode 802.11a		802.11a	Input Voltage	120V~		
Temperatu	ire	24 deg. C,	Humidity	56% RH		
Channel	Channel Frequency (MHz)		Total Po (dBr		Limit (dBm)	Pass/ Fail
36		5180	14.9	2	17	Pass
40	5200		16.1	2	17	Pass
48	5240		15.3	2	17	Pass
149		5745	15.9	5	30	Pass
153		5765	15.3	5	30	Pass
161	5805		14.9	0	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow:

Average Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No: 1406125-03 Page 39 of 73

Date: 2014-06-17



9. Power Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

Frequency Band	Limit
5.15 – 5.25GHz	4dBm
5.25 – 5.35GHz	11dBm
and 5.470-5.725GHz	
5.725 – 5.825GHz	17dBm

9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz.
- 3. Set the VBW =3MHz.
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Report No: 1406125-03 Page 40 of 73

Date: 2014-06-17



9.4Test Result

EUT	EUT MID		Model	WA-U420D, WA-U220D		220D
Mode		802.11a 6Mbps	Input Voltage		120V~	
Temperat	ure	24 deg. C,	Humidity		56% RH	
Channel		Frequency	Final Power Sp	ectral Density	Limit	Pass/ Fail
	(MHz)		(dB	m)	(dBm)	
36	5180		1.0	90	4	Pass
40	40 5200		3.7	88	4	Pass
48	48 5240		3.7	81	4	Pass
149	49 5745		4.7	63	17	Pass
153	5765		1.5	34	17	Pass
161	5805		1.3	86	17	Pass


Note: 1. Test method According to KDB669211 E) 2) c)

Report No: 1406125-03 Page 41 of 73

Date: 2014-06-17




9.5 Photo of Power Spectral Density Measurement

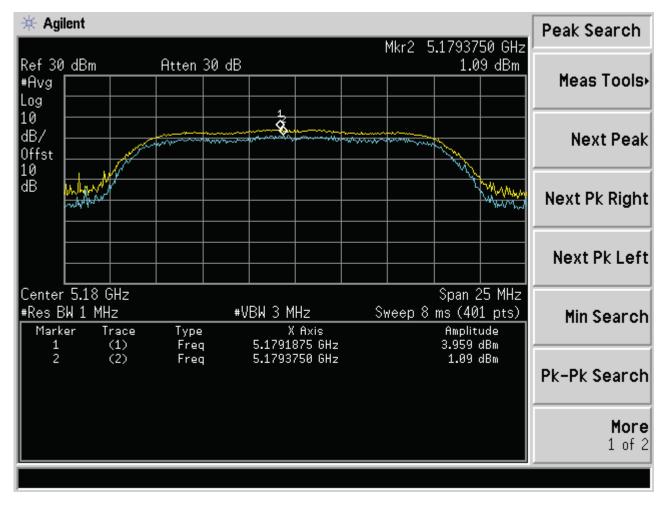

Report No: 1406125-03 Page 42 of 73

Date: 2014-06-17




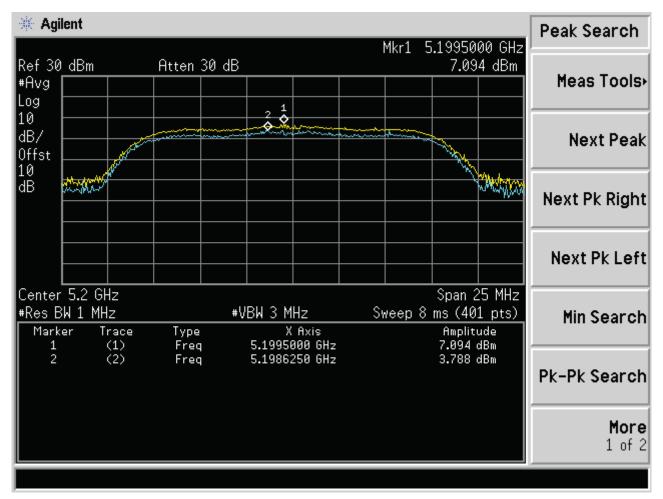

Report No: 1406125-03 Page 43 of 73

Date: 2014-06-17




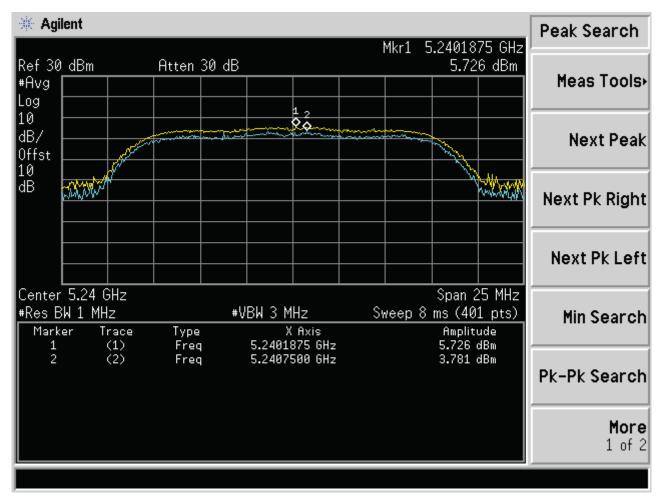

Report No: 1406125-03 Page 44 of 73

Date: 2014-06-17




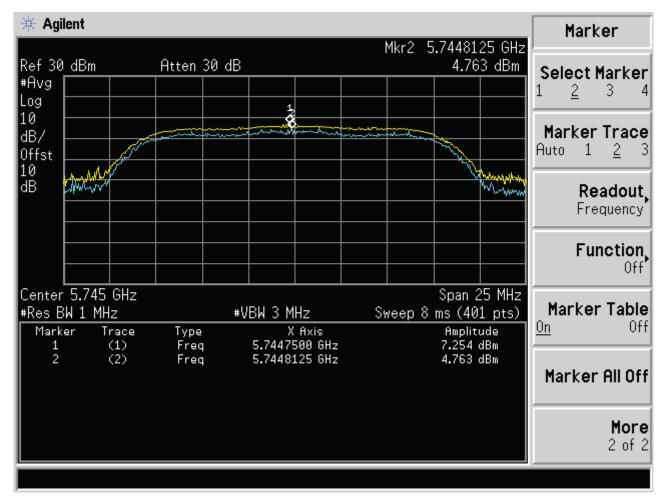

Report No: 1406125-03 Page 45 of 73

Date: 2014-06-17




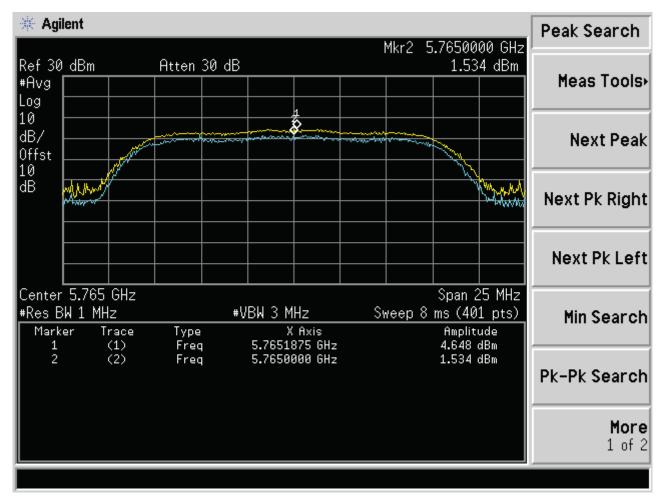

Report No: 1406125-03 Page 46 of 73

Date: 2014-06-17



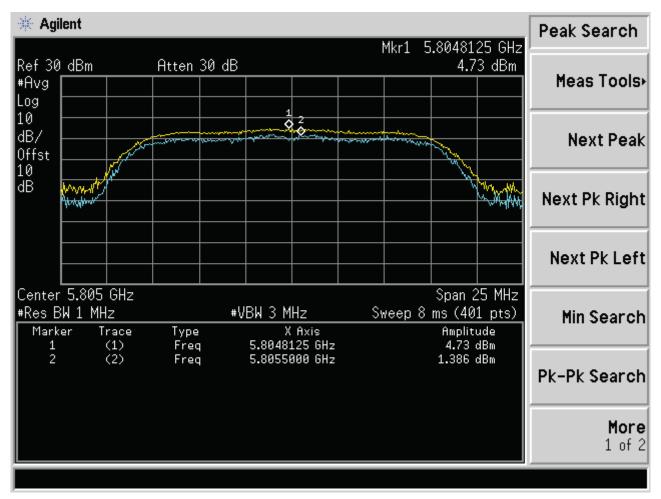


Report No: 1406125-03 Page 47 of 73

Date: 2014-06-17



10. Peak Excursion Measurement

10.2 Test Setup



10.2 Limits of Peak Power Excursion Measurement

Frequency Band	Limit
5.15 – 5.25GHz	13
5.25 – 5.35GHz	13
and 5.470-5.725GHz	
5.725 – 5.825GHz	13

10.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna
- 2. Set the RBW = 1MHz (Peak and Average Trace)
- 3. Set the VBW =3MHz (Peak and Average Trace)
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = Peak (Peak Trace) / RMS (Average Trace)
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.

Report No: 1406125-03 Page 48 of 73

Date: 2014-06-17



10.4 Test Result

EUT		MID		Model		TD9300D	
Mode		802.11b 11Mbps	In	nput Voltage		120V~	
Temperat	ure	24 deg. C,		Humidity 56% RH			
Channel	nel Frequency		Pea	ak	Limit (dB)	Pass/ Fail	
	(MHz)		Excursion	on (dB)			
36	5180		2.8	69	13	Pass	
40	40 5200		3.3	06	13	Pass	
48	48 5240		1.9	54	13	Pass	
149	149 5745		2.4	91	13	Pass	
153	5765		3.1	14	13	Pass	
161	1 5805		3.3	44	13	Pass	


Page 49 of 73

Report No: 1406125-03

Date: 2014-06-17




10.5 Photo of Peak Level

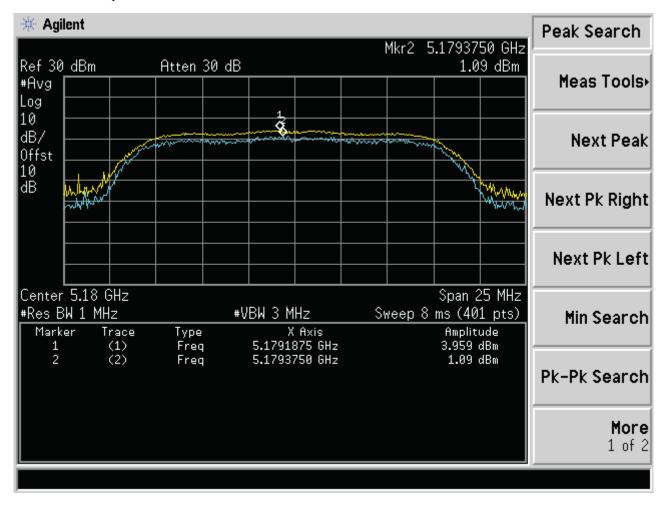

Report No: 1406125-03 Page 50 of 73

Date: 2014-06-17




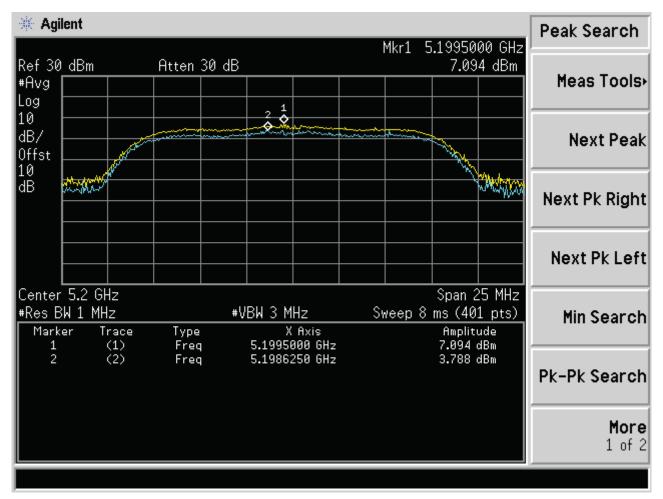

Report No: 1406125-03 Page 51 of 73

Date: 2014-06-17



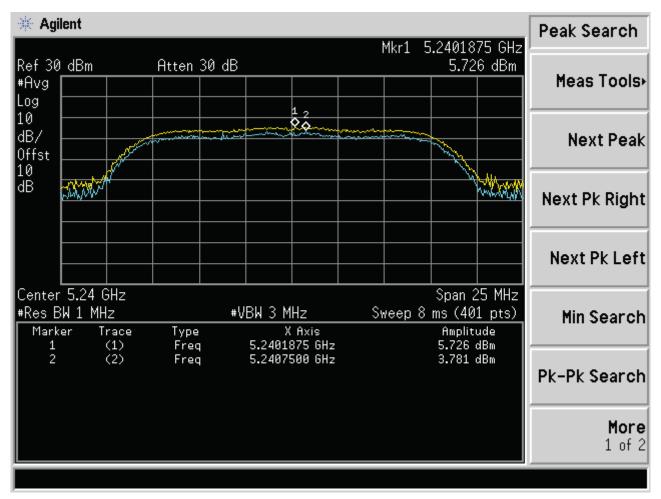


Page 52 of 73

Report No: 1406125-03

Date: 2014-06-17




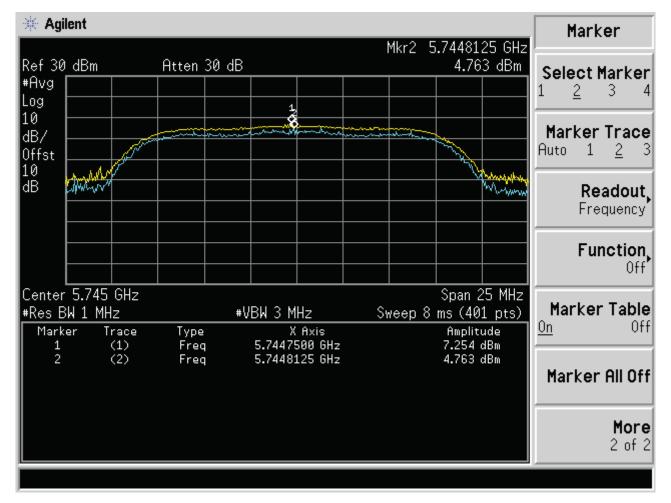

Report No: 1406125-03 Page 53 of 73

Date: 2014-06-17




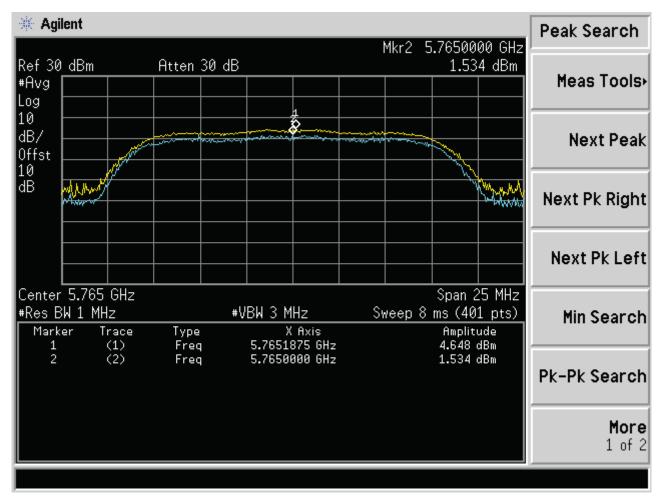

Report No: 1406125-03 Page 54 of 73

Date: 2014-06-17



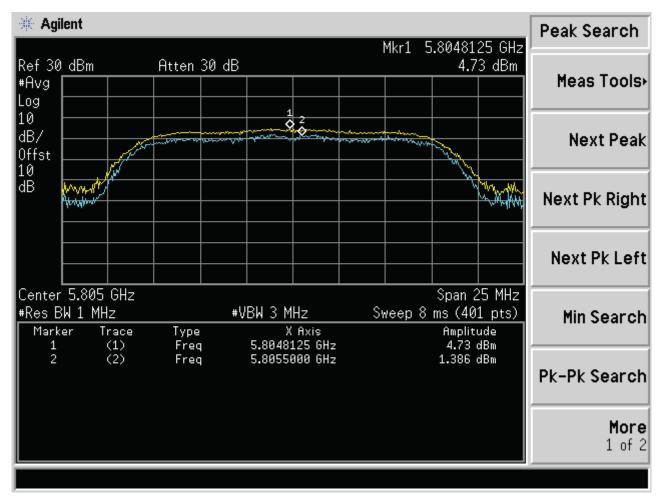

Date: 2014-06-17



Page 55 of 73

11.0 Frequency Stability

11.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

11.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Report No: 1406125-03 Page 56 of 73

Date: 2014-06-17



11.3 Test Result

Channel 36 (5180MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5179.9729
120V	5179.9792
102V	5179.9805
Max. Deviation (MHz)	0.0271
Max. Deviation (ppm)	5.2

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5179.9762
-20	5179.9770
-10	5179.9833
0	5179.9827
10	5179.9739
20	5179.9812
30	5179.9766
40	5179.9802
50	5179.9813
Max. Deviation (MHz)	0.0261
Max. Deviation (ppm)	5.0

Report No: 1406125-03 Page 57 of 73

Date: 2014-06-17



Channel 40 (5200MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5199.9629
120V	5199.9712
102V	5199.9775
Max. Deviation (MHz)	0.0371
Max. Deviation (ppm)	7.1

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5199.9682
-20	5199.9655
-10	5199.9709
0	5199.9728
10	5199.9815
20	5199.9752
30	5199.9738
40	5199.9690
50	5199.9718
Max. Deviation (MHz)	0.0345
Max. Deviation (ppm)	6.6

Report No: 1406125-03 Page 58 of 73

Date: 2014-06-17



Channel 48 (5240MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5239.9772
120V	5239.9825
102V	5239.9811
Max. Deviation (MHz)	0.0168
Max. Deviation (ppm)	4.4

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5239.9726
-20	5239.9758
-10	5329.9793
0	5239.9803
10	5239.9779
20	5239.9722
30	5239.9804
40	5239.9769
50	5239.9757
Max. Deviation (MHz)	0.0274
Max. Deviation (ppm)	5.2

Report No: 1406125-03 Page 59 of 73

Date: 2014-06-17



Channel 149 (5745MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5744.9736
120V	5744.9791
102V	5744.9723
Max. Deviation (MHz)	0.0277
Max. Deviation (ppm)	4.8

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5744.9722
-20	5744.9763
-10	5744.9755
0	5744.9790
10	5744.9788
20	5744.9758
30	5744.9802
40	5744.9733
50	5744.9762
Max. Deviation (MHz)	0.0278
Max. Deviation (ppm)	4.8

Report No: 1406125-03 Page 60 of 73

Date: 2014-06-17



Channel 153 (5765MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5764.9803
120V	5764.9792
102V	5764.9785
Max. Deviation (MHz)	0.0215
Max. Deviation (ppm)	3.7

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5764.9724
-20	5764.9687
-10	5764.9726
0	5764.9815
10	5764.9728
20	5764.9783
30	5764.9764
40	5764.9789
50	5764.9808
Max. Deviation (MHz)	0.0313
Max. Deviation (ppm)	5.4

Report No: 1406125-03 Page 61 of 73

Date: 2014-06-17



Channel 161 (5805MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5804.9778
120V	5804.9808
102V	5804.9823
Max. Deviation (MHz)	0.0222
Max. Deviation (ppm)	3.8

Rated working voltage: DC120V

Temperature (°C)	Measurement Frequency (MHz)
-30	5804.9719
-20	5804.9725
-10	5804.9738
0	5804.9811
10	5804.9828
20	5804.9830
30	5804.9787
40	5804.9812
50	5804.9773
Max. Deviation (MHz)	0.0281
Max. Deviation (ppm)	4.8

Report No: 1406125-03 Page 62 of 73

Date: 2014-06-17



12.0 Antenna Requirement

12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Connected construction

Integral antennas used. The maximum Gain of each antenna is 2.5 dBi for 5G band.

Report No: 1406125-03 Page 63 of 73

Date: 2014-06-17




13.0 FCC Label

FCC ID: 2ACDD-0508

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

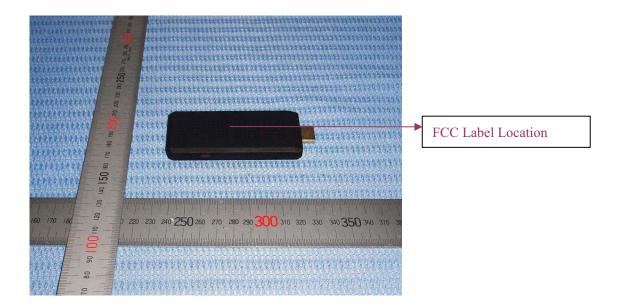


Report No: 1406125-03 Page 64 of 73

Date: 2014-06-17



14.0 Photo of testing

Conducted Emission Test Setup:

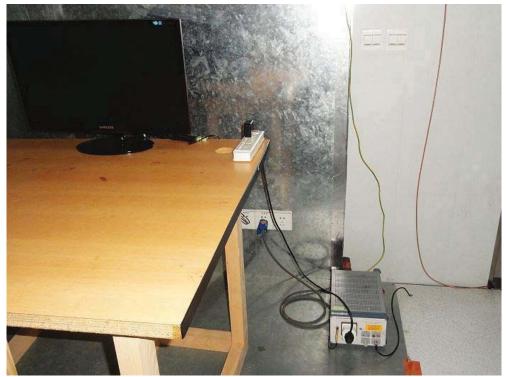

Radiated Emission Test Setup:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-06-17







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-06-17



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-06-17



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 68 of 73

Report No: 1406125-03

Date: 2014-06-17



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 69 of 73

Report No: 1406125-03

Date: 2014-06-17



Outside view

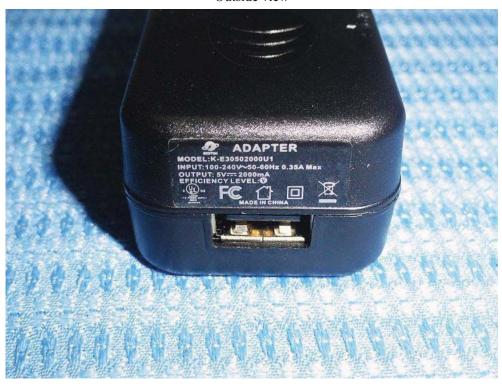



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 70 of 73

Report No: 1406125-03

Date: 2014-06-17



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 71 of 73

Report No: 1406125-03

Date: 2014-06-17



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co .,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 72 of 73

Report No: 1406125-03

Date: 2014-06-17



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1406125-03 Page 73 of 73

Date: 2014-06-17



Inside view



End of the report