

FCC Part 15C

Measurement and Test Report

For

Hangzhou Gubei Electronics Technology Co., Ltd.

Room106, No.1 Building, No.611 Jianghong Road, Binjiang,

Hangzhou, Zhejiang, China

FCC ID: 2ACDZRM3

FCC Rule(s):	<u>FCC Part 15.231</u>
Product Description:	<u>Universal Remote</u>
Tested Model:	<u>RM3</u>
Report No.:	<u>STR15128075I-3</u>
Tested Date:	<u>2015-12-25 to 2016-1-05</u>
Issued Date:	<u>2016-01-11</u>
Tested By:	<u>Irving Liu / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	Shenzhen SEM.Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 TEST EQUIPMENT LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
3. ANTENNA REQUIREMENT	7
3.1 STANDARD APPLICABLE.....	7
3.2 TEST RESULT.....	7
4. CONDUCTED EMISSIONS	8
4.1 MEASUREMENT UNCERTAINTY	8
4.2 TEST PROCEDURE.....	8
4.3 BASIC TEST SETUP BLOCK DIAGRAM.....	8
4.4 ENVIRONMENTAL CONDITIONS	9
4.5 TEST RECEIVER SETUP	9
4.6 SUMMARY OF TEST RESULTS/PLOTS	9
4.7 CONDUCTED EMISSIONS TEST DATA.....	9
5. RADIATED EMISSIONS	12
5.1 MEASUREMENT UNCERTAINTY	12
5.2 STANDARD APPLICABLE.....	12
5.3 TEST PROCEDURE.....	13
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
5.5 ENVIRONMENTAL CONDITIONS	14
5.6 SUMMARY OF TEST RESULTS/PLOTS	14
6. 20DB BANDWIDTH	17
6.1 STANDARD APPLICABLE.....	17
6.1 TEST PROCEDURE.....	17
6.2 ENVIRONMENTAL CONDITIONS	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	17
7. TRANSMISSION TIME.....	19
7.1 STANDARD APPLICABLE.....	19
7.2 TEST PROCEDURE.....	19
7.3 ENVIRONMENTAL CONDITIONS	19
7.4 SUMMARY OF TEST RESULTS/PLOTS	19
8. DUTY CYCLE.....	21
8.1 STANDARD APPLICABLE.....	21
8.2 TEST PROCEDURE.....	21
8.3 ENVIRONMENTAL CONDITIONS	21
8.4 SUMMARY OF TEST RESULTS/PLOTS	21

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Hangzhou Gubei Electronics Technology Co., Ltd.
Address of applicant: Room106, No.1 Building, No.611 Jianghong Road Binjiang, Hangzhou, Zhejiang, China
Manufacturer: Hangzhou Gubei Electronics Technology Co., Ltd.
Address of manufacturer: Room106, No.1 Building, No.611 Jianghong Road Binjiang, Hangzhou, Zhejiang, China

General Description of EUT	
Product Name:	Universal Remote
Brand Name:	BroadLink
Model No.:	RM3
Adding Model	RM3 B; RM pro; RM pro B; RM home, RM4, RM3 plus
Power Adaptor:	Model:JHD-AP006U-050100BB-2 Input: AC 100-240V Output: DC 5V/1A
Adding Power Adaptor:	Model:A050100U01 Input: AC 100-240V Output: DC 5V/1A
Device Category:	Portable Device
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model RM3, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	314.9525MHz
Max. Field Strength:	79.33dBuV/m (at 3m distance)
Data Rate:	/
Modulation:	FSK
Antenna Type:	PCB Antenna
Antenna Gain:	-6dBi
Lowest Internal Frequency of EUT:	30 MHz

1.2 Test Standards

The following report is prepared on behalf of the Hot Toys Ltd. in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	With modulation

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R
USB Cable	1.0	/	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.3 Basic Test Setup Block Diagram

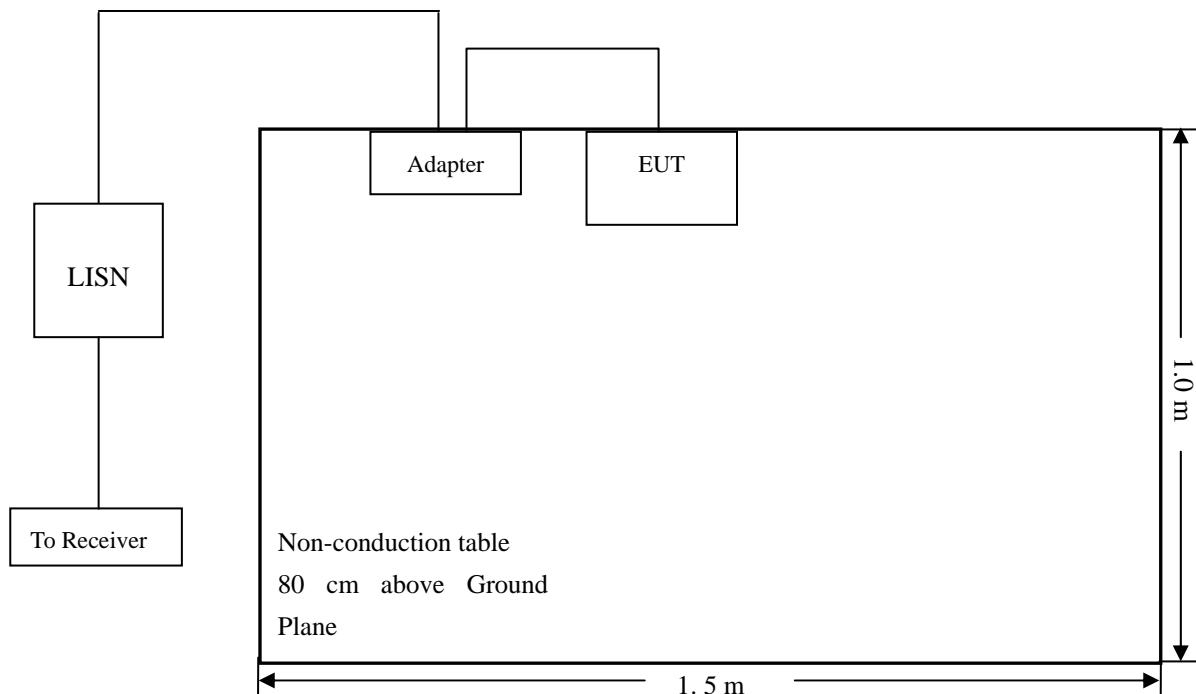

4.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

4.6 Summary of Test Results/Plots

According to the data in section 4.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

-7.08 dB at 0.1580 MHz in the Line mode, peak detector, 0.15-30MHz


4.7 Conducted Emissions Test Data

Note: Test was performed with two adapters and only the worst case was reported.

Plot of Conducted Emissions Test Data


EUT: Universal Remote
Tested Model: RM3
Operating Condition: 802.11b Transmitting Low Channel-2412MHz
Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Neutral

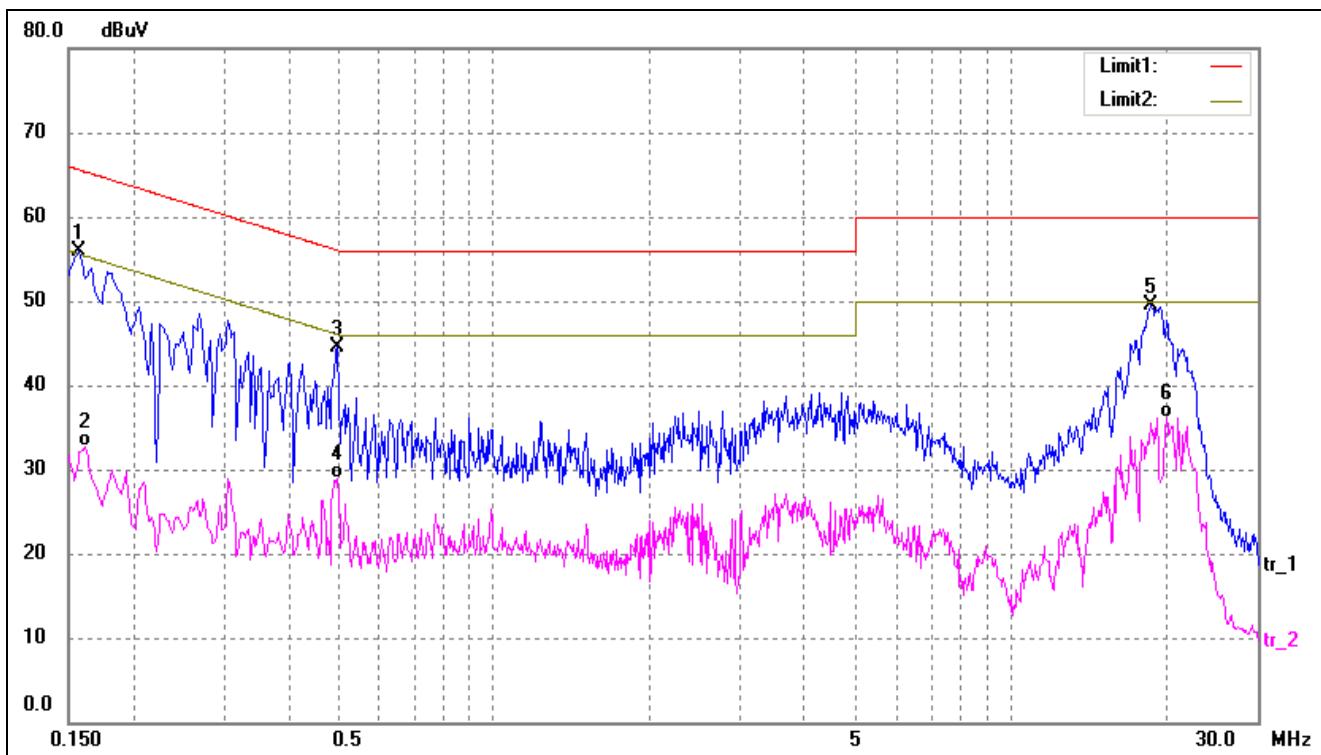

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	45.95	10.02	55.97	65.57	-9.60	peak
2	0.1620	22.96	9.78	32.74	55.36	-22.62	AVG
3	0.4980	37.01	7.50	44.51	56.03	-11.52	peak
4	0.4980	21.46	7.50	28.96	46.03	-17.07	AVG
5	18.6420	37.75	11.73	49.48	60.00	-10.52	peak
6	19.9740	24.20	11.99	36.19	50.00	-13.81	AVG

Test Specification: Line

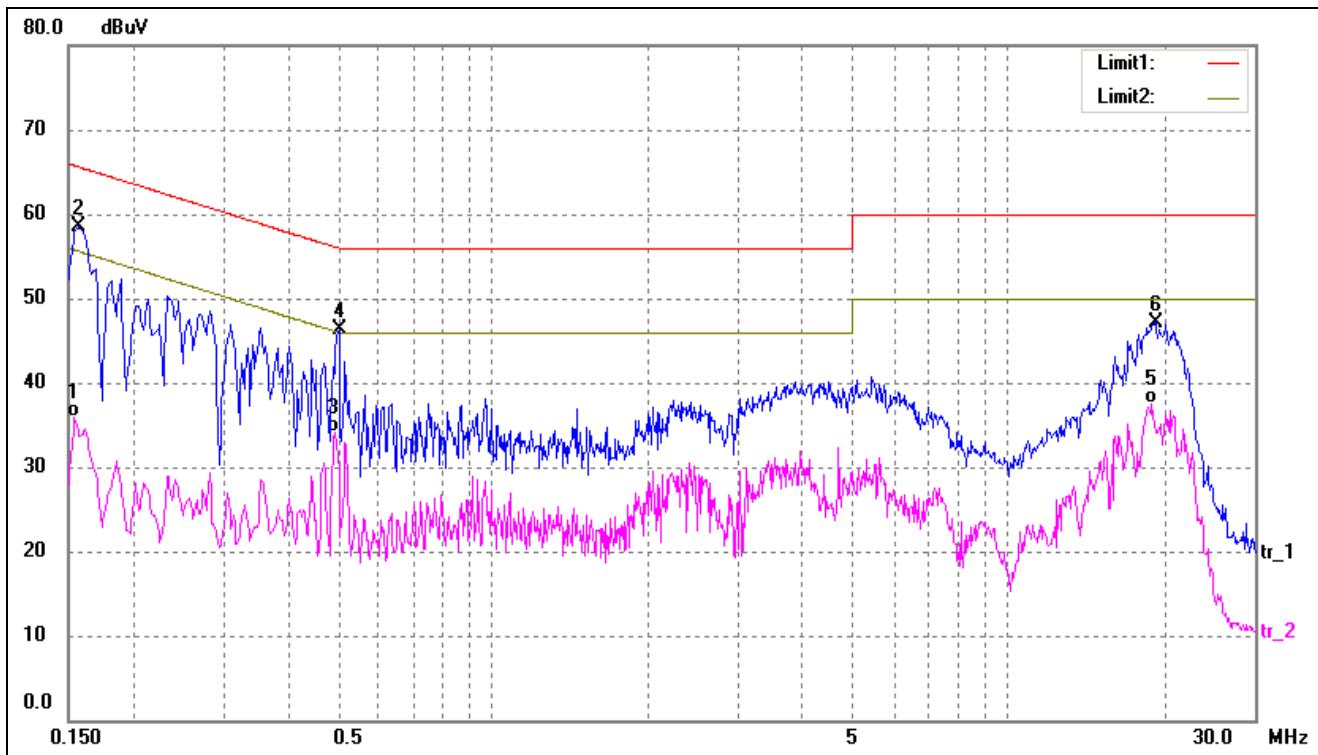

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	25.69	10.26	35.95	55.78	-19.83	AVG
2*	0.1580	48.47	10.02	58.49	65.57	-7.08	peak
3	0.4940	26.54	7.50	34.04	46.10	-12.06	AVG
4	0.5020	38.74	7.51	46.25	56.00	-9.75	peak
5	18.9900	25.66	11.80	37.46	50.00	-12.54	AVG
6	19.2260	35.35	11.85	47.20	60.00	-12.80	peak

5. Radiated Emissions

5.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

5.2 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations


The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

5.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

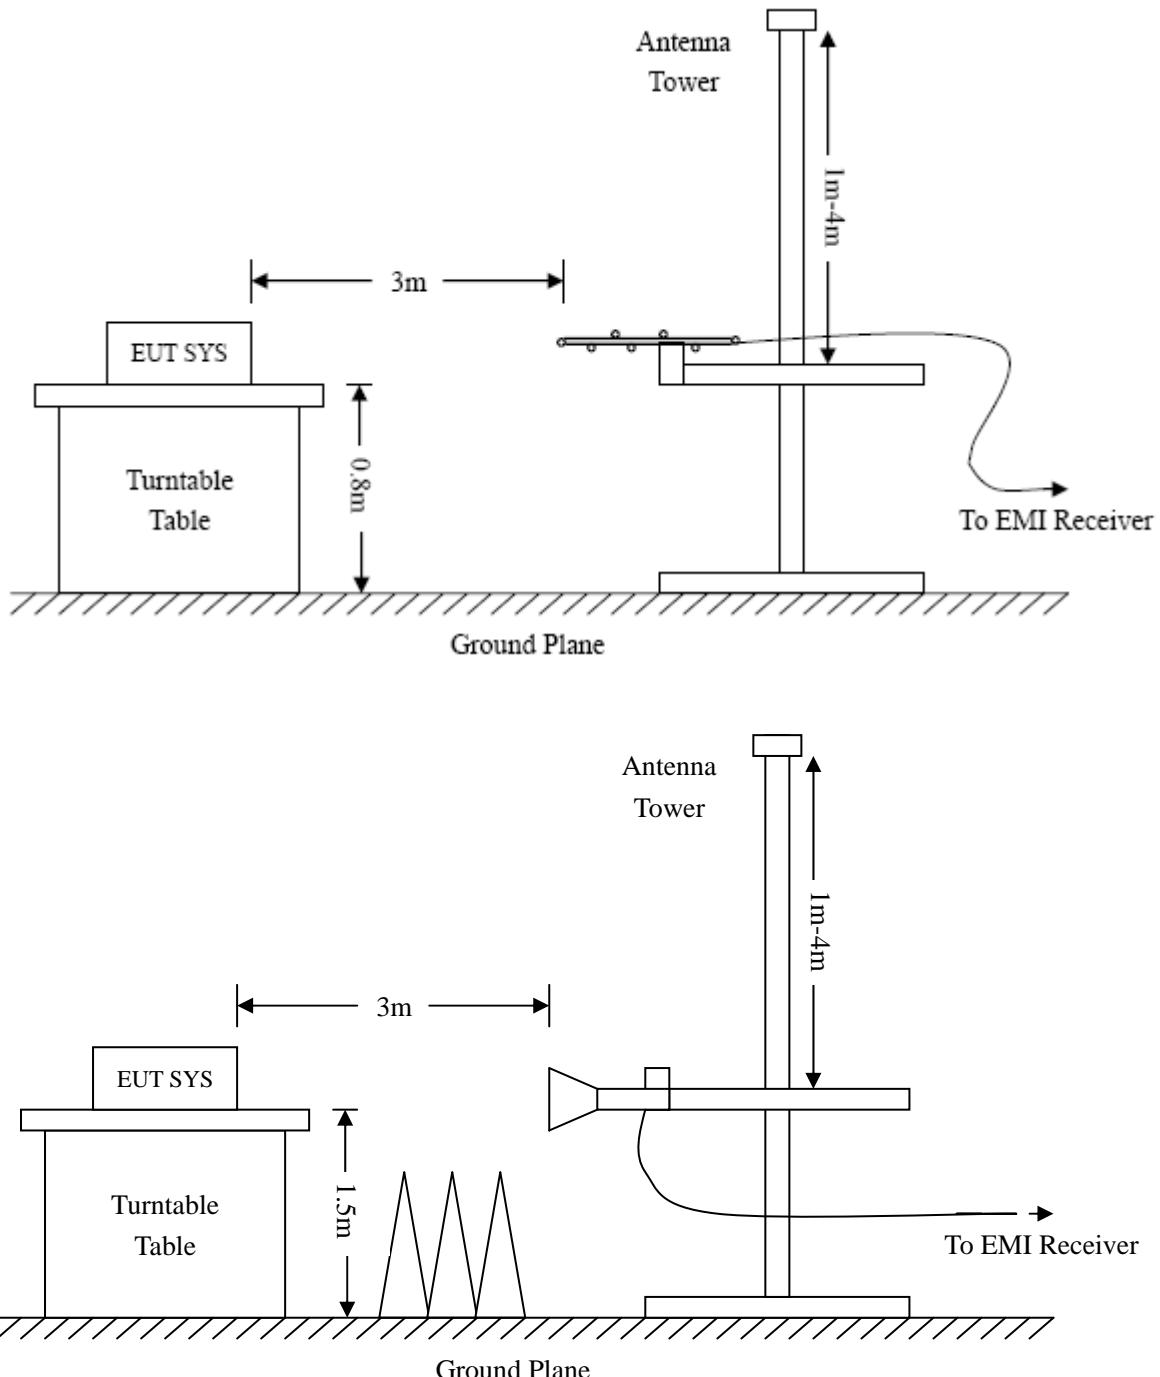

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant.Loss} + \text{Cab. Loss} - \text{Ampl.Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

5.5 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

5.6 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

-4.36 dB at 314.9525 MHz in the Horizontal polarization, Average Detector, 30MHz to 4 GHz, 3 Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position (Horizontal) data was reported.

Plot of Radiated Emissions Test Data

EUT: Universal Remote
Tested Model: RM3
Operating Condition: Transmitting
Comment: AC 120V/60Hz; Adapter DC 5V
Test Specification: Horizontal

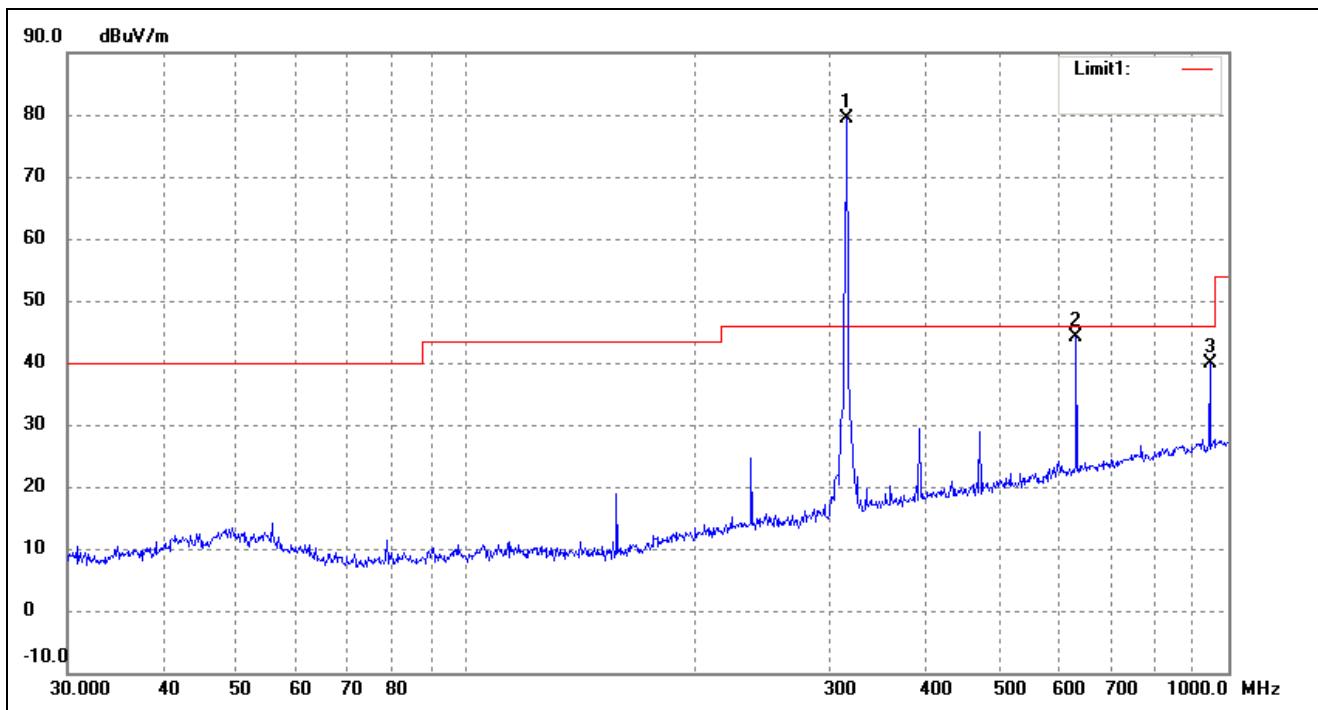


No.	Frequency	Reading	Correct	Dutycycle	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	Factor (dB)	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1*	314.9525	83.90	-4.57	N/A	79.33	95.62	-16.29	252	100	peak
	314.9525	/	/	-8.50	70.83	75.62	-4.79	252	100	Ave
2	629.9050	42.04	1.98	N/A	44.02	75.62	-31.60	255	100	peak
	629.9050	/	/	-8.50	35.52	55.62	-20.10	255	100	Ave
3	944.8575	33.97	5.91	N/A	39.88	75.62	-35.74	488	100	peak
	944.8575	/	/	-8.50	31.38	55.62	-24.24	488	100	Ave

Above 1GHz

No.	Frequency	Reading	Correct	Dutycycle	Result	Limit	Margin	Degree	Height	Detector
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1259.81	60.35	-14.15	N/A	46.20	74.00	-27.80	22	100	Peak
	1259.81	/	/	-8.50	37.70	54.00	-16.30	22	100	Ave

Test Specification: Vertical

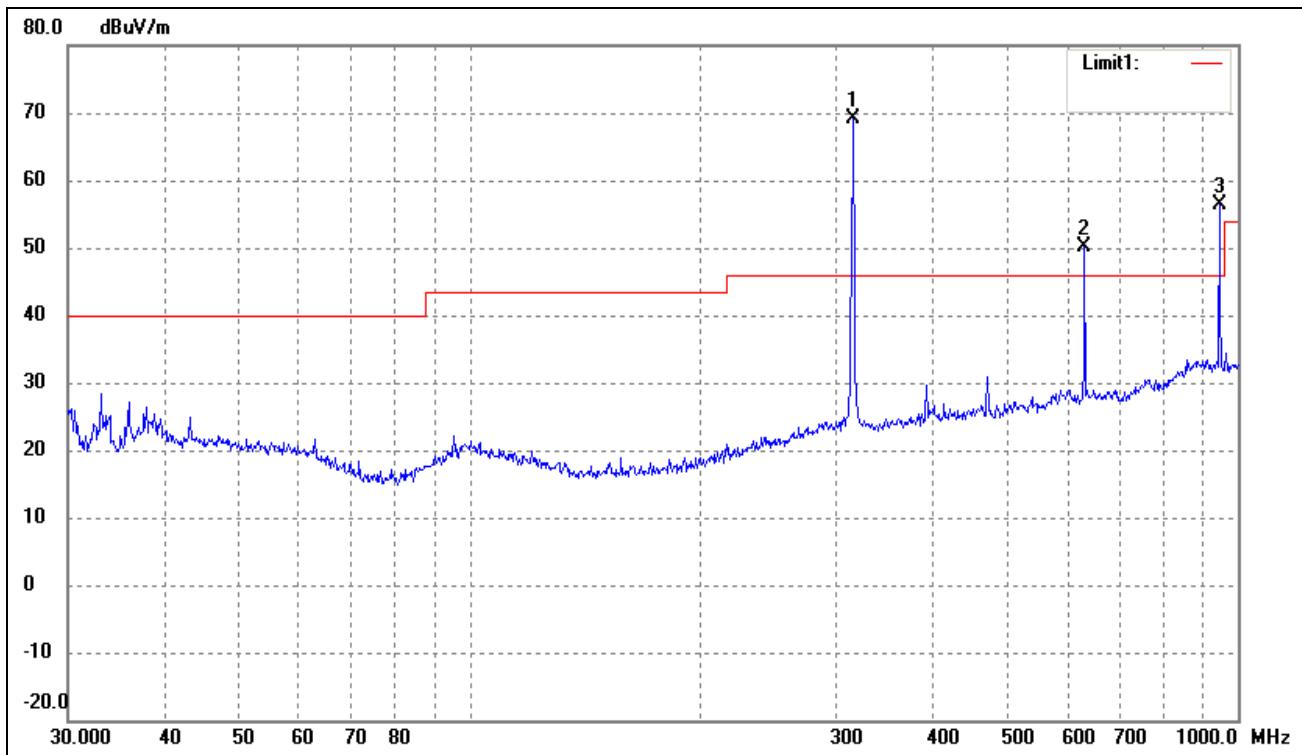

No.	Frequency	Reading	Correct	Dutycycle	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	Factor (dB)	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1*	314.9525	59.84	9.27	N/A	69.11	95.62	-26.51	155	100	Peak
	314.9525	/	/	-8.50	60.61	75.62	-15.01	155	100	Ave
2	629.9050	37.84	12.33	N/A	50.17	75.62	-25.45	27	100	Peak
	629.9050	/	/	-8.50	41.67	55.62	-13.95	27	100	Ave
3	944.8575	40.14	16.25	N/A	56.39	75.62	-19.23	33	100	Peak
	944.8575	/	/	-8.50	47.89	55.62	-7.73	33	100	Ave

Above 1GHz

No.	Frequency	Reading	Correct	Dutycycle	Result	Limit	Margin	Degree	Height	Detector
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1259.81	57.20	-14.15	N/A	43.05	74.00	30.95	0	100	Peak
	1259.81	/	/	-8.50	34.55	54.00	-19.45	0	100	Ave

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 4^h Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 314.9525 the fundamental and spurious emissions radiated limit base on the operating frequency 314.9525MHz.

6. 20dB Bandwidth

6.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

6.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

6.2 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

6.3 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
314.9525	48.30	787. 5	Pass

Limit = Fundamental Frequency X 0.25% = 315 MHz X 0.25% = 787.5 kHz

Please refer to the attached plots.

20dB Bandwidth Test Plot



7. Transmission Time

7.1 Standard Applicable

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 314.9525MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


7.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

Transmission Type	Test Frequency MHz	Transmission Time seconds	Limit s	Result
Manually	314.9525	0.175	5	Pass

Please refer to the attached plots.

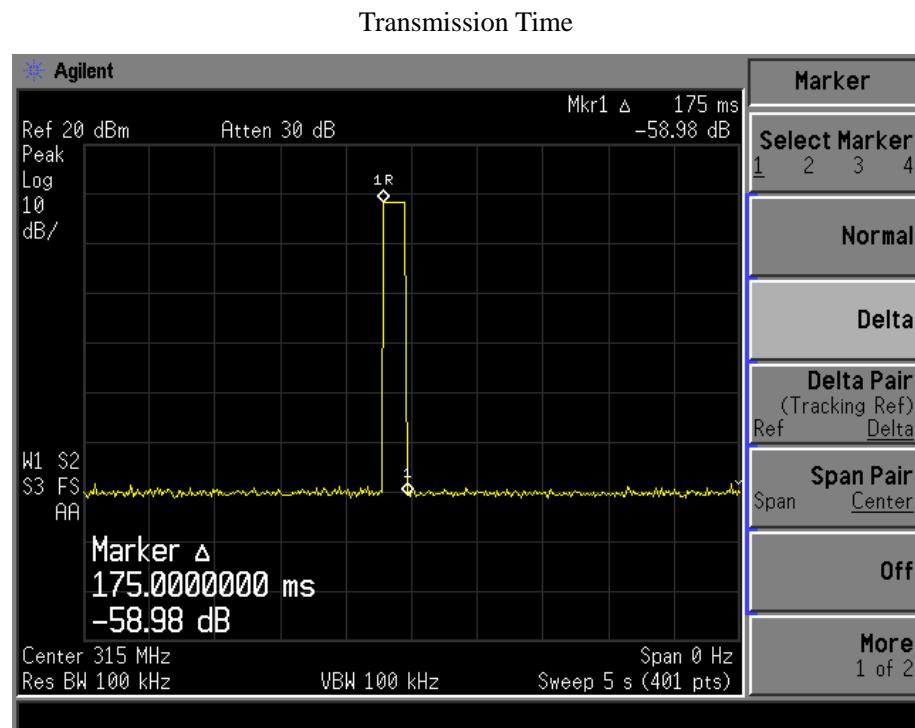

8. Duty Cycle

8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

8.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 314.9525MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

8.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

8.4 Summary of Test Results/Plots


Type of Pulse	Width of Pulse ms	Quantity of Pulse	Transmission Time ms	Total Time (T _{on}) ms
Pulse 1	2.66	1	2.66	23.03
Pulse 3	1.23	7	8.61	
Pulse 4	0.56	21	11.76	

Test Period (T _p) ms	Total Time (T _{on}) ms	Duty Cycle %	Duty Cycle Factor dB
61.25	23.03	37.6	-8.50


Remark: Duty Cycle Factor=20*log(Duty Cycle)

Please refer to the attached test plots


Period of Pulse

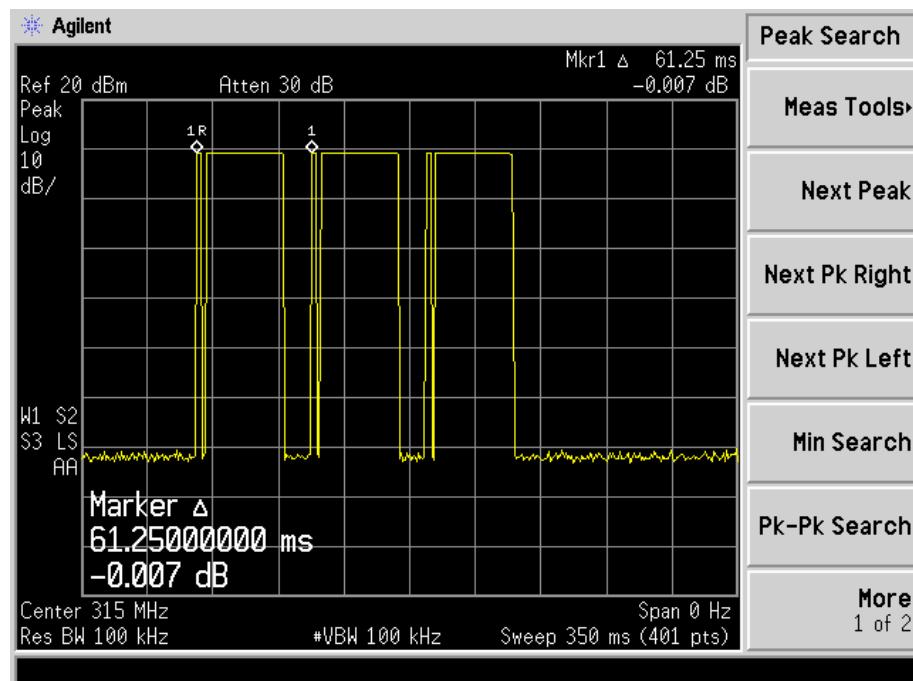


Quantity of Pulse

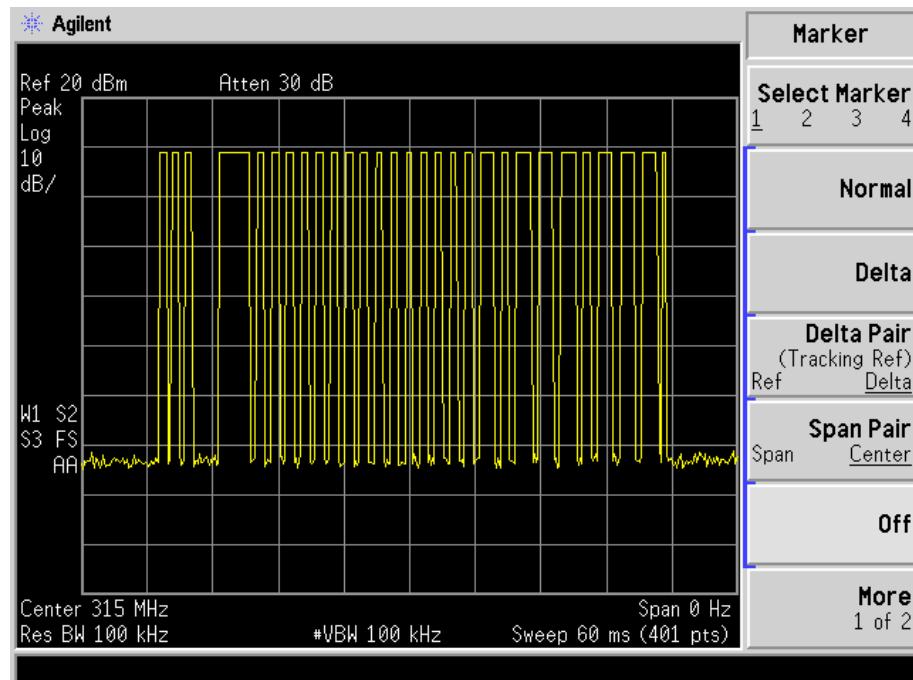

Width of Pulse 1

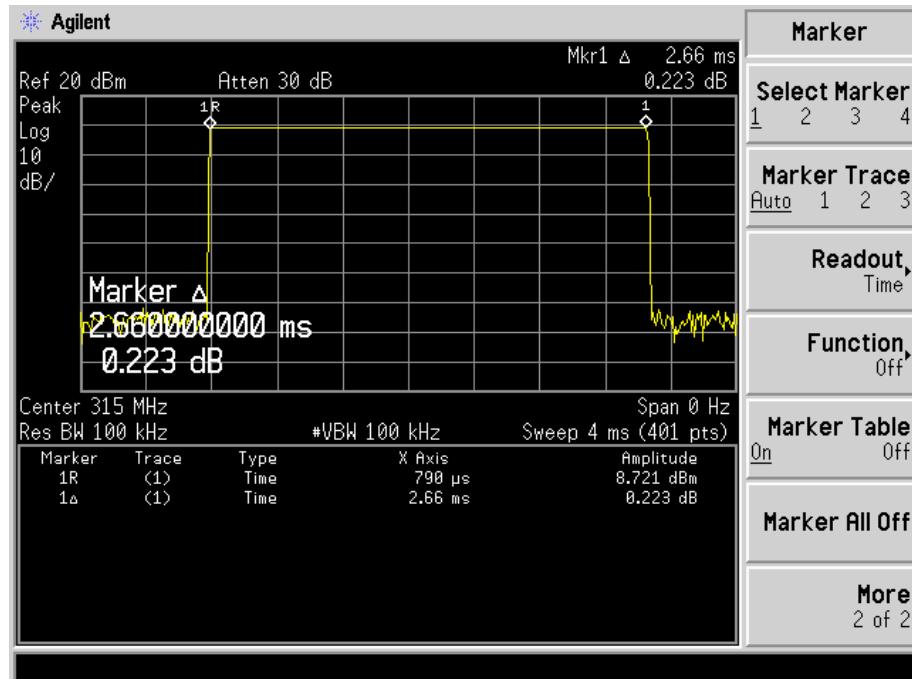

Width of Pulse 2 and Pulse 3

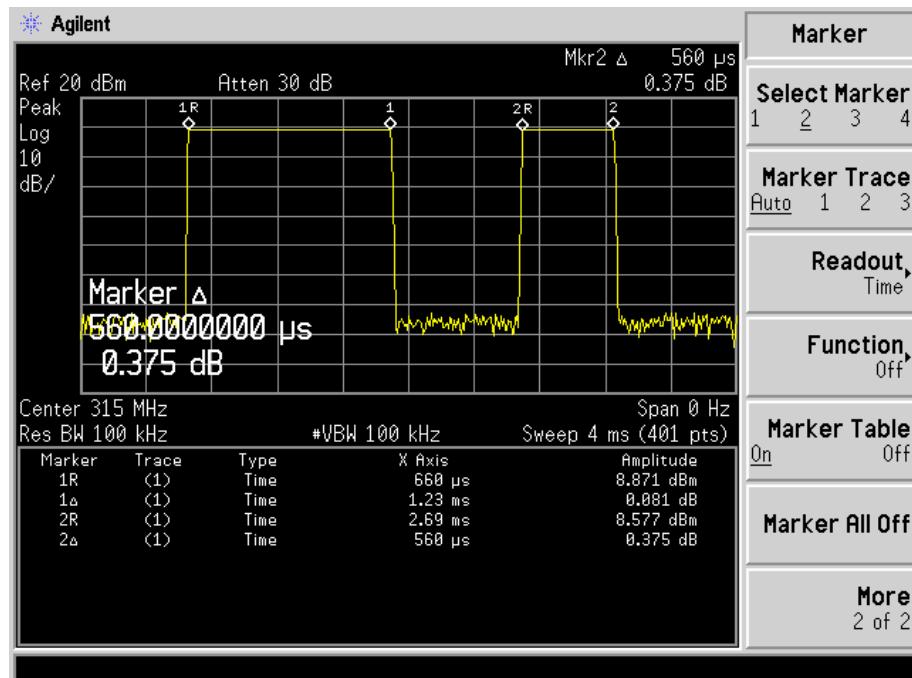

***** END OF REPORT *****